Simplebid®

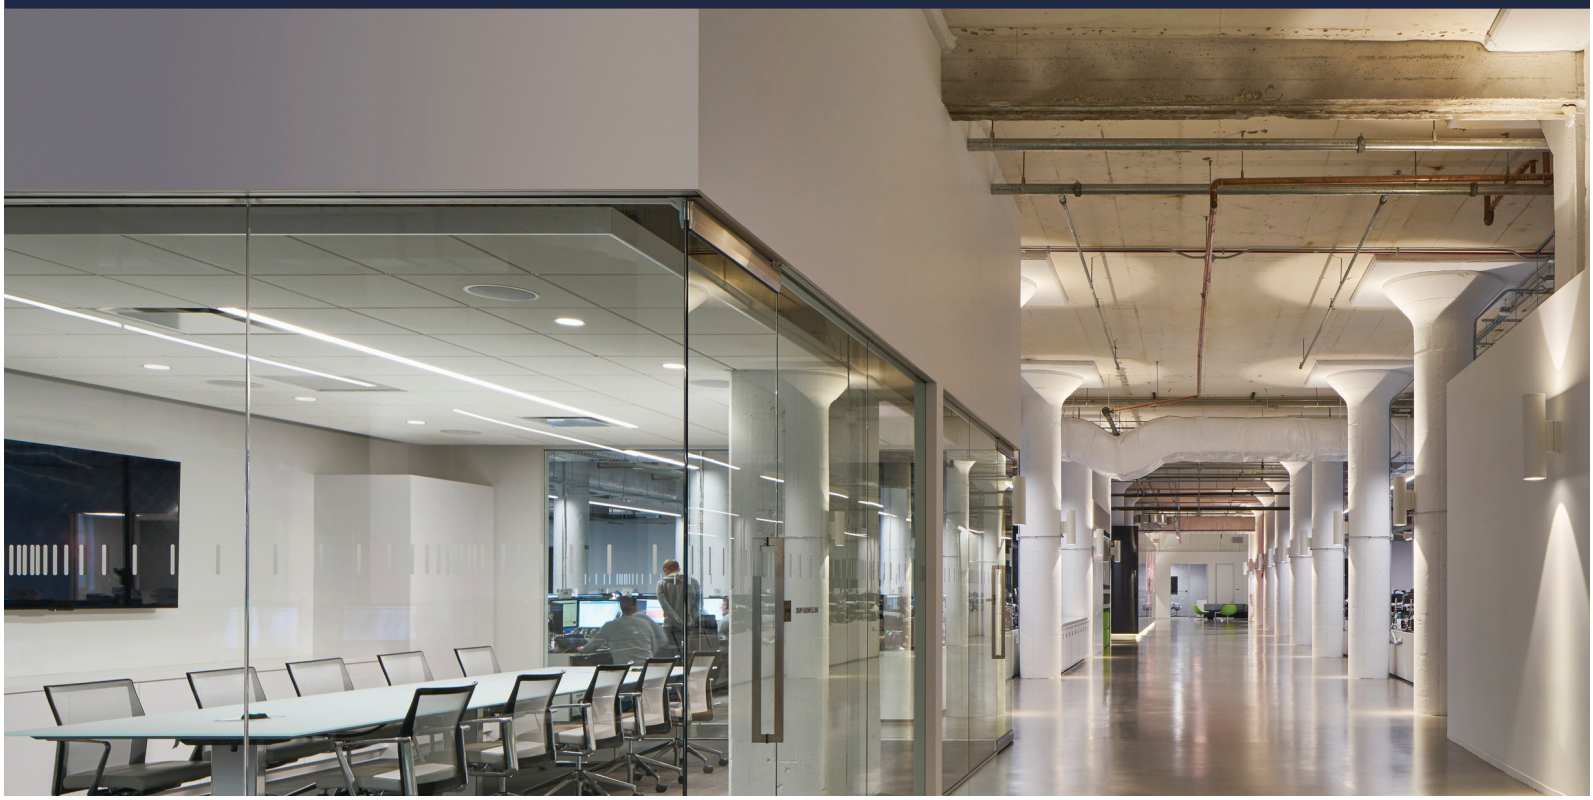

The Simplebid ® UPB

Job Order Contracting Unit Price Book

Prepared for: University of Kentucky

Contract: 2026-03-21 (KY - Fayette County)

Version: 3/21/2026

Date: March 21, 2026

FOS

Page Intentionally Blank

©2026 FOS of CannonDesign. All Rights Reserved.

Table of Contents

I. Introduction 37

II. Using the SimpleBid UPB 38

A. For Job Contracting Only ... 38

B. For JOC Solicitations and Work Order Proposal Pricing ... 38

C. Use of Adjustment Factors ... 38

D. UPB Layout ... 38

III. Pricing Structure 39

A. General Pricing Structure ... 39

B. General Requirements ... 40

C. Holistic Pricing ... 41

D. Economy of Scale ... 41

E. Measured Units ... 42

IV. Pricing Considerations 43

A. Labor, Materials, & Equipment ... 43

1. Labor Costs ... 43
2. Materials Costs ... 43
3. Construction Equipment Costs ... 44

B. MasterFormat® Section Specific Considerations ... 44

1. General Requirements Subgroup ... 44
2. Facility Construction ... 45
3. Facility Services Subgroup ... 45
4. Site and Infrastructure (Horizontal Construction) Subgroup ... 47

C. Other Pricing Considerations ... 48

1. Manufacturers Standard Shapes and Colors: Included ... 48
2. Atypical Costs: <u>Omitted</u> ... 48
3. General Calculations and Quantifications ... 48
4. Material Sourcing Requirements ... 48

V. New Item Additions 49

VI. Clerical errors and Omissions 50

End User License Agreement (EULA) 51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Table of Contents (Cost Book) 55
..... 55
01-00-00 General Requirements 56
01-20-00 Price and Payment Procedures 56
01-21-00 Allowances 56
01-21-43 Time Allowances 56
01-30-00 Administrative Requirements 57
01-35-00 Special Procedures 57
01-35-26 Governmental Safety Requirements 58
01-35-29 Health, Safety, and Emergency Response Procedures 59
01-40-00 Quality Requirements 67
01-41-00 Regulatory Requirements 67
01-41-23 Fees 67
01-45-00 Quality Control 68
01-45-23 Testing and Inspecting Services 68
01-50-00 Temporary Facilities and Controls 68
01-52-00 Construction Facilities 68
01-52-13 Field Offices and Sheds 68
01-52-19 Sanitary Facilities 69
01-53-00 Temporary Construction 70
01-53-00 Temporary Construction 70
01-54-00 Construction Aids 73
01-54-00 Construction Aids 73
01-54-19 Temporary Cranes and Lifts 79
01-54-20 Special Use Heavy Equipment 81
01-54-23 Temporary Scaffolding and Platforms 118
01-55-00 Vehicular Access and Parking 119
01-55-26 Traffic Control 119
01-58-00 Project Identification 123
01-58-13 Temporary Project Signage 123
01-60-00 Product Requirements 123
01-60-00 Product Requirements 123
01-66-00 Product Storage and Handling Requirements 123
01-64-00 Owner-Furnished Products 125
01-64-00 Owner-Furnished Products 125
01-65-00 Product Delivery Requirements 126
01-65-13 Mobilization & Demobilization of Heavy Equipment 126
01-65-16 Hauling of Bulk Materials 126
01-66-00 Product Storage and Handling Requirements 128
01-66-00 Product Storage and Handling Requirements 128
01-70-00 Execution and Closeout Requirements 129
01-74-00 Cleaning and Waste Management 129
01-74-23 Final Cleaning 129
02-00-00 Existing Conditions 129
02-30-00 Subsurface Investigation 129

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

02-31-00 Geophysical Investigations 129
02-31-23 Electromagnetic Investigations 129
02-32-00 Geotechnical Investigations 130
02-32-19 Exploratory Excavations 130
02-40-00 Demolition and Structure Moving 131
02-41-00 Demolition 131
02-41-13 Selective Site Demolition 131
02-41-16 Structure Demolition 139
02-41-20 Selective Structure Demolition 140
02-41-21 Selective Exterior Demolition 144
02-41-22 Selective Interior Demolition 151
02-42-00 Removal and Diversion of Construction Materials 159
02-42-19 Recycling of Construction Materials 159
02-60-00 Contaminated Site Material Removal 160
02-61-00 Removal and Disposal of Contaminated Soils 160
02-61-13 Excavation and Handling of Contaminated Material 160
02-80-00 Facility Remediation 160
02-81-00 Transportation and Disposal of Hazardous Materials 160
02-81-00 Transportation and Disposal of Hazardous Materials 160
02-82-00 Asbestos Remediation 160
02-82-13 Asbestos Abatement 160
02-83-00 Lead Remediation 164
02-83-00 Lead Remediation 164
02-84-00 Polychlorinate Biphenyl and Mercury Remediation 166
02-84-00 Polychlorinate Biphenyl and Mercury Remediation 166
02-87-00 Biohazard Remediation 167
02-87-13 Mold Remediation 167
03-00-00 Concrete 167
03-00-00 Concrete 168
03-01-00 Maintenance of Concrete 168
03-01-00 Maintenance of Concrete 168
03-10-00 Concrete Forming and Accessories 169
03-11-00 Concrete Forming 169
03-11-13 Structural Cast-in-Place Concrete Forming 169
03-11-16 Architectural Cast-in Place Concrete Forming 171
03-15-00 Concrete Accessories 171
03-15-13 Waterstops 171
03-15-16 Concrete Construction Joints 172
03-15-19 Cast-In Concrete Anchors 172
03-20-00 Concrete Reinforcing 172
03-21-00 Reinforcement Bars 172
03-21-00 Reinforcement Bars 172
03-22-00 Fabric and Grid Reinforcing 173
03-22-00 Fabric and Grid Reinforcing 173
03-23-00 Stressed Tendon Reinforcing 174

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

03-23-00 Stressed Tendon Reinforcing 174
03-24-00 Fibrous Reinforcing 174
03-24-00 Fibrous Reinforcing 174
03-30-00 Cast-in-Place Concrete 174
03-30-00 Cast-in-Place Concrete 174
03-30-53 Miscellaneous Cast-in-Place Concrete 174
03-31-00 Structural Concrete 174
03-31-13 Normalweight Structural Concrete 174
03-35-00 Concrete Finishing 178
03-35-23 Exposed Aggregate Concrete Finishing 178
03-35-29 Tooled Concrete Finishing 178
03-35-33 Stamped Concrete Finishing 179
03-35-43 Polished Concrete Finishing 179
03-35-46 Concrete Topical Treatments 179
03-37-00 Specialty Placed Concrete 180
03-37-00 Specialty Placed Concrete 180
03-39-00 Concrete Curing 180
03-39-00 Concrete Curing 180
03-40-00 Precast Concrete 181
03-41-00 Precast Structural Concrete 181
03-41-00 Precast Structural Concrete 181
03-45-00 Precast Architectural Concrete 182
03-45-00 Precast Architectural Concrete 182
03-47-00 Site-Cast Concrete 183
03-47-13 Tilt-Up Concrete 183
03-49-00 Glass-Fiber-Reinforced Concrete 183
03-49-00 Glass-Fiber-Reinforced Concrete 183
03-50-00 Cast Decks and Underlayment 184
03-54-00 Cast Underlayment 184
03-54-00 Cast Underlayment 184
03-60-00 Grouting 184
03-62-00 Non-Shrink Grouting 184
03-62-00 Non-Shrink Grouting 184
03-80-00 Concrete Cutting and Boring 184
03-82-00 Concrete Boring 184
03-82-13 Concrete Core Drilling 184
04-00-00 Masonry 185
04-00-00 Masonry 185
04-01-00 Maintenance of Masonry 185
04-01-20 Maintenance of Unit Masonry 185
04-05-00 Common Work Results for Masonry 187
04-05-23 Masonry Accessories 187
04-20-00 Unit Masonry 189
04-21-00 Clay Unit Masonry 189
04-21-13 Brick Masonry 189

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

04-21-16 Ceramic Glazed Clay Masonry 190
04-21-29 Terra Cotta Masonry 190
04-22-00 Concrete Unit Masonry 190
04-22-00 Concrete Unit Masonry 190
04-23-00 Glass Unit Masonry 195
04-23-00 Glass Unit Masonry 195
04-40-00 Stone Assemblies 196
04-43-00 Stone Masonry 196
04-43-13 Stone Masonry Veneer 196
04-43-16 Stone Fabrications 197
05-00-00 Metals 198
05-00-00 Metals 198
05-01-00 Maintenance of Metals 198
05-01-10 Maintenance of Structural Metal Framing 198
05-05-00 Common Work Results for Metals 199
05-05-13 Shop-Applied Coatings for Metal 199
05-05-23 Metal Fastenings 199
05-10-00 Structural Metal Framing 200
05-12-00 Structural Steel Framing 200
05-12-13 Architecturally-Exposed Structural Steel Framing 200
05-12-23 Structural Steel for Buildings 200
05-14-00 Structural Aluminum Framing 203
05-14-00 Structural Aluminum Framing 203
05-15-00 Wire Rope Assemblies 203
05-15-00 Wire Rope Assemblies 203
05-20-00 Metal Joists 203
05-21-00 Steel Joist Framing 203
05-21-00 Steel Joist Framing 203
05-30-00 Metal Decking 205
05-31-00 Steel Decking 205
05-31-13 Steel Floor Decking 205
05-31-23 Steel Roof Decking 205
05-31-33 Steel Form Decking 206
05-34-00 Acoustical Metal Decking 206
05-34-00 Acoustical Metal Decking 206
05-40-00 Cold-Formed Metal Framing 207
05-41-00 Structural Metal Stud Framing 207
05-41-00 Structural Metal Stud Framing 207
05-42-00 Cold-Formed Metal Joist Framing 208
05-42-00 Cold-Formed Metal Joist Framing 208
05-44-00 Cold-Formed Metal Trusses 210
05-44-00 Cold-Formed Metal Trusses 210
05-45-00 Metal Support Assemblies 212
05-45-00 Metal Support Assemblies 212
05-50-00 Metal Fabrications 213

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

05-51-00 Metal Stairs 213
05-51-00 Metal Stairs 213
05-51-33 Metal Ladders 215
05-51-36 Metal Walkways 215
05-52-00 Metal Railings 215
05-52-00 Metal Railings 215
05-53-00 Metal Gratings 216
05-53-00 Metal Gratings 216
05-55-00 Metal Stair Treads and Nosings 217
05-55-16 Metal Stair Nosings 217
05-58-00 Formed Metal Fabrications 217
05-58-00 Formed Metal Fabrications 217
05-59-00 Metal Specialties 217
05-59-00 Metal Specialties 217
05-70-00 Decorative Metal 217
05-71-00 Decorative Metal Stairs 217
05-71-13 Fabricated Metal Spiral Stairs 217
05-73-00 Decorative Metal Railings 217
05-73-00 Decorative Metal Railings 217
06-00-00 Wood, Plastics, and Composites 218
06-00-00 Wood, Plastics, and Composites 218
06-01-00 Maintenance of Wood, Plastics, and Composites 218
06-01-20 Maintenance of Finish Carpentry 218
06-01-80 Maintenance of Composite Assemblies 218
06-10-00 Rough Carpentry 218
06-10-00 Rough Carpentry 218
06-10-53 Miscellaneous Rough Carpentry 219
06-11-00 Wood Framing 219
06-11-16 Graded Lumber 219
06-12-00 Structural Panels 230
06-12-00 Structural Panels 230
06-13-00 Heavy Timber Construction 231
06-13-00 Heavy Timber Construction 231
06-15-00 Wood Decking 232
06-15-00 Wood Decking 232
06-16-00 Sheathing 232
06-16-00 Sheathing 232
06-17-00 Shop-Fabricated Structural Wood 235
06-17-11 Laminated Strand Lumber 235
06-17-13 Laminated Veneer Lumber 236
06-17-23 Parallel Strand Lumber 237
06-17-33 Truss Joist 238
06-17-53 Shop-Fabricated Wood Trusses 240
06-18-00 Glued-Laminated Construction 243
06-18-13 Glued-Laminated Beams 243

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

06-20-00 Finish Carpentry ... 246
06-22-00 Millwork ... 246
06-22-13 Standard Pattern Wood Trim ... 246
06-25-00 Prefinished Paneling ... 250
06-25-00 Prefinished Paneling ... 250
06-40-00 Architectural Woodwork ... 253
06-41-00 Architectural Wood Casework ... 253
06-41-13 Wood Faced Architectural Cabinets ... 253
06-41-16 Plastic-Laminate-Clad Architectural Cabinets ... 255
06-43-00 Wood Stairs and Railings ... 258
06-43-00 Wood Stairs and Railings ... 258
06-44-00 Ornamental Woodwork ... 259
06-44-39 Wood Posts and Columns ... 259
06-48-00 Wood Frames ... 259
06-48-00 Wood Frames ... 259
06-70-00 Structural Composites ... 259
06-72-00 Composite Structural Assemblies ... 259
06-72-00 Composite Structural Assemblies ... 259
06-73-00 Composite Decking ... 260
06-73-00 Composite Decking ... 260
06-80-00 Composite Fabrications ... 260
06-81-00 Composite Railings ... 260
06-81-00 Composite Railings ... 261
06-81-13 Glass-Fiber-Reinforced Plastic ... 261
06-82-00 Composite Trim ... 261
06-82-00 Composite Trim ... 261
06-83-00 Composite Paneling ... 262
06-83-16 Fiberglass Reinforced Paneling ... 262
07-00-00 Thermal and Moisture Protection ... 262
07-00-00 Thermal and Moisture Protection ... 262
07-01-00 Operation and Maintenance of Thermal and Moisture Protection ... 262
07-01-50 Maintenance of Membrane Roofing ... 262
07-10-00 Dampproofing and Waterproofing ... 263
07-11-00 Dampproofing ... 263
07-11-00 Dampproofing ... 263
07-13-00 Sheet Waterproofing ... 264
07-13-00 Sheet Waterproofing ... 264
07-14-00 Fluid-Applied Waterproofing ... 264
07-14-00 Fluid-Applied Waterproofing ... 265
07-16-00 Cementitious and Reactive Waterproofing ... 265
07-16-00 Cementitious and Reactive Waterproofing ... 265
07-17-00 Bentonite Waterproofing ... 266
07-17-00 Bentonite Waterproofing ... 266
07-18-00 Traffic Coatings ... 266
07-18-00 Traffic Coatings ... 266

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

07-19-00 Water Repellents ... 267
07-19-13 Water Repellents ... 267
07-20-00 Thermal Protection ... 267
07-21-00 Thermal Insulation ... 267
07-21-13 Board Insulation ... 267
07-21-16 Blanket Insulation ... 272
07-21-26 Blown Insulation ... 274
07-21-29 Sprayed Insulation ... 275
07-22-00 Roof and Deck Insulation ... 276
07-22-00 Roof and Deck Insulation ... 276
07-24-00 Exterior Insulation and Finish Systems ... 283
07-24-00 Exterior Insulation and Finish Systems ... 283
07-25-00 Weather Barriers ... 284
07-25-00 Weather Barriers ... 284
07-30-00 Steep Slope Roofing ... 285
07-31-00 Shingles and Shakes ... 285
07-31-13 Asphalt Shingles ... 285
07-31-16 Metal Shingles ... 288
07-31-26 Slate Shingles ... 289
07-31-29 Wood Shingles and Shakes ... 290
07-32-00 Roof Tiles ... 291
07-32-13 Clay Roof Tiles ... 291
07-32-16 Concrete Roof Tiles ... 292
07-33-00 Natural Roof Coverings ... 292
07-33-00 Natural Roof Coverings ... 292
07-40-00 Roofing and Siding Panels ... 293
07-41-00 Roof Panels ... 293
07-41-13 Metal Roof Panels ... 293
07-42-00 Wall Panels ... 294
07-42-13 Metal Wall Panels ... 294
07-42-43 Composite Wall Panels ... 295
07-42-46 Cementitious Wall Panels ... 296
07-46-00 Siding ... 297
07-46-00 Siding ... 297
07-50-00 Membrane Roofing ... 298
07-50-00 Membrane Roofing ... 298
07-50-00 Membrane Roofing ... 298
07-51-00 Built-Up Bituminous Roofing ... 298
07-51-00 Built-Up Bituminous Roofing ... 298
07-52-00 Modified Bituminous Membrane Roofing ... 299
07-52-00 Modified Bituminous Membrane Roofing ... 299
07-53-00 Elastomeric Membrane Roofing ... 300
07-53-23 Ethylene-Propylene-Diene-Monomer Roofing ... 300
07-54-00 Thermoplastic Membrane Roofing ... 301
07-54-19 Polyvinyl-Chloride Roofing ... 301

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

07-54-23 Thermoplastic-Polyolefin Roofing 302
07-56-00 Fluid-Applied Roofing 303
07-56-00 Fluid-Applied Roofing 303
07-60-00 Flashing and Sheet Metal 304
07-61-00 Sheet Metal Roofing 304
07-61-13 Standing Seam Sheet Metal Roofing 304
07-62-00 Sheet Metal Flashing and Trim 306
07-62-00 Sheet Metal Flashing and Trim 306
07-65-00 Flexible Flashing 307
07-65-00 Flexible Flashing 307
07-70-00 Roof and Wall Specialties and Accessories 307
07-71-00 Roof Specialties 307
07-71-00 Roof Specialties 307
07-72-00 Roof Accessories 309
07-72-00 Roof Accessories 309
07-72-13 Manufactured Curbs 311
07-72-53 Snow Guards 311
07-76-00 Roof Pavers 311
07-76-00 Roof Pavers 312
07-80-00 Fire and Smoke Protection 312
07-81-00 Applied Fire Protection 312
07-81-16 Cementitious Fire Protection 312
07-81-23 Intumescent Fire Protection 312
07-84-00 Firestopping 313
07-84-00 Firestopping 313
07-90-00 Joint Protection 313
07-92-00 Joint Sealants 313
07-92-00 Joint Sealants 313
07-95-00 Expansion Control 313
07-95-00 Expansion Control 313
08-00-00 Openings 314
08-10-00 Doors and Frames 314
08-11-00 Metal Doors and Frames 314
08-11-66 Metal Screen Doors and Frames 314
08-12-00 Metal Frames 318
08-12-13 Hollow Metal Frames 318
08-12-14 Steel Channel Frames 325
08-12-16 Aluminum Frames 326
08-13-00 Metal Doors 333
08-13-13 Hollow Metal Doors 333
08-13-16 Aluminum Doors 337
08-13-19 Stainless-Steel Doors 338
08-13-73 Sliding Metal Doors 339
08-14-00 Wood Doors 339
08-14-16 Wood Doors 339

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

08-15-00 Plastic Doors 348
08-15-00 Plastic Doors 348
08-15-16 Solid Plastic Doors 350
08-30-00 Specialty Doors and Frames 351
08-31-00 Access Doors and Panels 351
08-31-00 Access Doors and Panels 351
08-32-00 Sliding Glass Doors 357
08-32-00 Sliding Glass Doors 357
08-33-00 Coiling Doors and Grilles 358
08-33-00 Coiling Doors and Grilles 358
08-33-23 Overhead Coiling Doors 359
08-34-00 Special Function Doors 359
08-34-00 Special Function Doors 359
08-34-53 Security Doors and Frames 360
08-34-56 Security Gates 364
08-36-00 Panel Doors 365
08-36-13 Sectional Doors 365
08-40-00 Entrances, Storefronts, and Curtain Walls 365
08-42-00 Entrances 365
08-42-00 Entrances 365
08-42-29 Automatic Entrances 369
08-42-43 Intensive Care Unit/Critical Care Unit Entrances 369
08-43-00 Storefronts 369
08-43-00 Storefronts 369
08-44-00 Curtain Wall and Glazed Assemblies 371
08-44-00 Curtain Wall and Glazed Assemblies 371
08-45-00 Translucent Wall and Roof Assemblies 374
08-45-00 Translucent Wall and Roof Assemblies 374
08-50-00 Windows 375
08-51-00 Metal Windows 375
08-51-00 Metal Windows 375
08-52-00 Wood Windows 376
08-52-00 Wood Windows 376
08-52-13 Metal Clad Wood Windows 378
08-52-16 Plastic Clad Wood Windows 379
08-53-00 Plastic Windows 380
08-53-13 Vinyl Windows 380
08-56-00 Special Function Windows 382
08-56-19 Pass Windows 382
08-56-53 Security Windows 382
08-60-00 Roof Windows and Skylights 383
08-62-00 Unit Skylights 383
08-62-00 Unit Skylights 383
08-70-00 Hardware 386
08-71-00 Door Hardware 386

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

08-71-00 Door Hardware 386
08-71-53 Security Door Hardware 400
08-80-00 Glazing 400
08-81-00 Glass Glazing 400
08-81-26 Interior Glass Glazing 400
08-83-00 Mirrors 400
08-83-00 Mirrors 400
08-87-00 Glazing Surface Films 401
08-87-23 Safety and Security Films 401
08-88-00 Special Function Glazing 402
08-88-13 Fire-Rated Glazing 402
08-88-53 Security Glazing 402
08-88-56 Ballistics-Resistant Glazing 403
08-90-00 Louvers and Vents 404
08-91-00 Louvers 404
08-91-19 Louvers 404
09-00-00 Finishes 411
09-00-00 Finishes 411
09-01-00 Maintenance of Finishes 411
09-01-20 Maintenance of Plaster and Gypsum Board 411
09-01-30 Maintenance of Tiling 412
09-01-60 Maintenance of Flooring 412
09-05-00 Common Work Results for Finishes 412
09-05-00 Common Work Results for Finishes 412
09-05-61 Common Work Results for Flooring Preparation 413
09-20-00 Plaster and Gypsum Board 414
09-21-00 Plaster and Gypsum Board Assemblies 414
09-21-13 Plaster Assemblies 414
09-21-16 Gypsum Board Assemblies 416
09-22-00 Supports for Plaster and Gypsum Board 443
09-22-16 Non-Structural Metal Framing 443
09-24-00 Cement Plastering 443
09-24-23 Cement Stucco 443
09-24-26 Glass-Fiber-Reinforced Concrete Fabrications 444
09-27-00 Plaster Fabrications 445
09-27-13 Glass-Fiber-Reinforced Gypsum Fabrications 445
09-28-00 Backing Boards and Underlayments 446
09-28-13 Cementitious Backing Boards 446
09-30-00 Tiling 446
09-30-00 Tiling 446
09-30-13 Ceramic Tiling 446
09-30-16 Quarry Tiling 451
09-30-23 Glass Mosaic Tiling 452
09-30-29 Metal Tiling 454
09-30-33 Stone Tiling 455

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

09-50-00 Ceilings ... 456
09-51-00 Acoustical Ceilings ... 456
09-51-23 Acoustical Tile Ceilings ... 456
09-54-00 Specialty Ceilings ... 459
09-54-26 Suspended Wood Ceilings ... 459
09-54-33 Decorative Panel Ceilings ... 460
09-54-46 Fabric-Wrapped Ceiling Panels ... 461
09-57-53 Security Ceiling Assemblies ... 461
09-60-00 Flooring ... 461
09-61-00 Flooring Treatment ... 461
09-61-00 Flooring Treatment ... 461
09-62-00 Specialty Flooring ... 462
09-62-19 Laminate Flooring ... 462
09-62-23 Bamboo Flooring ... 462
09-62-29 Cork Flooring ... 463
09-62-53 Synthetic Turf Flooring ... 463
09-62-83 Structural Glass Flooring ... 464
09-64-00 Wood Flooring ... 464
09-64-23 Wood Parquet Flooring ... 464
09-64-29 Wood Strip and Plank Flooring ... 464
09-64-66 Wood Athletic Flooring ... 466
09-65-00 Resilient Flooring ... 467
09-65-13 Resilient Base and Accessories ... 467
09-65-16 Resilient Sheet Flooring ... 467
09-65-19 Resilient Tile Flooring ... 468
09-65-66 Resilient Athletic Flooring ... 469
09-66-00 Terrazzo Flooring ... 470
09-66-13 Portland Cement Terrazzo Flooring ... 470
09-66-16 Terrazzo Floor Tile ... 471
09-66-23 Resinous Matrix Terrazzo Flooring ... 472
09-67-00 Fluid-Applied Flooring ... 472
09-67-23 Resinous Flooring ... 472
09-68-00 Carpeting ... 473
09-68-00 Carpeting ... 473
09-69-00 Access Flooring ... 474
09-69-00 Access Flooring ... 474
09-70-00 Wall Finishes ... 475
09-72-00 Wall Coverings ... 475
09-72-00 Wall Coverings ... 475
09-74-00 Flexible Wood Sheets ... 476
09-72-00 Wall Coverings ... 476
09-74-13 Wood Wall Coverings ... 476
09-77-00 Special Wall Surfacing ... 477
09-77-00 Special Wall Surfacing ... 477
09-78-00 Interior Wall Paneling ... 477

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

09-78-00 Interior Wall Paneling 477
09-80-00 Acoustic Treatment 478
09-81-00 Acoustic Insulation 479
09-81-00 Acoustic Insulation 479
09-83-00 Acoustic Finishes 479
09-83-00 Acoustic Finishes 479
09-90-00 Painting and Coating 481
09-90-00 Painting and Coating 481
09-90-91 Surface Preparation 481
09-91-00 Painting 481
09-91-13 Exterior Painting 481
09-91-23 Interior Painting 485
09-93-00 Staining and Transparent Finishing 489
09-93-13 Staining and Finishing 489
09-96-00 High-Performance Coatings 490
09-96-23 Graffiti-Resistant Coatings 490
09-96-56 Epoxy Coatings 491
09-97-00 Special Coatings 493
09-97-13 Steel Coatings 493
10-00-00 Specialties 493
10-10-00 Information Specialties 493
10-11-00 Visual Display Units 493
10-11-13 Chalkboards 493
10-11-16 Markerboards 493
10-11-23 Tackboards 494
10-12-00 Display Cases 494
10-12-00 Display Cases 494
10-13-00 Directories 496
10-13-00 Directories 496
10-14-00 Signage 497
10-14-16 Plaques 497
10-14-19 Dimensional Letter Signage 498
10-14-23 Panel Signage 500
10-14-43 Photoluminescent Signage 501
10-20-00 Interior Specialties 501
10-21-00 Compartments and Cubicles 501
10-21-13 Toilet Compartments 501
10-21-23 Cubicle Curtains and Track 503
10-22-00 Partitions 503
10-22-13 Wire Mesh Partitions 503
10-22-19 Demountable Partitions 503
10-22-33 Operable Partitions 504
10-25-00 Service Walls 505
10-25-13 Patient Bed Service Walls 505
10-26-00 Wall and Door Protection 505

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

10-26-13 Corner Guards 505
10-26-16 Bumper Guards 506
10-26-23 Protective Wall Covering 506
10-26-41 Ballistics Resistant Panels 507
10-28-00 Toilet, Bath, and Laundry Accessories 507
10-28-13 Toilet Accessories 507
10-28-16 Bath Accessories 511
10-30-00 Fireplaces and Stoves 511
10-31-00 Manufactured Fireplaces 511
10-31-00 Manufactured Fireplaces 511
10-40-00 Safety Specialties 512
10-41-00 Emergency Access and Information Cabinets 512
10-41-16 Emergency Key Cabinets 512
10-44-00 Fire Protection Specialties 512
10-44-16 Fire Extinguishers 512
10-50-00 Storage Specialties 512
10-51-00 Lockers 512
10-51-13 Metal Lockers 512
10-51-16 Wood Lockers 513
10-51-23 Plastic-Laminate-Clad Lockers 514
10-51-26 Plastic Lockers 515
10-51-29 Phenolic Lockers 516
10-55-00 Postal Specialties 517
10-55-00 Postal Specialties 517
10-56-00 Storage Assemblies 518
10-56-13 Metal And Wood Storage Shelving 518
10-56-26 Mobile Storage Shelving 519
10-70-00 Exterior Specialties 519
10-71-00 Exterior Protection 519
10-71-13 Exterior Sun Control Devices 519
10-73-00 Protective Covers 519
10-73-43 Transportation Stop Shelters 519
10-74-00 Manufactured Exterior Specialties 519
10-74-49 Modular Landing and Ramp Systems 520
10-75-00 Flagpoles 520
10-75-00 Flagpoles 520
10-80-00 Other Specialties 520
10-81-00 Pest Control Devices 520
10-81-13 Bird Control Devices 520
11-00-00 Equipment 520
11-00-00 Equipment 520
11-15-00 Security Control Equipment 520
11-15-00 Security Control Equipment 520
11-10-00 Vehicle and Pedestrian Equipment 520
11-11-00 Vehicle Service Equipment 520

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

11-11-00 Vehicle Service Equipment 520
11-12-00 Parking Control Equipment 521
11-12-00 Parking Control Equipment 521
11-12-33 Parking Gates 521
11-13-00 Loading Dock Equipment 521
11-13-19 Stationary Loading Dock Equipment 521
11-14-00 Pedestrian Control Equipment 522
11-14-13 Pedestrian Gates 522
11-14-43 Pedestrian Detection Equipment 523
11-15-00 Security Control Equipment 523
11-15-00 Security Control Equipment 523
11-20-00 Commercial Equipment 526
11-21-00 Retail and Service Equipment 526
11-21-73 Commercial Laundry and Dry Cleaning Equipment 526
11-22-00 Banking Equipment 526
11-22-16 Teller and Service Equipment 526
11-30-00 Residential Equipment 527
11-30-00 Residential Equipment 527
11-30-13 Residential Appliances 527
11-40-00 Foodservice Equipment 532
11-41-00 Foodservice Storage Equipment 532
11-41-23 Walk-In Coolers 532
11-46-00 Food Dispensing Equipment 535
11-46-83 Ice Machines 535
11-48-00 Foodservice Cleaning and Disposal Equipment 536
11-48-13 Commercial Dishwashers 536
11-50-00 Educational and Scientific Equipment 536
11-51-00 Library Equipment 536
11-51-23 Library Stack Systems 536
11-52-00 Audio-Visual Equipment 539
11-52-13 Projection Screens 539
11-53-00 Laboratory Equipment 540
11-53-13 Laboratory Fume Hoods 540
11-53-16 Laboratory Incubators 540
11-53-17 Laboratory Equipment Washers 541
11-53-19 Laboratory Sterilizers 542
11-53-23 Laboratory Refrigerators 543
11-53-26 Laboratory Freezers 543
11-53-29 Laboratory Controlled-Environment Cabinets 543
11-53-43 Service Fittings and Accessories 544
11-53-53 Biological Safety Cabinets 546
11-55-00 Planetarium Equipment 546
11-55-13 Planetarium Projectors 546
11-60-00 Entertainment and Recreation Equipment 546
11-61-00 Broadcast, Theater, and Stage Equipment 546

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

11-61-33 Rigging Systems and Controls 546
11-66-00 Athletic Equipment 547
11-66-23 Gymnasium Equipment 547
11-66-43 Interior Scoreboards 548
11-66-53 Gymnasium Dividers 548
11-67-00 Recreational Equipment 549
11-67-33 Climbing Walls 549
11-68-00 Play Field Equipment and Structures 549
11-68-17 Playground - Structured Platforms and Stairs 549
11-68-18 Playground - Ladders and Slides 549
11-68-19 Playground - Obstacles 550
11-68-20 Playground - Stand Alone Items 551
11-68-21 Playground - Shade Structures 553
11-68-33 Athletic Field Equipment 553
11-68-43 Exterior Scoreboards 554
11-70-00 Healthcare Equipment 555
11-72-00 Examination and Treatment Equipment 555
11-72-13 Examination Equipment 555
11-73-00 Patient Care Equipment 556
11-73-13 Psychiatric Seclusion Room Padding 556
11-80-00 Facility Maintenance and Operation Equipment 556
11-81-00 Facility Maintenance Equipment 556
11-81-23 Facade Access Equipment 556
11-81-29 Facility Fall Protection 556
11-90-00 Other Equipment 556
11-95-00 Arts and Crafts Equipment 556
11-95-00 Arts and Crafts Equipment 556
12-00-00 Furnishings 557
12-00-00 Furnishings 557
12-01-00 Operation and Maintenance of Furnishings 557
12-01-50 Operation and Maintenance of Furniture 557
12-20-00 Window Treatments 558
12-21-00 Window Blinds 558
12-21-13 Horizontal Louver Blinds 558
12-21-16 Vertical Louver Blinds 559
12-24-00 Window Shades 559
12-24-13 Roller Window Shades 559
12-24-16 Pleated Window Shades 560
12-30-00 Casework 560
12-32-00 Manufactured Casework 560
12-32-12 Manufactured Metal Casework 560
12-32-13 Manufactured Wood Faced Casework 563
12-32-16 Manufactured Plastic-Laminate-Clad Casework 565
12-35-00 Specialty Casework 567
12-35-31 Residential Casework - Metal 567

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

12-35-32 Residential Casework - Wood ... 570
12-35-33 Residential Casework - Plastic-Laminate-Clad ... 572
12-35-53 Laboratory Casework ... 575
12-35-70 Healthcare Casework ... 582
12-36-00 Countertops ... 586
12-36-13 Concrete Countertops ... 587
12-36-16 Metal Countertops ... 587
12-36-19 Wood Countertops ... 587
12-36-23 Plastic Countertops ... 588
12-36-26 Glass Countertops ... 588
12-36-40 Stone Countertops ... 589
12-36-41 Solid Surface Countertops ... 590
12-36-53 Laboratory Countertops ... 591
12-40-00 Furnishings and Accessories ... 592
12-48-00 Rugs and Mats ... 592
12-48-13 Entrance Floor Mats and Frames ... 592
12-50-00 Furniture ... 592
12-51-00 Office Furniture ... 592
12-51-00 Office Furniture ... 592
12-59-00 Systems Furniture ... 593
12-59-16 Free-Standing Component System Furniture ... 593
12-60-00 Multiple Seating ... 593
12-61-00 Fixed Audience Seating ... 593
12-61-00 Fixed Audience Seating ... 593
12-63-00 Stadium and Arena Seating ... 594
12-63-00 Stadium and Arena Seating ... 594
12-63-13 Stadium and Arena Bench Seating ... 594
12-66-00 Telescoping Stands ... 596
12-66-00 Telescoping Stands ... 596
12-67-00 Pews and Benches ... 596
12-67-13 Pews ... 596
12-67-23 Benches ... 597
12-90-00 Other Furnishings ... 597
12-92-00 Interior Planters and Artificial Plants ... 597
12-92-43 Landscaping Accessories ... 597
13-00-00 Special Construction ... 597
13-00-00 Special Construction ... 597
13-01-00 Operation and Maintenance of Special Construction ... 598
13-01-11 Operation and Maintenance of Swimming Pools ... 598
13-10-00 Special Facility Components ... 599
13-11-00 Swimming Pools ... 599
13-11-13 Below-Grade Swimming Pools ... 599
13-11-20 Semi-Below-Grade Swimming Pools ... 600
13-11-23 On-Grade Swimming Pools ... 601
13-11-46 Swimming Pool Accessories ... 602

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

13-11-53 Movable Pool Bulkheads ... 603
13-12-00 Fountains ... 603
13-12-13 Exterior / Interior Fountains ... 603
13-17-00 Tubs and Pools ... 603
13-17-23 Therapeutic Pools ... 603
13-17-33 Whirlpool Tubs ... 604
13-18-00 Ice Rinks ... 604
13-18-00 Ice Rinks ... 604
13-20-00 Special Purpose Rooms ... 604
13-24-00 Special Activity Rooms ... 604
13-24-16 Saunas ... 604
13-27-00 Vaults ... 604
13-27-53 Security Vaults ... 604
13-28-00 Athletic and Recreational Special Construction ... 605
13-28-33 Athletic and Recreational Courts ... 605
13-30-00 Special Structures ... 605
13-31-00 Fabric Structures ... 605
13-31-33 Framed Fabric Structures ... 605
13-34-00 Fabricated Engineered Structures ... 605
13-34-19 Metal Building Systems ... 605
13-34-23 Fabricated Structures ... 606
13-40-00 Integrated Construction ... 606
13-49-00 Radiation Protection ... 606
13-49-00 Radiation Protection ... 606
14-00-00 Conveying Equipment ... 606
14-00-00 Conveying Equipment ... 606
14-01-00 Operation and Maintenance of Conveying Equipment ... 606
14-01-20 Operation and Maintenance of Elevators ... 606
14-10-00 Dumbwaiters ... 612
14-11-00 Manual Dumbwaiters ... 612
14-11-00 Manual Dumbwaiters ... 612
14-12-00 Electric Dumbwaiters ... 612
14-12-00 Electric Dumbwaiters ... 612
14-20-00 Elevators ... 613
14-21-00 Electric Traction Elevators ... 613
14-21-13 Electric Traction Freight Elevators ... 613
14-21-23 Electric Traction Passenger Elevators ... 613
14-24-00 Hydraulic Elevators ... 614
14-24-13 Hydraulic Freight Elevators ... 614
14-24-23 Hydraulic Passenger Elevators ... 614
14-30-00 Escalators and Moving Walks ... 615
14-31-00 Escalators ... 615
14-31-00 Escalators ... 615
14-32-00 Moving Walks ... 615
14-32-00 Moving Walks ... 615

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

14-40-00 Lifts ... 615
14-42-00 Wheelchair Lifts ... 615
14-42-00 Wheelchair Lifts ... 615
14-46-00 Material Lifts ... 616
14-46-00 Material Lifts ... 616
14-90-00 Other Conveying Equipment ... 616
14-92-00 Pneumatic Tube Systems ... 616
14-92-00 Pneumatic Tube Systems ... 616
21-00-00 Fire Suppression ... 616
21-00-00 Fire Suppression ... 617
21-01-00 Operation and Maintenance of Fire Suppression ... 617
21-01-10 Operation and Maintenance of Fire-Protection Systems ... 617
21-05-00 Common Work Results for Fire Suppression ... 620
21-05-05 Selective Demolition for Fire Suppression ... 620
21-05-17 Sleeves and Sleeve Seals for Fire-Suppression Piping ... 621
21-05-19 Meters and Gauges for Fire-Suppression Systems ... 621
21-05-23 General-Duty Valves for Water-Based Fire-Suppression Piping ... 622
21-05-29 Hangers and Supports for Fire-Suppression Piping and Equipment ... 623
21-05-48 Vibration and Seismic Controls for Fire-Suppression Piping and Equipment ... 624
21-05-53 Identification for Fire-Suppression Piping and Equipment ... 624
21-05-85 Miscellaneous Fire-Protection ... 624
21-09-00 Instrumentation and Control for Fire-Suppression Systems ... 625
21-09-13 Instrumentation and Control Devices for Fire-Suppression Systems ... 625
21-10-00 Water-Based Fire-Suppression Systems ... 625
21-11-00 Facility Fire-Suppression Water-Service Piping ... 625
21-11-19 Fire-Department Connections ... 625
21-12-26 Fire-Suppression Valve and Hose Cabinets ... 626
21-13-00 Fire-Suppression Sprinkler Systems ... 627
21-13-13 Wet-Pipe Sprinkler Systems ... 627
21-13-16 Dry-Pipe Sprinkler Systems ... 633
21-13-19 Preaction Sprinkler Systems ... 635
21-13-26 Deluge Fire-Suppression Sprinkler Systems ... 636
21-20-00 Fire-Extinguishing Systems ... 637
21-22-00 Clean-Agent Fire-Extinguishing Systems ... 637
21-22-13 Clean-Agent Fire-Extinguishing Piping ... 637
21-30-00 Fire Pumps ... 637
21-31-00 Centrifugal Fire Pumps ... 637
21-31-13 Fire Pumps ... 637
22-00-00 Plumbing ... 638
22-00-00 Plumbing ... 638
22-01-00 Operation and Maintenance of Plumbing ... 638
22-01-10 Operation and Maintenance of Plumbing Systems ... 638
22-05-00 Common Work Results for Plumbing ... 639
22-05-05 Selective Demolition for Plumbing ... 639
22-05-17 Sleeves and Sleeve Seals for Plumbing Piping ... 645

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

22-05-23 General-Duty Valves for Plumbing Piping 646
22-05-29 Hangers and Supports for Plumbing Piping and Equipment 650
22-05-48 Vibration and Seismic Controls for Plumbing Piping and Equipment 651
22-05-53 Identification for Plumbing Piping and Equipment 651
22-05-85 Miscellaneous Plumbing 651
22-07-00 Plumbing Insulation 652
22-07-19 Plumbing Piping Insulation 652
22-09-00 Instrumentation and Control for Plumbing 654
22-09-13 Instrumentation and Control Devices for Plumbing 654
22-10-00 Plumbing Piping 655
22-11-00 Facility Water Distribution 655
22-11-13 Facility Water Distribution Piping 655
22-11-16 Domestic Water Piping 658
22-11-19 Domestic Water Piping Specialties 664
22-11-23 Domestic Water Pumps 672
22-12-23 Facility Indoor Potable-Water Storage Tanks 674
22-13-00 Facility Sanitary Sewerage 675
22-13-16 Sanitary Waste and Vent Piping 675
22-13-19 Sanitary Waste Piping Specialties 687
22-13-23 Sanitary Waste Interceptors 689
22-13-29 Sanitary Sewerage Pumps 691
22-14-00 Facility Storm Drainage 692
22-14-13 Facility Storm Drainage Piping 692
22-14-26 Facility Storm Drains 700
22-14-29 Sump Pumps 702
22-15-00 General Service Compressed-Air Systems 703
22-15-19 General Service Packaged Air Compressors and Receivers 703
22-30-00 Plumbing Equipment 704
22-31-00 Domestic Water Softeners 704
22-31-16 Commercial Domestic Water Softeners 704
22-32-13 Domestic-Water Filters 705
22-33-00 Electric Domestic Water Heaters 706
22-33-36 Domestic Water Electric Heaters 706
22-34-00 Domestic Water Heaters 707
22-33-36 Domestic Water Electric Heaters 707
22-34-36 Domestic Water Gas Heaters 708
22-35-23 Domestic Water Heat Exchangers 710
22-35-00 Domestic Water Heat Exchangers 711
22-35-23 Domestic Water Heat Exchangers 711
22-40-00 Plumbing Fixtures 712
22-41-00 Residential Plumbing Fixtures 712
22-41-13 Residential Water Closets, Urinals, and Bidets 712
22-41-16 Residential Lavatories and Sinks 712
22-41-19 Residential Bathtubs 713
22-41-23 Residential Showers 713

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

22-42-00 Commercial Plumbing Fixtures 714
22-42-13 Commercial Water Closets, Urinals, and Bidets 714
22-42-16 Commercial Lavatories and Sinks 715
22-42-19 Commercial Bathtubs 718
22-42-23 Commercial Showers 718
22-42-33 Wash Fountains 720
22-42-36 Commercial Laundry, Mop and Utility Sinks 720
22-42-39 Commercial Faucets 721
22-42-43 Flushometers 722
22-42-45 Equipment Connections 722
22-43-00 Healthcare, Laboratory and Security Plumbing Fixtures 723
22-43-13 Healthcare Fixtures 723
22-43-53 Laboratory Fixtures 724
22-43-57 Laboratory Equipment Connections 725
22-46-13 Security Fixtures 726
22-45-00 Emergency Plumbing Fixtures 726
22-45-13 Emergency Showers 726
22-45-16 Eyewash Equipment 726
22-45-33 Combination Emergency Fixture Units 727
22-46-00 Security Plumbing Fixtures 727
22-46-13 Security Fixtures 727
22-47-00 Drinking Fountains and Water Coolers 727
22-47-13 Drinking Fountains 727
22-47-19 Water-Station Water Coolers 728
22-50-00 Pool and Fountain Plumbing Systems 729
22-51-00 Swimming Pool Plumbing Systems 730
22-51-13 Swimming Pool Piping 730
22-51-19 Swimming Pool Water Treatment Equipment 730
22-60-00 Gas and Vacuum Systems for Laboratory and Healthcare Facilities 731
22-61-00 Compressed-Air Systems for Laboratory and Healthcare Facilities 731
22-61-13 Compressed-Air Piping for Laboratory and Healthcare Facilities 731
22-61-19 Compressed-Air Equipment for Laboratory and Healthcare Facilities 734
22-62-00 Vacuum Systems for Laboratory and Healthcare Facilities 735
22-62-13 Vacuum Piping for Laboratory and Healthcare Facilities 735
22-62-19 Vacuum Equipment for Laboratory and Healthcare Facilities 737
22-63-00 Gas Systems for Laboratory and Healthcare Facilities 738
22-63-13 Gas Piping for Laboratory and Healthcare Facilities 738
22-63-19 Gas Equipment for Laboratory and Healthcare Facilities 740
22-66-00 Chemical-Waste Systems for Laboratory and Healthcare Facilities 742
22-66-53 Laboratory Chemical-Waste and Vent Piping 743
22-66-83 Chemical-Waste Tanks 748
22-67-00 Processed Water Systems for Laboratory and Healthcare Facilities 748
22-67-13 Processed Water Piping for Laboratory and Healthcare Facilities 748
23-00-00 Heating, Ventilating, and Air Conditioning (HVAC) 749
23-00-00 Heating, Ventilating, and Air Conditioning (HVAC) 750

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

23-01-00 Operation and Maintenance of HVAC Systems ... 750
23-01-20 Operation and Maintenance of HVAC Piping and Pumps ... 750
23-01-30 Operation and Maintenance of HVAC Air Distribution ... 750
23-01-70 Operation and Maintenance of Central HVAC Equipment ... 751
23-01-80 Operation and Maintenance of Decentralized HVAC Equipment ... 752
23-05-00 Common Work Results for HVAC ... 752
23-05-05 Selective Demolition for Heating, Ventilating, and Air Conditioning (HVAC) ... 752
23-05-13 Common Motor Requirements for HVAC Equipment ... 761
23-05-16 Expansion Fittings and Loops for HVAC Piping ... 766
23-05-17 Sleeves and Sleeve Seals for HVAC Piping and Ductwork ... 767
23-05-19 Meters and Gauges for HVAC Piping ... 768
23-05-23 General-Duty Valves for HVAC Piping ... 769
23-05-29 Hangers and Supports for HVAC Piping and Equipment ... 775
23-05-48 Vibration and Seismic Controls for HVAC ... 776
23-05-53 Identification for HVAC Piping and Equipment ... 777
23-05-85 Miscellaneous HVAC ... 777
23-05-93 Testing, Adjusting, and Balancing for HVAC ... 782
23-07-00 HVAC Insulation ... 784
23-07-13 Duct Insulation ... 784
23-07-19 HVAC Piping Insulation ... 785
23-09-00 Instrumentation and Control for HVAC ... 794
23-09-13 Instrumentation and Control Devices for HVAC ... 794
23-09-14 Instrumentation and Control Devices for Facility Fuel Systems ... 797
23-09-15 Instrumentation and Control Devices for HVAC Piping and Pumps ... 797
23-09-16 Instrumentation and Control Devices for HVAC Air Distribution ... 797
23-09-17 Instrumentation and Control Devices for HVAC Air Cleaning Devices ... 799
23-09-18 Instrumentation and Control Devices for Central Heating Equipment ... 799
23-09-19 Instrumentation and Control Devices for Central Cooling Equipment ... 800
23-09-20 Instrumentation and Control Devices for Central HVAC Equipment ... 800
23-09-21 Instrumentation and Control Devices for Decentralized HVAC Equipment ... 802
23-09-22 Instrumentation and Control Actuators and Control Valves ... 803
23-10-00 Facility Fuel Systems ... 806
23-11-00 Facility Fuel Piping ... 806
23-11-13 Facility Fuel-Oil Piping ... 806
23-11-23 Facility Natural-Gas Piping ... 808
23-12-00 Facility Fuel Pumps ... 810
23-12-13 Facility Fuel-Oil Pumps ... 810
23-13-00 Facility Fuel-Storage Tanks ... 810
23-13-13 Facility Fuel-Oil, Storage Tanks ... 810
23-20-00 HVAC Piping and Pumps ... 812
23-21-00 Hydronic Piping and Pumps ... 812
23-21-12 Hot Water Piping ... 813
23-21-13 Chilled Water Piping ... 818
23-21-14 Condenser Water Piping ... 824
23-21-15 Condensate Drain Piping ... 828

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

23-21-16 Hydronic Piping Specialties 829
23-21-23 Hydronic Pumps 832
23-22-00 Steam and Condensate Piping and Pumps 836
23-22-13 Steam and Condensate Heating Piping 836
23-22-16 Steam and Condensate Heating Piping Specialties 847
23-22-23 Steam Condensate Pumps 849
23-23-00 Refrigerant Piping 849
23-23-13 Refrigerant Piping 850
23-23-23 Refrigerants 851
23-25-00 HVAC Water Treatment 851
23-25-13 Water Treatment for Closed-Loop Hydronic Systems 851
23-25-16 Water Treatment for Open Hydronic Systems 852
23-30-00 HVAC Air Distribution 852
23-31-00 HVAC Ducts and Casings 852
23-31-13 Metal Ducts 852
23-31-16 Nonmetal Ducts 855
23-33-00 Air Duct Accessories 855
23-33-13 Dampers 855
23-33-19 Duct Silencers 858
23-33-33 Duct-Mounting Access Doors 858
23-33-46 Flexible Ducts 859
23-36-16 Air Terminal Units 860
23-41-13 Panel Air Filters 863
23-34-00 HVAC Fans 864
23-34-13 In-Line HVAC Fans 864
23-34-16 Utility HVAC Fans 865
23-34-19 Laboratory Exhaust HVAC Fans 866
23-34-23 Roof Mounted HVAC Fans 867
23-34-26 Wall Mounted HVAC Fans 868
23-34-39 High-Volume, Low-Speed HVAC Fans 869
23-35-00 Special Exhaust Systems 869
23-35-13 Dust Collection Systems 869
23-35-33 Listed Kitchen Ventilation Exhaust System 869
23-36-00 Air Terminal Units 869
23-36-16 Air Terminal Units 869
23-37-00 Air Outlets and Inlets 870
23-37-13 Diffusers, Registers, and Grilles 870
23-37-23 HVAC Gravity Ventilators 873
23-50-00 Central Heating Equipment 874
23-52-00 Heating Boilers 874
23-52-13 Electric Boilers 874
23-52-16 Condensing Boilers 875
23-52-23 Cast-Iron Boilers 876
23-52-33 Water-Tube Boilers 877
23-52-39 Fire-Tube Boilers 878

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

23-52-49 Boiler Hook-Ups & Modifiers 879
23-53-00 Heating Boiler Feedwater Equipment 880
23-53-13 Boiler Feedwater Pumps 881
23-54-00 Furnaces 881
23-54-16 Fuel-Fired Furnaces 881
23-57-00 Heat Exchangers for HVAC 881
23-57-13 Steam-to-Steam Heat Exchangers 881
23-57-16 Steam-to-Water Heat Exchangers 882
23-57-19 Liquid-to-Liquid Heat Exchangers 883
23-57-33 Direct Geoexchange Heat Exchangers 885
23-60-00 Central Cooling Equipment 885
23-62-00 Packaged Compressor and Condenser Units 885
23-62-13 Packaged Air-Cooled Refrigerant Compressor and Condenser Units 885
23-64-00 Packaged Water Chillers 889
23-64-16 Water Cooled Chillers 889
23-64-19 Air Cooled Chillers 893
23-65-00 Cooling Towers 896
23-65-13 Forced-Draft Cooling Towers 896
23-65-33 Liquid Coolers 901
23-70-00 Central HVAC Equipment 905
23-73-00 Central-Station Air-Handling Units 905
23-73-13 Modular Central-Station Air-Handling Units 905
23-73-16 Semi-Custom Central-Station Air-Handling Units 913
23-73-23 Custom Central-Station Air-Handling Units 918
23-73-39 Direct Gas-Fired Heating and Ventilating Units 923
23-74-13 Packaged, Outdoor, Central-Station Air-Handling Units 925
23-74-00 Packaged Outdoor HVAC Equipment 935
23-74-49 Air Handling Unit Coil Hook-Ups 935
23-80-00 Decentralized HVAC Equipment 938
23-81-00 Decentralized Unitary HVAC Equipment 938
23-81-13 Packaged Terminal Air-Conditioners 938
23-81-16 Room Air-Conditioners 939
23-81-19 Self-Contained Air-Conditioners 939
23-81-23 Computer-Room Air-Conditioners 940
23-81-26 Split-System Air-Conditioners 941
23-81-29 Variable Refrigerant Flow HVAC Systems 942
23-81-46 Water-Source Unitary Heat Pumps 943
23-82-00 Convection Heating and Cooling Units 944
23-82-13 Valance Heating and Cooling Units 944
23-82-19 Fan Coil Units 945
23-82-23 Unit Ventilators 945
23-82-33 Convectors 946
23-82-36 Finned-Tube Radiation Heaters 947
23-82-39 Unit Heaters 948
23-83-16 Radiant Heating and Cooling Hydronic Piping 948

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

23-83-00 Radiant Heating and Cooling Units ... 948
23-83-16 Radiant Heating and Cooling Hydronic Piping ... 948
23-83-93 Miscellaneous Terminal Units ... 949
23-84-00 Humidity Control Equipment ... 950
23-84-13 Humidifiers ... 950
26-00-00 Electrical ... 951
26-00-00 Electrical ... 951
26-05-00 Common Work Results for Electrical ... 951
26-05-05 Selective Demolition for Electrical ... 951
26-05-11 Control-Voltage Cable ... 954
26-05-12 Low-Voltage Copper Cable ... 954
26-05-17 Medium-Voltage Cable ... 956
26-05-39 Conduit Bodies and Supports ... 956
26-05-41 Wiremold Raceway ... 956
26-05-74 Junction Boxes - NEMA 4/4X ... 956
26-05-75 Wireway Gutter Enclosure ... 956
26-05-93 Electrical Support Items ... 957
26-05-95 Temporary Electrical Items ... 957
26-09-00 Instrumentation and Control for Electrical Systems ... 957
26-09-13 Electrical Power Monitoring ... 957
26-09-23 Lighting Control Devices ... 957
26-09-25 Line-Voltage Lighting Controls ... 959
26-09-27 Low-Voltage Lighting Controls ... 960
26-05-00 Common Work Results for Electrical ... 960
26-05-00 Common Work Results for Electrical ... 960
26-05-05 Selective Demolition for Electrical ... 960
26-05-10 Electrical Power Cables ... 960
26-05-11 Control-Voltage Cable ... 960
26-05-12 Low-Voltage Copper Cable ... 961
26-05-13 Low-Voltage Aluminum Cable ... 964
26-05-14 Low-Voltage Mineral Insulated Cable ... 965
26-05-15 Low-Voltage Metal Clad (MC) Cable ... 965
26-05-16 Low-Voltage Romex Cable ... 967
26-05-17 Medium-Voltage Cable ... 967
26-05-18 Feeder Assemblies ... 968
26-05-20 Grounding and Bonding for Electrical Systems ... 969
26-05-21 Grounding Cable ... 969
26-05-22 Grounding Rods and Clamps ... 970
26-05-30 Conduit for Electrical Systems ... 971
26-05-31 Galvanized Steel Conduit ... 971
26-05-32 Intermediate Metal Conduit ... 976
26-05-33 Electric Metallic Tubing Conduit ... 979
26-05-34 PVC Conduit ... 983
26-05-35 Liquid Tight Flexible Metal Conduit ... 986
26-05-36 Flexible Metallic Conduit ... 987

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

26-05-37 PVC Coated Galvanized Conduit 988
26-05-39 Conduit Bodies and Supports 990
26-05-40 Raceways and Supports for Electrical Systems 991
26-05-41 Wiremold Raceway 991
26-05-42 Cable Basket Support 993
26-05-43 Cable Tray Support 994
26-05-44 In-Slab Duct Raceway 994
26-05-45 In-Wall Duct Raceway 994
26-05-46 Raceway and Support Components 995
26-05-70 Junction Boxes for Electrical Equipment 997
26-05-71 Junction Boxes - NEMA 1 997
26-05-72 Junction Boxes - NEMA 3R 998
26-05-74 Junction Boxes - NEMA 4/4X 999
26-05-75 Wireway Gutter Enclosure 1000
26-05-76 Floor Boxes 1000
26-05-90 Miscellaneous Electrical Items and Systems 1001
26-05-93 Electrical Support Items 1001
26-05-95 Temporary Electrical Items 1001
26-05-97 Electric Vehicle Charging Stations 1002
26-05-98 Heat Trace and Snow Melt Systems 1003
26-09-00 Instrumentation and Control for Electrical Systems 1003
26-09-13 Electrical Power Monitoring 1003
26-09-25 Line-Voltage Lighting Controls 1003
26-09-27 Low-Voltage Lighting Controls 1004
26-10-00 Medium-Voltage Electrical Distribution 1005
26-12-00 Medium-Voltage Transformers 1005
26-12-23 Medium-Voltage Transformers - 15 KV 1005
26-13-00 Medium-Voltage Switchgear 1006
26-13-21 Medium-Voltage Switches - 5 KV 1006
26-20-00 Low-Voltage Electrical Distribution 1007
26-22-00 Low-Voltage Transformers 1007
26-22-13 Low-Voltage Distribution Transformers 1007
26-22-16 Low-Voltage Buck-Boost Transformers 1010
26-22-17 Low-Voltage Transformers for Nonlinear Loads 1010
26-24-00 Low-Voltage Switchboards and Panelboards 1012
26-24-13 Low-Voltage Switchboards 1012
26-24-16 Low-Voltage Panelboards 1015
26-24-17 Low-Voltage Panelboards - Isolation and Fused 1019
26-24-19 Low-Voltage Motor Control Centers 1019
26-25-00 Low-Voltage Enclosed Bus Assemblies 1020
26-25-13 Low-Voltage Busways 1020
26-25-15 Low-Voltage Busways - Aluminum 1021
26-25-17 Low-Voltage Busways - Copper 1021
26-27-00 Low-Voltage Distribution Equipment 1023
26-27-26 Wiring Devices 1023

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

26-27-33 Power Distribution Units 1026
26-28-00 Low-Voltage Circuit Protective Devices 1026
26-28-11 Low-Voltage Fuses 1026
26-28-12 Low-Voltage Circuit Breakers- 10AIC 1027
26-28-13 Low-Voltage Circuit Breakers- 25AIC 1029
26-28-14 Low-Voltage Circuit Breakers- 42AIC 1031
26-28-15 Low-Voltage Circuit Breakers- 65AIC 1032
26-28-16 Low-Voltage Disconnects- 250V 1034
26-28-18 Low-Voltage Disconnects- 600V 1036
26-29-11 Non-Fussed 250V 1038
26-30-00 Facility Electrical Power Generating and Storing Equipment 1038
26-31-00 Alternate Energy 1038
26-31-13 Photovoltaic Collectors 1038
26-32-00 Packaged Generator Assemblies 1039
26-32-11 Generators- Natural Gas or Propane 1039
26-32-12 Generators- Diesel 1043
26-32-14 Generators- CoGen 1051
26-32-16 Generator Accessories 1052
26-32-17 Generator Support Items 1052
26-32-18 Generator Load Banks 1052
26-32-19 Generator Paralleling and EDP 1053
26-32-21 Generator Transfer Switches 1054
26-33-00 Battery Equipment 1057
26-33-25 Inverters 1057
26-33-53 Static Uninterruptible Power Supply 1057
26-33-55 Rotary Uninterruptible Power Supply 1058
26-40-00 Electrical Protection 1059
26-41-00 Facility Lightning Protection 1059
26-41-13 Lightning Protection for Structures 1059
26-50-00 Lighting 1060
26-51-00 Interior Lighting 1060
26-51-11 LED Point Source Interior Lighting 1060
26-51-12 LED Linear Interior Lighting 1063
26-51-13 LED Pendent Interior Lighting 1068
26-51-14 LED Troffer Interior Lighting 1074
26-51-15 LED Wall Mounted Interior Lighting 1076
26-51-16 Fluorescent Interior Lighting 1079
26-51-17 Fluorescent to LED Retrofit 1086
26-51-23 HID Interior Lighting 1088
26-52-00 Safety Lighting 1088
26-52-13 Emergency and Exit Lighting 1088
26-55-00 Special Purpose Lighting 1089
26-55-13 Utility Lighting 1089
26-55-53 Security Lighting 1094
26-55-61 Theatrical Lighting 1094

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

26-55-68 Athletic Field Lighting 1098
26-55-69 Healthcare Lighting 1099
26-55-73 Clean Room and High Abuse Lighting 1101
26-56-00 Exterior Lighting 1103
26-55-68 Athletic Field Lighting 1103
26-56-19 LED Exterior Lighting 1104
27-00-00 Communications 1106
27-00-00 Communications 1106
27-05-00 Common Work Results for Communications 1106
27-05-13 Communications Wireless and Antenna Systems 1106
27-05-28 Communications Conduits, Raceways and Supports 1107
27-05-33 Communications Outlets 1107
27-10-00 Communications Structured Cabling 1108
27-15-00 Communications Horizontal Cabling 1108
27-15-16 Voice Communications Cabling 1108
27-20-00 Data Communications 1110
27-21-00 Data Communications Network Equipment 1110
27-21-33 Data Communications Wireless Access Points 1110
27-30-00 Voice Communications 1110
27-32-00 Voice Communications Systems 1111
27-32-13 Voice Communications Equipment 1111
27-40-00 Audio-Video Communications 1112
27-41-00 Audio-Video Communications Systems 1112
27-41-16 Audio-Video Communications Equipment 1112
27-50-00 Distributed Communications and Monitoring Systems 1114
27-51-00 Distributed Audio-Video Communications Systems 1114
27-51-13 Paging Communications Systems 1114
27-51-26 Assistive Listening Communications Systems 1116
27-52-00 Healthcare Communications and Monitoring Systems 1117
27-52-23 Nurse Call Communications Systems 1117
27-53-00 Distributed Communications Systems 1119
27-53-13 Clock Communications Systems 1119
28-00-00 Electronic Safety and Security 1119
28-00-00 Electronic Safety and Security 1119
28-05-00 Common Work Results for Electronic Safety and Security 1120
28-05-00 Common Work Results for Electronic Safety and Security 1120
28-10-00 Safety and Security Access Control 1120
28-13-00 Access Control Software and Database Management 1120
28-13-11 Access Control Software 1120
28-14-00 Access Control System Hardware 1120
28-14-11 Access Control Network Controllers 1120
28-14-13 Access Control Door Controllers 1121
28-14-19 Access Control Enclosures 1121
28-15-00 Integrated Access Control Hardware Devices 1121
28-15-11 Integrated Credential Readers and Entry Management 1122

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

28-15-13 Access Control Credentials 1123
28-15-15 Electrified Locking Devices and Accessories 1123
28-15-17 Egress Management Devices 1124
28-15-21 Telephone Entry Systems 1124
28-16-00 Access Control Interfaces 1124
28-16-11 Access Control Interfaces to Access Control Hardware 1124
28-20-00 Safety and Security Video Surveillance 1124
28-21-00 Safety and Security Video Surveillance Systems 1124
28-21-11 Safety and Security Video Surveillance Equipment 1124
28-30-00 Security Detection, Alarm, and Monitoring 1127
28-31-00 Intrusion Detection 1127
28-31-11 Building Intrusion Detection 1127
28-40-00 Safety and Security Life Safety 1127
28-46-00 Safety and Security Fire Detection and Alarm Systems 1127
28-46-20 Safety and Security Fire Alarm Devices 1127
28-46-21 Safety and Security Fire Alarm Panels 1130
28-50-00 Safety and Security Specialized Systems 1131
28-55-00 Safety and Security Specialized Systems 1131
28-55-11 Safety and Security Laser Safety 1131
31-00-00 Earthwork 1132
31-00-00 Earthwork 1132
31-09-00 Geotechnical Instrumentation and Monitoring of Earthwork 1132
31-09-13 Geotechnical Instrumentation and Monitoring 1132
31-10-00 Site Clearing 1132
31-14-00 Earth Stripping and Stockpiling 1132
31-14-13 Soil Stripping and Stockpiling 1132
31-14-16 Sod Stripping and Stockpiling 1133
31-20-00 Earth Moving 1134
31-22-00 Grading 1134
31-22-00 Grading 1134
31-22-19 Finish Grading 1135
31-23-00 Excavation and Fill 1135
31-23-16 Excavation 1135
31-23-19 Dewatering 1138
31-23-23 Fill 1140
31-25-00 Erosion and Sedimentation Controls 1147
31-25-00 Erosion and Sedimentation Controls 1147
31-30-00 Earthwork Methods 1149
31-35-00 Slope Protection 1149
31-35-00 Slope Protection 1149
31-35-19 Geosynthetic Slope Protection 1151
31-36-00 Gabions 1153
31-36-13 Gabion Boxes 1153
31-37-00 Riprap 1153
31-37-00 Riprap 1153

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

31-40-00 Shoring and Underpinning 1153
31-41-00 Shoring 1153
31-41-00 Shoring 1153
31-41-33 Trench Shielding 1153
31-48-00 Underpinning 1154
31-48-00 Underpinning 1154
31-60-00 Special Foundations and Load-Bearing Elements 1154
31-62-00 Driven Piles 1154
31-62-13 Concrete Piles 1154
31-62-16 Steel Piles 1154
31-63-00 Bored Piles 1155
31-63-33 Drilled Micropiles 1155
31-64-00 Caissons 1155
31-64-00 Caissons 1155
31-66-00 Special Foundations 1155
31-66-15 Helical Foundation Piles 1155
31-70-00 Tunneling and Mining 1155
31-74-00 Tunnel Construction 1156
31-74-00 Tunnel Construction 1156
32-00-00 Exterior Improvements 1156
32-00-00 Exterior Improvements 1156
32-01-00 Operation and Maintenance of Exterior Improvements 1156
32-01-16 Flexible Paving Rehabilitation 1156
32-01-17 Flexible Paving Repair 1161
32-05-00 Common Work Results for Exterior Improvements 1162
32-05-19 Geosynthetics for Exterior Improvements 1162
32-10-00 Bases, Ballasts, and Paving 1162
32-11-00 Base Courses 1162
32-11-13 Subgrade Modifications 1162
32-11-23 Aggregate Base Courses 1163
32-12-00 Flexible Paving 1164
32-12-13 Preparatory Coats 1164
32-12-16 Asphalt Paving 1165
32-12-36 Seal Coats 1185
32-13-00 Rigid Paving 1187
32-13-13 Concrete Paving 1187
32-14-00 Unit Paving 1190
32-14-13 Unit Paving 1191
32-15-00 Aggregate Surfacing 1191
32-15-40 Crushed Stone Surfacing 1191
32-16-00 Curbs, Gutters, Sidewalks, and Driveways 1192
32-16-13 Curbs and Gutters 1192
32-17-00 Paving Specialties 1193
32-17-13 Parking Bumpers 1193
32-17-15 Built In Place-Traffic Calming 1194

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

32-17-23 Pavement Markings 1194
32-18-00 Athletic and Recreational Surfacing 1198
32-18-23 Athletic Surfacing 1198
32-30-00 Site Improvements 1199
32-31-00 Fences and Gates 1199
32-31-00 Fences and Gates 1199
32-31-11 Gate Operators 1200
32-31-13 Chain Link Fences and Gates 1201
32-31-16 Welded Wire Fences and Gates 1202
32-31-19 Decorative Metal Fences and Gates 1203
32-31-23 Plastic Fences and Gates 1204
32-31-29 Wood Fences and Gates 1204
32-32-00 Retaining Walls 1205
32-32-13 Cast-in-Place Concrete Retaining Walls 1205
32-32-23 Segmental Retaining Walls 1205
32-33-00 Site Furnishings 1205
32-33-00 Site Furnishings 1205
32-33-13 Site Bicycle Racks 1206
32-33-23 Site Trash and Litter Receptacles 1206
32-33-43 Site Seating and Tables 1206
32-39-00 Manufactured Site Specialties 1206
32-39-13 Manufactured Metal Bollards 1206
32-80-00 Irrigation 1210
32-80-00 Irrigation 1210
32-80-00 Irrigation 1210
32-81-00 Irrigation Components 1212
32-81-13 Irrigation Intake Screens 1212
32-82-00 Irrigation Pumps 1213
32-82-13 Irrigation Pumps 1213
32-84-00 Planting Irrigation 1213
32-84-23 Underground Sprinklers 1213
32-90-00 Planting 1215
32-91-00 Planting Preparation 1215
32-91-19 Landscape Grading 1215
32-92-00 Turf and Grasses 1215
32-92-19 Seeding 1215
32-92-23 Sodding 1216
32-93-00 Plants 1216
32-93-13 Ground Covers 1216
32-93-33 Shrubs 1217
32-93-36 Ornamental Grasses and Perennials 1231
32-93-43 Trees 1235
32-94-00 Planting Accessories 1250
32-94-00 Planting Accessories 1250
32-94-19 Landscape Surfacing 1250

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

32-94-43 Tree Grates 1252
32-96-00 Transplanting 1252
32-96-43 Tree Transplanting 1252
33-00-00 Utilities 1253
33-00-00 Utilities 1253
33-01-00 Operation and Maintenance of Utilities 1253
33-01-00 Operation and Maintenance of Utilities 1253
33-01-10 Operation and Maintenance of Water Utilities 1254
33-01-30 Operation and Maintenance of Sewer Utilities 1254
33-05-00 Common Work Results for Utilities 1261
33-05-04 Selective Demolition for Utilities 1261
33-05-09 Piping Specials for Utilities 1263
33-05-85 Miscellaneous Site 1265
33-10-00 Water Utilities 1267
33-14-00 Water Utility Transmission and Distribution 1267
33-14-11 Water Utility Transmission Piping 1267
33-14-16 Site Water Utility Distribution Piping 1267
33-14-19 Valves and Hydrants for Water Utility Service 1283
33-14-23 Enclosures for Water Utility Piping and Valves 1284
33-16-00 Water Utility Storage Tanks 1285
33-16-53 Ground-Level Metal Water Storage Cisterns 1285
33-16-56 Ground-Level Plastic Water Storage Cisterns 1285
33-30-00 Sanitary Sewerage 1286
33-31-00 Sanitary Sewerage Piping 1286
33-31-13 Site Sanitary Sewerage Gravity Piping 1286
33-32-13 Site Sanitary Manholes and Equipment 1291
33-40-00 Stormwater Utilities 1292
33-42-00 Stormwater Conveyance 1292
33-42-11 Stormwater Gravity Piping 1292
33-42-16 Stormwater Force Main Piping 1316
33-42-23 Headwalls and Endwalls for Stormwater Piping 1316
33-42-31 Stormwater Area Drains and Inlets 1316
33-46-23 Modular Buried Stormwater Storage Units 1318
33-44-00 Stormwater Utility Equipment 1319
33-44-26 Stormwater Catch Basin Insert Filters 1319
33-50-00 Hydrocarbon Utilities 1319
33-52-00 Hydrocarbon Transmission and Distribution 1319
33-52-16 Gas Hydrocarbon Piping 1319
33-60-00 Hydronic and Steam Energy Utilities 1320
33-61-00 Hydronic Energy Distribution 1320
33-61-13 Buried Hydronic Energy Distribution 1320
33-70-00 Electrical Utilities 1331
33-71-00 Electrical Utility Transmission and Distribution 1331
33-71-15 Electrical Overhead Utilities 1331
33-71-19 Electrical Underground Utilities 1332

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

33-71-26 Transmission and Distribution Equipment 1338
33-79-00 Site Lighting 1338
33-79-13 Site Improvement Grounding 1338
33-79-23 Roadway and Traffic Lighting 1343
34-00-00 Transportation 1345
34-40-00 Transportation Signaling and Control Equipment 1345
34-41-00 Roadway Signaling and Control Equipment 1345
34-41-13 Traffic Signals 1345
34-70-00 Transportation Construction and Equipment 1346
34-71-00 Roadway Construction 1346
34-71-13 Vehicle Barriers 1346
35-00-00 Waterway and Marine Construction 1347
35-00-00 Waterway and Marine Construction 1347
35-05-00 Common Work Results for Waterway and Marine Construction 1347
35-05-50 Common Work Results for Marine Construction 1347
35-05-00 Common Work Results for Waterway and Marine Construction 1347
35-05-50 Common Work Results for Marine Construction 1347
35-05-50 Common Work Results for Marine Construction 1347
35-20-00 Waterway and Marine Construction and Equipment 1347
35-24-00 Dredging 1347
35-24-23 Clamshell Dredging 1347
40-00-00 Process Interconnections 1347
40-00-00 Process Interconnections 1347
40-05-00 Common Work Results for Process Interconnections 1347
40-05-59 Hydraulic Gates 1347
46-00-00 Water and Wastewater Equipment 1348
46-20-00 Water and Wastewater Preliminary Treatment Equipment 1348
46-23-00 Grit Removal and Handling Equipment 1348
46-23-43 Inline Baffled Grit Removal Equipment 1348

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Ownership and Permitted Use Statement

The Simplebid® Platform Including Software, Unit Price Book, and Associated Intellectual Property Ownership and Permitted Use Statement

All data contained in this document and the methodology behind it have been curated and crafted over many decades by Facility Optimization Solutions, LLC, a subsidiary of CannonDesign.

Your rights to access and make use of the data and intellectual property contained in the Simplebid platform including the Simplebid software and unit price book are limited and governed by the Terms and Conditions of any contract permitting your use of the Simplebid platform as well as by our End User License Agreement found at first login to our Simplebid software. You may not access or make use of the Simplebid platform, including the Simplebid software and unit price book, except as provided by these contracts, which are binding on you as the end user.

All data within and related to the Simplebid platform including the Simplebid software and unit price book are not to be copied, stored, or utilized in any manner except as authorized in writing by Facility Optimization Solutions, LLC, a subsidiary of CannonDesign.

Simplebid software user accounts and their login credentials including user names and passwords to the Simplebid system are for a single user and use only, and may not be shared, sold, or used for any reason outside of the licensed use and valid subscription agreement.

©2025 CannonDesign. All Rights Reserved.

® and ™ designate U.S. trademarks of CannonDesign, except as noted.

© 2016-2018 The Construction Specifications Institute, Inc. (CSI). The trademark MASTERFORMAT® and the copyrighted MasterFormat work are used under license from CSI

(<http://www.csiresources.org>)

I. Introduction

The Simplebid UPB is a database of construction tasks and associated unit costs. This database is designed to facilitate the job order contracting (JOC) construction procurement method. This publication is often known as a JOC Unit Price Book (UPB).

Important Considerations

It is important for users of the Simplebid platform to recognize that the Simplebid UPB has some characteristics that may be unlike other unit price books used in JOC programs.

- Items & Assemblies

The Simplebid UPB includes both itemized unit costs and assembly level line items. Assembly items combine multiple construction tasks into single systems level cost and are based on an appropriate unit of measure.

- Unit Costs

The Simplebid UPB's unit costs are inclusive of all labor, equipment, and materials required for the complete installation of a unit of measurable work.

- Pricing

Simplebid UPB line-items reflect subcontractor costs and exclude general conditions & requirements which are to be accounted for in the contractor's Adjustment Factors. Detailed information regarding the pricing structure and excluded costs are provided in Section III, entitled "General Pricing Structure".

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

II. Using the SimpleBid UPB

A. For Job Contracting Only

The Simplebid software and the Simplebid UPB are only to be used for the preparation of JOC Adjustment Factors and to prepare price proposals responding to work order requests for proposals issued within a JOC program. Other uses of the Simplebid software and Simplebid UPB are prohibited and subject to the Simplebid end user license agreement.

B. For JOC Solicitations and Work Order Proposal Pricing

The Simplebid UPB contains component and assembly unit prices for construction tasks and includes general notes, descriptions, and clarifications. These general notes, descriptions, and clarifications are intended to help guide the user in the selection of unit price line items, determine JOC Adjustment Factors, and compile individual work order price proposals. The Simplebid UPB does not replace or take precedence over project specific documents including but not limited to the following:

· Material Quality and Quantity
· Installation Means, Procedures, or Methods
· Scope of Work Documents
· Plans & Specifications
· Contractual Agreements

It is the responsibility of the responding bidder to review and understand all contract documents, including the contents of the Simplebid UPB, to determine Adjustment Factors as solicited by University of Kentucky.

It is the responsibility of awarded contractors using the Simplebid software and the Simplebid UPB to return price proposals that reflect each individual work order scope of work as described by any project documents. Awarded contractors are required to perform all tasks within a prescribed scope of work in accordance with the job order contract and any other contractual agreements with University of Kentucky. Furthermore, awarded contractors are required to perform all work in accordance with procurement, production, and project specifications, applicable laws, codes, statutes, and industry standards as prescribed by University of Kentucky.

C. Use of Adjustment Factors

Adjustment Factors that are established upon the execution of a job order contract between a responding bidder and University of Kentucky and are applied through the Simplebid software to all individual unit prices contained in the Simplebid UPB and to all New Item Requests (NIRs).

These Adjustment Factors are carried throughout the term defined by the job order contract between the responding bidder and University of Kentucky.

D. UPB Layout

The Simplebid UPB is arranged by CSI MasterFormat® which provides a standard list of numbers and titles to organize construction items and costs. This structure includes a sortable arrangement of industry-standard divisions that are broken down into four subgroups:

General Requirements Subgroup	Division 01
Facility Construction Subgroup	Division 02 through Division 14
Facility Services Subgroup	Division 21 through Division 28
Site and Infrastructure Subgroup	Division 31 through Division 35

The Simplebid Unit Price Book is further divided into four standard MasterFormat® Levels including Divisions (Level 1) and Titles or Sections (Levels 2 - 4). Hover notes are included as applicable for different levels to provide clarification statements. Hover notes typically apply to all levels and items within the associated level.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

III. Pricing Structure

A. General Pricing Structure

The Simplebid UPB's General Pricing Structure includes the following key factors used to determine line-item unit prices.

Line-item unit prices **include** applicable sales taxes.

Simplebid UPB line-item unit prices **include** burdened and "fully loaded" subcontractor pricing including but not limited to:

Subcontractor Indirect Costs and Markups
☑ All home office costs
☑ All required insurances, bonds, and indemnifications
☑ All construction facilities and personnel including mobilization and demobilization
☑ Nonworking supervision
☑ Overhead and Profit

Line-item unit prices include current local competitive construction market pricing. Local prevailing wage rates are included in unit price line items.

Responding bidder fees, profits, bonds, insurance, and general requirements / conditions are omitted from each individual line-item unit price within the Simplebid UPB and are to be included by the responding bidder within the job order contract Adjustment Factors. Responding bidder's typical omitted general requirements (CSI MasterFormat® Division 01) are listed below. The costs associated with omitted general requirements should be included by the responding bidder within the job order contract Adjustment Factors.

Certain project specific construction cost implications may exist. Where applicable, these costs should be included in additional adjustment factors or adjustment factor modifiers. Refer to INSERT CLIENT NAME HEREsolicitation documents to understand the scope of solicited job order contracts and the associated Adjustment Factors.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

B. General Requirements

All General Requirements **are excluded** (unless specifically stated otherwise) and are to be included in the Contractor's Adjustment Factor.

Examples of **Omitted** General Requirements:

Staff
⊘ All Field Staff - Engineer, Scheduler, Project Manager, Superintendent, Office Clerk, Secretary, etc.
⊘ General Foreman - Non-Working
⊘ Project Site Coordinator
⊘ Quality Control Manager
⊘ Training Consultant
⊘ Sustainability Coordinator
Permits & Fees
⊘ Building Permits
⊘ Demolition, Abatement, and Environmental Permits
⊘ HVAC, Plumbing, Fire Protection, and Electrical Permits
⊘ Stormwater & Dewatering Discharge Permits
⊘ Traffic Control & Street Use Permits
Testing and Inspections
⊘ Hourly Inspection Services
⊘ General Testing Services
⊘ Specified Material Testing and Inspection Services (subject to agency approval)
Documentation
⊘ As Built Drawings, Models, and Renderings (REVIT)
⊘ Construction Progress Documentation
⊘ Digital Progress, Aerial, and Drone Photos and Videos
⊘ Pre-Construction & Building Layout Surveys
⊘ Submittal Drawings & Procedures
⊘ Contractor Plans - Dewatering, Pollution Control, Emergency Response, Shoring, etc.
⊘ Project Closeout

Temporary Facilities
⊘ Temporary Energy Usage
⊘ Temporary Facilities - Field Offices, Furnishings, Equipment, etc.
⊘ Temporary Sanitary Facilities
⊘ Temporary Stormwater Runoff, Control, and Filtering
⊘ Temporary Utility Connections - Storm, Water, Sanitary, Electric, IT, Communiation, Gas, etc.
⊘ Sustainability Coordinator
Miscellaneous
⊘ Legal, Accounting, and Audit Consultants
⊘ Environmental, Indoor Air Quality, Pollution, and Infection Control Procedures
⊘ Waste Management Procedures (Handling & Separation)
⊘ Facility Performance and Quality Assurance Requirements
⊘ Commissioning
⊘ Field Equipment - Trucks, Buggies, Carts, etc.
⊘ Material Storage Facilities & Containers
⊘ Daily & Final Clean-up
⊘ Special Procedures
⊘ Safety Requirements & Fall Protection
⊘ Home Office Support
⊘ Travel Expenses, Mileage, and Per Diem
⊘ Mockups
⊘ Product Sourcing Administration
⊘ Project Meetings and Coordination
⊘ Best Management Practices (BMPs)
⊘ Protection of Existing Surfaces and Conditions
⊘ Safety, Security, and Surveillance Equipment

ⓘ **Exception** - See CSI MasterFormat® Division 01 for allowable general requirements items.
ⓘ **Exception** - General Requirements exceptions will be considered on a case-by-case basis for extenuating circumstances or conditions upon approval from the agency and project manager.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

C. Holistic Pricing

Assembly items are intended to create a holistic description and price for a measurable construction task. Not all items may be an exact match to any terms and specifications of the project documents. It is the responding bidder or awarded contractor's sole responsibility to select the assembly item that most closely reflects the intent of the scope of work and any project documents and to contact with any questions regarding selections or substitutions.

Assembly items **are required** for first selection and take precedence over the selection of individual component line items.

D. Economy of Scale

The Simplebid UPB is compiled with the recognition that economies-of-scale are not available in some cases. Where possible, unit price line items clearly define their quantification limits in the description. These unit price line-items provide pricing adjustments that represent equitable "high-cost/low-productivity" situations. It is important to read each description and notes regarding applicable quantities as pricing for a similar task may vary.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

E. Measured Units

The table contains the Simplebid UPB's measured units with the corresponding description:

Unit	Description
ACRE	Acre
CF	Cubic Feet
CFM	Cubic Feet Per Minute
CY	Cubic Yard
DAY	Day
DRUM	Drum
EA	Each
FL	Floor
FLAT	Flat
FLT	Flight
FT	Feet
GAL	Gallon
HOLE	Hole
HR	Hour
INCH	Inch
LB	Pound
LF	Linear Feet
LS	Lump Sum
ML	Mile
MO	Month
OP	Opening
PR	Pair
RI	Riser
SEAT	Seat
SET	Set
SF	Square Feet
SFCA	Square Foot Contact Area
SFRA	Square Foot Roof Area
SITE	Site
STOP	Stop
SY	Square Yards
TN	Ton
TON	Ton
WATT	Watt
WK	Week
YR	Year

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

IV. Pricing Considerations

A. Labor, Materials, & Equipment

1. Labor Costs

Labor (Included)
☑ All small tools.
☑ Base wages at straight time including fringes and benefits.
☑ Unemployment insurances, worker's compensation, social security, and Medicare taxes
☑ Refer to construction documents, applicable codes, and OSHA safety requirements for specific installation requirements.
☑ Receiving, unloading, stockpiling, distribution, handling, assembly, fitting, joining, spreading (earthwork, etc.), and erection as required for installation.

2. Materials Costs

Materials / Materials Handling (Included)
☑ Delivery FOB to the site - Including loading, transportation, unloading, staging to the required area and ready for installation.
☑ Consumable materials used up during construction such as drill bits, welding rods, gases, flux, saw blades, etc.
☑ Lifts, rigging, and scaffolding required to stage, lift and reach up to 15 feet above the work surface.
☑ All caulking including exterior weatherproofing caulking as well as interior material change caulking.
☑ Any construction aids for safety, testing or balancing as required by contract documents.
☑ Refer to contract documents and applicable building codes for specific material requirements.
☑ All general equipment (defined as any equipment which does not require a classified power equipment operator) including but not limited to air tools, welders, generators, and power tools.
☑ All required fasteners, gaskets, adhesives, and anchors to substrates.
☑ CSI MasterFormat® Divisions 02 through 28 items provide material handling for up to 200 feet and 3 stories from stockpile or delivery location to work areas unless specifically stated otherwise.
☑ CSI MasterFormat® Divisions 31 through 35 items include material handling for up to 500 yards from staging or delivery location to work areas unless specifically stated otherwise.
☑ Additional costs for seismic, hurricane impact, anti-ligature, and ADA-required materials are shown as separate line items.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

3. Construction Equipment Costs

Construction Equipment (Included)
☑ All heavy equipment (defined as any equipment requiring a classified power equipment operator) expenses including but not limited to rental, purchase, mobilization, demobilization, set-up, operating, maintenance, repair, depreciation, incidentals, and fuel costs.
☑ Equipment operators, oilers, truck drivers, etc. (unless noted otherwise)
☑ All equipment as required for installation and removals (unless noted otherwise) including but not limited to:
☑ Earthmoving
☑ Shoring
☑ Placement/Pouring
☑ Rigging
☑ Structural Items
☑ Hauling & Disposal (On and off site)

ⓘ **Exception** - Refer to MasterFormat® Section-Specific Notes below for exceptions and additional clarifications.
ⓘ **Exception** - All general equipment is included under material costs as noted above. Individual equipment line items can only be utilized as noted by specific items or MasterFormat sections.

B. MasterFormat® Section Specific Considerations

Refer to notes located on CSI MasterFormat® Levels 1 through 4 in the Simplebid Unit Price Book (presented as "hover notes" within the Simplebid JOC software) for additional section specific clarifications to the following:

1. General Requirements Subgroup

Disallowed	
⊘	Additional General Requirements beyond those included in UPB CSI MasterFormat® Division 01 or those excluded above.
Division 01 - General Requirements	
☑	Includes general requirements items which are exceptions to, or have not been, specifically omitted above.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

2. Facility Construction

Disallowed	
⊘	Mobilization and Demobilization of all construction equipment unless specifically stated otherwise
Division 02 - Existing Conditions	
☑	Includes all assembly items for temporary shoring of building structure to facilitate modifications and removals
☑	Includes all item removals for CSI MasterFormat® Divisions 3 through 14, 31, and 31. Item removals for CSI MasterFormat® Divisions 21 through 28 and 33 are located within their applicable sections.
☑	Refer to the corresponding CSI MasterFormat® Division for the refurbishment or reuse of existing items.
☑	Refer to the corresponding CSI MasterFormat® Division for the patching of existing conditions.
☑	All demolition/removal costs exclude any salvage value.
Division 03 - Concrete	
☑	All Structural Pre-cast Concrete Simplebid assembly Items may refer to CSI MasterFormat® Division 01 for the cost of rigging.
Division 05 - Structural Steel	
☑	Refer to CSI MasterFormat® Division 01 for rigging equipment if any single (1) structural steel piece weighs more than 1-Ton (2,000 lbs.)

3. Facility Services Subgroup

Allowed	
☑	Refer to CSI MasterFormat® Division 01 for rigging equipment required for the installation of mechanical and electrical equipment weighing over 1,000 pounds.
☑	Mobilization and Demobilization of temporary mechanical and electrical equipment
Disallowed	
⊘	Mobilization and Demobilization of all construction equipment (except rigging) unless specifically stated otherwise
Division 21 - Fire Suppression **Division 22 - Plumbing** **Division 23 - Heating, Ventilating, and Air Conditioning (HVAC)** **Division 25 - Integrated Automation**	
General	
☑	All demolition/removal costs exclude any salvage value
☑	Manufacturer and Model numbers are for reference/comparison purposes only and are not intended to specify specific items. Reference contract documents for specific selections and approved equals.
☑	Item descriptions may not include every size, range, or increment of sizes available for every item. It is the responsibility of the contractor to choose the most applicable item.
☑	Cutting and patching work required for the installation of mechanical system or components shall be included under CSI MasterFormat® Divisions 02 through 14.
☑	Items are of commercial grade unless stated otherwise.
☑	Labor costs include accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, mechanical & electrical systems, etc. to be priced separately.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Piping & Ductwork	
☑	Piping and ductwork insulation items include factory applied all service jacket as required
☑	Ductwork items include hangers and fittings.
☑	Piping, Fittings, Valves, and Specialties include all required nuts, bolts, and gaskets.
☑	Specialties include (but are not limited to): strainers, traps balancing valves, control valves, regulating valves, flexible connectors, vents, meters, gauges, etc.
☑	Piping items include hangers and couplings (as required) unless stated otherwise
☑	Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves and specialities.
☑	Pre-Insulated / Prefabricated piping systems to be factor fabricated, assembled, and pressure tested. System includes insulated carrier piping, conduit, fittings, and inner pipe supports.
☑	Cast iron no hub pipe and fittings including heavy-duty shielded couplings.
☑	Sizes shown for piping insulation line items are based on nominal pipe sizes.
Equipment, Terminal Units & Fixtures	
☑	Equipment costs include freight to jobsite, factory certified start-up services, owners' training, and manufacturer's standard warranty.
☑	Equipment and terminal unit items exclude balancing, temperature control, electrical, ductwork, and piping hook-ups (connections), unless stated otherwise. The contractor is responsible for adding these additional items as required.
☑	Equipment hook-up items include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
☑	Equipment costs exclude housekeeping pads. and dunnage.
☑	All air handling & rooftop unit costs include variable frequency drives.
☑	Exhaust fan and packaged DX rooftop unit costs include roof curbs as required.
☑	Division 25 Integrated Automation Instrumentation and Control items include all actuators, sensors (digital & analog), thermostats, control valves, controllers, transducers, wiring, programming, startup, etc. as required for proper operation unless stated otherwise. Refer to contract documents for specific control points and details.
☑	Equipment, terminal unit, and plumbing fixture demolition / removal costs exclude piping, ductwork, and electrical connections and should be added as separate items as required.
Division 26 - Electrical **Division 27 - Communications** **Division 28 - Electronic Safety and Security**	
General	
☑	Due to the transient and proprietary nature of Division 27 Communications equipment, it is the contractor's responsibility to select equipment from Simplebid that meets the intent of the construction document's specified equipment.
☑	All demolition/removal costs exclude any salvage value.
☑	Manufacturer and Model numbers are for reference/comparison purposes only and are not intended to specify specific items. Reference contract documents for specific selections and approved equals.
☑	Item descriptions may not include every size, range, or increment of sizes available for every item. It is the responsibility of the contractor to choose the most applicable item.
☑	Cutting and patching work required for the installation of electrical system or components shall be included under CSI MasterFormat® Divisions 02 through 14.
☑	Items are of commercial grade unless stated otherwise.
☑	Labor costs include accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, mechanical & electrical systems, etc. to be priced separately.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Conduit & Wire	
☑	Conduit line items include couplings and supports unless stated otherwise.
☑	Conduit fittings reflect the average cost of all fitting types and should be quantified as such.
Equipment & Fixtures	
☑	Equipment items include freight to jobsite, factory certified start-up services, owners' training, and manufacturer's standard warranty.
☑	Equipment items exclude ductwork, piping, wiring, cable, conductors' and conduit connections.
☑	Exclude housekeeping pads and dunnage.
☑	Equipment demolition / removal costs exclude wiring, cable, conductors, and conduit connections.
☑	Excludes Integrated Automation Instrumentation and Controls.

4. Site and Infrastructure (Horizontal Construction) Subgroup

Allowed	
☑	Refer to CSI MasterFormat® Division 01 for the mobilization and demobilization of heavy construction equipment weighing over 1 ton.
☑	Refer to CSI MasterFormat® Division 01 for the hauling/trucking of Division 31 and 31 excavated, backfill, paving and removal items over 30 miles.
Disallowed	
⊘	The use of any designated emergency construction equipment as applied to UPB line items.
Division 31 - Earthwork **Division 32 - Exterior Improvements**	
☑	Includes any required hauling/trucking (on or off site) for up to 30 miles for all excavated, backfill, paving, and removal items for up to 30 miles unless noted otherwise.
☑	Rock excavation items include pneumatic excavation equipment.
☑	All hauling items are per bank CY and account for swell.
☑	All bedding and backfill items include compaction.
Division 33 - Site Utilities	
☑	Refer to CSI MasterFormat® Division 31 for excavation, backfill, and stone bedding items required for the installation or removal of Site Utility items.
☑	Refer to CSI MasterFormat® Division 32 for cutting and patching work required for the installation of Site Utility items.
☑	All piping items under Division 33 exclude hangers.
☑	Piping, Fittings, Valves, and Specialties include all required nuts, bolts, and gaskets.
☑	All piping items include couplings, identification tape, location wire, glue, lube, grout, mastic type, plastic sleeves, structure penetration seals and pull ropes as required by contract documents.
☑	Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.
☑	All demolition/removal costs exclude any salvage value.
☑	Manufacturer and Model numbers are for reference/comparison purposes only and are not intended to specify specific items. Reference contract documents for specific selections and approved quals.
☑	Item descriptions may not include every size, range, or increment of sizes available for every item. It is the responsibility of the contractor to choose the most applicable item.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

C. Other Pricing Considerations

1. Manufacturers Standard Shapes and Colors: Included

Manufacturer's standard shapes and colors (included)	
☑	Manufacturer's standard shapes and colors are included

ⓘ **Exception** - Custom order shapes and colors

2. Atypical Costs: **Omitted**

Atypical Costs - Paid for by Contracting Agency
The below items must be verified as **omitted** in the job order contract and not included with the responding bidder's Adjustment Factors.
⊘ Architectural Fees
⊘ Interior Designer Fees
⊘ FF&E Consultant Fees
⊘ Management Fees
⊘ Engineering Fees
⊘ Civil Engineering Fees
⊘ Geotechnical Consulting Fees
⊘ Geotechnical Borings Costs
⊘ Hazardous Material Consultant Fees
⊘ Commissioning Agent Fees

3. General Calculations and Quantifications

Pricing Considerations: General Calculations and Quanitifications	
☑	Calculations are quantified based on the in-place dimensions
Allowed	
☑	Replacement quantities as specified by the construction documents are to be added to the estimate as separate line items, excluding labor, and noted as such.
Disallowed	
⊘	Additional quantities for "swell" factors or waste - Line-item costs already include allowances for these factors.

4. Material Sourcing Requirements

Review job order contract general conditions, program procedures, and any other relevant documentation to understand requirements for materials sourcing.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

V. New Item Additions

New Item Additions, if any, shall be separately identified and requested using the Simplebid New Item Request (NIR) form. The Unit Price for a New Item Addition shall be researched and generated by FOS of CannonDesign in the same manner as a Pre-Priced Task. New Item Additions will be subject to the appropriate Adjustment Factor as defined per Work Order. The Contracting Agency's determination as to whether an Item is a Pre-Priced Task or a New Item Addition shall be final and binding to the Contractor. Information submitted with a New Item Request shall include, but not be limited to, the following:

- Complete specifications and technical data, including task content, support drawings, task cost data, quality control and inspection requirements.
- Itemized labor, material, and equipment costs.
- Vendor and subcontractor quotes.

The Contractor shall not submit a quote or bid from any supplier or subcontractor that the Contractor is not prepared to use. The Agency may require additional quotes and bids if the suppliers or subcontractors are not acceptable or if the prices are not reasonable. The Contractor shall provide an installed unit price (or demolition price if appropriate) which shall include all costs required to accomplish the requested task.

At a minimum, Contractor shall provide the following documentation to the Agency when requested, in support of Contractor and Subcontractor cost proposals:

- Material quantities and type of products.
- Labor breakdown by trade classification, wage rates, and estimated hours.
- Equipment breakdown by trade classification, wage rates, and estimated hours.

Following approval by the Contracting Agency of a New Item Request, the unit price line-item will be added to the Unit Price Book as a New Item Addition. The total extended price for the New Item Addition will be determined by multiplying the unit price by the quantity required. The price offered in the Work Order Proposal will be determined by multiplying the total extended price by the appropriate Adjustment Factor. Following approval by the Contracting Agency, a New Item Addition may become a permanent Pre-Priced Task which will no longer require price justification. The Contracting Agency's determination as to whether an item is a Pre-Priced Task or a Detailed Scope of Work item requiring a New Item Addition shall be final and binding to the Contractor.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

VI. Clerical errors and Omissions

If you believe there is an error in the information included in the Simplebid UPB, please contact the appropriate Simplebid representative.

FACILITY OPTIMIZATION SOLUTIONS, LLC ("FOS of CannonDesign"), ITS PARENT AND AFFILIATED COMPANIES (COLLECTIVELY, "CANNONDESIGN") MAKE NO GUARANTEES, REPRESENTATION OR WARRANTIES OF, AND DISCLAIMS ANY IMPLIED WARRANTY OR REPRESENTATION ABOUT, THE SIMPLEBID PLATFORM, INCLUDING THE SIMPLEBID SOFTWARE AND SIMPLEBID UPB INCLUDING THAT THE INFORMATION, CALCULATIONS, AND/OR THE RESOURCES PROVIDED ARE ACCURATE, RELEVANT, TIMELY, COMPLETE, ERROR-FREE OR APPROPRIATE FOR A PARTICULAR PURPOSE. YOU ACKNOWLEDGE THAT ANY RELIANCE ON THE SIMPLEBID PLATFORM IS AT YOUR SOLE RISK.

CannonDesign is not responsible for any use or misuse of the Simplebid Platform, including the Simplebid Software and Simplebid UPB, for fluctuations in commodity and product prices, availability of commodities/products, for performance of the Work associated with this JOC program, for compliance with contractual agreements, for compliance with procurement, production and/or project specifications, or compliance of the work with applicable laws/codes.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

End User License Agreement (EULA)

Simplebid® End User License Agreement

This End User License Agreement ("EULA") is a legal agreement between you (either an individual or a single entity) ("You", "Your") and Facility Optimization Solutions, LLC ("FOS", "we," or "us"). Your use of, and access to, the Simplebid® job order contracting platform, including the Simplebid Unit Price Book ("UPB") and/or other related products (collectively, the "Platform"), and the features, functions, and services offered through the Platform (collectively, the "Services"), is subject to Your prior acceptance of this EULA, as may be amended from time to time by FOS.

Scope of License. Subject to the terms and conditions contained herein including, without limitation, the restrictions below, FOS grants You a limited, revocable, non-exclusive, non-transferable license to use the Platform. This License is also subject to such other restrictions as may be contained in the Privacy Policy:

a. You will not permit any person other than Yourself and if you are a single entity, employees who have accepted this EULA ("Authorized Users") to access and use the Platform and/or Services;

b. If you are an Authorized User of the entity/agency (the "User Agency") engaged by FOS to provide this Platform, You will not use the Platform or Services for any purposes other than the User Agency's internal business purposes in support of the User Agency's program;

c. If You are a contractor or Authorized User of a contractor participating in a User Agency job order contracting program, You will not use the Platform or Services for any purposes other than Your internal business purposes to provide job order contract task order documents exclusively to the User Agency;

d. You may not resell, sublicense, transfer, re-distribute, allow access to or otherwise provide or make available for any purpose any component of the Platform to any person, firm or entity except as expressly set forth herein;

e. You may not alter, reverse engineer, disassemble, decompile, circumvent or disable any code, feature or security or technologic measure that effectively controls access to the Platform, or otherwise engage in any conduct designed or intended to interfere with the operation of the Platform, or permit or authorize any third party to do so.

f. You shall not, and shall cause the Authorized Users not to, (i) use the Platform and/or Services to store or transmit computer viruses, worms, time bombs, Trojan horses and other harmful or malicious code, routines, files, scripts, agents or programs, (ii) use the Platform and/or Services to store or distribute any information, material or data that is harassing, threatening, infringing, libelous, unlawful, obscene, or which violates the privacy or intellectual property rights of any third party, (iii) access or use the Platform and/or Services for any benchmarking or competitive purposes, including, without limitation, for the purpose of designing and/or developing any competitive products or services, (iv) sell, resell, rent, lease, offer any time sharing arrangement, service bureau or any service based upon the Platform and/or Services, (v) interfere with or disrupt the integrity or performance of the Platform and/or Services or third-party data contained therein, (vi) attempt to gain unauthorized access to the Platform and/or Services or any associated systems or networks or (vii) modify, make derivative works of, disassemble, decompile or reverse engineer the Platform and/or Services or any component thereof.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

DISCLAIMER. FOS is not responsible for use or misuse of the Platform or Services by any party or harm or damages that may result from use or misuse of the Platform or Services. NOTWITHSTANDING ANY PROVISION TO THE CONTRARY OF THIS EULA, OR THE PRIVACY POLICY, THE PLATFORM IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND AND EXCEPT TO THE EXTENT REQUIRED BY APPLICABLE LAW, FOS HEREBY DISCLAIMS ALL WARRANTIES OF ANY TYPE, EXPRESS OR IMPLIED, WITH RESPECT TO THE PLATFORM AND ANY UPB DATA INCLUDED IN THE PLATFORM, INCLUDING, WITHOUT LIMITATION, ANY AND ALL WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR OR ORDINARY PURPOSE, NON INFRINGEMENT, MISAPPROPRIATION OF INTELLECTUAL PROPERTY RIGHTS OF THIRD PARTIES, TITLE, CUSTOM, TRADE, QUIET ENJOYMENT, SYSTEM INTEGRATION, FEATURES, PERFORMANCE LEVELS, SUPPORT RESOURCES, AND FREEDOM FROM COMPUTER VIRUS. TO THE EXTENT A WARRANTY MAY NOT BE DISCLAIMED AS A MATTER OF APPLICABLE LAW, THE SCOPE AND DURATION OF SUCH WARRANTY WILL BE THE MINIMUM REQUIRED UNDER SUCH LAW. NO ORAL OR WRITTEN INFORMATION OR ADVICE PROVIDED BY FOS AND/OR ITS AGENTS OR EMPLOYEES, SHALL CREATE A WARRANTY. FOS DOES NOT WARRANT THAT THE PLATFORM WILL MEET ALL YOUR REQUIREMENTS, THAT THE OPERATION OF THE PLATFORM WILL BE UNINTERRUPTED OR ERROR FREE, OR THAT ALL PLATFORM DEFECTS WILL BE CORRECTED.

Ownership of Platform. The Platform, including the UPB, contains copyrighted material, trademarks and other intellectual property that is owned or licensed by FOS. FOS retains all title, interest, ownership rights and intellectual property rights in and to the Platform and/or Services and reserves all rights not expressly granted to You in this EULA. The Platform is licensed to You, not sold. Updates. FOS may, from time to time, develop new versions, patches, bug fixes, updates, upgrades and other modifications to improve the Platform and/or Services ("Updates"). These may be automatically installed and/or released without providing any additional notice to, or consent from, You or Your Authorized Users. All Updates are subject to the terms of this EULA.

Third Party Software. Some components of the Platform or Services (whether developed by FOS, our affiliates or third parties) (the "Third-Party Software") may be governed by separate licenses. Your license rights with respect to Third-Party Software are defined by the applicable Third-Party Software license, and nothing in this EULA will restrict, limit, or otherwise affect any rights or obligations you may have, or conditions to which you may be subject under such Third-Party Software licenses. You agree to be bound by and subject to the terms and conditions of each applicable Third-Party Software license. If you do not agree to be bound by and subject to the terms and conditions of each applicable Third-Party Software license, You must terminate this EULA by uninstalling and destroying all copies of the Platform that are in Your and Your Authorized Users possession or control. If our rights from a licensor of Third-Party Software are limited, suspended or terminated for any reason, Your rights will also be so limited, suspended or terminated.

For U.S. Government End Users. The Platform is a "commercial item," as that term is defined at 48 C.F.R. 2.101 (OCT 1995), and more specifically is "commercial computer Platform" and "commercial computer software documentation," as such terms are used in 48 C.F.R. 12.212 (SEPT 1995). Consistent with 48 C.F.R. 12.212 and 48 C.F.R. 227.7202-1 through 227.7202-4 (JUNE 1995), the Platform is provided to U.S. Government End Users only as a commercial end item and with only those rights as are granted to all other customers pursuant to the terms and conditions herein.

Export Restrictions. The Platform, Services and related technologies are subject to U.S. export control laws and may be subject to export or import regulations in other countries. You agree to strictly comply with all such laws and regulations and acknowledge that you have the responsibility to obtain authorization to export, re-export, or import the Platform and related technology, as may be required. You will indemnify and hold FOS harmless from any and all claims, losses, liabilities, damages, fines, penalties, costs and expenses (including attorney's fees) arising from or relating to any breach by You and/or Your Users in connection with this paragraph.

Limitation of Liability. Unless prohibited by law, FOS's liability under this EULA in connection with any claim arising out of or relating to the License, Platform and/or Services any provided in connection with this EULA shall be limited to the lesser of the amount of Your actual direct damages or $500. Your right to monetary damages in such amount shall be exclusive of all other remedies which You may have at law or in equity against FOS, any affiliate or subsidiary of FOS, or any officer, director, shareholder, employee, consultant, agent, successor, or assign of FOS.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Account; Passwords. To access and use the Platform and/or the Services, you must register an account with FOS (the "Account"). You shall only use the username issued to You by FOS in connection with the Account, except as authorized by this EULA. If You are provided with a temporary username and/or password, You must modify the temporary credentials and create a unique username and/or password. You shall not share the Your Account username or password with anyone except as authorized by this EULA. You are responsible for maintaining the confidentiality of Your Account username and password and You are fully responsible for all activities that occur in connection with same. In the event of any breach of security, including, without limitation, access to the Platform and/or Services via Your Account by someone other than You, You agree to immediately (a) change Your password, and (b) notify FOS of the security breach. You agree that the terms of this EULA will be binding upon and govern the relationship between You and FOS. You further agree to take any and all action necessary to ensure compliance with this EULA, and You shall indemnify FOS for any and all costs, damages, losses or expenses (including attorneys' fees) incurred in respect any use of the Platform and/or Services via Your Account. FOS will not be liable for any loss or damage arising from your failure to comply with this paragraph. FOS reserves the right to terminate Your access to the Platform and/or Services at any time for any reason or no reason.

Your Data; Suggestions.

a. As between You and FOS, You own all right, title, and interest in and to Your Data. Except as provided in this subparagraph, FOS obtains no rights under this EULA from you in or to the Your Data, including any related intellectual property rights. You grant FOS a license to display, perform, execute, distribute, and modify Your Data to enable You to operate the Platform and/or Services and provide any applicable support. Further, You consent to FOS's (i) use of anonymous or de-identified versions of Your Data for the purposes of marketing the Platform and/or Services for benchmarking purposes; (ii) use of technical data and related information, including information about your browser, to facilitate the provision of software updates, product support, and other services to you (if any) related to the Platform and/or Services, and (iii) disclosure of Your Data to comply with any request of a governmental or regulatory body (including subpoenas or court orders). You agree that these rights and licenses are royalty-free, worldwide and irrevocable (for so long as the Your Data is stored in the Platform) and include a right of FOS to make the Your Data available to, and transfer such rights to, others with whom FOS has contractual relationships related to the provision of the Platform, the Services and/or any support related to same.

b. You further represent and warrant that (a) You own all right, title, and interest in and to Your Data or have the rights and permissions necessary to use Your Data in connection with the Platform and Services; and (b) You have all rights and permissions necessary to grant the rights contemplated by this EULA.

c. If you provide any suggestions regarding the Platform or the Services to FOS, we will own all right, title and interest in and to the suggestions, even if you have designated the suggestions as confidential. FOS will be entitled to use the suggestions without restriction. You hereby irrevocably assign to FOS all right, title, and interest in and to the suggestions and agree to provide FOS any assistance FOS may require to document, perfect and maintain FOS's rights in the suggestions.

Waiver of Consequential Damages. In no event shall FOS or its affiliates be liable to You for any special, indirect, consequential, or incidental damages arising out of, or as the result of the License, the Platform and/or the Services provided to You, regardless of whether arising out of a contract claim, tort claim or otherwise and whether such damages are foreseeable.

Indemnification. You assume sole responsibility for use of the License, the Platform and/or the Services by You and Your Authorized Users and You shall defend, indemnify and hold FOS, its affiliates, and their directors, officers and employees harmless from and against all liabilities, claims, and damages that arise in connection with or as a result of use of the Platform and/or Services by You or Your Authorized Users.

Right to Audit. FOS reserves the right to monitor and audit Your and Your Authorized Users' use of the Platform and/or Services.

Termination. This EULA shall continue in effect until terminated as set forth herein. This EULA may be terminated, and/or the License revoked or modified by FOS if You breach any provision of this EULA, including, without limitation, if You fail to pay applicable fees when due and FOS submitted a proper invoice. FOS shall provide seven (7) days written notice to You of termination of this EULA or revocation of any License. FOS may also terminate this EULA immediately upon notice to You if (a) FOS's relationship with a third-party provider whose software, hosting or other technology FOS

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

uses to provide the Platform and/or Services expires, terminates or requires FOS to change the way FOS provides the Platform and/or Services, or (b) You permit any individual to access or use Your Account username or password in violation of this EULA. Upon FOS's termination of this EULA due to Your breach, it is agreed that no refund of License Fees shall be due to You. Upon termination of the EULA, neither You nor Your Authorized Users will be authorized to use the Platform and/or Services and the License shall be immediately cancelled. In the event of termination of the EULA, upon written request by You, copies of Your Data will be delivered to You within thirty (30) days thereof; provided, that You shall pay in advance all reasonable costs of transferring copies of the Your Data to You. No termination of this EULA shall release or affect any obligations or liabilities incurred by either party under this EULA prior to the effective date of such termination. The paragraphs of this EULA under the headings "Disclaimer," "Ownership of Platform," "Limitation of Liability," "For U.S. Government End Users," "Export Restrictions," "Waiver of Consequential Damages," "Indemnification," and "Governing Law" shall survive termination of the License and this EULA. Force Majeure. FOS shall have no liability to You for any damages whatsoever arising out of or as a result of the failure by FOS to provide the Platform, Services and/or any support as a direct or indirect result of any use or circumstance beyond the reasonable control of FOS (including, without limitation, acts of God, acts of public enemy, war, accidents, fires, electrical or equipment failures, strikes, postal delays, labor difficulties, contractor difficulties, problems with telecommunications providers or database hosting entities, Internet disruption, explosions or governmental orders or regulations).

Governing Law. Unless prohibited by law, this EULA shall be construed according to, and the legal relations between the Parties shall be governed by, the laws of the State of New York, excluding its conflicts of law provisions. Unless prohibited by law, You and FOS agree to submit to the personal and exclusive jurisdiction of the courts located within the county of Erie, to resolve any dispute or claim arising from this EULA.

Amendments. Changes to this EULA may be made by FOS by publishing revised versions of this EULA to the URL www.simplebid.net. All revisions to this EULA shall be deemed effective and binding upon You and Your Authorized Users immediately upon being published to the foregoing URL without advance notice or consent of You or Your Authorized Users.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Page Intentionally Blank

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
01-00-00 General Requirements						
01-20-00 Price and Payment Procedures						
01-21-00 Allowances						
01-21-43 Time Allowances						
All line items in 01-21-43 must be authorized by Agency and Account Manager prior to usage						
100000	Hourly Labor Rate - Carpenter Must be authorized by Agency and Account Manager prior to usage.	HR	$70.87	$0.00	$0.00	$70.87
100001	Hourly Labor Rate - Electrician Must be authorized by Agency and Account Manager prior to usage.	HR	$89.40	$0.00	$0.00	$89.40
100002	Hourly Labor Rate - Elevator Mechanic Must be authorized by Agency and Account Manager prior to usage.	HR	$132.03	$0.00	$0.00	$132.03
100003	Hourly Labor Rate - Operating Engineer, Crane, or Equipment Operator (Includes all Classification Groups) Must be authorized by Agency and Account Manager prior to usage.	HR	$87.71	$0.00	$0.00	$87.71
100004	Hourly Labor Rate - Glazier (Glassman) Must be authorized by Agency and Account Manager prior to usage.	HR	$68.75	$0.00	$0.00	$68.75
100005	Hourly Labor Rate - Insulator, Asbestos or Abatement Worker Must be authorized by Agency and Account Manager prior to usage.	HR	$70.60	$0.00	$0.00	$70.60
100006	Hourly Labor Rate - Asbestos or Abatement Laborer Must be authorized by Agency and Account Manager prior to usage.	HR	$60.01	$0.00	$0.00	$60.01
100007	Hourly Labor Rate - Asbestos or Abatement Mechanic Must be authorized by Agency and Account Manager prior to usage.	HR	$39.54	$0.00	$0.00	$39.54
100008	Hourly Labor Rate - Iron Worker Must be authorized by Agency and Account Manager prior to usage.	HR	$85.82	$0.00	$0.00	$85.82
100009	Hourly Labor Rate - Laborer Must be authorized by Agency and Account Manager prior to usage.	HR	$63.66	$0.00	$0.00	$63.66
100010	Hourly Labor Rate - Mason (Bricklayer) Must be authorized by Agency and Account Manager prior to usage.	HR	$74.04	$0.00	$0.00	$74.04
100011	Hourly Labor Rate - Painter Must be authorized by Agency and Account Manager prior to usage.	HR	$71.23	$0.00	$0.00	$71.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100012	Hourly Labor Rate - Pipefitter Must be authorized by Agency and Account Manager prior to usage.	HR	$88.56	$0.00	$0.00	$88.56
100013	Hourly Labor Rate - Plumber Must be authorized by Agency and Account Manager prior to usage.	HR	$88.56	$0.00	$0.00	$88.56
100014	Hourly Labor Rate - Roofer Must be authorized by Agency and Account Manager prior to usage.	HR	$76.30	$0.00	$0.00	$76.30
100015	Hourly Labor Rate - Sheetmetal Worker Must be authorized by Agency and Account Manager prior to usage.	HR	$82.78	$0.00	$0.00	$82.78
100016	Hourly Labor Rate - Sprinkler Fitter Must be authorized by Agency and Account Manager prior to usage.	HR	$98.53	$0.00	$0.00	$98.53
100017	Hourly Labor Rate - Tile Setter Must be authorized by Agency and Account Manager prior to usage.	HR	$75.51	$0.00	$0.00	$75.51
100018	Hourly Labor Rate - Teamster or Truck Driver Must be authorized by Agency and Account Manager prior to usage.	HR	$58.67	$0.00	$0.00	$58.67
100019	Hourly Labor Rate - Diver - Wet Must be authorized by Agency and Account Manager prior to usage.	HR	$107.17	$0.00	$0.00	$107.17
100020	Hourly Labor Rate - Diver - Dry, Standby, Tender, or Manifold Operator Must be authorized by Agency and Account Manager prior to usage.	HR	$76.45	$0.00	$0.00	$76.45
100021	Hourly Labor Rate - Project Manager Must be authorized by Agency and Account Manager prior to usage.	HR	$89.30	$0.00	$0.00	$89.30
100022	Hourly Labor Rate - Superintendent Must be authorized by Agency and Account Manager prior to usage.	HR	$82.93	$0.00	$0.00	$82.93
100023	Hourly Labor Rate - Field Engineer Must be authorized by Agency and Account Manager prior to usage.	HR	$74.42	$0.00	$0.00	$74.42
100024	Hourly Labor Rate - Foreman Must be authorized by Agency and Account Manager prior to usage.	HR	$73.00	$0.00	$0.00	$73.00
100025	Hourly Labor Rate - Drafter Must be authorized by Agency and Account Manager prior to usage.	HR	$51.74	$0.00	$0.00	$51.74

01-30-00 Administrative Requirements

01-35-00 Special Procedures

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	01-35-26 Governmental Safety Requirements					
100026	Traffic Plate, 5' x 8' (DY) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	DY	$36.68	$22.93	$14.77	$74.38
100027	Traffic Plate, 5' x 8' (WK) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	WK	$36.68	$77.78	$14.77	$129.23
100028	Traffic Plate, 5' x 8' (MO) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	MO	$36.68	$199.68	$14.77	$251.13
100029	Traffic Plate, 5' x 10' (DY) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	DY	$36.68	$27.82	$14.77	$79.27
100030	Traffic Plate, 5' x 10' (WK) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	WK	$36.68	$72.98	$14.77	$124.43
100031	Traffic Plate, 5' x 10' (MO) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	MO	$36.68	$192.37	$14.77	$243.82
100032	Trench Plate, 8' x 10' (DY) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	DY	$36.68	$45.18	$14.77	$96.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100033	Trench Plate, 8' x 10' (WK) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	WK	$36.68	$106.56	$14.77	$158.01
100034	Trench Plate, 8' x 10' (MO) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	MO	$36.68	$278.72	$14.77	$330.17
100035	Trench Plate, 8' x 20' (DY) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	DY	$36.68	$88.61	$28.51	$153.80
100036	Trench Plate, 8' x 20' (WK) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	WK	$36.68	$215.62	$28.51	$280.81
100037	Trench Plate, 8' x 20' (MO) Includes delivery to jobsite, setting in initial positioning, and removal from jobsite and return. (aka Roadway or Trench Plates) Traffic plates to be ASTM A-36 steel, extending 12" minimum beyond depressions, and thickness to be capable of supporting H-20 traffic loads.	MO	$36.68	$527.58	$28.51	$592.77
100038	[Modifier] Planned movement of Traffic Plates at start and end of inclusive daily shift. Includes removal from jobsite work area position, and resetting of position at daily rate per plate. (aka Roadway or Trench Plates)	DY	$36.68	$0.00	$14.77	$51.45

01-35-29 Health, Safety, and Emergency Response Procedures

All items in Division 01-35-29 Health, Safety and Emergency Response Procedures apply to emergency work only and must be authorized by Agency and Account Manager prior to usage.

100039	Specialty Cleaning & Damage Restoration - Assistant Project Manager	HR	$100.98	$0.00	$0.00	$100.98
100040	Specialty Cleaning & Damage Restoration - Content Inventory Supervisor	HR	$61.59	$0.00	$0.00	$61.59
100041	Specialty Cleaning & Damage Restoration - Health & Safety Officer	HR	$81.85	$0.00	$0.00	$81.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100042	Specialty Cleaning & Damage Restoration - Project Clerical Administrator	HR	$50.16	$0.00	$0.00	$50.16
100043	Specialty Cleaning & Damage Restoration - Project Consultant/Estimator	HR	$92.40	$0.00	$0.00	$92.40
100044	Specialty Cleaning & Damage Restoration - Project Coordinator	HR	$127.59	$0.00	$0.00	$127.59
100045	Specialty Cleaning & Damage Restoration - Reconstruction Foreman	HR	$92.40	$0.00	$0.00	$92.40
100046	Specialty Cleaning & Damage Restoration - Reconstruction Sr. Project Manager	HR	$118.80	$0.00	$0.00	$118.80
100047	Specialty Cleaning & Damage Restoration - Remediation Supervisor	HR	$76.57	$0.00	$0.00	$76.57
100048	Specialty Cleaning & Damage Restoration - Remediation Technician	HR	$60.72	$0.00	$0.00	$60.72
100049	Specialty Cleaning & Damage Restoration - Resource Coordinator/Supply Supervisor	HR	$57.20	$0.00	$0.00	$57.20
100050	Specialty Cleaning & Damage Restoration - Restoration Supervisor	HR	$67.76	$0.00	$0.00	$67.76
100051	Specialty Cleaning & Damage Restoration - Restoration Technician	HR	$81.97	$0.00	$0.00	$81.97
100052	Specialty Cleaning & Damage Restoration - Sr. Project Manager	HR	$118.80	$0.00	$0.00	$118.80
100053	Specialty Cleaning & Damage Restoration - Technical Specialist	HR	$74.80	$0.00	$0.00	$74.80
100054	Specialty Cleaning & Damage Restoration - Decon 30 Disinfectant	GAL	$0.00	$57.46	$0.00	$57.46
100055	Specialty Cleaning & Damage Restoration - 3M Defoamer	GAL	$0.00	$69.34	$0.00	$69.34
100056	Specialty Cleaning & Damage Restoration - No Rinse Floor Cleaner	GAL	$0.00	$35.05	$0.00	$35.05
100057	Specialty Cleaning & Damage Restoration - Smoke and Odor Cleaner	GAL	$0.00	$79.66	$0.00	$79.66
100058	Specialty Cleaning & Damage Restoration - Carpet and Upholstery Cleaner Betco FiberPRO extraction cleaner or equal	GAL	$0.00	$32.24	$0.00	$32.24
100059	Specialty Cleaning & Damage Restoration - Upholstery, Furniture and Drapery Compound Solvent Cleaner Bridgepoint Systems Upholstery Cleaning Furniture and Drapery Compound Solvent Cleaner or equal	GAL	$0.00	$77.08	$0.00	$77.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100060	Specialty Cleaning & Damage Restoration - Glass Cleaner, Concentrate MOTHERS Professional glass cleaner concentrate or equal	GAL	$0.00	$41.19	$0.00	$41.19
100061	Specialty Cleaning & Damage Restoration - WallGlide Plus, 5 Gal Pail	PAIL	$0.00	$259.54	$0.00	$259.54
100062	Specialty Cleaning & Damage Restoration - Foaming Glass Cleaner, 19 oz Can	EA	$0.00	$7.01	$0.00	$7.01
100063	Specialty Cleaning & Damage Restoration - Simple Green Extreme Heavy-Duty Degreaser	GAL	$0.00	$35.05	$0.00	$35.05
100064	Specialty Cleaning & Damage Restoration - Microfiber Cleaning Towel, 16" x 16"	DOZ	$0.00	$49.06	$0.00	$49.06
100065	Specialty Cleaning & Damage Restoration - Mop Head, Microfiber, Launderable, 24 oz	EA	$0.00	$21.03	$0.00	$21.03
100066	Specialty Cleaning & Damage Restoration - Microfiber Dusting Cloths, 12" x 12", 50 Count	BOX	$0.00	$51.87	$0.00	$51.87
100067	Specialty Cleaning & Damage Restoration - Soot Removing Sponge, 3" x 6" x 1 1/2", 6 Count	BOX	$0.00	$84.11	$0.00	$84.11
100068	Specialty Cleaning & Damage Restoration - N95 Respirator Mask, 3M #8210, 20 Count	BOX	$0.00	$32.24	$0.00	$32.24
100069	Specialty Cleaning & Damage Restoration - Full Face Respirator	EA	$0.00	$146.56	$0.00	$146.56
100070	Specialty Cleaning & Damage Restoration - Half Face Respirator	EA	$0.00	$28.04	$0.00	$28.04
100071	Specialty Cleaning & Damage Restoration - Latex Gloves, Nitrile, Powdered, 6 Mil, 100 Count	BOX	$0.00	$23.83	$0.00	$23.83
100072	Specialty Cleaning & Damage Restoration - Safety Glasses with Wrap Around	EA	$0.00	$4.91	$0.00	$4.91
100073	Specialty Cleaning & Damage Restoration - Safety Goggles (Chemical Splash)	EA	$0.00	$30.84	$0.00	$30.84
100074	Specialty Cleaning & Damage Restoration - Hard Hat, 4 Point Ratchet Suspension	EA	$0.00	$14.02	$0.00	$14.02
100075	Specialty Cleaning & Damage Restoration - Safety Vest, Class 2	EA	$0.00	$14.02	$0.00	$14.02
100076	Specialty Cleaning & Damage Restoration - Tyvek Coverall	EA	$0.00	$16.47	$0.00	$16.47
100077	Specialty Cleaning & Damage Restoration - Dry Ice Bin Global Industrial™ Dry Ice Storage Container with Lid, 29"L x 20"W x 23"H, Blue or equal	EA	$0.00	$937.84	$0.00	$937.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100078	Specialty Cleaning & Damage Restoration - Dry Ice Pellets	LB	$0.00	$3.16	$0.00	$3.16
100079	Specialty Cleaning & Damage Restoration - Lay Flat Poly Tubing (Roll - 24" x 600'), 6 Mil	SF	$0.00	$0.21	$0.00	$0.21
100080	Specialty Cleaning & Damage Restoration - Lay Flat Poly Tubing (Roll - 24" x 900'), 4 Mil	SF	$0.00	$0.13	$0.00	$0.13
100081	Specialty Cleaning & Damage Restoration - Poly Sheeting - 1 Mil, Clear, 12' x 400'	SF	$0.00	$0.04	$0.00	$0.04
100082	Specialty Cleaning & Damage Restoration - Poly Sheeting - 4 Mil, Clear, 20' x 100'	SF	$0.00	$0.07	$0.00	$0.07
100083	Specialty Cleaning & Damage Restoration - Poly Sheeting - 6 Mil, Clear, 20' x 100'	SF	$0.00	$0.10	$0.00	$0.10
100084	Specialty Cleaning & Damage Restoration - Plastic Sheeting 6 mil - Fire Retardant , Black, 20' x 100'	SF	$0.00	$0.20	$0.00	$0.20
100085	Specialty Cleaning & Damage Restoration - Caution Tape, 3" x 1000 LF, 2" Letters	ROLL	$0.00	$26.64	$0.00	$26.64
100086	Specialty Cleaning & Damage Restoration - Tape - Double Sided, 3" X 36 Yds	ROLL	$0.00	$40.65	$0.00	$40.65
100087	Specialty Cleaning & Damage Restoration - Painters Tape, Blue, 2" x 60 Yds	ROLL	$0.00	$17.25	$0.00	$17.25
100088	Specialty Cleaning & Damage Restoration - 3M Duct Tape, 3" x 50 Yds	ROLL	$0.00	$28.18	$0.00	$28.18
100089	Specialty Cleaning & Damage Restoration - 3M Duct Tape, 2" x 50 Yds	ROLL	$0.00	$18.93	$0.00	$18.93
100090	Specialty Cleaning & Damage Restoration - Cardboard Box, 24" x 18" x 16"	EA	$0.00	$6.66	$0.00	$6.66
100091	Specialty Cleaning & Damage Restoration - Cardboard Box - 36" x 24" x 18"	EA	$0.00	$19.52	$0.00	$19.52
100092	Specialty Cleaning & Damage Restoration - Reclosable Poly Bags, 12" x 12", 4 mil, 1,000 Bags Per Case	CASE	$0.00	$287.38	$0.00	$287.38
100093	Specialty Cleaning & Damage Restoration - Trash Can Liners, 55 - 60 Gallon, 2.5 Mil, Black, 75 Count	BOX	$0.00	$114.95	$0.00	$114.95
100094	Specialty Cleaning & Damage Restoration - Insulation Removal Bag, 75 CF Capacity, 20 Count	EA	$0.00	$22.11	$0.00	$22.11
100095	Specialty Cleaning & Damage Restoration - Vacuum Cleaner Bags, Backpack, 6 Qt, 10 Count	BOX	$0.00	$30.84	$0.00	$30.84
100096	Specialty Cleaning & Damage Restoration - Plastic Stretch Wrap, 80 Gauge, 18" x 1500 LF	ROLL	$0.00	$32.24	$0.00	$32.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100097	Specialty Cleaning & Damage Restoration - Wall Zippers, 2" x 7'	EA	$0.00	$30.84	$0.00	$30.84
100098	Specialty Cleaning & Damage Restoration - Moving Blankets, 72" x 80" x 36 oz	EA	$0.00	$25.23	$0.00	$25.23
100099	Specialty Cleaning & Damage Restoration - Kraft Sheet Packing Paper, 24" x 36", 800 Count	BUNDLE	$0.00	$128.97	$0.00	$128.97
100100	Specialty Cleaning & Damage Restoration - Dish Packing Kit, 26" x 14" x 12" Holds 11" dishes, inside dimensions 12" x 12" x 12", includes box and partitions	EA	$0.00	$24.49	$0.00	$24.49
100101	Specialty Cleaning & Damage Restoration - Glass Packing Kit, 26" x 12" x 12" Holds 18 tall glasses, inside dimensions 3 7/8" x 3 7/8" x 12", includes box and partitions	EA	$0.00	$17.29	$0.00	$17.29
100102	Specialty Cleaning & Damage Restoration - Bubble Wrap, 16" x 750'	ROLL	$0.00	$185.04	$0.00	$185.04
100103	Specialty Cleaning & Damage Restoration - Kraft Paper Packing Paper, 18" x 1,200'	ROLL	$0.00	$44.86	$0.00	$44.86
100104	Specialty Cleaning & Damage Restoration - Standard HEPA Air Filter, 12" x 12" x 11-1/2", 300 CFM, Downstream Face	EA	$0.00	$527.34	$0.00	$527.34
100105	Specialty Cleaning & Damage Restoration - Standard HEPA Air Filter, 12" x 24" x 11-1/2", 554 CFM, Downstream Face	EA	$0.00	$663.55	$0.00	$663.55
100106	Specialty Cleaning & Damage Restoration - Air Scrubber Filter, HEPA/MERV 17, 20" x 20" x 5 7/8"	EA	$0.00	$784.58	$0.00	$784.58
100107	Specialty Cleaning & Damage Restoration - Air Scrubber Filter, HEPA, Cardboard, Synthetic Fiber Filter Material, 30% Filter Efficiency	EA	$0.00	$29.83	$0.00	$29.83
100108	Specialty Cleaning & Damage Restoration - Filter - Activated Carbon 2000 CFM	EA	$0.00	$210.07	$0.00	$210.07
100109	Specialty Cleaning & Damage Restoration - Filter - Activated Carbon 500 / 700 CFM	EA	$0.00	$87.48	$0.00	$87.48
100110	Specialty Cleaning & Damage Restoration - Filter - Air Scrubber 2000 CFM - Prefilter	EA	$0.00	$27.20	$0.00	$27.20
100111	Specialty Cleaning & Damage Restoration - Filter - Air Scrubber 2000 CFM - Secondary	EA	$0.00	$188.13	$0.00	$188.13
100112	Specialty Cleaning & Damage Restoration - Filter - Air Scrubber 500 / 700 CFM	EA	$0.00	$13.95	$0.00	$13.95
100113	Specialty Cleaning & Damage Restoration - Filter - Air Scrubber 500/700 CFM - Secondary	EA	$0.00	$25.66	$0.00	$25.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100114	Specialty Cleaning & Damage Restoration - Air Scrubber - 2000 CFM (Day)	DY	$0.00	$0.00	$137.98	$137.98
100115	Specialty Cleaning & Damage Restoration - Air Scrubber - 2000 CFM (Week)	WK	$0.00	$0.00	$413.93	$413.93
100116	Specialty Cleaning & Damage Restoration - Air Scrubber - 2000 CFM (Month)	MO	$0.00	$0.00	$1,345.27	$1,345.27
100117	Specialty Cleaning & Damage Restoration - Air Scrubber - 500 CFM (Day)	DY	$0.00	$0.00	$105.80	$105.80
100118	Specialty Cleaning & Damage Restoration - Air Scrubber - 500 CFM (Week)	WK	$0.00	$0.00	$343.85	$343.85
100119	Specialty Cleaning & Damage Restoration - Air Scrubber - 500 CFM (Month)	MO	$0.00	$0.00	$1,117.51	$1,117.51
100120	Specialty Cleaning & Damage Restoration - Fogger/Thermal (Day)	DY	$0.00	$0.00	$132.08	$132.08
100121	Specialty Cleaning & Damage Restoration - Fogger/Thermal (Week)	WK	$0.00	$0.00	$429.25	$429.25
100122	Specialty Cleaning & Damage Restoration - Fogger/Thermal (Month)	MO	$0.00	$0.00	$1,395.06	$1,395.06
100123	Specialty Cleaning & Damage Restoration - Hydroxyl Machine, No Ozone (Day)	DY	$0.00	$0.00	$410.64	$410.64
100124	Specialty Cleaning & Damage Restoration - Hydroxyl Machine, No Ozone (Week)	WK	$0.00	$0.00	$781.21	$781.21
100125	Specialty Cleaning & Damage Restoration - Hydroxyl Machine, No Ozone (Month)	MO	$0.00	$0.00	$2,013.51	$2,013.51
100126	Specialty Cleaning & Damage Restoration - Desiccant - 2,000/2250 CFM (Day)	DY	$0.00	$0.00	$650.95	$650.95
100127	Specialty Cleaning & Damage Restoration - Desiccant - 2,000/2250 CFM (Week)	WK	$0.00	$0.00	$2,115.57	$2,115.57
100128	Specialty Cleaning & Damage Restoration - Desiccant - 2,000/2250 CFM (Month)	MO	$0.00	$0.00	$6,344.55	$6,344.55
100129	Specialty Cleaning & Damage Restoration - Media Blaster & Compressor Package (Day)	DY	$0.00	$0.00	$542.22	$542.22
100130	Specialty Cleaning & Damage Restoration - Media Blaster & Compressor Package (Week)	WK	$0.00	$0.00	$1,348.95	$1,348.95
100131	Specialty Cleaning & Damage Restoration - Media Blaster & Compressor Package (Month)	MO	$0.00	$0.00	$4,046.85	$4,046.85
100132	Specialty Cleaning & Damage Restoration - Insulation Vacuum (Day)	DY	$0.00	$0.00	$236.73	$236.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100133	Specialty Cleaning & Damage Restoration - Insulation Vacuum (Week)	WK	$0.00	$0.00	$454.51	$454.51
100134	Specialty Cleaning & Damage Restoration - Insulation Vacuum (Month)	MO	$0.00	$0.00	$859.62	$859.62
100135	Specialty Cleaning & Damage Restoration - 15 Gal Heated Carpet Extractor (Day)	DY	$0.00	$0.00	$190.44	$190.44
100136	Specialty Cleaning & Damage Restoration - 15 Gal Heated Carpet Extractor (Week)	WK	$0.00	$0.00	$539.58	$539.58
100137	Specialty Cleaning & Damage Restoration - 15 Gal Heated Carpet Extractor (Month)	MO	$0.00	$0.00	$1,050.06	$1,050.06
100138	Specialty Cleaning & Damage Restoration - Hot Pressure Washer - 3000 PSI (Day)	DY	$0.00	$0.00	$211.60	$211.60
100139	Specialty Cleaning & Damage Restoration - Hot Pressure Washer - 3000 PSI (Week)	WK	$0.00	$0.00	$634.80	$634.80
100140	Specialty Cleaning & Damage Restoration - Hot Pressure Washer - 3000 PSI (Month)	MO	$0.00	$0.00	$1,587.00	$1,587.00
100141	Specialty Cleaning & Damage Restoration - Vacuum -5V Corded Backpack HEPA Vacuum (Day)	DY	$0.00	$0.00	$52.90	$52.90
100142	Specialty Cleaning & Damage Restoration - Vacuum -5V Corded Backpack HEPA Vacuum (Week)	WK	$0.00	$0.00	$160.02	$160.02
100143	Specialty Cleaning & Damage Restoration - Vacuum -5V Corded Backpack HEPA Vacuum (Month)	MO	$0.00	$0.00	$296.24	$296.24
100144	Specialty Cleaning & Damage Restoration - Vacuum - Electric Wet/Dry Shop Vacuum (Day)	DY	$0.00	$0.00	$34.38	$34.38
100145	Specialty Cleaning & Damage Restoration - Vacuum - Electric Wet/Dry Shop Vacuum (Week)	WK	$0.00	$0.00	$149.44	$149.44
100146	Specialty Cleaning & Damage Restoration - Vacuum - Electric Wet/Dry Shop Vacuum (Month)	MO	$0.00	$0.00	$370.30	$370.30
100147	Specialty Cleaning & Damage Restoration - Lighting - 25' String Lights (Day)	DY	$0.00	$0.00	$15.87	$15.87
100148	Specialty Cleaning & Damage Restoration - Lighting - 25' String Lights (Week)	WK	$0.00	$0.00	$41.00	$41.00
100149	Specialty Cleaning & Damage Restoration - Lighting - 25' String Lights (Month)	MO	$0.00	$0.00	$122.99	$122.99
100150	Specialty Cleaning & Damage Restoration - Cable - 100 Ft (Day)	DY	$0.00	$0.00	$11.50	$11.50
100151	Specialty Cleaning & Damage Restoration - Cable - 100 Ft (Week)	WK	$0.00	$0.00	$46.00	$46.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100152	Specialty Cleaning & Damage Restoration - Cable - 100 Ft (Month)	MO	$0.00	$0.00	$149.50	$149.50
100153	Specialty Cleaning & Damage Restoration - Lighting - Demo Lights (Day)	DY	$0.00	$0.00	$13.22	$13.22
100154	Specialty Cleaning & Damage Restoration - Lighting - Demo Lights (Week)	WK	$0.00	$0.00	$34.38	$34.38
100155	Specialty Cleaning & Damage Restoration - Lighting - Demo Lights (Month)	MO	$0.00	$0.00	$103.16	$103.16
100156	Specialty Cleaning & Damage Restoration - Cable Ramps (Day)	DY	$0.00	$0.00	$16.56	$16.56
100157	Specialty Cleaning & Damage Restoration - Cable Ramps (Week)	WK	$0.00	$0.00	$66.24	$66.24
100158	Specialty Cleaning & Damage Restoration - Cable Ramps (Month)	MO	$0.00	$0.00	$215.28	$215.28
100159	Specialty Cleaning & Damage Restoration - Spider Box Splitter with Cable (Day)	DY	$0.00	$0.00	$38.35	$38.35
100160	Specialty Cleaning & Damage Restoration - Spider Box Splitter with Cable (Week)	WK	$0.00	$0.00	$96.54	$96.54
100161	Specialty Cleaning & Damage Restoration - Spider Box Splitter with Cable (Month)	MO	$0.00	$0.00	$289.63	$289.63
100162	Specialty Cleaning & Damage Restoration - Flex Duct (Day)	DY	$0.00	$0.00	$25.94	$25.94
100163	Specialty Cleaning & Damage Restoration - Fuel Trailer - 200 Gallons (Day)	DY	$0.00	$0.00	$165.31	$165.31
100164	Specialty Cleaning & Damage Restoration - Fuel Trailer - 200 Gallons (Week)	WK	$0.00	$0.00	$495.94	$495.94
100165	Specialty Cleaning & Damage Restoration - Fuel Trailer - 200 Gallons (Month)	MO	$0.00	$0.00	$1,322.50	$1,322.50
100166	Specialty Cleaning & Damage Restoration - Baker Scaffold, 1 Platform, 64" High (Day)	DY	$0.00	$0.00	$66.12	$66.12
100167	Specialty Cleaning & Damage Restoration - Baker Scaffold, 1 Platform, 64" High (Week)	WK	$0.00	$0.00	$204.99	$204.99
100168	Specialty Cleaning & Damage Restoration - Baker Scaffold, 1 Platform, 64" High (Month)	MO	$0.00	$0.00	$608.35	$608.35
100169	Specialty Cleaning & Damage Restoration - Spill Containment Berm, Low Profile 10' x 4" x 2 1/4"	EA	$0.00	$0.00	$1,024.94	$1,024.94
100170	Specialty Cleaning & Damage Restoration - Propane/Natural Gas 1 M BTU Direct Fired Heater w/Hood (Day)	DY	$0.00	$0.00	$276.40	$276.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100171	Specialty Cleaning & Damage Restoration - Propane/Natural Gas 1 M BTU Direct Fired Heater w/Hood (Week)	WK	$0.00	$0.00	$800.11	$800.11
100172	Specialty Cleaning & Damage Restoration - Propane/Natural Gas 1 M BTU Direct Fired Heater w/Hood (Month)	MO	$0.00	$0.00	$2,278.67	$2,278.67
100173	Specialty Cleaning & Damage Restoration - Vehicle - 26' Box Truck (WK)	WK	$0.00	$0.00	$1,463.95	$1,463.95
100174	Specialty Cleaning & Damage Restoration - Vehicle - 26' Box Truck (MO)	MO	$0.00	$0.00	$5,225.60	$5,225.60
100175	Specialty Cleaning & Damage Restoration - Vehicle - Onsite Recovery Trailer - 53' (Month)	MO	$0.00	$0.00	$293.25	$293.25
100176	Specialty Cleaning & Damage Restoration - Vehicle - Semi-Tractor (Day)	DY	$0.00	$0.00	$345.00	$345.00
100177	Specialty Cleaning & Damage Restoration - Video Inspection (Day)	DY	$0.00	$0.00	$304.75	$304.75

01-40-00 Quality Requirements

01-41-00 Regulatory Requirements

01-41-23 Fees

Reimbursable Fees may only be used when specifically approved by agency. All Reimbursable Fee items will utilize an Adjustment Factor of 1.00, unless otherwise specified by the agency.

100178	Reimbursable Fees - Architectural and Engineering Design Costs	USD	$0.00	$0.00	$1.00	$1.00
100179	Reimbursable Fees - Consultant Design Costs	USD	$0.00	$0.00	$1.00	$1.00
100180	Reimbursable Fees - Conservator as a Non-Professional Service Typically associated with historic building restorations.	USD	$0.00	$0.00	$1.00	$1.00
100181	Reimbursable Fees - Plan Checks and Permits	USD	$0.00	$0.00	$1.00	$1.00
100182	Reimbursable Fees - Pollution Control Program (WPCP) The plan identifies all pollutant sources, develops an inspection program, and establishes, implements, reports, and maintains BMPs. Does not include repairs nor origination of SWPPP.	USD	$0.00	$0.00	$1.00	$1.00
100183	Reimbursable Fees - Roofing Warranty Type of warranty and warranty period as determined by owner; above and beyond manufacturers standard warranty	USD	$0.00	$0.00	$1.00	$1.00
100184	Reimbursable Fees - Testing and Inspections	USD	$0.00	$0.00	$1.00	$1.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100185	Reimbursable Fees - Fuel for Temporary & Construction Equipment Gasoline, Diesel, Fuel Oil, Propane, or Natural Gas	USD	$0.00	$0.00	$1.00	$1.00
100186	Reimbursable Fees - Product Delivery Requirements Includes requirements for expedited packing, shipping, delivery, and acceptance of products	USD	$0.00	$0.00	$1.00	$1.00
100187	Reimbursable Fees - Item Credits from Previous Unit Price Book Versions Applies to Item Credits from Previous Proposals with Unit Cost Changes Due to Updated Unit Price Book Versions.	USD	$0.00	$0.00	$1.00	$1.00
	01-45-00 Quality Control					
	01-45-23 Testing and Inspecting Services					
100188	Window System Water Test	SF	$0.54	$0.60	$0.25	$1.39
100189	Agency Required Seismic Inspection – Per Building GSF	SF	$0.18	$0.23	$0.00	$0.41
	01-50-00 Temporary Facilities and Controls					
	01-52-00 Construction Facilities					
	01-52-13 Field Offices and Sheds					
100190	On Site Storage Container - 20' Standard cube with doors on one end	WK	$0.00	$0.00	$374.64	$374.64
100191	On Site Storage Container - 20' Standard cube with doors on one end	MO	$0.00	$0.00	$401.48	$401.48
100192	On Site Storage Container - 40' Standard cube with doors on one end	WK	$0.00	$0.00	$438.38	$438.38
100193	On Site Storage Container - 40' Standard cube with doors on one end	MO	$0.00	$0.00	$471.17	$471.17
100194	On Site Storage Container 20' - Delivery and Pick Up Unit cost includes delivery and pick up	EA	$0.00	$0.00	$490.00	$490.00
100195	On Site Storage Container 40' - Delivery and Pick Up Unit cost includes delivery and pick up	EA	$0.00	$0.00	$590.00	$590.00
100196	PODS Storage Container - 16'	MO	$0.00	$0.00	$302.84	$302.84
100197	PODS Storage Container - Delivery and Pick Up Unit cost includes delivery and pick up	EA	$0.00	$0.00	$188.00	$188.00
100198	Mobile Office Trailer - 40' x 10' For Owners Use Only. Includes HVAC, (1) Metal Stair, Landing, and Skirt. Excludes Furniture, Office Equipment, ADA Ramp, and Service Connections.	MO	$0.00	$0.00	$803.85	$803.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100199	Mobile Office Trailer - 44' x 24' For Owners Use Only. Includes HVAC, (1) Metal Stair, and Skirt. Excludes Furniture, Office Equipment, ADA Ramp, and Service Connections.	MO	$0.00	$0.00	$1,279.95	$1,279.95
100200	Mobile Office Trailer - Delivery, Set-Up, Take-Down, and Pick-Up For owners use only; Does not include service connections	EA	$3,947.17	$0.00	$0.00	$3,947.17
100201	[Modifier] Mobile Office Trailer - (1) Additional Stair & Landing For Owners Use Only	MO	$0.00	$0.00	$56.35	$56.35
100202	[Modifier] Mobile Office Trailer - (1) ADA Ramp 36' & Up w/Steps For Owners Use Only	MO	$0.00	$0.00	$414.00	$414.00
100203	[Modifier] Mobile Office Trailer - ADA Ramp Delivery, Set-Up, Take-Down, and Pick-Up For owners use only.	EA	$1,591.60	$0.00	$0.00	$1,591.60
100204	[Modifier] Mobile Office Trailer - Furniture & Equipment Package For Owners Use Only. Includes Office, Conference, and Cafe Furniture and Equipment.	MO	$0.00	$0.00	$244.95	$244.95
	01-52-19 Sanitary Facilities					
100205	Handwashing Station with Soap and Paper Towel Dispenser w/ Maintenance Cleaning Once a Week, Includes Delivery and Pickup For owners use only	MO	$0.00	$0.00	$199.00	$199.00
100206	Standard Portable Toilet w/ Maintenance Cleaning Once a Week, Includes Delivery and Pickup For owners use only	MO	$0.00	$0.00	$199.00	$199.00
100207	ADA Portable Toilet w/ Maintenance Cleaning Once a Week, Includes Delivery and Pickup For owners use only	MO	$0.00	$0.00	$299.00	$299.00
100208	Rental of Temporary Toilet Room Trailer with (1) ADA Compliant Toilet Compartment with Sink & Accessible Ramp For owners use only. Includes weekly water tank service & weekly janitorial service as required	WK	$0.00	$0.00	$4,351.00	$4,351.00
100209	Delivery, Setup and Pickup of Temporary Toilet Room Trailer During Normal Working Hours For owners use only	EA	$0.00	$0.00	$700.00	$700.00
100210	Maintenance and Cleaning of Standard Portable Toilet Unit Includes cleaning supplies - up to 2 units per day.	DY	$63.60	$0.00	$0.00	$63.60
100211	Maintenance and Cleaning of ADA Portable Toilet Unit Includes cleaning supplies - up to 2 units per day.	DY	$85.86	$0.00	$0.00	$85.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100212	Maintenance and Cleaning for Portable Handwashing Unit Includes cleaning supplies - up to 2 units per day	EA	$111.30	$0.00	$0.00	$111.30
100213	250 Gallon Waste Holding Tank Rental Includes 1 Service Day Per Week	WK	$200.33	$40.80	$0.00	$241.13
	01-53-00 Temporary Construction					
	01-53-00 Temporary Construction					
100214	Temp Gravel Staging and Parking – Up To 6" Thick Includes filter fabric and removal	SF	$2.55	$0.24	$1.47	$4.26
100215	Temp Gravel Staging and Parking – Up To 8" Thick Includes filter fabric and removal	SF	$3.34	$0.32	$1.92	$5.58
100216	Temp Gravel Staging and Parking – Up To 12" Thick Includes filter fabric and removal	SF	$4.37	$0.41	$2.52	$7.30
100217	Temp Gravel Roads – Up To 6" Thick Includes filter fabric and removal	SF	$2.55	$0.24	$1.47	$4.26
100218	Temp Gravel Roads – Up To 8" Thick Includes filter fabric and removal	SF	$3.34	$0.32	$1.92	$5.58
100219	Temp Gravel Roads – Up To 12" Thick Includes filter fabric and removal	SF	$4.37	$0.41	$2.52	$7.30
100220	Ground Protection Mat (DY) - HDPE, Heavy Duty Similar or equal to Dura-Base Mat (HDPE) 8' x 14' x 4" thick. Includes delivery and pickup	SF	$0.00	$0.00	$0.94	$0.94
100221	Ground Protection Mat (WK) - HDPE, Heavy Duty Similar or equal to Dura-Base Mat (HDPE) 8' x 14' x 4" thick. Includes delivery and pickup	SF	$0.00	$0.00	$1.40	$1.40
100222	Ground Protection Mat (MO) - HDPE, Heavy Duty Similar or equal to Dura-Base Mat (HDPE) 8' x 14' x 4" thick. Includes delivery and pickup	SF	$0.00	$0.00	$2.33	$2.33
100223	Ground Protection Mat - Set and Remove, Heavy Duty Includes the labor and equipment for placing and moving the mats. Similar or equal to Dura-Base Mat (HDPE) 8' x 14' x 4" thick	EA	$15.92	$0.00	$12.19	$28.11
100224	Ground Protection Mat (DY) - HDPE, Light Duty Similar or equal to Duradeck (HDPE) 4' x 8', up to 1" thick. Includes delivery and pickup	SF	$0.00	$0.00	$0.33	$0.33
100225	Ground Protection Mat (WK) - HDPE, Light Duty Similar or equal to Duradeck (HDPE) 4' x 8', up to 1" thick. Includes delivery and pickup	SF	$0.00	$0.00	$0.66	$0.66
100226	Ground Protection Mat (MO) - HDPE, Light Duty Similar or equal to Duradeck (HDPE) 4' x 8', up to 1" thick. Includes delivery and pickup	SF	$0.00	$0.00	$1.99	$1.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100227	Ground Protection Mat - Set and Remove, Light Duty Includes the labor for placing and moving the mats. Similar or equal to Duredeck (HDPE) 8' x 4', up to 1" thick	EA	$26.30	$0.00	$0.00	$26.30
100228	Temp Truck Scale - 70' L x 11' W Includes set up/breakdown, calibration, freight to and from site, crane to unload/load. Ramps are to be field constructed, electrical connections are not included	MO	$1,137.02	$0.00	$15,484.00	$16,621.02
100229	Temporary Protection - Tank Shroud (On Grade or Elevated Water Tower) Includes fabric, cables, winches, stantions, and all required material/equipment to completely seal the tank	SF	$7.38	$2.29	$3.35	$13.02
100230	Temp Plastic Poly Sheeting – Includes Removal	SF	$0.29	$0.17	$0.00	$0.46
100231	Temp Dust Partitions, Zip Wall - Includes Removal Suitable in positive and negative pressure applications	SF	$0.71	$1.55	$0.00	$2.26
100232	Temp Sealed Partition – Includes Removal Refer to partition type L3 for details	SF	$2.98	$2.08	$0.00	$5.06
100233	Temp Partition, Starc LiteBarrier – Includes Removal	SF	$3.81	$1.65	$0.00	$5.46
100234	Floor Protection - Red Rosin Paper Floor Protection Includes pressure sensitive kraft tape	SF	$0.20	$0.06	$0.00	$0.26
100235	Floor Protection - Ram Board Floor Protection 38" x 100' Roll, 46 mil Includes Ram Board seam tape	SF	$0.20	$0.49	$0.00	$0.69
100236	Floor Protection - Ram Board Floor Protection, 48" x 96" Sheets Includes Ram Board seam tape	SF	$0.33	$0.65	$0.00	$0.98
100237	[Modifier] Floor Protection - Ram Board Sheet Floor Protection Re-use Includes removal of seam tape, relocating floor protection, re-taping seams	SF	$0.33	$0.02	$0.00	$0.35
100238	Light Traffic Construction Tack-Mat	SF	$0.15	$0.98	$0.00	$1.13
100239	Tacky Mat Sheets with Frame, 36" x 36", 60 Count	CTN	$31.83	$166.82	$0.00	$198.65
100240	Temporary Pedestrian Control / Protection Walkway – Includes Removal Enclosed on two sides with 2x4 framing and plywood. Roof constructed of 2x6 framing and plywood or equal	SF	$8.36	$6.85	$0.00	$15.21
100241	Temporary Construction Fence - 6' Tall Includes delivery, set-up and removal; Rental rate is LF per month	LF	$1.43	$0.00	$1.26	$2.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100242	Temporary Construction Fence - 8' Tall Includes delivery, set-up and removal; Rental rate is LF per month	LF	$1.75	$0.00	$1.55	$3.30
100243	Relocate Temporary Construction Fencing On-Site	LF	$1.43	$0.00	$0.00	$1.43
100244	Temp Fence Single Gate – Up To 6' Wide – Includes Removal	EA	$46.46	$228.32	$0.00	$274.78
100245	Temp Fence Double Gate – Up To 12' Wide – Includes Removal	EA	$92.91	$428.11	$0.00	$521.02
100246	Temp Fence Sliding Gate – Up To 12' Wide – Includes Removal	EA	$92.91	$513.72	$0.00	$606.63
100247	Temporary Fence Ballast - Prefabricated Low profile ballast for temporary fence panel stands, Bigfoot Ballast Weight or equal; Includes delivery, set-up and removal; Rental rate is EA per month	EA	$0.71	$0.00	$5.50	$6.21
100248	Temporary Fence Ballast - Sand / Gravel Bag 50 LB bags; Includes delivery, set-up and removal; Rental rate is EA per month	EA	$0.71	$0.00	$3.00	$3.71
100249	Temporary Construction Fence Windscreen - Up To 8' High Includes delivery, set-up and removal	SF	$0.31	$0.84	$0.00	$1.15
100250	[Modifier] Temporary Construction Fence Rental Over 1 Month - 6' Tall Rental rate is LF per month	LF	$0.00	$0.00	$1.26	$1.26
100251	[Modifier] Temporary Construction Fence Rental Over 1 Month - 8' Tall Rental rate is LF per month	LF	$0.00	$0.00	$1.55	$1.55
100252	[Modifier] Temporary Fence Ballast Rental Over 1 Month - Prefabricated Rental rate is per EA for 1 month	MO	$0.00	$0.00	$5.50	$5.50
100253	[Modifier] Temporary Fence Ballast Rental Over 1 Month - Sand / Gravel Bag Rental rate is per EA for 1 month	MO	$0.00	$0.00	$3.00	$3.00
100254	Temp Wood Framed Stairs – LF of Tread – Includes Removal Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$2.02	$6.28	$0.00	$8.30
100255	Temp Wood Framed Stair Landing – Includes Removal Includes, framing, sheathing, posts, fasteners, blocking, hangers	SF	$25.05	$35.39	$0.00	$60.44
100256	Temp Ladder – Includes Removal	LF	$5.11	$6.28	$0.00	$11.39
100257	Temp Construction – Perimeter Cable Rails – Includes Removal	LF	$4.74	$3.25	$0.00	$7.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100258	Temp Construction – Perimeter Wood Rails – Includes Removal	LF	$3.90	$1.71	$0.00	$5.61
100259	[Modifier] Add Reinforced Poly for Dust Partitions	SF	$0.00	$0.17	$0.00	$0.17

01-54-00 Construction Aids

Cost excludes fuel and operator unless noted otherwise. If the rental equipment use is for a trades specific scope of work, an operator cannot be added

01-54-00 Construction Aids

Cost excludes fuel and operator unless noted otherwise. If the rental equipment use is for a trades specific scope of work, an operator cannot be added

100260	Rubbish Chute (Per Floor) Includes set up and removal	FLR	$121.95	$342.49	$0.00	$464.44
100261	6 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$727.60	$0.00	$727.60
100262	10 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$840.23	$0.00	$840.23
100263	16 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$881.32	$0.00	$881.32
100264	20 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$924.26	$0.00	$924.26
100265	30 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$1,021.41	$0.00	$1,021.41
100266	40 CY Dumpster Rental Includes delivery, pick-up and dump fees	EA	$0.00	$1,109.38	$0.00	$1,109.38
100267	Frac Tank – 21,000 Gallon – Uncoated Includes delivery and pickup	MO	$0.00	$1,940.76	$0.00	$1,940.76
100268	Frac Tank – 21,000 Gallon – Coated For chemical storage. Includes delivery and pickup	MO	$0.00	$2,397.41	$0.00	$2,397.41
100269	Recycling Requirements and Containers Can be used where special recycling requirements are called out in the project documents	MO	$1,578.67	$513.72	$0.00	$2,092.39
100270	Temporary Powered Personnel Hoist & Tower – Up to 6,000 LB Capacity & 75 to 100 FT High Includes Attachment to Building or Structure and Removal	MO	$5,397.88	$1,522.15	$20,000.00	$26,920.03
100271	Temporary Powered Material Hoist & Tower – Up to 2,000 LB Capacity & 75 to 100 FT High Includes Attachment to Building or Structure and Removal	MO	$4,048.40	$1,141.62	$15,000.00	$20,190.02
100272	Utility Vehicle - 2 Seat, 4 Wheel Drive, Diesel	DY	$0.00	$0.00	$195.01	$195.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100273	Utility Vehicle - 2 Seat, 4 Wheel Drive, Diesel	WK	$0.00	$0.00	$475.00	$475.00
100274	Utility Vehicle - 2 Seat, 4 Wheel Drive, Diesel	MO	$0.00	$0.00	$1,225.00	$1,225.00
100275	Towable Air Compressor, 185 CFM, Tier 4, Diesel Powered (DY)	DY	$0.00	$0.00	$360.79	$360.79
100276	Towable Air Compressor, 185 CFM, Tier 4, Diesel Powered (WK)	WK	$0.00	$0.00	$808.99	$808.99
100277	Towable Air Compressor, 185 CFM, Tier 4, Diesel Powered (MO)	MO	$0.00	$0.00	$1,408.39	$1,408.39
100278	Towable Air Compressor, 250-345 CFM, Diesel Powered (DY)	DY	$0.00	$0.00	$382.00	$382.00
100279	Towable Air Compressor, 250-345 CFM, Diesel Powered (WK)	WK	$0.00	$0.00	$826.19	$826.19
100280	Towable Air Compressor, 250-345 CFM, Diesel Powered (MO)	MO	$0.00	$0.00	$1,635.12	$1,635.12
100281	Towable Air Compressor, 300 CFM 100 PSI, Diesel Powered (DY)	DY	$0.00	$0.00	$403.08	$403.08
100282	Towable Air Compressor, 300 CFM 100 PSI, Diesel Powered (WK)	WK	$0.00	$0.00	$815.63	$815.63
100283	Towable Air Compressor, 300 CFM 100 PSI, Diesel Powered (MO)	MO	$0.00	$0.00	$2,478.82	$2,478.82
100284	Towable Air Compressor, 350-395 CFM, Diesel Powered (DY)	DY	$0.00	$0.00	$535.00	$535.00
100285	Towable Air Compressor, 350-395 CFM, Diesel Powered (WK)	WK	$0.00	$0.00	$1,085.00	$1,085.00
100286	Towable Air Compressor, 350-395 CFM, Diesel Powered (MO)	MO	$0.00	$0.00	$3,486.00	$3,486.00
100287	Compressor, 850-900 CFM, Gas or Diesel Powered (DY)	DY	$0.00	$0.00	$803.19	$803.19
100288	Compressor, 850-900 CFM, Gas or Diesel Powered (WK)	WK	$0.00	$0.00	$1,635.88	$1,635.88
100289	Compressor, 850-900 CFM, Gas or Diesel Powered (MO)	MO	$0.00	$0.00	$4,551.88	$4,551.88
100290	Compressor Air Hose - 50' (DY)	DY	$0.00	$0.00	$21.60	$21.60
100291	Compressor Air Hose - 50' (WK)	WK	$0.00	$0.00	$43.21	$43.21
100292	Compressor Air Hose - 50' (MO)	MO	$0.00	$0.00	$135.00	$135.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100293	Compressor Air Hammer/Rock Drill (DY)	DY	$0.00	$0.00	$76.68	$76.68
100294	Compressor Air Hammer/Rock Drill (WK)	WK	$0.00	$0.00	$210.60	$210.60
100295	Compressor Air Hammer/Rock Drill (MO)	MO	$0.00	$0.00	$659.34	$659.34
100296	20' Scissor Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$246.00	$246.00
100297	20' Scissor Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$505.00	$505.00
100298	20' Scissor Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$1,000.99	$1,000.99
100299	30' Scissor Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$249.00	$249.00
100300	30' Scissor Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$570.00	$570.00
100301	30' Scissor Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$1,285.00	$1,285.00
100302	40' Scissor Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$311.25	$311.25
100303	40' Scissor Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$712.51	$712.51
100304	40' Scissor Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$1,606.25	$1,606.25
100305	30' Rough Terrain Scissor Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$360.00	$360.00
100306	30' Rough Terrain Scissor Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$754.00	$754.00
100307	30' Rough Terrain Scissor Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$1,503.00	$1,503.00
100308	40' Rough Terrain Scissor Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$416.00	$416.00
100309	40' Rough Terrain Scissor Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$839.99	$839.99
100310	40' Rough Terrain Scissor Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$1,632.00	$1,632.00
100311	30' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$435.00	$435.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100312	30' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,094.00	$1,094.00
100313	30' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$2,342.00	$2,342.00
100314	40' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$594.00	$594.00
100315	40' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,341.00	$1,341.00
100316	40' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$2,783.00	$2,783.00
100317	50' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$608.00	$608.00
100318	50' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,435.00	$1,435.00
100319	50' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$2,863.01	$2,863.01
100320	60' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$769.00	$769.00
100321	60' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,632.00	$1,632.00
100322	60' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$3,249.00	$3,249.00
100323	80' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$1,235.00	$1,235.00
100324	80' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$2,633.99	$2,633.99
100325	80' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$4,553.00	$4,553.00
100326	120' Telescopic, Stick, or Straight Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$1,414.01	$1,414.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100327	120' Telescopic, Stick, or Straight Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$3,130.00	$3,130.00
100328	120' Telescopic, Stick, or Straight Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$8,935.01	$8,935.01
100329	30' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$496.00	$496.00
100330	30' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$1,141.00	$1,141.00
100331	30' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$2,453.00	$2,453.00
100332	40' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$595.21	$595.21
100333	40' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$1,369.20	$1,369.20
100334	40' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$2,943.60	$2,943.60
100335	60' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$677.00	$677.00
100336	60' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$1,437.01	$1,437.01
100337	60' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$3,334.00	$3,334.00
100338	80' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$1,023.01	$1,023.01
100339	80' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$2,286.00	$2,286.00
100340	80' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$5,071.01	$5,071.01
100341	125' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$1,611.00	$1,611.00
100342	125' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$3,638.00	$3,638.00
100343	125' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$8,766.00	$8,766.00
100344	135' Articulating or Knuckle Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$2,072.00	$2,072.00
100345	135' Articulating or Knuckle Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$4,823.00	$4,823.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100346	135' Articulating or Knuckle Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$12,169.00	$12,169.00
100347	30' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$600.00	$600.00
100348	30' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,400.00	$1,400.00
100349	30' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$2,988.00	$2,988.00
100350	60' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$1,585.00	$1,585.00
100351	60' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$3,710.00	$3,710.00
100352	60' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$7,897.00	$7,897.00
100353	80' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$2,515.00	$2,515.00
100354	80' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$7,272.00	$7,272.00
100355	80' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$16,755.01	$16,755.01
100356	100' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$2,895.70	$2,895.70
100357	100' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$8,362.80	$8,362.80
100358	100' Atrium, Spider, Compact Crawler, Tracked, or Arborist Boom Lift Rental (MO) JLG or equal. Can be used where heights are > 15'	MO	$0.00	$0.00	$17,731.00	$17,731.00
100359	20' and Up to 5,000 LB Telehandler or Variable Reach Forklift Rental (DY) JLG or equal. Can be used where heights are > 15'	DY	$0.00	$0.00	$599.00	$599.00
100360	20' and Up to 5,000 LB Telehandler or Variable Reach Forklift Rental (WK) JLG or equal. Can be used where heights are > 15'	WK	$0.00	$0.00	$1,386.00	$1,386.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100361	20' and Up to 5,000 LB Telehandler or Variable Reach Forklift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$2,894.00	$2,894.00
100362	40' and Up to 7,000 LB Telehandler or Variable Reach Forklift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$671.00	$671.00
100363	40' and Up to 7,000 LB Telehandler or Variable Reach Forklift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$1,573.00	$1,573.00
100364	40' and Up to 7,000 LB Telehandler or Variable Reach Forklift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$3,429.00	$3,429.00
100365	50' and Up to 10,000 LB Telehandler or Variable Reach Forklift Rental (DY) JLG or equal. Can be used where heights are > 15’	DY	$0.00	$0.00	$881.00	$881.00
100366	50' and Up to 10,000 LB Telehandler or Variable Reach Forklift Rental (WK) JLG or equal. Can be used where heights are > 15’	WK	$0.00	$0.00	$2,353.00	$2,353.00
100367	50' and Up to 10,000 LB Telehandler or Variable Reach Forklift Rental (MO) JLG or equal. Can be used where heights are > 15’	MO	$0.00	$0.00	$5,006.00	$5,006.00
	01-54-19 Temporary Cranes and Lifts					
100368	25 Ton Hydraulic Crane Rental (DY) – Excludes Operator Includes Maintenance Costs	DY	$0.00	$184.14	$1,263.63	$1,447.77
100369	25 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$923.25	$3,790.27	$4,713.52
100370	25 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$4,002.43	$11,372.64	$15,375.07
100371	45 Ton Hydraulic Crane Rental (DY) – Excludes Operator Includes Maintenance Costs	DY	$0.00	$184.14	$1,944.04	$2,128.18
100372	45 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$923.25	$5,831.19	$6,754.44
100373	45 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$4,002.43	$17,496.36	$21,498.79
100374	55 Ton Hydraulic Crane Rental (DY) – Excludes Operator Includes Maintenance Costs	DY	$0.00	$184.14	$2,235.65	$2,419.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100375	55 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$923.25	$6,705.87	$7,629.12
100376	55 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$4,002.43	$20,120.83	$24,123.26
100377	80 Ton Hydraulic Crane Rental (DY) – Excludes Operator Includes Maintenance Costs	DY	$0.00	$175.54	$2,879.60	$3,055.14
100378	80 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$8,638.80	$9,518.92
100379	80 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$25,916.40	$29,731.87
100380	130 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Liebherr LTM 1130-5.1, 197' main boom	DY	$0.00	$184.14	$3,320.00	$3,504.14
100381	130 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$9,960.15	$10,840.27
100382	130 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$29,880.45	$33,695.92
100383	150 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Liebherr LTM 1130-5.1, 197' main boom	DY	$0.00	$175.54	$3,726.00	$3,901.54
100384	150 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$11,178.00	$12,058.12
100385	150 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$33,534.00	$37,349.47
100386	200 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Liebherr LTM 1200-5.1, 236' main boom	DY	$0.00	$184.14	$4,120.00	$4,304.14
100387	200 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$12,361.35	$13,241.47
100388	200 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$37,084.05	$40,899.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100389	265 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Tadano 7.450-1, 262' main boom	DY	$0.00	$184.14	$4,920.00	$5,104.14
100390	265 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$14,759.10	$15,639.22
100391	265 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$44,277.30	$48,092.77
100392	350 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Tadano 7.450-1, 262' main boom	DY	$0.00	$175.54	$7,084.00	$7,259.54
100393	350 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$21,252.00	$22,132.12
100394	350 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$63,756.00	$67,571.47
100395	500 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Tadano 7.450-1, 262' main boom	DY	$0.00	$175.54	$9,844.00	$10,019.54
100396	500 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$29,532.00	$30,412.12
100397	500 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$88,596.00	$92,411.47
100398	600 Ton Hydraulic Crane Rental (DY) - Excludes Operator Includes Maintenance Costs; Tadano 7.450-1, 262' main boom	DY	$0.00	$175.54	$12,098.00	$12,273.54
100399	600 Ton Hydraulic Crane Rental (WK) – Excludes Operator Includes Maintenance Costs	WK	$0.00	$880.12	$36,294.00	$37,174.12
100400	600 Ton Hydraulic Crane Rental (MO) – Excludes Operator Includes Maintenance Costs	MO	$0.00	$3,815.47	$108,882.00	$112,697.47
100401	Rigging - Per Person Per Day Labor required for rigging to set equipment in place. Includes rigging equipment/hardware (shackles, master links, slings, etc.) Excludes crane.	DY	$509.31	$0.00	$189.75	$699.06

01-54-20 Special Use Heavy Equipment

To be used for emergency or site-specific work as authorized by the project manager. To be used with Divisions 31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	and 32 only. Division 01-54-20 equipment items exclude operators.					
100402	Crawler Dozer 70 - 75 HP (Per Day) Similar to John Deere 450P. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$348.71	$348.71
100403	Crawler Dozer 70 - 75 HP (Per Week) Similar to John Deere 450P. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,238.44	$1,238.44
100404	Crawler Dozer 70 - 75 HP (Per Month) Similar to John Deere 450P. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,806.98	$3,806.98
100405	Dozer 80 to 95 HP (Per Day) Similar to CAT D2. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$635.36	$635.36
100406	Dozer 80 to 95 HP (Per Week) Similar to CAT D2. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,129.51	$2,129.51
100407	Dozer 80 to 95 HP (Per Month) Similar to CAT D2. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,732.27	$5,732.27
100408	Dozer 100 to 125 HP (Per Day) Similar to CAT D3. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$742.15	$742.15
100409	Dozer 100 to 125 HP (Per Week) Similar to CAT D3. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,515.68	$2,515.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100410	Dozer 100 to 125 HP (Per Month) Similar to CAT D3. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$7,043.03	$7,043.03
100411	Dozer 130 to 145 HP (Per Day) Similar to CAT D4. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$732.50	$732.50
100412	Dozer 130 to 145 HP (Per Week) Similar to CAT D4. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,668.49	$2,668.49
100413	Dozer 130 to 145 HP (Per Month) Similar to CAT D4. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$7,425.00	$7,425.00
100414	Dozer 170 to 200 HP (Per Day) Similar to CAT D5. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,100.00	$1,100.00
100415	Dozer 170 to 200 HP (Per Week) Similar to CAT D5. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,253.34	$3,253.34
100416	Dozer 170 to 200 HP (Per Month) Similar to CAT D5. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$8,659.99	$8,659.99
100417	Dozer 210 to 250 HP (Per Day) Similar to CAT D6. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,660.00	$1,660.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100418	Dozer 210 to 250 HP (Per Week) Similar to CAT D6. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$4,950.00	$4,950.00
100419	Dozer 210 to 250 HP (Per Month) Similar to CAT D6. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$13,675.00	$13,675.00
100420	Dozer 260 to 300 HP (Per Day) Similar to CAT D7. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$2,300.00	$2,300.00
100421	Dozer 260 to 300 HP (Per Week) Similar to CAT D7. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$6,850.00	$6,850.00
100422	Dozer 260 to 300 HP (Per Month) Similar to CAT D7. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$18,900.00	$18,900.00
100423	Dozer 350 to 400 HP (Per Day) Similar to CAT D8. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$3,000.00	$3,000.00
100424	Dozer 350 to 400 HP (Per Week) Similar to CAT D8. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$9,000.00	$9,000.00
100425	Dozer 350 to 400 HP (Per Month) Similar to CAT D8. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$24,700.00	$24,700.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100426	Dozer 450 to 475 HP (Per Day) Similar to CAT D9. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$4,300.00	$4,300.00
100427	Dozer 450 to 475 HP (Per Week) Similar to CAT D9. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$13,100.00	$13,100.00
100428	Dozer 450 to 475 HP (Per Month) Similar to CAT D9. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$36,000.00	$36,000.00
100429	Dozer 575 to 625 HP (Per Day) Similar to CAT D10. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$6,500.00	$6,500.00
100430	Dozer 575 to 625 HP (Per Week) Similar to CAT D10. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$19,500.00	$19,500.00
100431	Dozer 575 to 625 HP (Per Month) Similar to CAT D10. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$53,500.00	$53,500.00
100432	Excavator 14 to 20 HP (Per Day) (Mini or Compact) Similar to Takeuchi Compact TB216 or TB225. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$314.00	$314.00
100433	Excavator 14 to 20 HP (Per Week) (Mini or Compact) Similar to Takeuchi Compact TB216 or TB225. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$997.34	$997.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100434	Excavator 14 to 20 HP (Per Month) (Mini or Compact) Similar to Takeuchi Compact TB216 or TB225. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,401.43	$2,401.43
100435	Excavator 23 to 30 HP (Per Day) (Mini or Compact) Similar to CAT 303. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$356.48	$356.48
100436	Excavator 23 to 30 HP (Per Week) (Mini or Compact) Similar to CAT 303. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,139.68	$1,139.68
100437	Excavator 23 to 30 HP (Per Month) (Mini or Compact) Similar to CAT 303. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,937.38	$2,937.38
100438	Excavator 40 to 50 HP (Per Day) (Mini or Compact) Similar to CAT 305. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$435.41	$435.41
100439	Excavator 40 to 50 HP (Per Week) (Mini or Compact) Similar to CAT 305. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,365.05	$1,365.05
100440	Excavator 40 to 50 HP (Per Month) (Mini or Compact) Similar to CAT 305. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,335.02	$3,335.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100441	Excavator 55 to 60 HP (Per Day) (Mini or Compact) Similar to CAT 306. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$467.49	$467.49
100442	Excavator 55 to 60 HP (Per Week) (Mini or Compact) Similar to CAT 306. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,471.59	$1,471.59
100443	Excavator 55 to 60 HP (Per Month) (Mini or Compact) Similar to CAT 306. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,848.98	$3,848.98
100444	Excavator 65 to 70 HP (Per Day) (Mini or Compact) Similar to CAT 308 or 310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$562.67	$562.67
100445	Excavator 65 to 70 HP (Per Week) (Mini or Compact) Similar to CAT 308 or 310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,000.00	$2,000.00
100446	Excavator 65 to 70 HP (Per Month) (Mini or Compact) Similar to CAT 308 or 310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,163.34	$5,163.34
100447	Excavator 100 to 125 HP (per Day) (Medium) Similar to CAT 313 or 315. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$716.25	$716.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100448	Excavator 100 to 125 HP (per Week) (Medium) Similar to CAT 313 or 315. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,389.50	$2,389.50
100449	Excavator 100 to 125 HP (per Month) (Medium) Similar to CAT 313 or 315. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$6,425.00	$6,425.00
100450	Excavator 150 to 200 HP (per Day) (Medium) Similar to CAT 320 or 325. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$956.27	$956.27
100451	Excavator 150 to 200 HP (per Week) (Medium) Similar to CAT 320 or 325. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,147.16	$3,147.16
100452	Excavator 150 to 200 HP (per Month) (Medium) Similar to CAT 320 or 325. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$8,716.93	$8,716.93
100453	Excavator 220 to 300 HP (per Day) (Medium) Similar to CAT 330 or 335. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,343.38	$1,343.38
100454	Excavator 220 to 300 HP (per Week) (Medium) Similar to CAT 330 or 335. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,858.62	$3,858.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100455	Excavator 220 to 300 HP (per Month) (Medium) Similar to CAT 330 or 335. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$10,462.38	$10,462.38
100456	Excavator 325 to 375 HP (per Day) (Medium) Similar to CAT 336 or 340. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,689.72	$1,689.72
100457	Excavator 325 to 375 HP (per Week) (Medium) Similar to CAT 336 or 340. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$4,894.49	$4,894.49
100458	Excavator 325 to 375 HP (per Month) (Medium) Similar to CAT 336 or 340. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$14,085.48	$14,085.48
100459	Excavator 400 to 450 HP (per Day) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$2,250.00	$2,250.00
100460	Excavator 400 to 450 HP (per Week) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$6,750.01	$6,750.01
100461	Excavator 400 to 450 HP (per Month) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$18,500.00	$18,500.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100462	Excavator 470 to 500 HP (per Day) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$3,390.00	$3,390.00
100463	Excavator 470 to 500 HP (per Week) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$10,100.00	$10,100.00
100464	Excavator 470 to 500 HP (per Month) (Large) Similar to CAT 349, 350 or 352. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$27,900.00	$27,900.00
100465	Skid Steer Loader 20 HP to 30 HP (Per Day) (Wheel - Small) Similar to Bobcat S70. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$200.00	$200.00
100466	Skid Steer Loader 20 HP to 30 HP (Per Week) (Wheel - Small) Similar to Bobcat S70. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$709.00	$709.00
100467	Skid Steer Loader 20 HP to 30 HP (Per Month) (Wheel - Small) Similar to Bobcat S70. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,350.00	$1,350.00
100468	Skid Steer Loader 35 HP to 50 HP (Per Day) (Wheel - Small) Similar to Bobcat 753. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$289.00	$289.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100469	Skid Steer Loader 35 HP to 50 HP (Per Week) (Wheel - Small) Similar to Bobcat 753. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,550.00	$1,550.00
100470	Skid Steer Loader 35 HP to 50 HP (Per Month) (Wheel - Small) Similar to Bobcat 753. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,465.00	$3,465.00
100471	Skid Steer Loader 60 HP to 75 HP (Per Day) (Wheel - Medium) Similar to Cat 232. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$347.08	$347.08
100472	Skid Steer Loader 60 HP to 75 HP (Per Week) (Wheel - Medium) Similar to Cat 232. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,127.67	$1,127.67
100473	Skid Steer Loader 60 HP to 75 HP (Per Month) (Wheel - Medium) Similar to Cat 232. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,878.92	$2,878.92
100474	Skid Steer Loader 85 HP to 100 HP (Per Day) (Track - Large) Similar to Cat 272. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$432.50	$432.50
100475	Skid Steer Loader 85 HP to 100 HP (Per Week) (Track - Large) Similar to Cat 272. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,370.00	$1,370.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100476	Skid Steer Loader 85 HP to 100 HP (Per Month) (Track - Large) Similar to Cat 272. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,275.00	$3,275.00
100477	Loader 70 to 95 HP (Per Day) (Wheel - Compact) Similar to CAT 908. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$390.00	$390.00
100478	Loader 70 to 95 HP (Per Week) (Wheel - Compact) Similar to CAT 908. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,290.00	$1,290.00
100479	Loader 70 to 95 HP (Per Month) (Wheel - Compact) Similar to CAT 908. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,700.00	$3,700.00
100480	Loader 100 to 115 HP (Per Day) (Wheel - Compact) Similar to CAT 914. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$425.01	$425.01
100481	Loader 100 to 115 HP (Per Week) (Wheel - Compact) Similar to CAT 914. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,600.00	$1,600.00
100482	Loader 100 to 115 HP (Per Month) (Wheel - Compact) Similar to CAT 914. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$4,650.00	$4,650.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100483	Loader 120 to 145 HP (Per Day) (Wheel - Compact) Similar to CAT 920. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$700.00	$700.00
100484	Loader 120 to 145 HP (Per Week) (Wheel - Compact) Similar to CAT 920. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,200.00	$2,200.00
100485	Loader 120 to 145 HP (Per Month) (Wheel - Compact) Similar to CAT 920. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$6,150.00	$6,150.00
100486	Loader 150 to 185 HP (Per Day) (Wheel - Small) Similar to CAT 926 or 930. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$724.99	$724.99
100487	Loader 150 to 185 HP (Per Week) (Wheel - Small) Similar to CAT 926 or 930. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,425.00	$2,425.00
100488	Loader 150 to 185 HP (Per Month) (Wheel - Small) Similar to CAT 926 or 930. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$6,400.00	$6,400.00
100489	Loader 190 to 225 HP (Per Day) (Wheel - Small) Similar to CAT 938. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$850.00	$850.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100490	Loader 190 to 225 HP (Per Week) (Wheel - Small) Similar to CAT 938. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,850.00	$2,850.00
100491	Loader 190 to 225 HP (Per Month) (Wheel - Small) Similar to CAT 938. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$7,200.00	$7,200.00
100492	Loader 230 to 275 HP (Per Day) (Wheel - Medium) Similar to CAT 950. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$900.00	$900.00
100493	Loader 230 to 275 HP (Per Week) (Wheel - Medium) Similar to CAT 950. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,200.00	$3,200.00
100494	Loader 230 to 275 HP (Per Month) (Wheel - Medium) Similar to CAT 950. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$8,000.00	$8,000.00
100495	Loader 310 to 350 HP (Per Day) (Wheel - Medium) Similar to CAT 966. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,670.00	$1,670.00
100496	Loader 310 to 350 HP (Per Week) (Wheel - Medium) Similar to CAT 966. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$5,000.00	$5,000.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100497	Loader 310 to 350 HP (Per Month) (Wheel - Medium) Similar to CAT 966. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$13,800.00	$13,800.00
100498	Loader 400 to 425 HP (Per Day) (Wheel - Medium) Similar to CAT 980. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$2,200.00	$2,200.00
100499	Loader 400 to 425 HP (Per Week) (Wheel - Medium) Similar to CAT 980. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$6,650.00	$6,650.00
100500	Loader 400 to 425 HP (Per Month) (Wheel - Medium) Similar to CAT 980. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$18,300.00	$18,300.00
100501	Loader 430 to 440 HP (Per Day) (Wheel - Medium) Similar to CAT 982. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$2,350.00	$2,350.00
100502	Loader 430 to 440 HP (Per Week) (Wheel - Medium) Similar to CAT 982. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$7,100.00	$7,100.00
100503	Loader 430 to 440 HP (Per Month) (Wheel - Medium) Similar to CAT 982. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$19,500.00	$19,500.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100504	Loader 450 to 475 HP (Per Day) (Wheel - Large) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$3,100.00	$3,100.00
100505	Loader 450 to 475 HP (Per Week) (Wheel - Large) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$9,300.00	$9,300.00
100506	Loader 450 to 475 HP (Per Month) (Wheel - Large) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$25,500.00	$25,500.00
100507	Loader 60 to 70 HP (Per Day) (Track - Medium) Similar to CAT 239 or 249. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$373.29	$373.29
100508	Loader 60 to 70 HP (Per Week) (Track - Medium) Similar to CAT 239 or 249. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,213.57	$1,213.57
100509	Loader 60 to 70 HP (Per Month) (Track - Medium) Similar to CAT 239 or 249. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,012.86	$3,012.86
100510	Loader 75 to 85 HP (Per Day) (Track - Large) Similar to CAT 259, 279 or 289. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$460.84	$460.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100511	Loader 75 to 85 HP (Per Week) (Track - Large) Similar to CAT 259, 279 or 289. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,483.96	$1,483.96
100512	Loader 75 to 85 HP (Per Month) (Track - Large) Similar to CAT 259, 279 or 289. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,794.88	$3,794.88
100513	Loader 90 to 125 HP (Per Day) (Track - Large) Similar to CAT 299. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$590.00	$590.00
100514	Loader 90 to 125 HP (Per Week) (Track - Large) Similar to CAT 299. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,883.33	$1,883.33
100515	Loader 90 to 125 HP (Per Month) (Track - Large) Similar to CAT 299. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$4,683.33	$4,683.33
100516	Loader 150 to 175 HP (Per Day) (Track - Large) Similar to CAT 953. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,150.00	$1,150.00
100517	Loader 150 to 175 HP (Per Week) (Track - Large) Similar to CAT 953. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,400.00	$3,400.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100518	Loader 150 to 175 HP (Per Month) (Track - Large) Similar to CAT 953. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$9,400.00	$9,400.00
100519	Loader 200 to 225 HP (Per Day) (Track - Large) Similar to CAT 963. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$1,500.00	$1,500.00
100520	Loader 200 to 225 HP (Per Week) (Track - Large) Similar to CAT 963. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$4,500.00	$4,500.00
100521	Loader 200 to 225 HP (Per Month) (Track - Large) Similar to CAT 963. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$12,799.99	$12,799.99
100522	Loader 250 to 300 HP (Per Day) (Track - Large) Similar to CAT 973. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$2,200.00	$2,200.00
100523	Loader 250 to 300 HP (Per Week) (Track - Large) Similar to CAT 973. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$6,650.00	$6,650.00
100524	Loader 250 to 300 HP (Per Month) (Track - Large) Similar to CAT 973. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$18,300.00	$18,300.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100525	Backhoe 65 HP to 75 HP (Per Day) (Medium) Similar to John Deere JD310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$429.42	$429.42
100526	Backhoe 65 HP to 75 HP (Per Week) (Medium) Similar to John Deere JD310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,316.96	$1,316.96
100527	Backhoe 65 HP to 75 HP (Per Month) (Medium) Similar to John Deere JD310. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,100.15	$3,100.15
100528	Backhoe 90 to 115 HP (Per Day) (Large) Similar to CAT 420 OR 430. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$503.33	$503.33
100529	Backhoe 90 to 115 HP (Per Week) (Large) Similar to CAT 420 OR 430. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,600.00	$1,600.00
100530	Backhoe 90 to 115 HP (Per Month) (Large) Similar to CAT 420 OR 430. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,596.67	$3,596.67
100531	Backhoe 120 to 135 HP (Per Day) (Large) Similar to CAT 450. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$547.50	$547.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100532	Backhoe 120 to 135 HP (Per Week) (Large) Similar to CAT 450. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,050.00	$2,050.00
100533	Backhoe 120 to 135 HP (Per Month) (Large) Similar to CAT 450. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,100.00	$5,100.00
100534	Backhoe 140 to 155 HP (Per Day) (Large) Similar to John Deere JD710. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$692.50	$692.50
100535	Backhoe 140 to 155 HP (Per Week) (Large) Similar to John Deere JD710. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,670.00	$2,670.00
100536	Backhoe 140 to 155 HP (Per Month) (Large) Similar to John Deere JD710. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$6,212.50	$6,212.50
100537	Street Sweeper Rental (DY) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$287.73	$287.73
100538	Street Sweeper Rental (WK) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$959.10	$959.10
100539	Street Sweeper Rental (MO) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,877.30	$2,877.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100540	Water Trailer 500 Gallon (Per Day) Similar to MultiQuip WT5C. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$167.00	$167.00
100541	Water Trailer 500 Gallon (Per Week) Similar to MultiQuip WT5C. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$604.00	$604.00
100542	Water Trailer 500 Gallon (Per Month) Similar to MultiQuip WT5C. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,179.00	$1,179.00
100543	Water Trailer 800 Gallon (Per Day) Similar to Wylie EXP-800-S. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$200.00	$200.00
100544	Water Trailer 800 Gallon (Per Week) Similar to Wylie EXP-800-S. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$710.00	$710.00
100545	Water Trailer 800 Gallon (Per Month) Similar to Wylie EXP-800-S. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,586.00	$1,586.00
100546	Water Truck 2000 Gallon (Per Day) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$443.82	$443.82
100547	Water Truck 2000 Gallon (Per Week) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,480.46	$1,480.46
100548	Water Truck 2000 Gallon (Per Month) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,384.80	$3,384.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100549	Water Truck 4000 Gallon (Per Day) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$651.59	$651.59
100550	Water Truck 4000 Gallon (Per Week) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,216.88	$2,216.88
100551	Water Truck 4000 Gallon (Per Month) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,904.48	$5,904.48
100552	Water Truck 4000 Gallon 6X6 AWD (Per Day) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$850.00	$850.00
100553	Water Truck 4000 Gallon 6X6 AWD (Per Week) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$3,400.00	$3,400.00
100554	Water Truck 4000 Gallon 6X6 AWD (Per Month) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$8,500.00	$8,500.00
100555	Dump Truck 3 CY to 4 CY (Per Day) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$346.00	$346.00
100556	Dump Truck 3 CY to 4 CY (Per Week) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$962.00	$962.00
100557	Dump Truck 3 CY to 4 CY (Per Month) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,200.00	$2,200.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100558	Dump Truck 5 CY to 6 CY (Per Day) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$450.18	$450.18
100559	Dump Truck 5 CY to 6 CY (Per Week) Similar to CAT 986. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,320.00	$1,320.00
100560	Dump Truck 5 CY to 6 CY (Per Month) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,190.01	$3,190.01
100561	Dump Truck 10 CY to 14 CY (Per Day) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$714.43	$714.43
100562	Dump Truck 10 CY to 14 CY (Per Week) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,189.17	$2,189.17
100563	Dump Truck 10 CY to 14 CY (Per Month) May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,683.06	$5,683.06
100564	Accessory for Excavator - Exhaust Scrubber (Per Day) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$50.00	$50.00
100565	Accessory for Excavator - Exhaust Scrubber (Per Week) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$200.00	$200.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100566	Accessory for Excavator - Exhaust Scrubber (Per Month) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$500.00	$500.00
100567	Accessory for Excavator - 300# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$255.00	$255.00
100568	Accessory for Excavator - 300# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$735.00	$735.00
100569	Accessory for Excavator - 300# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,750.00	$1,750.00
100570	Accessory for Excavator - 550# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$285.00	$285.00
100571	Accessory for Excavator - 550# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$850.00	$850.00
100572	Accessory for Excavator - 550# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,200.00	$2,200.00
100573	Accessory for Excavator - 825# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$295.00	$295.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100574	Accessory for Excavator - 825# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,050.00	$1,050.00
100575	Accessory for Excavator - 825# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,400.00	$2,400.00
100576	Accessory for Excavator - 1200# to 1500# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$435.00	$435.00
100577	Accessory for Excavator - 1200# to 1500# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,250.00	$1,250.00
100578	Accessory for Excavator - 1200# to 1500# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,300.01	$3,300.01
100579	Accessory for Excavator - 3000# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$575.00	$575.00
100580	Accessory for Excavator - 3000# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,200.00	$2,200.00
100581	Accessory for Excavator - 3000# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,600.01	$5,600.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100582	Accessory for Excavator - 5000# Breaker (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$750.00	$750.00
100583	Accessory for Excavator - 5000# Breaker (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$2,950.00	$2,950.00
100584	Accessory for Excavator - 5000# Breaker (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$7,500.00	$7,500.00
100585	Accessory for Excavator - 12" to 18" Compaction Wheel (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$125.00	$125.00
100586	Accessory for Excavator - 12" to 18" Compaction Wheel (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$500.00	$500.00
100587	Accessory for Excavator - 12" to 18" Compaction Wheel (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,250.00	$1,250.00
100588	Accessory for Excavator - 24" Compaction Wheel (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$187.50	$187.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100589	Accessory for Excavator - 24" Compaction Wheel (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$750.00	$750.00
100590	Accessory for Excavator - 24" Compaction Wheel (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,925.00	$1,925.00
100591	Accessory for Excavator - 36" Compaction Wheel (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$250.00	$250.00
100592	Accessory for Excavator - 36" Compaction Wheel (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$900.00	$900.00
100593	Accessory for Excavator - 36" Compaction Wheel (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,400.00	$2,400.00
100594	Accessory for Excavator - Auger (Per Day) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$375.00	$375.00
100595	Accessory for Excavator - Auger (Per Week) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,150.00	$1,150.00
100596	Accessory for Excavator - Auger (Per Month) Additional accessories/attachments for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,500.00	$2,500.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100597	Accessory for Skid Steer Loader - Exhaust Scrubber (Per Day) Additional accessories for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$50.00	$50.00
100598	Accessory for Skid Steer Loader - Exhaust Scrubber (Per Week) Additional accessories for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$200.00	$200.00
100599	Accessory for Skid Steer Loader - Exhaust Scrubber (Per Month) Additional accessories for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$500.00	$500.00
100600	Accessory for Skid Steer Loader - 200# Breaker (Per Day) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$255.00	$255.00
100601	Accessory for Skid Steer Loader - 200# Breaker (Per Week) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$735.00	$735.00
100602	Accessory for Skid Steer Loader - 200# Breaker (Per Month) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,750.00	$1,750.00
100603	Accessory for Skid Steer Loader - Vacuum Plate (Per Day) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$100.00	$100.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100604	Accessory for Skid Steer Loader - Vacuum Plate (Per Week) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$300.00	$300.00
100605	Accessory for Skid Steer Loader - Vacuum Plate (Per Month) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$650.00	$650.00
100606	Accessory for Skid Steer Loader - Lift Hook and Arm (Per Day) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$50.00	$50.00
100607	Accessory for Skid Steer Loader - Lift Hook and Arm (Per Week) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$200.00	$200.00
100608	Accessory for Skid Steer Loader - Lift Hook and Arm (Per Month) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$500.00	$500.00
100609	Accessory for Skid Steer Loader - Street Sweeper Attachment (Per Day) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$172.01	$172.01
100610	Accessory for Skid Steer Loader - Street Sweeper Attachment (Per Week) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$345.00	$345.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100611	Accessory for Skid Steer Loader - Street Sweeper Attachment (Per Month) Additional accessories/attachments for Skid Steers. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,032.00	$1,032.00
100612	Accessory for Loader - Exhaust Scrubber (Per Day) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$50.00	$50.00
100613	Accessory for Loader - Exhaust Scrubber (Per Week) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$200.00	$200.00
100614	Accessory for Loader - Exhaust Scrubber (Per Month) Additional accessories for Excavators. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$500.00	$500.00
100615	Accessory for Loader - 300# Breaker (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$225.00	$225.00
100616	Accessory for Loader - 300# Breaker (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$724.99	$724.99
100617	Accessory for Loader - 300# Breaker (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,750.00	$1,750.00
100618	Accessory for Loader - 550# Breaker (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$250.00	$250.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100619	Accessory for Loader - 550# Breaker (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$775.00	$775.00
100620	Accessory for Loader - 550# Breaker (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,000.00	$2,000.00
100621	Accessory for Loader - 825# Breaker (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$275.00	$275.00
100622	Accessory for Loader - 825# Breaker (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,050.00	$1,050.00
100623	Accessory for Loader - 825# Breaker (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,400.00	$2,400.00
100624	Accessory for Loader - 36" to 72" Grapple Bucket (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$125.00	$125.00
100625	Accessory for Loader - 36" to 72" Grapple Bucket (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$400.00	$400.00
100626	Accessory for Loader - 36" to 72" Grapple Bucket (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$400.00	$400.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100627	Accessory for Loader - Rock Skeleton Bucket <=4 CY (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$200.00	$200.00
100628	Accessory for Loader - Rock Skeleton Bucket <=4 CY (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$800.00	$800.00
100629	Accessory for Loader - Rock Skeleton Bucket <=4 CY (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,400.00	$2,400.00
100630	Accessory for Loader - Auger (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$375.00	$375.00
100631	Accessory for Loader - Auger (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,150.00	$1,150.00
100632	Accessory for Loader - Auger (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,500.00	$2,500.00
100633	Accessory for Loader - 18" Cold Planer (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$400.00	$400.00
100634	Accessory for Loader - 18" Cold Planer (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,550.00	$1,550.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100635	Accessory for Loader - 18" Cold Planer (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$4,500.00	$4,500.00
100636	Accessory for Loader - 24" Cold Planer (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$475.00	$475.00
100637	Accessory for Loader - 24" Cold Planer (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,850.00	$1,850.00
100638	Accessory for Loader - 24" Cold Planer (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,400.00	$5,400.00
100639	Accessory for Loader - Concrete Removal "Beak" (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$149.99	$149.99
100640	Accessory for Loader - Concrete Removal "Beak" (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$600.00	$600.00
100641	Accessory for Loader - Concrete Removal "Beak" (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,200.00	$1,200.00
100642	Accessory for Loader - Hook Over Forks (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$95.00	$95.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100643	Accessory for Loader - Hook Over Forks (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$275.00	$275.00
100644	Accessory for Loader - Hook Over Forks (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$650.00	$650.00
100645	Accessory for Loader - Mower (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$250.00	$250.00
100646	Accessory for Loader - Mower (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$900.00	$900.00
100647	Accessory for Loader - Mower (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,100.00	$2,100.00
100648	Accessory for Loader - Flail Mower 60" (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$250.00	$250.00
100649	Accessory for Loader - Flail Mower 60" (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$900.00	$900.00
100650	Accessory for Loader - Flail Mower 60" (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,100.00	$2,100.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100651	Accessory for Loader - Disc (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$200.00	$200.00
100652	Accessory for Loader - Disc (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$800.00	$800.00
100653	Accessory for Loader - Disc (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,400.00	$2,400.00
100654	Accessory for Loader - Mulcher 76" (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$450.00	$450.00
100655	Accessory for Loader - Mulcher 76" (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,800.00	$1,800.00
100656	Accessory for Loader - Mulcher 76" (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$5,400.00	$5,400.00
100657	Accessory for Loader - Stump Grinder (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$250.00	$250.00
100658	Accessory for Loader - Stump Grinder (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$950.00	$950.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100659	Accessory for Loader - Stump Grinder (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,200.00	$2,200.00
100660	Accessory for Loader - Sweeper (Per Day) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$225.00	$225.00
100661	Accessory for Loader - Sweeper (Per Week) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$800.00	$800.00
100662	Accessory for Loader - Sweeper (Per Month) Additional accessories/attachments for Loaders. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,900.00	$1,900.00
100663	Accessory for Backhoe - 1500 # Breaker (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$435.00	$435.00
100664	Accessory for Backhoe - 1500 # Breaker (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,250.00	$1,250.00
100665	Accessory for Backhoe - 1500 # Breaker (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$3,300.01	$3,300.01
100666	Accessory for Backhoe - 2000 # Breaker (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$460.00	$460.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100667	Accessory for Backhoe - 2000 # Breaker (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,840.00	$1,840.00
100668	Accessory for Backhoe - 2000 # Breaker (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$4,600.00	$4,600.00
100669	Accessory for Backhoe - 18" Compaction Wheel (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$125.00	$125.00
100670	Accessory for Backhoe - 18" Compaction Wheel (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$500.00	$500.00
100671	Accessory for Backhoe - 18" Compaction Wheel (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,250.00	$1,250.00
100672	Accessory for Backhoe - 24" Compaction Wheel (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$149.99	$149.99
100673	Accessory for Backhoe - 24" Compaction Wheel (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$600.00	$600.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100674	Accessory for Backhoe - 24" Compaction Wheel (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$1,500.00	$1,500.00
100675	Accessory for Backhoe - Auger (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$325.00	$325.00
100676	Accessory for Backhoe - Auger (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$1,075.00	$1,075.00
100677	Accessory for Backhoe - Auger (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$2,500.00	$2,500.00
100678	Accessory for Backhoe - Hook Over Forks (Per Day) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	DY	$0.00	$0.00	$125.00	$125.00
100679	Accessory for Backhoe - Hook Over Forks (Per Week) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	WK	$0.00	$0.00	$275.00	$275.00
100680	Accessory for Backhoe - Hook Over Forks (Per Month) Additional accessories/attachments for Backhoes. May ONLY be used for emergency or site-specific work as authorized by the project manager in conjunction with ONLY Divisions 31 and 32. No Fuel or Operator.	MO	$0.00	$0.00	$550.00	$550.00
	01-54-23 Temporary Scaffolding and Platforms					
100681	Exterior Scaffold per SF of Vertical Surface (WK) Can be used where heights are > 15'. Includes delivery, set up and removal, building anchorage as required. Unit cost includes rental for 1 week	SF	$2.74	$0.00	$1.51	$4.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100682	Exterior Scaffold per SF of Vertical Surface (MO) Can be used where heights are > 15'. Includes delivery, set up and removal, building anchorage as required. Unit cost includes rental for 28 days	SF	$2.74	$0.00	$6.00	$8.74
100683	[Modifier] Exterior Scaffold Weekly Rental Rate After 28 Days Per SF of vertical surface area	SF	$0.00	$0.00	$0.54	$0.54
100684	Interior Scaffold per SF of Vertical Surface – Includes Removal Can be used where heights are greater than 15'. Unit cost includes rental for 1 week	SF	$2.09	$0.00	$1.25	$3.34
100685	Scaffold Stair Tower – LF of Tread – Includes Removal Includes, frame, stringers, treads, fasteners, hangers, railings, and landings	LF	$2.02	$6.28	$0.00	$8.30
100686	Scaffold Shoring Towers Includes delivery, set up and removal	CF	$13.96	$5.57	$0.00	$19.53
100687	Scaffold - Swing Stage Set Up/Removal Includes mobilization/demobilization, set up and disassembly	EA	$1,021.14	$0.00	$0.00	$1,021.14
100688	Scaffold - Swing Stage (WK) Includes anchorage, tiebacks, counterweights (if required), cables, winches, decking and guard systems and all necessary equipment for a complete installation. Assumes 20' deck	WK	$0.00	$0.00	$1,237.00	$1,237.00
100689	Scaffold - Swing Stage (MO) Includes anchorage, tiebacks, counterweights (if required), cables, winches, decking and guard systems and all necessary equipment for a complete installation. Assumes 20' deck	MO	$0.00	$0.00	$2,250.00	$2,250.00
100690	Scaffold - One Man Work Cage (WK) Includes anchorage, tiebacks, counterweights (if required), cables, winches, decking and guard systems and all necessary equipment for a complete installation	WK	$0.00	$0.00	$408.22	$408.22
	01-55-00 Vehicular Access and Parking					
	01-55-26 Traffic Control					
100691	Temp Concrete Barrier – Up To 32" Tall Includes traffic ends, crane and operator, setting/removal labor, delivery and pick up from site	LF	$70.85	$34.25	$0.00	$105.10
100692	[Modifier] Temporary Concrete Barrier Rental Over 1 Month Rental rate is LF per month. Includes concrete barrier, reflectorizing and necessary parts to secure the barriers together	LF	$0.00	$23.90	$0.00	$23.90
100693	Traffic Control – 2 Person Crew	DY	$885.53	$0.00	$0.00	$885.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100694	Traffic Control Cones w/Reflective Tape (DY) Unit cost is for the rental of one cone for one day	DY	$0.00	$0.00	$0.90	$0.90
100695	Traffic Control Cones w/Reflective Tape (WK) Unit cost is for the rental of one cone for one week	WK	$0.00	$0.00	$5.36	$5.36
100696	Traffic Control Cones w/Reflective Tape (MO) Unit cost is for the rental of one cone for one month	MO	$0.00	$0.00	$19.99	$19.99
100697	Traffic Control Vertical Panel Channelizers (DY) Unit cost is for the rental of one channelizer for one day	DY	$0.00	$0.00	$1.82	$1.82
100698	Traffic Control Vertical Panel Channelizers (WK) Unit cost is for the rental of one channelizer for one week	WK	$0.00	$0.00	$9.06	$9.06
100699	Traffic Control Vertical Panel Channelizers (MO) Unit cost is for the rental of one channelizer for one month	MO	$0.00	$0.00	$39.27	$39.27
100700	Traffic Control Barrels, Plastic, Single Barrel (DY) Unit cost is for the rental of one traffic control barrel for one day	DY	$0.00	$0.00	$4.06	$4.06
100701	Traffic Control Barrels, Plastic, Single Barrel (WK) Unit cost is for the rental of one traffic control barrel for one week	WK	$0.00	$0.00	$28.45	$28.45
100702	Traffic Control Barrels, Plastic, Single Barrel (MO) Unit cost is for the rental of one traffic control barrel for one month	MO	$0.00	$0.00	$121.92	$121.92
100703	Traffic Control Type 1 Barricade (DY) Unit cost is for the rental of one Type 1 barricade for one day	DY	$0.00	$0.00	$0.86	$0.86
100704	Traffic Control Type 1 Barricade (WK) Unit cost is for the rental of one Type 1 barricade for one week	WK	$0.00	$0.00	$4.67	$4.67
100705	Traffic Control Type 1 Barricade (MO) Unit cost is for the rental of one Type 1 barricade for one month	MO	$0.00	$0.00	$18.92	$18.92
100706	Traffic Control Type 2 Barricade (DY) Unit cost is for the rental of one Type 2 barricade for one day	DY	$0.00	$0.00	$1.44	$1.44
100707	Traffic Control Type 2 Barricade (WK) Unit cost is for the rental of one Type 2 barricade for one week	WK	$0.00	$0.00	$7.19	$7.19
100708	Traffic Control Type 2 Barricade (MO) Unit cost is for the rental of one Type 2 barricade for one month	MO	$0.00	$0.00	$31.62	$31.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100709	Traffic Control Type 3 Barricade (DY) Unit cost is for the rental of one Type 3 barricade for one day	DY	$0.00	$0.00	$3.48	$3.48
100710	Traffic Control Type 3 Barricade (WK) Unit cost is for the rental of one Type 3 barricade for one week	WK	$0.00	$0.00	$17.38	$17.38
100711	Traffic Control Type 3 Barricade (MO) Unit cost is for the rental of one Type 3 barricade for one month	MO	$0.00	$0.00	$52.14	$52.14
100712	Traffic Control Cones/Channelizers, Set and Removed by Hand	EA	$3.48	$0.00	$0.00	$3.48
100713	[Modifier] Additional Resetting of Traffic Control Cones/Channelizers by Hand Modifier can be used to relocate cones/channelizers initially set by hand	EA	$1.41	$0.00	$0.00	$1.41
100714	Traffic Control Cones/Channelizers, Set And Removed By Truck Does not include truck or operator	EA	$0.87	$0.00	$0.00	$0.87
100715	Traffic Control Barrels, Plastic, Single Barrel, Set and Remove by Hand	EA	$7.00	$0.00	$0.00	$7.00
100716	Traffic Control Type 1 Barricade, Set and Remove by Hand	EA	$7.00	$0.00	$0.00	$7.00
100717	Traffic Control Type 2 Barricade, Set and Remove by Hand	EA	$7.00	$0.00	$0.00	$7.00
100718	Traffic Control Type 3 Barricade, Set and Remove by Hand	EA	$7.00	$0.00	$0.00	$7.00
100719	Traffic Control LED Barricade Light (Flasher), Battery Operated With Photocell (Types A, B and C)	EA	$7.00	$0.00	$0.93	$7.93
100720	Traffic Control Trailer Mounted Flashing Arrow Board (DY), Solar Powered Includes set up, removal and 1 hour per day for maintenance	DY	$55.36	$0.00	$78.21	$133.57
100721	Traffic Control Trailer Mounted Flashing Arrow Board (WK), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	WK	$138.40	$0.00	$391.05	$529.45
100722	Traffic Control Trailer Mounted Flashing Arrow Board (MO), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	MO	$608.96	$0.00	$819.75	$1,428.71
100723	Traffic Control Trailer Mounted Variable Message Board, 3 Lines (DY), Solar Powered Includes set up, removal and 1 hour per day for maintenance	DY	$55.36	$0.00	$231.72	$287.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100724	Traffic Control Trailer Mounted Variable Message Board, 3 Lines (WK), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	WK	$138.40	$0.00	$724.17	$862.57
100725	Traffic Control Trailer Mounted Variable Message Board, 3 Lines (MO), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	MO	$608.96	$0.00	$1,795.94	$2,404.90
100726	Traffic Control - Portable Traffic Signal, Trailer Mounted (DY), Solar Powered Includes set up, removal and 1 hour per day for maintenance	DY	$55.36	$0.00	$545.00	$600.36
100727	Traffic Control - Portable Traffic Signal, Trailer Mounted (WK), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	WK	$138.40	$0.00	$1,498.75	$1,637.15
100728	Traffic Control - Portable Traffic Signal, Trailer Mounted (MO), Solar Powered Includes set up, removal and 1/2 hour per day for maintenance	MO	$608.96	$0.00	$5,350.82	$5,959.78
100729	Traffic Control - Light Tower, Trailer Mounted (DY), Diesel Powered Includes set up, removal and 1 hour per day for maintenance	DY	$55.36	$0.00	$110.07	$165.43
100730	Traffic Control - Light Tower, Trailer Mounted (WK), Diesel Powered Includes set up, removal and 1/2 hour per day for maintenance	WK	$138.40	$0.00	$405.52	$543.92
100731	Traffic Control - Light Tower, Trailer Mounted (MO), Diesel Powered Includes set up, removal and 1/2 hour per day for maintenance	MO	$608.96	$0.00	$1,332.47	$1,941.43
100732	Traffic Control Truck w/Mounted Impact Attenuators/Crash Cushions and Arrow Board (DY) - Excludes Operator	DY	$0.00	$0.00	$463.47	$463.47
100733	Traffic Control Truck w/Mounted Impact Attenuators/Crash Cushions and Arrow Board (WK) - Excludes Operator	WK	$0.00	$0.00	$1,564.20	$1,564.20
100734	Traffic Control Truck w/Mounted Impact Attenuators/Crash Cushions and Arrow Board (MO) - Excludes Operator	MO	$0.00	$0.00	$3,939.47	$3,939.47
100735	Traffic Control Mesh/Vinyl Roll Up Construction Signs (DY), Set and Remove by Hand Daily Includes sign and stand	EA	$13.85	$0.00	$2.90	$16.75
100736	Traffic Control Mesh/Vinyl Roll Up Construction Signs (WK), Set and Remove by Hand Daily Includes sign and stand	EA	$69.21	$0.00	$13.04	$82.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100737	Traffic Control Mesh/Vinyl Roll Up Construction Signs (MO), Set and Remove by Hand Daily Includes sign and stand	EA	$304.52	$0.00	$47.81	$352.33
100738	Traffic Control Road Work Construction Sign, Up To 18" x 24" (DY), Set and Remove 1 Time Includes sign and stand	EA	$13.85	$0.00	$2.50	$16.35
100739	Traffic Control Road Work Construction Sign, Over 24" Up To 36", Aluminum (DY), Set and Remove 1 Time Includes sign and stand	EA	$13.85	$0.00	$2.50	$16.35
100740	Temporary Traffic Stripe - Tape	LF	$2.05	$1.08	$0.00	$3.13
100741	Temporary Traffic Stripe - Paint	LF	$1.55	$0.83	$0.00	$2.38
100742	Temporary Overlay Marker (TOM) Unit price includes setting and removing temporary pavement markers	EA	$0.62	$1.82	$0.45	$2.89
	01-58-00 Project Identification					
	01-58-13 Temporary Project Signage					
100743	MDO Plywood Sign, Up to 8 SF, One or Two Color Design, Engineer Grade	EA	$0.00	$171.25	$0.00	$171.25
100744	MDO Plywood Sign, >8 to 16 SF, One or Two Color Design, Engineer Grade	EA	$0.00	$342.49	$0.00	$342.49
	01-60-00 Product Requirements					
	01-60-00 Product Requirements					
	01-66-00 Product Storage and Handling Requirements					
100745	Confined Space Equipment - Temporary Bulkhead Usage of this item is limited by permit or requirements as determined by Agency.	EA	$0.00	$0.00	$380.01	$380.01
100746	[Modifier] Confined Space - Production Downtime for Operator Usage of this item is limited by permit or requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (non-confined space). Normal production to be accounted for in standard UPB line items. This item is may only be used with other Confined Space items.	HR	$87.71	$0.00	$0.00	$87.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100747	[Modifier] Confined Space - Production Downtime for Laborer Usage of this item is limited by permit or requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (non-confined space). Normal production to be accounted for in standard UPB line items. This item is may only be used with other Confined Space items.	HR	$63.66	$0.00	$0.00	$63.66
100748	[Modifier] Confined Space - Production Downtime for Pipefitter (or Plumber) Usage of this item is limited by permit or requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (non-confined space). Normal production to be accounted for in standard UPB line items. This item is may only be used with other Confined Space items.	HR	$88.56	$0.00	$0.00	$88.56
100749	[Modifier] Confined Space - Production Downtime for Sheetmetal Worker Usage of this item is limited by permit or requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (non-confined space). Normal production to be accounted for in standard UPB line items. This item is may only be used with other Confined Space items.	HR	$82.78	$0.00	$0.00	$82.78
100750	[Modifier] Confined Space - Production Downtime for Electrician Usage of this item is limited by permit or requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (non-confined space). Normal production to be accounted for in standard UPB line items. This item is may only be used with other Confined Space items.	HR	$89.40	$0.00	$0.00	$89.40
100751	[Modifier] Material Installations Greater Than 15 FT Above Floor - Production Downtime for Operator Usage of this item is limited by requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (15 FT or less above floor). Normal production to be accounted for in standard UPB line items.	HR	$87.71	$0.00	$0.00	$87.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100752	[Modifier] Material Installations Greater Than 15 FT Above Floor - Production Downtime for Laborer Usage of this item is limited by requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (15 FT or less above floor). Normal production to be accounted for in standard UPB line items.	HR	$63.66	$0.00	$0.00	$63.66
100753	[Modifier] Material Installations Greater Than 15 FT Above Floor - Production Downtime for Pipefitter (or Plumber) Usage of this item is limited by requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (15 FT or less above floor). Normal production to be accounted for in standard UPB line items.	HR	$88.56	$0.00	$0.00	$88.56
100754	[Modifier] Material Installations Greater Than 15 FT Above Floor - Production Downtime for Sheetmetal Worker Usage of this item is limited by requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (15 FT or less above floor). Normal production to be accounted for in standard UPB line items.	HR	$82.78	$0.00	$0.00	$82.78
100755	[Modifier] Material Installations Greater Than 15 FT Above Floor - Production Downtime for Electrician Usage of this item is limited by requirements as determined by Agency. Use for production downtime only or any time when labor is not producing as efficiently as normal production (15 FT or less above floor). Normal production to be accounted for in standard UPB line items.	HR	$89.40	$0.00	$0.00	$89.40
	01-64-00 Owner-Furnished Products					
	01-64-00 Owner-Furnished Products					
100756	Reimbursable Fees - Furniture Moving, Relocating, Storing and Re-Installing Includes removal, storing and/or relocating existing furniture prior to and after construction	USD	$0.00	$0.00	$1.00	$1.00
100757	Reimbursable Fees - Furniture, Fixtures and Equipment (FF&E) Includes interior/exterior furnishings and accessories	USD	$0.00	$0.00	$1.00	$1.00
100758	Reimbursable Fees - Audio-Visual Systems Includes stand alone and integrated audio-visual systems and equipment	USD	$0.00	$0.00	$1.00	$1.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100759	Reimbursable Fees - Video/Electronic Safety and Security Systems Includes stand alone and integrated video/electronic safety and security equipment	USD	$0.00	$0.00	$1.00	$1.00
100760	Reimbursable Fees - Software License	USD	$0.00	$0.00	$1.00	$1.00
100761	Reimbursable Fees - MBE/WBE/VSOB Requirements Use this line item to show the delta between the quoted pricing and the added MBE/WBE/VSOB costs	USD	$0.00	$0.00	$1.00	$1.00

01-65-00 Product Delivery Requirements

All items in Division 01-65-00 apply to Divisions 31 to 35 only.

01-65-13 Mobilization & Demobilization of Heavy Equipment

100762	Mobilization and Demobilization of Heavy Construction Equipment by Transport w/ Flatbed, Stake, or Rollback Truck Cost per hour includes multiple pieces of equipment if loaded on a single trailer. Item applies to Divisions 1 and 31 through 35 only.	HR	$58.67	$0.00	$97.75	$156.42
100763	Mobilization and Demobilization of Heavy Construction Equipment (Over 1 Ton) by Transport w/Dump Truck and Trailer Cost per hour includes multiple pieces of equipment if loaded on a single trailer. Item applies to Divisions 1 and 31 through 35 only.	HR	$96.48	$0.00	$124.20	$220.68
100764	Mobilization and Demobilization of Heavy Construction Equipment (Over 1 Ton) by Transport w/ Tractor Trailer and Lowboy - Up to 8'6" Wide, 65' Long and 80,000 LBS Cost per hour includes multiple pieces of equipment if loaded on a single trailer. Item applies to Divisions 1 and 31 through 35 only.	HR	$105.25	$0.00	$185.15	$290.40
100765	Mobilization and Demobilization of Heavy Construction Equipment (Over 1 Ton) by Transport w/ Tractor Trailer and Lowboy - Either Over 8'6" Wide, 65' Long or 80,000 LBS (Oversized Load) Cost per hour includes multiple pieces of equipment if loaded on a single trailer. Item applies to Divisions 1 and 31 through 35 only.	HR	$114.02	$0.00	$286.35	$400.37

01-65-16 Hauling of Bulk Materials

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100766	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Materials (Other Than Asphalt) Over 30 Miles (Dump Truck or Equal, Up to 8 CY or 2-1/2 Tons) Quantity to be calculated based on the number of hours required for hauling materials over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 through 35 only.	HR	$58.67	$0.00	$37.17	$95.84
100767	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Materials (Other Than Asphalt) Over 30 Miles (Dump Truck or Equal, 9 to 15 CY or 3 to 10 Tons) Quantity to be calculated based on the number of hours required for hauling materials over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 through 35 only.	HR	$61.61	$0.00	$43.99	$105.60
100768	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Materials (Other Than Asphalt) Over 30 Miles (Dump Truck or Equal, 16 to 25 CY or 11 to 30 Tons) Quantity to be calculated based on the number of hours required for hauling materials over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 through 35 only.	HR	$64.54	$0.00	$54.45	$118.99
100769	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Asphalt Materials Over 30 Miles (Dump Truck or Equal, Up to 8 CY or 2-1/2 Tons) Quantity to be calculated based on the number of hours required for hauling asphalt over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 and 32 only.	HR	$67.47	$0.00	$37.17	$104.64
100770	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Asphalt Materials Over 30 Miles (Dump Truck or Equal, 9 to 15 CY or 3 to 10 Tons) Quantity to be calculated based on the number of hours required for hauling asphalt over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 and 32 only.	HR	$70.40	$0.00	$43.99	$114.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100771	[Modifier] Hourly Rate for Trucking / Hauling / Transport of Asphalt Materials Over 30 Miles (Dump Truck or Equal, 16 to 25 CY or 11 to 30 Tons) Quantity to be calculated based on the number of hours required for hauling asphalt over 30 miles only. Hauling time for the first 30 miles should be excluded. Can be applied cumulatively to base line items for importing or exporting materials. Applies to Divisions 31 and 32 only.	HR	$73.35	$0.00	$54.45	$127.80

01-66-00 Product Storage and Handling Requirements

01-66-00 Product Storage and Handling Requirements

100772	Material Handling - Horizontal Distribution - Work Areas Greater Than 200 Feet from Material Stockpile or Delivery Location Quantity to be calculated based on the number of hours required for material handling over 200' only. Distribution time for the first 200' should be excluded. Applies to Divisions 02 through 28 only.	HR	$63.66	$0.00	$0.00	$63.66
100773	Material Handling - Vertical Distribution - Work Areas Greater Than 3 Floors from Material Stockpile or Delivery Location Quantity to be calculated based on the number of hours required for material handling over 3 floors only. Distribution time for the first 3 floors should be excluded. Applies to Divisions 02 through 28 only.	HR	$63.66	$0.00	$0.00	$63.66
100774	Material Handling - Site Infrastructure - Work Areas Greater Than 500 Yards from Staging Area Quantity to be calculated based on the number of hours required for material handling over 500 yards only. Distribution time for the first 500 yards should be excluded. Cost includes equipment to transport materials. Applies to Divisions 31 through 35 only.	HR	$58.67	$0.00	$25.59	$84.26
100775	Confined Space Equipment - Winch or Manhoist, Body Harness, and (SRL) Self Retracting Lifeline Usage of this item is limited by permit or requirements as determined by Agency.	DY	$0.00	$0.00	$96.00	$96.00
100776	Confined Space Equipment - Tripod Usage of this item is limited by permit or requirements as determined by Agency.	DY	$0.00	$0.00	$56.99	$56.99
100777	Confined Space Equipment - Personal Multi-Gas Detector (4 Gas) and Respirator Usage of this item is limited by permit or requirements as determined by Agency.	DY	$0.00	$0.00	$47.00	$47.00
100778	Confined Space Equipment - 1 Standard Entry and 1 Exit Fan with 20' of Ductwork for each Usage of this item is limited by permit or requirements as determined by Agency.	DY	$0.00	$0.00	$68.00	$68.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100779	Confined Space Equipment - 1 Large (20"+) Entry and 1 Large (20"+) Exit Fan with 50' of Ductwork each Usage of this item is limited by permit or requirements as determined by Agency.	DY	$0.00	$0.00	$300.00	$300.00
100780	Confined Space Equipment - Daily Monitoring, Setup & Take Down of LockOut/TagOut, Warning Signs and required Safety Equipment Usage of this item is limited by permit or requirements as determined by Agency.	DY	$221.44	$0.00	$0.00	$221.44

01-70-00 Execution and Closeout Requirements

01-74-00 Cleaning and Waste Management

01-74-23 Final Cleaning

100781	Daily Cleanup of Occupied Spaces – Per Building Work Area Square Foot Daily cleaning of work area during construction. General cleaning using appropriate materials and means to leave site in a condition safe and acceptable for intended use or occupancy. Only applicable for occupied spaces.	SF	$0.33	$0.00	$0.00	$0.33
100782	Final Cleanup – Per Building Work Area Square Foot Cleaning when work is substantially complete and dry. Thoroughly clean, sweep, wash, and polish all work and equipment provided under the Contract, including finishes. Using appropriate materials and means, to leave structures and site in a complete and finished condition ready for intended use or occupancy. No exposed temporary labels or markings to remain	SF	$0.68	$0.00	$0.00	$0.68
100783	Final Window or Glass Cleaning – Per Square Foot Of Glass Wash glass in accordance with glass manufacturer's recommendations. Both sides of exposed surfaces, not more than 4 days prior to close of construction activities. Cannot be combined with Final Cleanup line item, which would include glass cleanup	SF	$0.49	$0.00	$0.00	$0.49
100784	[Modifier] Quantity Premium - Cleanup (< 500 SF) Quantity premium can be used when total square footage of Cleaning is less than 500 sf. Can be applied cumulatively to base line item	SF	$1.02	$0.00	$0.00	$1.02

02-00-00 Existing Conditions

Removals for MasterFormat divisions three through fourteen and thirty-two are included in 02-00-00 Existing Conditions. Mechanical, Electrical, and Site Utility removals are located within their applicable divisions

02-30-00 Subsurface Investigation

02-31-00 Geophysical Investigations

02-31-23 Electromagnetic Investigations

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100785	Electromagnetic Survey using Subsurface Interface Radar (SIR) and/or Ground Penetrating Radar (GPR) Non-Destructive Surface Scanning to Determine Properties, Features, and Location of Subsurface Items for Documentation, Investigation, Assessment, Drilling, Cutting, or Excavation Purposes.	HR	$111.41	$0.00	$28.75	$140.16

02-32-00 Geotechnical Investigations

02-32-19 Exploratory Excavations

Unit price includes an operated backhoe and one laborer, and assumes vertical trench conditions.
Excavation is to be performed using the smallest practical bucket to minimize surface disturbance. Backfilling with native excavated materials is included.
Excludes traffic control, off-haul or disposal of spoils, and any hard-surface restoration or replacement.

100786	Potholing For Utilities - Less Than 5' Deep Unit price includes an operated backhoe and one laborer, and assumes vertical trench conditions. Excavation is to be performed using the smallest practical bucket to minimize surface disturbance. Backfilling with native excavated materials is included. Excludes traffic control, off-haul or disposal of spoils, and any hard-surface restoration or replacement.	HOLE	$316.46	$0.00	$111.83	$428.29
100787	Potholing For Utilities - 5' To 8' Deep Unit price includes an operated backhoe and one laborer, and assumes vertical trench conditions. Excavation is to be performed using the smallest practical bucket to minimize surface disturbance. Backfilling with native excavated materials is included. Excludes traffic control, off-haul or disposal of spoils, and any hard-surface restoration or replacement.	HOLE	$506.33	$0.00	$178.93	$685.26
100788	Potholing For Utilities - 8' To 11' Deep Unit price includes an operated backhoe and one laborer, and assumes vertical trench conditions. Excavation is to be performed using the smallest practical bucket to minimize surface disturbance. Backfilling with native excavated materials is included. Excludes traffic control, off-haul or disposal of spoils, and any hard-surface restoration or replacement.	HOLE	$696.20	$0.00	$246.02	$942.22
100789	Potholing For Utilities - 11' To 14' Deep Unit price includes an operated backhoe and one laborer, and assumes vertical trench conditions. Excavation is to be performed using the smallest practical bucket to minimize surface disturbance. Backfilling with native excavated materials is included. Excludes traffic control, off-haul or disposal of spoils, and any hard-surface restoration or replacement.	HOLE	$886.08	$0.00	$313.12	$1,199.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100790	Potholing For Utilities - Using Hydrovac (HR) Self-contained truck unit with 11-13 CY capacity tank to remove soils within a confined area. Provided with a two-person crew: one operator and one general laborer. Excludes hard surface removal or replacement, providing water or usage fees, disposal of removed material, or backfilling of the area.	HR	$151.90	$0.00	$261.92	$413.82

02-40-00 Demolition and Structure Moving

Unit pricing includes all labor and equipment to safely remove the item and transport it into an approved rubbish container, such as a dumpster, trailer, truck, etc. Hauling of demolished materials which are not disposed of in a dumpster can be selected at the end of each section.

02-41-00 Demolition

02-41-13 Selective Site Demolition

Limited access items can be used for all quantities/areas which cannot be accessed with heavy equipment.

100791	Remove Stone Rip-Rap (Under 100 CY)	CY	$37.34	$0.00	$0.00	$37.34
100792	Remove Stone Rip-Rap (100 To 200 CY)	CY	$33.60	$0.00	$0.00	$33.60
100793	Remove Stone Rip-Rap (Over 200 CY)	CY	$30.54	$0.00	$0.00	$30.54
100794	Sawcut - Asphalt, Concrete, or Unit Paving (Under 50 LF) Roadway, Parking Lot, or Pedestrian Paving. Use is cumulative, may only be used once per entire project, regardless of thickness.	LS	$469.07	$0.00	$0.00	$469.07
100795	Sawcut - Asphalt From 1" To 3" Thick (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$1.39	$0.51	$0.89	$2.79
100796	Sawcut - Asphalt From 4" To 6" Thick (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$1.86	$0.69	$1.18	$3.73
100797	Sawcut - Asphalt From 7" To 9" Thick (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$2.53	$0.94	$1.61	$5.08
100798	Sawcut - Asphalt From 10" To 12" Thick (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$3.65	$1.35	$2.32	$7.32
100799	Sawcut - Asphalt From 13" To 15" Thick (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$4.36	$1.62	$2.78	$8.76
100800	Sawcut - Concrete 1" To 3" Thick (50 LF & Up) Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$2.12	$0.79	$1.35	$4.26
100801	Sawcut - Concrete 4" To 6" Thick (50 LF & Up) Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$2.79	$1.04	$1.78	$5.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100802	Sawcut - Concrete 7" To 9" Thick (50 LF & Up) Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$3.66	$1.35	$2.32	$7.33
100803	Sawcut - Concrete 10" To 12" Thick (50 LF & Up) Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$4.36	$1.62	$2.77	$8.75
100804	Sawcut - Concrete 13" To 15" Thick (50 LF & Up) Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$6.15	$2.28	$3.92	$12.35
100805	Sawcut - Unit Pavers (50 LF & Up) Roadway, Parking Lot, or Pedestrian Paving.	LF	$6.22	$0.00	$0.00	$6.22
100806	Sawcut - Concrete Vertical Curb At edge of: Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	EA	$9.52	$3.54	$6.06	$19.12
100807	Sawcut - Concrete Curb and Gutter At edge of: Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	EA	$21.13	$7.85	$13.46	$42.44
100808	Sawcut - Traffic Loop Detector in Asphalt Roadway, Parking Lot, Pedestrian Paving, Sidewalk, Crosswalk, Cross or Valley Gutter.	LF	$13.57	$5.05	$8.65	$27.27
100809	Remove Pavement - Asphalt (Under 100 SF Or Limited Access) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$89.76	$0.00	$0.00	$89.76
100810	Remove Pavement - Asphalt (100 to 399 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$77.61	$0.00	$0.00	$77.61
100811	Remove Pavement - Asphalt (400 To 999 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$69.17	$0.00	$0.00	$69.17
100812	Remove Pavement - Asphalt (1,000 SF & Up) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$62.34	$0.00	$0.00	$62.34
100813	Remove Pavement - Concrete (Under 100 SF Or Limited Access) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$251.40	$0.00	$0.00	$251.40
100814	Remove Pavement - Concrete (100 to 399 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$184.60	$0.00	$0.00	$184.60
100815	Remove Pavement - Concrete (400 To 999 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$142.37	$0.00	$0.00	$142.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100816	Remove Pavement - Concrete (1,000 SF & Up) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	CY	$110.60	$0.00	$0.00	$110.60
100817	Remove Pavement - Unit Paving (Under 100 SF Or Limited Access) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	SF	$3.02	$0.00	$0.00	$3.02
100818	Remove Pavement - Unit Paving (100 to 399 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	SF	$2.20	$0.00	$0.00	$2.20
100819	Remove Pavement - Unit Paving (400 To 999 SF) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	SF	$1.86	$0.00	$0.00	$1.86
100820	Remove Pavement - Unit Paving (1,000 SF & Up) Roadway, Parking Lot, or Pedestrian Paving. Includes surface course removal only.	SF	$1.72	$0.00	$0.00	$1.72
100821	Remove Curb or Gutter - Concrete Roadway, Parking Lot, or Pedestrian	CY	$67.21	$0.00	$0.00	$67.21
100822	Remove Asphalt Dike - 1-50 LF On Roadway or Parking Lot. Includes a smooth surface after removal.	LF	$20.38	$0.00	$0.00	$20.38
100823	Remove Asphalt Dike - 51-99 LF On Roadway or Parking Lot. Includes a smooth surface after removal.	LF	$18.17	$0.00	$0.00	$18.17
100824	Remove Asphalt Dike - 100-200 LF On Roadway or Parking Lot. Includes a smooth surface after removal.	LF	$14.32	$0.00	$0.00	$14.32
100825	Remove Asphalt Dike - 201-300 LF On Roadway or Parking Lot. Includes a smooth surface after removal.	LF	$8.80	$0.00	$0.00	$8.80
100826	Remove Asphalt Dike - >300 LF On Roadway or Parking Lot. Includes a smooth surface after removal.	LF	$3.28	$0.00	$0.00	$3.28
100827	Remove Signage - Single Post Traffic, Roadway, Parking Lot, or Pedestrian. Includes pole and base removal.	EA	$42.00	$0.00	$0.00	$42.00
100828	Remove Signage - Double Post Traffic, Roadway, Parking Lot, or Pedestrian. Includes pole and base removal.	EA	$84.01	$0.00	$0.00	$84.01
100829	Remove Pavement Marking - Painted Symbols	SF	$2.96	$0.00	$0.00	$2.96
100830	Remove Pavement Marker - Raised / Reflective	EA	$1.18	$0.00	$0.00	$1.18
100831	Remove Pavement Striping - 4" Paint	LF	$1.77	$0.00	$0.00	$1.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100832	Remove Pavement Striping - 12" Paint	LF	$2.04	$0.00	$0.00	$2.04
100833	Remove Roadway Speed Bump – Plastic	LF	$18.22	$0.00	$0.00	$18.22
100834	Remove Roadway Vehicle Barrier	EA	$253.02	$0.00	$0.00	$253.02
100835	Remove Equipment - Parking, Vehicle, or Pedestrian Includes Ticketing Dispenser, Fare/Fee Collection, Key Card Control Unit, Pedestrian Detection, Money Changing, or Security Equipment	EA	$556.66	$0.00	$0.00	$556.66
100836	Remove Parking Bumper / Wheel Stop	EA	$42.00	$0.00	$0.00	$42.00
100837	Remove Parking Meter	EA	$168.00	$0.00	$0.00	$168.00
100838	Remove Parking Gates	LF	$33.60	$0.00	$0.00	$33.60
100839	Remove Exterior Stairs - Cast-In-Place Concrete Per LF of Stair Tread Width.	LF	$35.44	$0.00	$0.00	$35.44
100840	Remove Exterior Stairs - Precast Concrete Per LF of Stair Tread Width.	LF	$30.38	$0.00	$0.00	$30.38
100841	Remove Exterior Stairs - Metal Per LF of Stair Tread Width.	LF	$21.26	$0.00	$0.00	$21.26
100842	Remove Exterior Stairs - Wood Per LF of Stair Tread Width.	LF	$15.18	$0.00	$0.00	$15.18
100843	Remove Exterior Ramp - Concrete	SF	$6.72	$0.00	$0.00	$6.72
100844	Remove Exterior Ramp - Metal	SF	$4.48	$0.00	$0.00	$4.48
100845	Remove Exterior Ramp - Wood	SF	$3.36	$0.00	$0.00	$3.36
100846	Remove Tactile Warning Surface Textured ground surface indicators	SF	$1.68	$0.00	$0.00	$1.68
100847	Remove Basketball Backstop Includes post and base.	EA	$336.02	$0.00	$0.00	$336.02
100848	Remove Post - Volleyball Net	EA	$168.00	$0.00	$0.00	$168.00
100849	Remove Post - Tennis Net	EA	$168.00	$0.00	$0.00	$168.00
100850	Remove Recreational Court Surface - Limited Access Basketball, Tennis, etc.	SF	$3.36	$0.00	$0.00	$3.36
100851	Remove Recreational Court Surface Basketball, Tennis, etc.	SF	$1.68	$0.00	$0.00	$1.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100852	Remove Playground Equipment Includes obstacles, ladders, stairs, slides, swings, etc.	EA	$336.02	$0.00	$0.00	$336.02
100853	Remove Playground Structure Includes platforms, walks, etc.	SF	$12.48	$0.00	$0.00	$12.48
100854	Remove Playfield Surfacing, Limited Access	SF	$3.36	$0.00	$0.00	$3.36
100855	Remove Playfield Surfacing	SF	$1.68	$0.00	$0.00	$1.68
100856	Remove Fountain / Water Feature	EA	$1,344.07	$0.00	$0.00	$1,344.07
100857	Remove Fountain / Water Feature - Equipment Controls	EA	$253.02	$0.00	$0.00	$253.02
100858	Remove Fence - Chain Link Includes Recreational Courts	SF	$1.67	$0.00	$0.00	$1.67
100859	Remove Existing Chain Link Mesh Existing fence posts and rails to remain	SF	$1.25	$0.00	$0.00	$1.25
100860	Remove Fence - Decorative Metal	SF	$2.24	$0.00	$0.00	$2.24
100861	Remove Fence - Plastic	SF	$1.35	$0.00	$0.00	$1.35
100862	Remove Fence - Wood	SF	$1.22	$0.00	$0.00	$1.22
100863	Remove Fence Post - Wood or Metal	EA	$57.40	$0.00	$0.00	$57.40
100864	Remove Fence Gate - Chain Link (Single) Includes Door, Frame, and Hardware	EA	$73.11	$0.00	$0.00	$73.11
100865	Remove Fence Gate - Chain Link (Double) Includes Door, Frame, and Hardware	EA	$89.96	$0.00	$0.00	$89.96
100866	Remove Fence Gate - Decorative Metal, Plastic, or Wood (Single)	EA	$168.00	$0.00	$0.00	$168.00
100867	Remove Fence Gate - Decorative Metal, Plastic, or Wood (Double)	EA	$210.01	$0.00	$0.00	$210.01
100868	Remove Bicycle Rack	EA	$168.00	$0.00	$0.00	$168.00
100869	Remove Bicycle Locker	EA	$42.50	$0.00	$0.00	$42.50
100870	Remove Trash / Litter/ Recycle Receptor	EA	$168.00	$0.00	$0.00	$168.00
100871	Remove Fixed Table or Bench	EA	$168.00	$0.00	$0.00	$168.00
100872	Remove Seating - Fixed Stadium	SEAT	$35.44	$0.00	$0.00	$35.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100873	Remove Seating - Fixed Bleacher	SEAT	$26.58	$0.00	$0.00	$26.58
100874	Remove Signage - Monumental	SF	$28.95	$0.00	$0.00	$28.95
100875	Remove Flagpole Includes Foundation	EA	$408.73	$0.00	$0.00	$408.73
100876	Remove Booth - Ticket / Attendant	EA	$672.04	$0.00	$0.00	$672.04
100877	Remove Car Shelter	SF	$2.23	$0.00	$0.00	$2.23
100878	Remove Transportation Stop Shelter	SF	$2.78	$0.00	$0.00	$2.78
100879	Remove Shelter / Gazebo - Cast-In-Place Concrete	SF	$4.48	$0.00	$0.00	$4.48
100880	Remove Shelter / Gazebo - Precast Concrete	SF	$3.36	$0.00	$0.00	$3.36
100881	Remove Shelter / Gazebo - Steel	SF	$2.78	$0.00	$0.00	$2.78
100882	Remove Shelter / Gazebo - Wood	SF	$2.02	$0.00	$0.00	$2.02
100883	Remove Shelter / Gazebo - Laminated Wood	SF	$2.28	$0.00	$0.00	$2.28
100884	Remove Shelter / Gazebo - Fabric	SF	$2.02	$0.00	$0.00	$2.02
100885	Remove Retaining Wall - Cast-In-Place Concrete (Less Than 20 CY)	CY	$224.01	$0.00	$0.00	$224.01
100886	Remove Retaining Wall - Cast-In-Place Concrete (20 To 50 CY)	CY	$168.00	$0.00	$0.00	$168.00
100887	Remove Retaining Wall - Cast-In-Place Concrete (Greater Than 20CY)	CY	$134.41	$0.00	$0.00	$134.41
100888	Remove Retaining Wall - Precast Concrete	SF	$8.96	$0.00	$0.00	$8.96
100889	Remove Retaining Wall - Unit Masonry	SF	$6.72	$0.00	$0.00	$6.72
100890	Remove Retaining Wall - Concrete Cap	LF	$13.41	$0.00	$0.00	$13.41
100891	Remove Retaining Wall - Segmental	SF	$6.72	$0.00	$0.00	$6.72
100892	Remove Retaining Wall - Metal Crib	SF	$5.06	$0.00	$0.00	$5.06
100893	Remove Retaining Wall - Timber	SF	$5.06	$0.00	$0.00	$5.06
100894	Remove Retaining Wall - Stone	SF	$6.72	$0.00	$0.00	$6.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100895	Remove Bollard - Metal or Concrete	EA	$253.02	$0.00	$0.00	$253.02
100896	Remove Guardrail	LF	$26.58	$0.00	$0.00	$26.58
100897	Remove Deck - Wood	SF	$5.06	$0.00	$0.00	$5.06
100898	Remove Deck - Wood Railing	LF	$13.29	$0.00	$0.00	$13.29
100899	Remove Deck - Wood Stair Tread Per LF of Tread Width	LF	$15.18	$0.00	$0.00	$15.18
100900	Remove Deck - Composite	SF	$5.06	$0.00	$0.00	$5.06
100901	Remove Deck - Composite Railing	LF	$13.29	$0.00	$0.00	$13.29
100902	Remove Deck - Composite Stair Tread Per LF of Tread Width	LF	$15.18	$0.00	$0.00	$15.18
100903	Remove Irrigation System - Pump	EA	$168.00	$0.00	$0.00	$168.00
100904	Remove Irrigation System - Drip Includes All Distribution Components	LF	$1.52	$0.00	$0.00	$1.52
100905	Remove Irrigation System - Pop-Up Includes All Distribution Components	SF	$1.52	$0.00	$0.00	$1.52
100906	Remove Turf and Grasses	SF	$1.52	$0.00	$0.00	$1.52
100907	Remove Ground Cover	SF	$1.52	$0.00	$0.00	$1.52
100908	Remove Plants and Bulbs	SF	$1.52	$0.00	$0.00	$1.52
100909	Remove Shrub - Up To 2 Ft Diameter	EA	$42.00	$0.00	$0.00	$42.00
100910	Remove Shrub - 2 To 4 Ft Diameter	EA	$84.01	$0.00	$0.00	$84.01
100911	Remove Shrub - Over 4 Ft Diameter	EA	$168.00	$0.00	$0.00	$168.00
100912	Trim Tree - Up To 6" Max Branch Caliper Includes chipping and loading	EA	$42.00	$0.00	$0.00	$42.00
100913	Trim Tree - 6 To 12" Max Branch Caliper Includes chipping and loading	EA	$84.01	$0.00	$0.00	$84.01
100914	Trim Tree - 12 To 24" Max Branch Caliper Includes chipping and loading	EA	$168.00	$0.00	$0.00	$168.00
100915	Trim Tree - Over 24" Max Branch Caliper Includes chipping and loading	IN	$14.00	$0.00	$0.00	$14.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100916	Remove Tree - Up To 6" Caliper – Excludes Stump Removal Includes chipping and loading	EA	$672.04	$0.00	$0.00	$672.04
100917	Remove Tree - 6 To 12" Caliper – Excludes Stump Removal Includes chipping and loading	EA	$840.04	$0.00	$0.00	$840.04
100918	Remove Tree - 12 To 24" Caliper – Excludes Stump Removal Includes chipping and loading	EA	$1,344.07	$0.00	$0.00	$1,344.07
100919	Remove Tree - Over 24" Caliper – Excludes Stump Removal Includes chipping and loading	IN	$56.00	$0.00	$0.00	$56.00
100920	Grind Tree Stump - Up To 6" Caliper	EA	$101.21	$0.00	$0.00	$101.21
100921	Grind Tree Stump - 6 To 12" Caliper	EA	$168.68	$0.00	$0.00	$168.68
100922	Grind Tree Stump - 12 To 24" Caliper	EA	$202.42	$0.00	$0.00	$202.42
100923	Grind Tree Stump - Over 24" Caliper	IN	$8.43	$0.00	$0.00	$8.43
100924	Remove Tree Stump - Up To 6" Caliper	EA	$121.45	$0.00	$0.00	$121.45
100925	Remove Tree Stump - 6 To 12" Caliper	EA	$202.42	$0.00	$0.00	$202.42
100926	Remove Tree Stump - 12 To 24" Caliper	EA	$242.90	$0.00	$0.00	$242.90
100927	Remove Tree Stump - Over 24" Caliper	IN	$10.12	$0.00	$0.00	$10.12
100928	Remove Landscape Edging	LF	$1.35	$0.00	$0.00	$1.35
100929	Remove Landscape Timber	LF	$1.68	$0.00	$0.00	$1.68
100930	Remove Tree Grate	EA	$84.01	$0.00	$0.00	$84.01
100931	Removal and Disposal of Existing Large Sized Mixed Debris from Site Including but not limited to large concrete aggregates, large tree stumps, mixed concrete bricks, asphalt, etc. Debris to be broken into allowable sizes to not incur hard-to-handle bulk waste fee charges.	CY	$21.01	$179.02	$28.85	$228.88
100932	Remove Landscape Lighting	EA	$42.00	$0.00	$0.00	$42.00
100933	Trucking / Hauling / Transport and Disposal of Removals / Debris – Up To 30 Miles Not to be combined with Dumpster items.	CY	$16.43	$1.43	$8.75	$26.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100934	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60
	02-41-16 Structure Demolition					
100935	Remove Building / Structure - Concrete (Up To 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$9.34	$0.00	$0.00	$9.34
100936	Remove Building / Structure - Concrete (Over 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$10.72	$0.00	$0.00	$10.72
100937	Remove Building / Structure - Masonry (Up To 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$7.48	$0.00	$0.00	$7.48
100938	Remove Building / Structure - Masonry (Over 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$8.57	$0.00	$0.00	$8.57
100939	Remove Building / Structure - Steel (Up To 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$6.23	$0.00	$0.00	$6.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100940	Remove Building / Structure - Steel (Over 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$7.14	$0.00	$0.00	$7.14
100941	Remove Building / Structure - Wood (Up 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$3.34	$0.00	$0.00	$3.34
100942	Remove Building / Structure - Wood (Over 5,000 SF) Includes building structure, enclosure, and all interior construction components (including MEP and slab on grade). Excludes abatement, foundations and deconstruction/recycling (see Division 02-42-19 for recycling costs)	SF	$4.45	$0.00	$0.00	$4.45
100943	Remove Concrete Slab On Grade – With Welded Wire Mesh (W.W.M) Excludes foundations.	SF	$3.90	$0.00	$0.00	$3.90
100944	Remove Concrete Slab On Grade – With Rebar Excludes foundations.	SF	$4.88	$0.00	$0.00	$4.88
100945	Remove Foundation (Less Than 20 CY) Includes Walls and Footers	CY	$224.01	$0.00	$0.00	$224.01
100946	Remove Foundation (20 To 50 CY) Includes Walls and Footers	CY	$168.00	$0.00	$0.00	$168.00
100947	Remove Foundation (Greater Than 50 CY) Includes Walls and Footers	CY	$134.41	$0.00	$0.00	$134.41
100948	Trucking / Hauling / Transport and Disposal of Removals / Debris – Up To 30 Miles Not to be combined with Dumpster items.	CY	$16.43	$1.43	$8.75	$26.61
100949	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60
	02-41-20 Selective Structure Demolition					
100950	Sawcut Floor – Concrete with Welded Wire Mesh (W.W.M)	LF	$5.72	$0.00	$0.00	$5.72
100951	Sawcut Floor – Concrete with Rebar	LF	$7.14	$0.00	$0.00	$7.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100952	Sawcut Wall – Cast-In-Place Concrete	LF	$24.67	$0.00	$0.00	$24.67
100953	Sawcut Wall – Precast Concrete	LF	$22.80	$0.00	$0.00	$22.80
100954	Sawcut Wall – Brick	LF	$9.98	$0.00	$0.00	$9.98
100955	Sawcut Wall – Concrete Masonry Unit (CMU Block)	LF	$12.76	$0.00	$0.00	$12.76
100956	Remove Concrete Foundation (Less Than 20 CY) Includes Walls and Footers	CY	$224.01	$0.00	$0.00	$224.01
100957	Remove Concrete Foundation (20 To 50 CY) Includes Walls and Footers	CY	$168.00	$0.00	$0.00	$168.00
100958	Remove Concrete Foundation (Greater Than 50 CY) Includes Walls and Footers	CY	$134.41	$0.00	$0.00	$134.41
100959	Remove Concrete Slab-On-Grade – With Welded Wire Mesh (W.W.M) Excludes foundations.	SF	$3.90	$0.00	$0.00	$3.90
100960	Remove Concrete Slab-On-Grade – With Rebar Excludes foundations.	SF	$4.88	$0.00	$0.00	$4.88
100961	Remove Concrete Slab-On-Grade – Small Quantity or Trench Work With Welded Wire Mesh (W.W.M) Excludes foundations.	SF	$7.80	$0.00	$0.00	$7.80
100962	Remove Concrete Slab-On-Grade – Small Quantity or Trench Work With Rebar Excludes foundations.	SF	$9.75	$0.00	$0.00	$9.75
100963	Shoring - Temporary Jack Post Includes installation and removal.	EA	$243.89	$285.40	$0.00	$529.29
100964	Remove Structural Wall – Concrete (Less Than 20 CY)	CY	$224.01	$0.00	$0.00	$224.01
100965	Remove Structural Wall – Concrete (20 To 50 CY)	CY	$168.00	$0.00	$0.00	$168.00
100966	Remove Structural Wall – Concrete (Greater Than 50 CY)	CY	$134.41	$0.00	$0.00	$134.41
100967	Remove Structural Wall – Precast Concrete	SF	$13.93	$0.00	$0.00	$13.93
100968	Remove Structural Wall - Brick	SF	$3.90	$0.00	$0.00	$3.90
100969	Remove Structural Wall - Concrete Masonry Unit (CMU Block)	SF	$6.34	$0.00	$0.00	$6.34
100970	Remove Structural Wall - Stone	SF	$6.34	$0.00	$0.00	$6.34
100971	Remove Structural Wall Stud - Wood	SF	$2.32	$0.00	$0.00	$2.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100972	Remove Structural Wall Stud - Metal	SF	$2.44	$0.00	$0.00	$2.44
100973	Remove Structural Framing - Cast-In-Place Concrete Column	CY	$406.18	$0.00	$0.00	$406.18
100974	Remove Structural Framing - Cast-In-Place Concrete Beam	CY	$528.41	$0.00	$0.00	$528.41
100975	Remove Structural Framing - Cast-In-Place Concrete Lintel	CY	$792.61	$0.00	$0.00	$792.61
100976	Remove Structural Framing - Precast Concrete Column	CY	$352.69	$0.00	$0.00	$352.69
100977	Remove Structural Framing - Precast Concrete Beam	CY	$406.81	$0.00	$0.00	$406.81
100978	Remove Structural Framing - Precast Concrete Lintel	CY	$610.54	$0.00	$0.00	$610.54
100979	Remove Structural Framing - Masonry Brick Column	CF	$5.72	$0.00	$0.00	$5.72
100980	Remove Structural Framing - Concrete Masonry Unit (CMU Block) Column	CF	$9.28	$0.00	$0.00	$9.28
100981	Remove Structural Framing - Masonry Lintel	CF	$23.83	$0.00	$0.00	$23.83
100982	Remove Structural Framing - Steel Column	TON	$1,672.46	$0.00	$0.00	$1,672.46
100983	Remove Structural Framing - Steel Beam, Truss, or Joist	TON	$2,173.49	$0.00	$0.00	$2,173.49
100984	Remove Structural Framing - Steel Lintel	TON	$3,260.87	$0.00	$0.00	$3,260.87
100985	Remove Structural Framing - Wood Column	CF	$3.71	$0.00	$0.00	$3.71
100986	Remove Structural Framing - Wood Beam, Truss, or Joist	CF	$4.83	$0.00	$0.00	$4.83
100987	Remove Structural Framing - Wood Timber Column	CF	$5.01	$0.00	$0.00	$5.01
100988	Remove Structural Framing - Wood Timber Beam, Truss, or Joist	CF	$6.52	$0.00	$0.00	$6.52
100989	Remove Structural Framing - Glue-Laminated Column	CF	$5.81	$0.00	$0.00	$5.81
100990	Remove Structural Framing - Glue-Laminated Beam or Arch	CF	$7.54	$0.00	$0.00	$7.54
100991	Remove Elevated Floor - Concrete Slab	SF	$19.52	$0.00	$0.00	$19.52
100992	Remove Elevated Floor - Concrete Waffle Slab	SF	$25.37	$0.00	$0.00	$25.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
100993	Remove Elevated Floor - Concrete Slab on Deck	SF	$16.26	$0.00	$0.00	$16.26
100994	Remove Elevated Floor - Precast Concrete	SF	$19.52	$0.00	$0.00	$19.52
100995	Remove Elevated Floor - Wood Subfloor and Framing	SF	$9.75	$0.00	$0.00	$9.75
100996	Remove Balcony - Concrete	SF	$19.52	$0.00	$0.00	$19.52
100997	Remove Balcony - Metal	SF	$11.22	$0.00	$0.00	$11.22
100998	Remove Balcony - Wood	SF	$9.75	$0.00	$0.00	$9.75
100999	Remove Mezzanine - Concrete	SF	$19.52	$0.00	$0.00	$19.52
101000	Remove Mezzanine - Metal	SF	$14.02	$0.00	$0.00	$14.02
101001	Remove Mezzanine - Wood	SF	$12.19	$0.00	$0.00	$12.19
101002	Remove Ramp - Concrete	SF	$19.52	$0.00	$0.00	$19.52
101003	Remove Ramp - Metal	SF	$9.76	$0.00	$0.00	$9.76
101004	Remove Ramp - Wood	SF	$8.49	$0.00	$0.00	$8.49
101005	Remove Roof Deck - Concrete	SF	$5.09	$0.00	$0.00	$5.09
101006	Remove Roof Deck - Concrete on Metal Deck	SF	$6.37	$0.00	$0.00	$6.37
101007	Remove Roof Deck - Steel	SF	$2.54	$0.00	$0.00	$2.54
101008	Remove Roof Deck - Acoustical Metal	SF	$3.19	$0.00	$0.00	$3.19
101009	Remove Roof Deck - Structural Panel	SF	$3.50	$0.00	$0.00	$3.50
101010	Remove Roof Deck - Plywood or Tongue and Groove Sheathing	SF	$0.64	$0.00	$0.00	$0.64
101011	Remove Roof Deck - Roof Panel	SF	$2.54	$0.00	$0.00	$2.54
101012	Remove Roof Deck - Insulated Roof Panel	SF	$2.86	$0.00	$0.00	$2.86
101013	Remove Canopy and Associated Structure	SF	$19.52	$0.00	$0.00	$19.52
101014	Remove Stair Tread - Concrete	LF	$32.52	$0.00	$0.00	$32.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101015	Remove Stair Tread - Precast Concrete	LF	$27.88	$0.00	$0.00	$27.88
101016	Remove Stair Tread - Metal	LF	$19.52	$0.00	$0.00	$19.52
101017	Remove Stair Tread - Concrete Filled Metal Pan	LF	$22.44	$0.00	$0.00	$22.44
101018	Remove Stair Tread - Wood	LF	$19.52	$0.00	$0.00	$19.52
101019	Remove Railing	LF	$24.39	$0.00	$0.00	$24.39
101020	Remove Wall Railing	LF	$12.19	$0.00	$0.00	$12.19
101021	Remove Fire Escape (Per Flight)	FLT	$975.58	$0.00	$0.00	$975.58
101022	Remove Metal Walkway	SF	$14.02	$0.00	$0.00	$14.02
101023	Remove Ladder	LF	$6.97	$0.00	$0.00	$6.97
101024	Trucking / Hauling / Transport and Disposal of Removals / Debris – Up To 30 Miles Not to be combined with Dumpster items.	CY	$16.43	$1.43	$8.75	$26.61
101025	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-41-21 Selective Exterior Demolition

101026	Remove Wall Veneer Only – Precast	SF	$5.66	$0.00	$0.00	$5.66
101027	Remove Wall Veneer Only – Brick	SF	$3.90	$0.00	$0.00	$3.90
101028	Remove Wall Veneer Only – Concrete Masonry Unit (CMU Block)	SF	$5.65	$0.00	$0.00	$5.65
101029	Remove Wall Veneer Only – Terra Cotta	SF	$3.90	$0.00	$0.00	$3.90
101030	Remove Wall Veneer Only – Stone	SF	$5.65	$0.00	$0.00	$5.65
101031	Remove Wall Veneer Only – Exterior Insulation Finishing System (EIFS)	SF	$3.01	$0.00	$0.00	$3.01
101032	Remove Wall Veneer Only – Plaster / Stucco	SF	$3.48	$0.00	$0.00	$3.48
101033	Remove Wall Veneer Only – Composite Metal Panel	SF	$3.01	$0.00	$0.00	$3.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101034	Remove Wall Veneer Only – Metal Panel	SF	$3.01	$0.00	$0.00	$3.01
101035	Remove Wall Veneer Only – Vinyl Siding	SF	$2.09	$0.00	$0.00	$2.09
101036	Remove Wall Veneer Only – Metal Siding	SF	$2.32	$0.00	$0.00	$2.32
101037	Remove Wall Veneer Only – Wood Siding	SF	$2.55	$0.00	$0.00	$2.55
101038	Remove Wall Backup - Concrete Masonry Unit (CMU Block) Includes Air Vapor Barrier, and Insulation	SF	$6.77	$0.00	$0.00	$6.77
101039	Remove Wall Backup - Wood Stud Includes Air Vapor Barrier, Insulation, and Sheathing	SF	$4.92	$0.00	$0.00	$4.92
101040	Remove Wall Backup - Metal Stud Includes Air Vapor Barrier, Insulation, and Sheathing	SF	$4.92	$0.00	$0.00	$4.92
101041	Remove Entire Wall System – Precast On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$10.58	$0.00	$0.00	$10.58
101042	Remove Entire Wall System – Precast on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$12.43	$0.00	$0.00	$12.43
101043	Remove Entire Wall System – Brick On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$8.82	$0.00	$0.00	$8.82
101044	Remove Entire Wall System – Brick on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$10.67	$0.00	$0.00	$10.67
101045	Remove Entire Wall System – Concrete Masonry Unit (CMU Block) on Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$10.57	$0.00	$0.00	$10.57
101046	Remove Entire Wall System – Concrete Masonry Unit (CMU Block) on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$12.42	$0.00	$0.00	$12.42
101047	Remove Entire Wall System – Terra Cotta On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$8.82	$0.00	$0.00	$8.82
101048	Remove Entire Wall System – Terra Cotta on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$10.67	$0.00	$0.00	$10.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101049	Remove Entire Wall System – Stone On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$10.57	$0.00	$0.00	$10.57
101050	Remove Entire Wall System – Stone on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$12.42	$0.00	$0.00	$12.42
101051	Remove Entire Wall System – Exterior Insulation Finishing System (EIFS) On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.94	$0.00	$0.00	$7.94
101052	Remove Entire Wall System – Exterior Insulation Finishing System (EIFS) on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$9.80	$0.00	$0.00	$9.80
101053	Remove Entire Wall System – Plaster / Stucco On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$8.41	$0.00	$0.00	$8.41
101054	Remove Entire Wall System – Plaster / Stucco on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$10.26	$0.00	$0.00	$10.26
101055	Remove Entire Wall System – Composite Metal Panel On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.94	$0.00	$0.00	$7.94
101056	Remove Entire Wall System – Composite Metal Panel on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$9.80	$0.00	$0.00	$9.80
101057	Remove Entire Wall System – Metal Panel On Metal Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.94	$0.00	$0.00	$7.94
101058	Remove Entire Wall System – Metal Panel on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$9.80	$0.00	$0.00	$9.80
101059	Remove Entire Wall System – Vinyl Siding On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.02	$0.00	$0.00	$7.02
101060	Remove Entire Wall System – Vinyl Siding on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$8.87	$0.00	$0.00	$8.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101061	Remove Entire Wall System – Metal Siding On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.24	$0.00	$0.00	$7.24
101062	Remove Entire Wall System – Metal Siding on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$9.10	$0.00	$0.00	$9.10
101063	Remove Entire Wall System – Wood Siding On Stud Includes veneer, studs, air / vapor barrier, insulation, and sheathing	SF	$7.48	$0.00	$0.00	$7.48
101064	Remove Entire Wall System – Wood Siding on Concrete Masonry Unit (CMU Block) Includes veneer, CMU, air / vapor barrier, and insulation	SF	$9.33	$0.00	$0.00	$9.33
101065	Remove Wall - Exterior Curtainwall System	SF	$7.51	$0.00	$0.00	$7.51
101066	Remove Wall - Exterior Storefront System	SF	$6.97	$0.00	$0.00	$6.97
101067	Remove Wall - Exterior Window System	SF	$7.51	$0.00	$0.00	$7.51
101068	Remove Door Assembly - Exterior Single Solid Door Includes, Door, Frame, and Hardware	EA	$60.97	$0.00	$0.00	$60.97
101069	Remove Door Assembly - Exterior Double Solid Door Includes, Door, Frame, and Hardware	EA	$75.04	$0.00	$0.00	$75.04
101070	Remove Door Assembly - Exterior Single Glass Door Includes door, frame, and hardware	EA	$67.08	$0.00	$0.00	$67.08
101071	Remove Door Assembly - Exterior Double Glass Door Includes, Door, Frame, and Hardware	EA	$82.55	$0.00	$0.00	$82.55
101072	Remove Door Assembly - Exterior Sliding Manual Includes door, frame, and hardware	EA	$327.14	$0.00	$0.00	$327.14
101073	Remove Door Assembly - Exterior Sliding Automatic Includes, Door, Frame, and Hardware	EA	$487.80	$0.00	$0.00	$487.80
101074	Remove Door Assembly - Exterior Coiling Includes, Door, Frame, and Hardware	SF	$6.50	$0.00	$0.00	$6.50
101075	Remove Door Assembly - Exterior Folding Includes door, frame, and hardware	SF	$6.50	$0.00	$0.00	$6.50
101076	Remove Door Assembly - Exterior Sectional Overhead Includes, Door, Frame, and Hardware	SF	$6.51	$0.00	$0.00	$6.51
101077	Remove Grille Assembly - Exterior Sliding Includes door, frame, and hardware	SF	$6.50	$0.00	$0.00	$6.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101078	Remove Grille Assembly - Exterior Folding Includes door, frame, and hardware	SF	$6.50	$0.00	$0.00	$6.50
101079	Remove Gate Assembly - Exterior Single Includes, Door, Frame, and Hardware	EA	$75.04	$0.00	$0.00	$75.04
101080	Remove Gate Assembly - Exterior Double Includes door, frame, and hardware	EA	$67.08	$0.00	$0.00	$67.08
101081	Remove Door Assembly - Exterior Revolving Entrance Includes, Door, Frame, and Hardware	EA	$487.80	$0.00	$0.00	$487.80
101082	Remove Exterior Louver – Including Frame	SF	$5.85	$0.00	$0.00	$5.85
101083	Remove Awning - Metal	SF	$2.63	$0.00	$0.00	$2.63
101084	Remove Awning - Fabric	SF	$2.44	$0.00	$0.00	$2.44
101085	Remove Railing	LF	$24.39	$0.00	$0.00	$24.39
101086	Remove Wall Railing	LF	$12.19	$0.00	$0.00	$12.19
101087	Remove Exterior Glass-Fiber-Reinforced Concrete	SF	$3.01	$0.00	$0.00	$3.01
101088	Remove Exterior Column Cover	SF	$3.01	$0.00	$0.00	$3.01
101089	Remove Exterior Decorative Metal	SF	$3.01	$0.00	$0.00	$3.01
101090	Remove Exterior Wood Wall Panel	SF	$3.01	$0.00	$0.00	$3.01
101091	Remove Exterior Plastic Wall Panel	SF	$3.01	$0.00	$0.00	$3.01
101092	Remove Bird Control Device Metal or plastic bird spikes	LF	$1.62	$0.00	$0.00	$1.62
101093	Remove Window Well	EA	$185.72	$0.00	$0.00	$185.72
101094	Remove Steep Roofing System - Shingles / Shakes, 6/12 Pitch or Less Includes complete shingle system removal including synthetic underlayment	SF	$0.93	$0.00	$0.00	$0.93
101095	Remove Steep Roofing System - Shingles / Shakes, Greater Than 6/12 Pitch Includes complete shingle system removal including synthetic underlayment	SF	$1.12	$0.00	$0.00	$1.12
101096	Remove Steep Roofing System - Tiles, 6/12 Pitch or Less Includes removal of synthetic underlayment	SF	$1.39	$0.00	$0.00	$1.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101097	Remove Steep Roofing System - Tiles, Greater Than 6/12 Pitch Includes removal of synthetic underlayment	SF	$1.67	$0.00	$0.00	$1.67
101098	Remove Steep Roofing System - Panels, 6/12 Pitch or Less Includes removal of synthetic underlayment	SF	$1.21	$0.00	$0.00	$1.21
101099	Remove Steep Roofing System - Panels, Greater Than 6/12 Pitch Includes removal of synthetic underlayment	SF	$1.45	$0.00	$0.00	$1.45
101100	Remove Steep Roofing System - Sheet Metal, 6/12 Pitch or Less Includes removal of synthetic underlayment	SF	$1.21	$0.00	$0.00	$1.21
101101	Remove Steep Roofing System - Sheet Metal, Greater Than 6/12 Pitch Includes removal of synthetic underlayment	SF	$1.45	$0.00	$0.00	$1.45
101102	Remove Flat Roofing System - Built-Up Membrane Includes removal of membrane, insulation, flashings, terminations and copings. This item is applicable to the complete removal of the roofing system and supersedes individual line items	SF	$1.91	$0.00	$0.00	$1.91
101103	Remove Flat Roofing System - Built-Up Membrane, Substrate / Protection Board Includes removal of membrane, insulation, substrate board, flashings, terminations and copings. This item is applicable to the complete removal of the roofing system and supersedes individual line items	SF	$2.25	$0.00	$0.00	$2.25
101104	Remove Flat Roofing System - Built-Up Membrane, Substrate / Protection Board, and Ballast Includes removal of membrane, insulation, substrate board, flashings, terminations, copings, and ballast. This item is applicable to the complete removal of the roofing system and supersedes individual line items.	SF	$3.05	$0.00	$0.00	$3.05
101105	Remove Flat Roofing System - Vegetated	SF	$3.90	$0.00	$0.00	$3.90
101106	Remove Roofing Membrane – EPDM, PVC or TPO Roofing membrane is not mechanically fastened or adhesive applied	SF	$1.30	$0.00	$0.00	$1.30
101107	Remove Roofing Ballast - Gravel	SF	$1.10	$0.00	$0.00	$1.10
101108	Remove Roofing Ballast - Pavers	SF	$0.85	$0.00	$0.00	$0.85
101109	Remove Roof Flashing / Trim - Sheet Metal	SF	$7.26	$0.00	$0.00	$7.26
101110	Remove Roof Flashing / Trim - Flexible	SF	$7.26	$0.00	$0.00	$7.26
101111	Remove Roof Coping	LF	$3.94	$0.00	$0.00	$3.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101112	Remove Roof Counterflashing	SF	$7.26	$0.00	$0.00	$7.26
101113	Remove Roof Gravel Stop / Fascia	LF	$3.25	$0.00	$0.00	$3.25
101114	Remove Roof Expansion Joint	LF	$9.75	$0.00	$0.00	$9.75
101115	Remove Roof Ladder	LF	$7.43	$0.00	$0.00	$7.43
101116	Remove Roof Curb	LF	$9.76	$0.00	$0.00	$9.76
101117	Remove Roof Vent - Relief	SF	$9.29	$0.00	$0.00	$9.29
101118	Remove Roof Vent - Ridge	LF	$4.88	$0.00	$0.00	$4.88
101119	Remove Roof Vent - Smoke	SF	$9.75	$0.00	$0.00	$9.75
101120	Remove Roof Snow Guard	LF	$2.44	$0.00	$0.00	$2.44
101121	Remove Rainwater Gutter - Aluminum	LF	$2.44	$0.00	$0.00	$2.44
101122	Remove Rainwater Downspout - Aluminum	LF	$2.44	$0.00	$0.00	$2.44
101123	Remove Rainwater Scupper	EA	$232.16	$0.00	$0.00	$232.16
101124	Remove Rainwater Splash Block	EA	$55.72	$0.00	$0.00	$55.72
101125	Remove Roof Paver	SF	$2.44	$0.00	$0.00	$2.44
101126	Remove Skylight	SF	$7.57	$0.00	$0.00	$7.57
101127	Remove Skylight Protection	SF	$4.88	$0.00	$0.00	$4.88
101128	Remove Roof Hatch - Up To 4' X 4'	EA	$243.31	$0.00	$0.00	$243.31
101129	Remove Roof Hatch - Up To 4' X 6'	EA	$364.95	$0.00	$0.00	$364.95
101130	Remove Roof Hatch - Up To 4' X 8'	EA	$364.95	$0.00	$0.00	$364.95
101131	Remove Exterior Soffit	SF	$4.88	$0.00	$0.00	$4.88
101132	Remove Plywood Wall or Roof Sheathing	SF	$0.63	$0.00	$0.00	$0.63
101133	Trucking / Hauling / Transport and Disposal of Removals / Debris – Up To 30 Miles Not to be combined with Dumpster items.	CY	$16.43	$1.43	$8.75	$26.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101134	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-41-22 Selective Interior Demolition

101135	Remove Partition - Brick	SF	$3.25	$0.00	$0.00	$3.25
101136	Remove Partition - Concrete Masonry Unit (CMU Block)	SF	$4.80	$0.00	$0.00	$4.80
101137	Remove Partition - Concrete Masonry Unit (CMU Block) (Reinforced)	SF	$6.34	$0.00	$0.00	$6.34
101138	Remove Partition Firestopping	LF	$4.88	$0.00	$0.00	$4.88
101139	Remove Joint Sealant - Partition	LF	$4.88	$0.00	$0.00	$4.88
101140	Remove Partition Expansion Control	LF	$4.88	$0.00	$0.00	$4.88
101141	Remove Partition - Interior Storefront	SF	$3.74	$0.00	$0.00	$3.74
101142	Remove Partition - Drywall and Stud Includes removal of studs (wood or metal) and one layer of drywall on each side	SF	$2.44	$0.00	$0.00	$2.44
101143	Remove Partition - Drywall Only	SF	$1.08	$0.00	$0.00	$1.08
101144	Remove Partition - Plaster and Stud Includes removal of studs (wood or metal), lath and one layer of plaster on each side	SF	$2.93	$0.00	$0.00	$2.93
101145	Remove Partition - Plaster Only Includes removal of lath and plaster	SF	$1.30	$0.00	$0.00	$1.30
101146	Remove Partition - Wire Mesh	SF	$2.44	$0.00	$0.00	$2.44
101147	Remove Partition - Demountable Includes removal of framing, doors and glazing	SF	$3.25	$0.00	$0.00	$3.25
101148	Remove Partition - Portable	SF	$1.62	$0.00	$0.00	$1.62
101149	Remove Partition - Accordion Folding	SF	$3.25	$0.00	$0.00	$3.25
101150	Remove Partition - Coiling	SF	$3.25	$0.00	$0.00	$3.25
101151	Remove Partition - Folding Panel	SF	$32.52	$0.00	$0.00	$32.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101152	Remove Partition - Sliding	SF	$3.25	$0.00	$0.00	$3.25
101153	Remove Partition - Grille / Screen	SF	$2.44	$0.00	$0.00	$2.44
101154	Remove Insulation – Batt or Rolls Fiberglass or Mineral Wool	SF	$0.56	$0.00	$0.00	$0.56
101155	Remove Insulation – Rigid	SF	$0.60	$0.00	$0.00	$0.60
101156	Remove Insulation – Spray Foam	SF	$0.93	$0.00	$0.00	$0.93
101157	Remove Insulation – Loose/Blown-In, By Hand	SF	$0.55	$0.00	$0.00	$0.55
101158	Remove Insulation – Loose/Blown-In, By Vacuum	SF	$0.22	$0.00	$0.05	$0.27
101159	Remove Interior Window Includes glazing and frame (hollow metal, aluminum or wood)	SF	$5.58	$0.00	$0.00	$5.58
101160	Remove Surface Applied Window Tint - Up To 100 SF Removal by hot air gun, razor blade or solvent. Includes cleaning of existing surfaces	SF	$4.75	$0.00	$0.00	$4.75
101161	Remove Surface Applied Window Tint - Over 100 SF Removal by hot air gun, razor blade or solvent. Includes cleaning of existing surfaces	SF	$2.85	$0.00	$0.00	$2.85
101162	Remove Door Assembly - Interior Solid Door, Single Includes door, frame and hardware	EA	$60.97	$0.00	$0.00	$60.97
101163	Remove Door Assembly - Interior Solid Door, Double Includes door, frame and hardware	EA	$75.04	$0.00	$0.00	$75.04
101164	Remove Door Assembly - Interior Glass Door, Single Includes door, frame and hardware	EA	$67.07	$0.00	$0.00	$67.07
101165	Remove Door Assembly - Interior Glass Door, Double Includes door, frame and hardware	EA	$82.55	$0.00	$0.00	$82.55
101166	Remove Door Assembly - Interior Access Includes door, frame and hardware	EA	$30.49	$0.00	$0.00	$30.49
101167	Remove Door Assembly - Interior Sectional Overhead Includes door panels, guide rails and related hardware	SF	$6.51	$0.00	$0.00	$6.51
101168	Remove Sliding Security Grille Assembly - Interior Includes track, curtain and hardware; commercial applications	SF	$6.50	$0.00	$0.00	$6.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101169	Remove Rollup Security Grill Assembly - Interior Includes curtain, guides, counterbalance and housing, commercial applications	SF	$6.50	$0.00	$0.00	$6.50
101170	Remove Folding Security Grille Assembly - Interior Includes track, curtain and hardware, commercial applications	SF	$6.50	$0.00	$0.00	$6.50
101171	Remove Gate Assembly - Interior Single Includes Frame and Hardware	EA	$67.07	$0.00	$0.00	$67.07
101172	Remove Gate Assembly - Interior Double Includes Frame and Hardware	EA	$82.55	$0.00	$0.00	$82.55
101173	Remove Platform / Stage Floor - Wood Structure Includes removal of stairs and ramps	SF	$6.50	$0.00	$0.00	$6.50
101174	Remove Platform / Stage Floor - Metal Structure Includes removal of stairs and ramps	SF	$8.77	$0.00	$0.00	$8.77
101175	Remove Access Flooring	SF	$4.88	$0.00	$0.00	$4.88
101176	Remove Ceiling, Plaster – Includes Suspension System	SF	$1.62	$0.00	$0.00	$1.62
101177	Remove Ceiling, Drywall – Includes Suspension System	SF	$1.39	$0.00	$0.00	$1.39
101178	Remove Ceiling, Acoustical Ceiling Tile – Includes Grid and Suspension System	SF	$1.02	$0.00	$0.00	$1.02
101179	Remove Ceiling, Acoustical Ceiling Tile Only – Grid Remains	SF	$0.70	$0.00	$0.00	$0.70
101180	Remove Ceiling, Spline Ceiling – Includes Suspension System	SF	$0.70	$0.00	$0.00	$0.70
101181	Remove Ceiling, Wood – Includes Suspension System	SF	$1.39	$0.00	$0.00	$1.39
101182	Remove Ceiling, Metal – Includes Suspension System	SF	$1.39	$0.00	$0.00	$1.39
101183	Remove Railing	LF	$24.39	$0.00	$0.00	$24.39
101184	Remove Wall Railing	LF	$12.19	$0.00	$0.00	$12.19
101185	Remove Mirror	SF	$4.65	$0.00	$0.00	$4.65
101186	Remove Interior Louver – Including Frame	SF	$4.88	$0.00	$0.00	$4.88
101187	Remove Visual Display Board Surface mounted marker board, tack board or chalk board	SF	$3.71	$0.00	$0.00	$3.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101188	Remove Chalkboard - Adhesive Applied Mounted in masonry or plaster wall	SF	$5.22	$0.00	$0.00	$5.22
101189	Remove Interior Signage – Directory	EA	$60.97	$0.00	$0.00	$60.97
101190	Remove Interior Signage – Wayfinding	EA	$30.49	$0.00	$0.00	$30.49
101191	Remove Interior Signage – Room Signage	EA	$13.93	$0.00	$0.00	$13.93
101192	Remove Toilet Compartment - Ceiling Mounted Includes removal of one door panel, one side panel, pilasters and all associated hardware	EA	$121.95	$0.00	$0.00	$121.95
101193	Remove Toilet Compartment - Floor Mounted Includes removal of one door panel, one side panel, pilasters and all associated hardware	EA	$110.72	$0.00	$0.00	$110.72
101194	Remove Urinal Screen	EA	$48.78	$0.00	$0.00	$48.78
101195	Remove Patient Bed Service Wall	EA	$487.80	$0.00	$0.00	$487.80
101196	Remove Wall Corner Guard - Mechanically Fastened Synthetic or metal, up to 10' high	EA	$27.68	$0.00	$0.00	$27.68
101197	Remove Wall Corner Guard - Adhesive Applied Synthetic or metal, up to 10' high	EA	$13.83	$0.00	$0.00	$13.83
101198	Remove Wall Bumper Guard Wood or synthetic, mechanically attached	LF	$5.53	$0.00	$0.00	$5.53
101199	Remove Protective Wall Covering	SF	$0.98	$0.00	$0.00	$0.98
101200	Remove Door and Frame Protection	EA	$48.78	$0.00	$0.00	$48.78
101201	Remove Interior Door - Single Includes door, frame, and hardware	EA	$95.44	$0.00	$0.00	$95.44
101202	Remove Interior Door - Double Includes door, frame, and hardware	EA	$127.25	$0.00	$0.00	$127.25
101203	Remove Kitchen Traffic Door - Single	EA	$47.71	$0.00	$0.00	$47.71
101204	Remove Kitchen Traffic Door - Double	EA	$95.44	$0.00	$0.00	$95.44
101205	Remove Toilet Accessory - Surface Mounted Excludes toilet accessory removal attached to toilet partitions unless required to be saved by the contract	EA	$22.83	$0.00	$0.00	$22.83
101206	Remove Toilet Accessory - Recessed Excludes toilet accessory removal attached to toilet partitions unless required to be saved by the contract	EA	$73.06	$0.00	$0.00	$73.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101207	Remove Toilet Accessory - Baby Changing Station	EA	$97.40	$0.00	$0.00	$97.40
101208	Remove Toilet Accessory - Medicine Cabinet	EA	$60.64	$0.00	$0.00	$60.64
101209	Remove Toilet Accessory - Electric Hand Dryer	EA	$91.20	$0.00	$0.00	$91.20
101210	Remove Toilet Accessory - Grab Bar Excludes grab bar removal attached to toilet partitions unless required to be saved by the contract	EA	$13.83	$0.00	$0.00	$13.83
101211	Remove Fireplace Insert	EA	$487.80	$0.00	$0.00	$487.80
101212	Remove Metal Locker Up to 18" wide, single or multiple tiers	EA	$55.36	$0.00	$0.00	$55.36
101213	Remove Sports/Stadium Metal Locker Up to 24" wide, single tier	EA	$83.04	$0.00	$0.00	$83.04
101214	Remove Sports/Stadium Wood Locker Up to 24" wide, single tier	EA	$110.72	$0.00	$0.00	$110.72
101215	Remove Locker Base - Wood or Metal Framed	LF	$30.49	$0.00	$0.00	$30.49
101216	Remove Locker Base - Concrete Assumes concrete base was poured after concrete slab	CF	$25.33	$0.00	$8.98	$34.31
101217	Remove Locker Room Bench and Post	LF	$15.25	$0.00	$0.00	$15.25
101218	Remove Central Mail Delivery Boxes	EA	$19.52	$0.00	$0.00	$19.52
101219	Remove Mail Collection Box	EA	$121.95	$0.00	$0.00	$121.95
101220	Remove Mailbox	EA	$60.97	$0.00	$0.00	$60.97
101221	Remove Parcel Locker	EA	$121.95	$0.00	$0.00	$121.95
101222	Remove Storage Shelving	LF	$9.75	$0.00	$0.00	$9.75
101223	Remove Storage Rack	EA	$40.64	$0.00	$0.00	$40.64
101224	Remove Coat Rack	EA	$30.49	$0.00	$0.00	$30.49
101225	Remove Closet / Utility Shelving	LF	$9.75	$0.00	$0.00	$9.75
101226	Remove Flag Or Banner	EA	$30.49	$0.00	$0.00	$30.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101227	Remove Security Mirror	SF	$4.65	$0.00	$0.00	$4.65
101228	Remove Wall Paneling	SF	$0.98	$0.00	$0.00	$0.98
101229	Remove Flooring - Hard Tile Includes ceramic, porcelain, quarry or other similar tiles	SF	$4.43	$0.00	$0.00	$4.43
101230	Remove Flooring - Wood Includes hardwood strips, planks, parquet or other similar material	SF	$2.17	$0.00	$0.00	$2.17
101231	Remove Flooring - Wood Laminate Includes wood laminates, engineered flooring other similar material	SF	$1.67	$0.00	$0.00	$1.67
101232	Remove Flooring - Wood, Athletic	SF	$2.17	$0.00	$0.00	$2.17
101233	Remove Flooring - Resilient Sheet Includes removal of vinyl, linoleum sheet, including removal of rubber or resilient base	SF	$1.35	$0.00	$0.00	$1.35
101234	Remove Flooring - Resilient Tile Includes removal of rubber or resilient base	SF	$1.30	$0.00	$0.00	$1.30
101235	Remove Flooring - Resilient, Athletic Includes removal of rubber or resilient base	SF	$1.35	$0.00	$0.00	$1.35
101236	Remove Flooring - Terrazzo	SF	$4.43	$0.00	$0.00	$4.43
101237	Remove Flooring - Fluid-Applied Includes removal integral base	SF	$2.78	$0.00	$0.00	$2.78
101238	Remove Flooring - Fluid-Applied, Athletic Includes removal integral base	SF	$2.78	$0.00	$0.00	$2.78
101239	Remove Flooring - Carpeting Includes removal of rubber or resilient base	SF	$1.22	$0.00	$0.00	$1.22
101240	Remove Flooring - Entrance Grill	SF	$2.78	$0.00	$0.00	$2.78
101241	Remove Wall Base - Tile, Terrazzo, or Wood Does not include wall prep/patching for new base	LF	$1.47	$0.00	$0.00	$1.47
101242	Remove Wall Base - Rubber or Resilient, 4" or 6" Does not include wall prep/patching for new base	LF	$0.62	$0.00	$0.00	$0.62
101243	Remove Stair Tread Finish - Tile	LF	$20.33	$0.00	$0.00	$20.33
101244	Remove Stair Tread Finish - Masonry	LF	$20.33	$0.00	$0.00	$20.33
101245	Remove Stair Tread Finish - Wood	LF	$13.93	$0.00	$0.00	$13.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101246	Remove Stair Tread Finish - Resilient	LF	$7.43	$0.00	$0.00	$7.43
101247	Remove Stair Tread Finish - Terrazzo	LF	$20.33	$0.00	$0.00	$20.33
101248	Remove Stair Tread Finish - Carpet	LF	$7.43	$0.00	$0.00	$7.43
101249	Remove Elevator Equipment and Controls	EA	$9,755.83	$0.00	$0.00	$9,755.83
101250	Remove Elevator Cab - Freight	EA	$5,365.65	$0.00	$0.00	$5,365.65
101251	Remove Elevator Cab - Passenger	EA	$4,877.92	$0.00	$0.00	$4,877.92
101252	Remove Elevator Cab Door - Freight	EA	$268.28	$0.00	$0.00	$268.28
101253	Remove Elevator Cab Door - Passenger	EA	$243.89	$0.00	$0.00	$243.89
101254	Remove Lift - Wheelchair	EA	$975.58	$0.00	$0.00	$975.58
101255	Remove Lift - Vehicle	EA	$2,438.95	$0.00	$0.00	$2,438.95
101256	Remove Escalator Includes, not limited to removal of escalator steps, drive motors/gears, tracks, belts and handrails	EA	$4,877.92	$0.00	$0.00	$4,877.92
101257	Remove Dumbwaiter	EA	$487.80	$0.00	$0.00	$487.80
101258	Remove Moving Walkway Includes, not limited to removal of pallets/belt, drive motors/gears, tracks and handrails	SF	$9.75	$0.00	$0.00	$9.75
101259	Remove Chute - Laundry	LF	$27.86	$0.00	$0.00	$27.86
101260	Remove Chute - Trash	LF	$27.86	$0.00	$0.00	$27.86
101261	Remove Pneumatic Tube System	STOP	$390.23	$0.00	$0.00	$390.23
101262	Remove Foodservice Equipment - Refrigerated Food Storage Case	EA	$487.80	$0.00	$0.00	$487.80
101263	Remove Foodservice Equipment - Walk-In Cooler	SF	$8.13	$0.00	$0.00	$8.13
101264	Remove Foodservice Equipment - Walk-In Freezer	SF	$8.13	$0.00	$0.00	$8.13
101265	Remove Foodservice Equipment - Freestanding Freezer/Refrigerator	EA	$63.63	$0.00	$0.00	$63.63
101266	Remove Foodservice Equipment - Shelving	LF	$7.62	$0.00	$0.00	$7.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101267	Remove Foodservice Equipment - Commercial Range	EA	$325.20	$0.00	$0.00	$325.20
101268	Remove Foodservice Equipment - Commercial Oven	EA	$325.20	$0.00	$0.00	$325.20
101269	Remove Foodservice Equipment - Commercial Dishwasher	EA	$325.20	$0.00	$0.00	$325.20
101270	Remove Audio-Visual Equipment - Projection Screen	EA	$81.30	$0.00	$0.00	$81.30
101271	Remove Audio-Visual Equipment - Projector	EA	$121.95	$0.00	$0.00	$121.95
101272	Remove Audio-Visual Equipment - Ceiling Hung or Wall Mounted TV	EA	$63.63	$0.00	$0.00	$63.63
101273	Remove Laboratory Equipment - Fume Hood	EA	$381.98	$0.00	$0.00	$381.98
101274	Remove Laboratory Equipment - Incubator	EA	$381.98	$0.00	$0.00	$381.98
101275	Remove Laboratory Equipment - Equipment Washer	EA	$405.86	$0.00	$0.00	$405.86
101276	Remove Laboratory Equipment - Sterilizer	EA	$374.35	$0.00	$0.00	$374.35
101277	Remove Laboratory Equipment - Refrigerator	EA	$294.45	$0.00	$0.00	$294.45
101278	Remove Laboratory Equipment - Freezer	EA	$294.45	$0.00	$0.00	$294.45
101279	Remove Laboratory Equipment - Environmental Cabinet	EA	$381.98	$0.00	$0.00	$381.98
101280	Remove Laboratory Equipment - Biological Safety Cabinet	EA	$381.98	$0.00	$0.00	$381.98
101281	Remove Window Treatment	SF	$2.32	$0.00	$0.00	$2.32
101282	Remove Cabinet - Base	LF	$24.39	$0.00	$0.00	$24.39
101283	Remove Cabinet - Wall	LF	$15.32	$0.00	$0.00	$15.32
101284	Remove Cabinet - Countertop	SF	$9.29	$0.00	$0.00	$9.29
101285	Remove Shelving	LF	$12.19	$0.00	$0.00	$12.19
101286	Remove Display Case	LF	$24.39	$0.00	$0.00	$24.39
101287	Remove Seating - Fixed	SEAT	$32.52	$0.00	$0.00	$32.52
101288	Remove Seating - Bleacher	SEAT	$24.39	$0.00	$0.00	$24.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101289	Remove Wall Tile Finish	SF	$4.65	$0.00	$0.00	$4.65
101290	Remove Wall Covering	SF	$0.66	$0.00	$0.00	$0.66
101291	Remove Wall Carpeting	SF	$0.66	$0.00	$0.00	$0.66
101292	Remove Wall Stone Facing	SF	$4.65	$0.00	$0.00	$4.65
101293	Remove Wall Acoustical Panel	SF	$0.98	$0.00	$0.00	$0.98
101294	Remove Wall Painting Or Coating	SF	$0.48	$0.00	$0.00	$0.48
101295	Remove Column Covers	SF	$1.86	$0.00	$0.00	$1.86
101296	Trucking / Hauling / Transport and Disposal of Removals / Debris – Up To 30 Miles Not to be combined with Dumpster items.	CY	$16.43	$1.43	$8.75	$26.61
101297	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-42-00 Removal and Diversion of Construction Materials

02-42-19 Recycling of Construction Materials

101298	Recycling - Tire Disposal	EA	$0.00	$12.71	$0.00	$12.71
101299	Building / Structure Demolition Recycling - Wood Includes additional labor cost associated with structue deconstruction and recycling. Can be added to the unit costs for Remove Building / Structure in Division 02-41-16	SF	$2.93	$0.00	$0.00	$2.93
101300	Building / Structure Demolition Recycling - Steel Includes additional labor cost associated with structue deconstruction and recycling. Can be added to the unit costs for Remove Building / Structure in Division 02-41-16	SF	$3.53	$0.00	$0.00	$3.53
101301	Building / Structure Demolition Recycling - Masonry Includes additional labor cost associated with structue deconstruction and recycling. Can be added to the unit costs for Remove Building / Structure in Division 02-41-16	SF	$4.23	$0.00	$0.00	$4.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101302	Building / Structure Demolition Recycling - Concrete Includes additional labor cost associated with structue deconstruction and recycling. Can be added to the unit costs for Remove Building / Structure in Division 02-41-16	SF	$5.29	$0.00	$0.00	$5.29

02-60-00 Contaminated Site Material Removal

02-61-00 Removal and Disposal of Contaminated Soils

02-61-13 Excavation and Handling of Contaminated Material

101303	Excavate Contaminated Soils	CY	$14.17	$1.34	$8.16	$23.67
101304	Trucking / Hauling / Transport and Disposal of Hazardous Materials – Up to 30 Miles	CY	$118.52	$10.28	$63.00	$191.80
101305	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-80-00 Facility Remediation

Unit pricing includes all labor, material, and equipment to prepare the work area, safely remove material, transport material into an approved special waste disposal container, and decontaminate/clean the work area. Hauling of demolished material can be selected at the end of each section.

02-81-00 Transportation and Disposal of Hazardous Materials

02-81-00 Transportation and Disposal of Hazardous Materials

101306	Special Waste Disposal Container 30 CY Includes delivery and pickup. Up to 30 days	EA	$0.00	$1,712.43	$0.00	$1,712.43

02-82-00 Asbestos Remediation

02-82-13 Asbestos Abatement

101307	Individual Asbestos Containment Areas - Up to 100 SF Includes labor and material/decontamination equipment to set up and remove containment area.	EA	$2,449.06	$770.26	$0.00	$3,219.32
101308	Remove Asbestos, Tar On Porous Surfaces	SF	$10.84	$0.00	$0.00	$10.84
101309	Remove Asbestos, Tar On Smooth Surfaces	SF	$8.03	$0.00	$0.00	$8.03
101310	Remove Asbestos, Insulation, Tank	SF	$16.26	$0.00	$0.00	$16.26
101311	Remove Asbestos, Insulation, Boiler	SF	$16.26	$0.00	$0.00	$16.26
101312	Remove Asbestos, Insulation, Pipe	LF	$19.52	$0.00	$0.00	$19.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101313	Remove Asbestos, Insulation, Pipe Fitting	EA	$127.33	$0.00	$0.00	$127.33
101314	Remove Asbestos, Insulation, Duct	SF	$13.94	$0.00	$0.00	$13.94
101315	Remove Asbestos, Duct Joint Sealant / Tape	EA	$101.87	$0.00	$0.00	$101.87
101316	Remove Asbestos, Shingle, Roofing	SF	$5.66	$0.00	$0.00	$5.66
101317	Remove Asbestos, Siding, Shingle / Board	SF	$5.99	$0.00	$0.00	$5.99
101318	Remove Asbestos, Roofing, Membrane	SF	$5.42	$0.00	$0.00	$5.42
101319	Remove Asbestos, Roofing, Flashing	SF	$6.10	$0.00	$0.00	$6.10
101320	Remove Asbestos, Roofing, Tar / Felt	SF	$6.10	$0.00	$0.00	$6.10
101321	Remove Asbestos, Spray On Fireproofing	SF	$12.19	$0.00	$0.00	$12.19
101322	Remove Asbestos, Caulk / Glazing Compound	LF	$10.19	$0.00	$0.00	$10.19
101323	Remove Asbestos, Ceiling, Suspended	SF	$6.80	$0.00	$0.00	$6.80
101324	Remove Asbestos, Ceiling, Concealed Grid	SF	$7.28	$0.00	$0.00	$7.28
101325	Remove Asbestos, Plaster / Drywall	SF	$9.26	$0.00	$0.00	$9.26
101326	Remove Asbestos, Textured Plaster Surface - Up To 4,000 SF Includes scraping, brushing, cleaning and bagging of removed materials	SF	$20.96	$3.30	$0.00	$24.26
101327	Remove Asbestos, Textured Plaster Surface - Over 4,000 SF Includes scraping, brushing, cleaning and bagging of removed materials	SF	$16.62	$2.62	$0.00	$19.24
101328	Remove Asbestos, Flooring, Tiles and Mastic	SF	$5.09	$0.00	$0.00	$5.09
101329	Remove Asbestos, Vapor Barrier	SF	$3.39	$0.00	$0.00	$3.39
101330	Remove Asbestos, Fabric	SF	$3.63	$0.00	$0.00	$3.63
101331	Remove Asbestos, Rubber/Resilient Wall Base	LF	$4.43	$0.00	$0.00	$4.43
101332	Remove Asbestos, Cabinet Base	SF	$6.10	$0.00	$0.00	$6.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101333	Remove Asbestos, Fume Hood Lining	SF	$12.19	$0.00	$0.00	$12.19
101334	Remove Asbestos, Sink Undercoating	SF	$9.75	$0.00	$0.00	$9.75
101335	Remove Asbestos, Lab Countertop / Sink and Back Splash	SF	$12.19	$0.00	$0.00	$12.19
101336	Remove Asbestos, Elevator Brake Shoes and Elec. Panel	EA	$975.58	$0.00	$0.00	$975.58
101337	Encapsulate Asbestos, Tar On Porous Surfaces	SF	$6.20	$0.00	$0.00	$6.20
101338	Encapsulate Asbestos, Tar On Smooth Surfaces	SF	$4.59	$0.00	$0.00	$4.59
101339	Encapsulate Asbestos, Insulation, Tank	SF	$9.29	$0.00	$0.00	$9.29
101340	Encapsulate Asbestos, Insulation, Boiler	SF	$9.29	$0.00	$0.00	$9.29
101341	Encapsulate Asbestos, Insulation, Pipe	LF	$11.16	$0.00	$0.00	$11.16
101342	Encapsulate Asbestos, Insulation, Pipe Fitting	EA	$72.76	$0.00	$0.00	$72.76
101343	Encapsulate Asbestos, Insulation, Duct	SF	$7.97	$0.00	$0.00	$7.97
101344	Encapsulate Asbestos, Duct Joint Sealant / Tape	EA	$58.20	$0.00	$0.00	$58.20
101345	Encapsulate Asbestos, Shingle, Roofing	SF	$3.23	$0.00	$0.00	$3.23
101346	Encapsulate Asbestos, Siding, Shingle / Board	SF	$3.43	$0.00	$0.00	$3.43
101347	Encapsulate Asbestos, Roofing, Membrane	SF	$3.09	$0.00	$0.00	$3.09
101348	Encapsulate Asbestos, Roofing, Flashing	SF	$3.48	$0.00	$0.00	$3.48
101349	Encapsulate Asbestos, Roofing, Tar / Felt	SF	$3.48	$0.00	$0.00	$3.48
101350	Remove Flat Roofing System - Asbestos Built-Up Membrane Includes removal of membrane, insulation, flashings, terminations and copings. This item is applicable to the complete removal of the roofing system and supersedes individual line items	SF	$1.91	$0.00	$0.00	$1.91
101351	Remove Flat Roofing System - Asbestos Built-Up Membrane, Substrate / Protection Board Includes removal of membrane, insulation, substrate board, flashings, terminations and copings. This item is applicable to the complete removal of the roofing system and supersedes individual line items	SF	$2.25	$0.00	$0.00	$2.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101352	Remove Flat Roofing System - Asbestos Built-Up Membrane, Substrate / Protection Board, and Ballast Includes removal of membrane, insulation, substrate board, flashings, terminations, copings, and ballast. This item is applicable to the complete removal of the roofing system and supersedes individual line items.	SF	$3.05	$0.00	$0.00	$3.05
101353	Encapsulate Asbestos, Spray On Fireproofing	SF	$6.97	$0.00	$0.00	$6.97
101354	Encapsulate Asbestos, Caulk / Glazing Compound	LF	$8.86	$0.00	$0.00	$8.86
101355	Encapsulate Asbestos, Ceiling, Suspended	SF	$3.88	$0.00	$0.00	$3.88
101356	Encapsulate Asbestos, Ceiling, Concealed Grid	SF	$4.16	$0.00	$0.00	$4.16
101357	Encapsulate Asbestos, Plaster / Drywall	SF	$5.29	$0.00	$0.00	$5.29
101358	Encapsulate Asbestos, Flooring, Tiles and Mastic	SF	$2.91	$0.00	$0.00	$2.91
101359	Encapsulate Asbestos, Vapor Barrier	SF	$1.94	$0.00	$0.00	$1.94
101360	Encapsulate Asbestos, Fabric	SF	$2.08	$0.00	$0.00	$2.08
101361	Encapsulate Asbestos, Rubber/Resilient Wall Base	SF	$2.53	$0.00	$0.00	$2.53
101362	Encapsulate Asbestos, Cabinet Base	SF	$3.48	$0.00	$0.00	$3.48
101363	Encapsulate Asbestos, Fume Hood Lining	SF	$6.97	$0.00	$0.00	$6.97
101364	Encapsulate Asbestos, Sink Undercoating	SF	$5.58	$0.00	$0.00	$5.58
101365	Encapsulate Asbestos, Lab Countertop / Sink and Back Splash	SF	$6.97	$0.00	$0.00	$6.97
101366	Encapsulate Asbestos, Elevator Brake Shoes and Elec. Panel	EA	$557.47	$0.00	$0.00	$557.47
101367	[Modifier] Quantity Premium - Asbestos Abatement (101-500 SF) Quantity premium can be used when total square footage in section 02-82-13 Asbestos Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
101368	[Modifier] Quantity Premium - Asbestos Abatement (51-100 SF) Quantity premium can be used when total square footage in section 02-82-13 Asbestos Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101369	[Modifier] Quantity Premium - Asbestos Abatement (< or = to 50 SF) Quantity premium can be used when total square footage in section 02-82-13 Asbestos Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
101370	Trucking / Hauling / Transport and Disposal of Hazardous Materials – Up to 30 Miles	CY	$118.52	$10.28	$63.00	$191.80
101371	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-83-00 Lead Remediation

02-83-00 Lead Remediation

101372	Remove Lead Paint – On Flooring	SF	$7.28	$0.00	$0.00	$7.28
101373	Remove Lead Paint, Interior, Ceiling / Soffit	SF	$12.45	$0.00	$0.00	$12.45
101374	Remove Lead Paint, Interior, Wall	SF	$8.61	$0.00	$0.00	$8.61
101375	Remove Lead Paint, Interior, Door	EA	$280.12	$0.00	$0.00	$280.12
101376	Remove Lead Paint, Interior, Window	SF	$14.01	$0.00	$0.00	$14.01
101377	Remove Lead Paint, Interior, Trim	LF	$22.41	$0.00	$0.00	$22.41
101378	Remove Lead Paint, Exterior, Ceiling / Soffit	SF	$11.32	$0.00	$0.00	$11.32
101379	Remove Lead Paint, Exterior, Wall - Heat Stripping Includes removal by heat stripping of wood siding, removal of flaking/cracked paint, lift equipment and disposal. Unit costs based on 528 sf	SF	$16.53	$8.59	$0.00	$25.12
101380	Remove Lead Paint, Exterior, Wall - Heat Stripping Includes removal by heat stripping of wood siding, lift equipment and disposal. Unit costs based on 1,792 sf	SF	$19.09	$9.95	$2.09	$31.13
101381	Remove Lead Paint, Exterior, Wall and Window Trim - Heat Stripping Includes removal by heat stripping of wood siding and window trim, lift equipment and disposal. Unit costs based on 794 sf	SF	$49.61	$25.79	$4.72	$80.12
101382	Remove Lead Paint, Exterior, Wall - Scrape and Sanding	SF	$7.83	$0.00	$0.00	$7.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101383	Remove Lead Paint, Exterior, Door - Scrape and Sanding	EA	$254.66	$0.00	$0.00	$254.66
101384	Remove Lead Paint, Exterior, Window - Scrape and Sanding	SF	$12.73	$0.00	$0.00	$12.73
101385	Remove Lead Paint, Exterior, Trim - Scrape and Sanding	LF	$20.38	$0.00	$0.00	$20.38
101386	Remove Lead Paint, Pipe	LF	$14.55	$0.00	$0.00	$14.55
101387	Encapsulate Lead Paint -On Flooring	SF	$3.23	$0.00	$0.00	$3.23
101388	Encapsulate Lead Paint, Interior, Ceiling / Soffit	SF	$5.53	$0.00	$0.00	$5.53
101389	Encapsulate Lead Paint, Interior, Wall	SF	$3.83	$0.00	$0.00	$3.83
101390	Encapsulate Lead Paint, Interior, Door	EA	$124.50	$0.00	$0.00	$124.50
101391	Encapsulate Lead Paint, Interior, Window	SF	$6.22	$0.00	$0.00	$6.22
101392	Encapsulate Lead Paint, Interior, Trim	LF	$9.96	$0.00	$0.00	$9.96
101393	Encapsulate Lead Paint, Exterior, Ceiling / Soffit	SF	$5.03	$0.00	$0.00	$5.03
101394	Encapsulate Lead Paint, Exterior, Wall	SF	$3.48	$0.00	$0.00	$3.48
101395	Encapsulate Lead Paint, Exterior, Door	EA	$113.18	$0.00	$0.00	$113.18
101396	Encapsulate Lead Paint, Exterior, Window	SF	$5.66	$0.00	$0.00	$5.66
101397	Encapsulate Lead Paint, Exterior, Trim	LF	$9.05	$0.00	$0.00	$9.05
101398	Encapsulate Lead Paint, Pipe	LF	$6.46	$0.00	$0.00	$6.46
101399	[Modifier] Quantity Premium - Lead Abatement (101-500 SF) Quantity premium can be used when total square footage in section 02-83-13 Lead Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
101400	[Modifier] Quantity Premium - Lead Abatement (51-100 SF) Quantity premium can be used when total square footage in section 02-83-13 Lead Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101401	[Modifier] Quantity Premium - Lead Abatement (< or = to 50 SF) Quantity premium can be used when total square footage in section 02-83-13 Lead Abatement are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
101402	Trucking / Hauling / Transport and Disposal of Hazardous Materials – Up to 30 Miles	CY	$118.52	$10.28	$63.00	$191.80
101403	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-84-00 Polychlorinate Biphenyl and Mercury Remediation

02-84-00 Polychlorinate Biphenyl and Mercury Remediation

101404	Remove PCB Penetration Sealant	EA	$97.55	$0.00	$0.00	$97.55
101405	Remove PCB Caulk – Non Porous Surface	LF	$12.19	$0.00	$0.00	$12.19
101406	Remove PCB Caulk – Porous Surface	LF	$16.26	$0.00	$0.00	$16.26
101407	Remove PCB Light Fixture Ballast	EA	$69.64	$0.00	$0.00	$69.64
101408	Abate Mercury, Floor Finish	SF	$16.26	$0.00	$0.00	$16.26
101409	[Modifier] Quantity Premium - Polychlorinate Biphenyl and Mercury Remediation (101-500 SF) Quantity premium can be used when total square footage in section 02-84-00 Polychlorinate Biphenyl and Mercury Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
101410	[Modifier] Quantity Premium - Polychlorinate Biphenyl and Mercury Remediation (51-100 SF) Quantity premium can be used when total square footage in section 02-84-00 Polychlorinate Biphenyl and Mercury Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
101411	[Modifier] Quantity Premium - Polychlorinate Biphenyl and Mercury Remediation (< or = to 50 SF) Quantity premium can be used when total square footage in section 02-84-00 Polychlorinate Biphenyl and Mercury Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101412	Trucking / Hauling / Transport and Disposal of Hazardous Materials – Up to 30 Miles	CY	$118.52	$10.28	$63.00	$191.80
101413	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

02-87-00 Biohazard Remediation

02-87-13 Mold Remediation

101414	Mold Remediation – Flooring	SF	$16.26	$0.00	$0.00	$16.26
101415	Mold Remediation, Walls / Doors / Windows	SF	$19.52	$0.00	$0.00	$19.52
101416	Mold Remediation, Ceiling / Soffit	SF	$24.39	$0.00	$0.00	$24.39
101417	Mold Remediation, Counters / Cabinets	SF	$24.39	$0.00	$0.00	$24.39
101418	Mold Remediation, Ducts	SF	$32.52	$0.00	$0.00	$32.52
101419	[Modifier] Quantity Premium - Mold Remediation (101-500 SF) Quantity premium can be used when total square footage in section 02-87-13 Mold Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
101420	[Modifier] Quantity Premium - Mold Remediation (51-100 SF) Quantity premium can be used when total square footage in section 02-87-13 Mold Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
101421	[Modifier] Quantity Premium - Mold Remediation (< or = to 50 SF) Quantity premium can be used when total square footage in section 02-87-13 Mold Remediation are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
101422	Trucking / Hauling / Transport and Disposal of Hazardous Materials – Up to 30 Miles	CY	$118.52	$10.28	$63.00	$191.80
101423	[Modifier] Hourly Rate for Trucking / Hauling / Transport and Disposal of Removals / Debris Over 30 Miles (Dump Truck, 12-14 CY or =) Quantity premium can be used when travel distance goes over 30 miles. Can be applied cumulatively to base line items.	HR	$61.61	$0.00	$43.99	$105.60

03-00-00 Concrete

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

03-00-00 Concrete

03-01-00 Maintenance of Concrete

Maintenance items in this category include complete removal of deteriorated concrete, with in kind repair and finish unless otherwise noted. Includes investigations and reporting, testing, layout, preparatory cleaning, final cleaning, and protections.

03-01-00 Maintenance of Concrete

Maintenance items in this category include complete removal of deteriorated concrete, with in kind repair and finish unless otherwise noted. Includes investigations and reporting, testing, layout, preparatory cleaning, final cleaning, and protections.

		Units	Labor	Material	Equipment	Total
101424	Concrete Cleaning (< 50 SF) General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$161.39	$57.09	$0.00	$218.48
101425	Concrete Cleaning (< 50 SF) – Overhead Work General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$203.22	$57.09	$0.00	$260.31
101426	Concrete Cleaning (50 -100 SF) General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$270.89	$91.33	$0.00	$362.22
101427	Concrete Cleaning (50 -100 SF) – Overhead Work General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$343.34	$91.33	$0.00	$434.67
101428	Concrete Cleaning (101 – 200 SF) General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$417.58	$114.16	$0.00	$531.74
101429	Concrete Cleaning (101 – 200 SF) – Overhead Work General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	EA	$531.78	$114.16	$0.00	$645.94
101430	Concrete Cleaning (> 200 SF) General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	SF	$1.15	$0.45	$0.00	$1.60
101431	Concrete Cleaning (> 200 SF) – Overhead Work General cleaning to restore surfaces. Pre-cleaning incidental to concrete maintenance is included with the respective maintenance item	SF	$1.40	$0.45	$0.00	$1.85
101432	Concrete Resurfacing (Up To 1/4" Deep) Deterioration up to 1/4" deep. Remove unsound material, prepare edges and surfaces appropriate to resurfacing method	SF	$71.77	$34.25	$0.00	$106.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101433	Concrete Resurfacing (Up To 1/4" Deep) – Overhead Work Deterioration up to 1/4" deep. Remove unsound material, prepare edges and surfaces appropriate to resurfacing method	SF	$93.30	$34.25	$0.00	$127.55
101434	Concrete Rehabilitation, Crack Repair, Spall, Epoxy Injection Pressurized injection. Prepare crack. Includes follow up to remove temporary installation accessories	LF	$35.88	$17.13	$0.00	$53.01
101435	Concrete Rehabilitation, Crack Repair, Spall, Epoxy Injection – Overhead Work Pressurized injection. Prepare crack. Includes follow up to remove temporary installation accessories	LF	$46.66	$17.13	$0.00	$63.79
101436	Concrete Rehabilitation, Crack Repair, Spall, Mortar Prepare crack appropriate to trowel and patch method	LF	$28.72	$13.70	$0.00	$42.42
101437	Concrete Rehabilitation, Crack Repair, Spall, Mortar – Overhead Work Prepare crack appropriate to trowel and patch method	LF	$37.33	$13.70	$0.00	$51.03
101438	Concrete Rehabilitation (1/4" To 1-1/2") Deterioration up to 1 1/2" deep with or without reinforcing exposure	SF	$107.65	$51.37	$0.00	$159.02
101439	Concrete Rehabilitation (1/4" To 1-1/2") – Overhead Work Deterioration up to 1 1/2" deep with or without reinforcing exposure	SF	$139.96	$51.37	$0.00	$191.33
101440	Concrete Joint Repair Removal of deteriorated field applied joints with full depth replacement	LF	$97.55	$171.25	$0.00	$268.80
101441	Concrete Joint Repair – Overhead Work Removal of deteriorated field applied joints with full depth replacement	LF	$126.82	$171.25	$0.00	$298.07
101442	[Modifier] For Spliced Replacement Of Rebar Add to concrete repair for replacing rebar that has deteriorated. Splice new reinforcing to existing reinforcing. Inclusive of all rebar sizes	LF	$28.72	$13.40	$0.00	$42.12
101443	[Modifier] For Additional 1" Depth Of Concrete Rehabilitation Item can be used when depth of rehabilitation is greater then 1-1/2”	SF	$18.57	$5.70	$0.00	$24.27

03-10-00 Concrete Forming and Accessories

03-11-00 Concrete Forming

03-11-13 Structural Cast-in-Place Concrete Forming

Cost items in this category include metal, wood, or preformed formwork. Cost includes chamfer strips, detail strips,

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	blockouts, sleeves, and form ties. Concrete material includes up to 30 miles of trucking.					
101444	Cast-in-Place (CIP) Concrete Formwork - Wall Footings	SF	$10.25	$3.08	$0.00	$13.33
101445	Cast-in-Place (CIP) Concrete Formwork - Spread Footings	SF	$14.26	$3.08	$0.00	$17.34
101446	Cast-in-Place (CIP) Concrete Formwork - Pile Caps	SF	$12.51	$3.08	$0.00	$15.59
101447	Cast-in-Place (CIP) Concrete Formwork - Foundation Wall	SF	$11.51	$3.08	$0.00	$14.59
101448	Cast-in-Place (CIP) Concrete Formwork - Exterior Wall	SF	$9.80	$3.08	$0.00	$12.88
101449	Cast-in-Place (CIP) Concrete Formwork - Interior Wall	SF	$9.80	$3.08	$0.00	$12.88
101450	Cast-in-Place (CIP) Concrete Formwork - Pilaster	SF	$14.05	$3.08	$0.00	$17.13
101451	Cast-in-Place (CIP) Concrete Formwork - Column Piers	SF	$14.05	$3.08	$0.00	$17.13
101452	Cast-in-Place (CIP) Concrete Formwork - Columns	SF	$14.05	$3.08	$0.00	$17.13
101453	Cast-in-Place (CIP) Concrete Formwork - Elevator Pit	SF	$12.42	$3.08	$0.00	$15.50
101454	Cast-in-Place (CIP) Concrete Formwork - Elevated Floor Slab	SF	$10.79	$3.08	$0.00	$13.87
101455	Cast-in-Place (CIP) Concrete Formwork - Elevated Floor Slab Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$7.80	$3.08	$0.00	$10.88
101456	Cast-in-Place (CIP) Concrete Formwork - Elevated Floor Slab Drop Panel	SF	$13.06	$3.08	$0.00	$16.14
101457	Cast-in-Place (CIP) Concrete Formwork - Elevated Floor Slab Drop Panel Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$10.09	$3.08	$0.00	$13.17
101458	Cast-in-Place (CIP) Concrete Formwork - Roof Slab	SF	$10.79	$3.08	$0.00	$13.87
101459	Cast-in-Place (CIP) Concrete Formwork - Roof Slab Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$7.80	$3.08	$0.00	$10.88
101460	Cast-in-Place (CIP) Concrete Formwork - Roof Slab Drop Panel	SF	$13.06	$3.08	$0.00	$16.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101461	Cast-in-Place (CIP) Concrete Formwork - Roof Slab Drop Panel Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$10.09	$3.08	$0.00	$13.17
101462	Cast-in-Place (CIP) Concrete Formwork - Pan Joist	SF	$15.41	$3.08	$0.00	$18.49
101463	Cast-in-Place (CIP) Concrete Formwork - Floor Beams	SF	$14.85	$3.08	$0.00	$17.93
101464	Cast-in-Place (CIP) Concrete Formwork - Roof Beams	SF	$14.85	$3.08	$0.00	$17.93
101465	Cast-in-Place (CIP) Concrete Formwork - Grade Beams	SF	$10.88	$3.08	$0.00	$13.96
101466	Cast-in-Place (CIP) Concrete Formwork - Preformed Tube	SF	$10.88	$3.08	$0.00	$13.96
101467	Cast-in-Place (CIP) Concrete Formwork - Sidewalk	SF	$10.79	$3.00	$0.00	$13.79
101468	Cast-in-Place (CIP) Concrete Formwork - Sidewalk Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$7.80	$3.08	$0.00	$10.88
101469	Cast-in-Place (CIP) Concrete Formwork - Slab-on-Grade	SF	$10.79	$3.00	$0.00	$13.79
101470	Cast-in-Place (CIP) Concrete Formwork - Slab-on-Grade Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$7.80	$3.08	$0.00	$10.88
101471	Cast-in-Place (CIP) Concrete Formwork - Slab-on-Grade Drop Panel	SF	$13.06	$3.00	$0.00	$16.06
101472	Cast-in-Place (CIP) Concrete Formwork - Slab-on-Grade Drop Panel Perimeter/Edge Form Square footage of edge formwork = linear feet of formwork x formwork height	SF	$10.09	$3.00	$0.00	$13.09
	03-11-16 Architectural Cast-in Place Concrete Forming					
101473	[Modifier] For Form Liner	SF	$5.72	$6.85	$0.00	$12.57
	03-15-00 Concrete Accessories					
	03-15-13 Waterstops					
101474	Strip Footer / Footing Waterstop Preformed flexible waterstops, pre-fabricated corners, transitions, and manufacturer's splicing accessories. Includes elastomeric, PVC, bentonite clay, and urethane waterstops	LF	$3.99	$10.22	$0.00	$14.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101475	Foundation Wall Waterstop Preformed flexible waterstops, pre-fabricated corners, transitions, and manufacturer's splicing accessories. Includes elastomeric, PVC, bentonite clay, and urethane waterstops	LF	$3.99	$10.22	$0.00	$14.21
	03-15-16 Concrete Construction Joints					
101476	Expansion Joint Filler Cost item includes, preformed, pourable, or gun applied. Vertical applications	LF	$1.36	$1.15	$0.00	$2.51
101477	Control Joint Filler Cost item includes, preformed, pourable, or gun applied. Horizontal applications	LF	$1.36	$1.15	$0.00	$2.51
	03-15-19 Cast-In Concrete Anchors					
101478	Drill and Dowel Existing Concrete Structure Up to 1-9/16" Diameter Dowling Anchors, Up to 8" Deep. Includes Doweling Epoxy Adhesives.	EA	$40.65	$8.94	$0.00	$49.59
	03-20-00 Concrete Reinforcing					
	03-21-00 Reinforcement Bars					
	03-21-00 Reinforcement Bars					
101479	Rebar Installed In Wall Footings	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101480	Rebar Installed In Spread Footings	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101481	Rebar Installed In Pile Caps	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101482	Rebar Installed In Foundation Wall	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101483	Rebar Installed In Exterior CIP Wall	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101484	Rebar Installed In Interior CIP Wall	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101485	Rebar Installed In Pilaster	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101486	Rebar Installed In Column Piers	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101487	Rebar Installed In Columns	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101488	Rebar Installed In Slab On Grade	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101489	Rebar Installed In Sidewalk	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101490	Rebar Mat Installed In Foundation	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101491	Rebar Installed In Elevator Pit	TON	$1,748.90	$1,317.81	$0.00	$3,066.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101492	Rebar Installed In Elevated Slab	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101493	Rebar Installed In Floor Drop Panel	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101494	Rebar Installed In Roof Slab	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101495	Rebar Installed In Roof Drop Panel	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101496	Rebar Installed In Floor Beams	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101497	Rebar Installed In Vertical Curb	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101498	Rebar Installed In Roof Beams	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101499	Rebar Installed In Grade Beams	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
101500	Micro Fiber Concrete Reinforcement Admixture Helix 5-25 Micro Rebar or equal; material added at batching plant	LB	$0.00	$3.45	$0.00	$3.45
101501	[Modifier] For Epoxy Coated Rebar	TON	$0.00	$1,457.41	$0.00	$1,457.41
101502	[Modifier] For Galvanized Rebar Hot dipped galvanized	TON	$0.00	$616.42	$0.00	$616.42
101503	[Modifier] For Stainless Steel Rebar	TON	$0.00	$7,371.40	$0.00	$7,371.40
101504	[Modifier] Quantity Add For Rebar (< or = to 1 ton)	TON	$349.76	$131.79	$0.00	$481.55
101505	[Modifier] Quantity Add For Rebar (1.1 tons to 3 tons)	TON	$177.85	$65.89	$0.00	$243.74
	03-22-00 Fabric and Grid Reinforcing					
	03-22-00 Fabric and Grid Reinforcing					
101506	Welded Wire Fabric (W.W.F) Mesh Sidewalk / Pad	SF	$1.04	$1.01	$0.00	$2.05
101507	Welded Wire Fabric (W.W.F) Mesh Slab On Grade	SF	$1.04	$1.01	$0.00	$2.05
101508	Welded Wire Fabric (W.W.F) Mesh Floor Slab	SF	$1.04	$1.01	$0.00	$2.05
101509	Welded Wire Fabric (W.W.F) Mesh at Roof Slab	SF	$1.04	$1.01	$0.00	$2.05
101510	[Modifier] For Galvanized Welded Wire Fabric (W.W.F) Mesh Hot dipped galvanized	SF	$0.00	$0.40	$0.00	$0.40
101511	[Modifier] For Epoxy Coated Welded Wire Fabric (W.W.F) Mesh	SF	$0.00	$0.68	$0.00	$0.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101512	[Modifier] For Stainless Steel Welded Wire Fabric (W.W.F) Mesh	SF	$0.00	$4.90	$0.00	$4.90

03-23-00 Stressed Tendon Reinforcing

03-23-00 Stressed Tendon Reinforcing

101513	Post Tension-Slab On Grade	TON	$7,877.01	$2,412.46	$0.00	$10,289.47
101514	Post Tension Tendons – Floor Slab	TON	$7,877.01	$2,412.46	$0.00	$10,289.47
101515	Post Tension Tendons – Roof Slab	TON	$7,877.01	$2,412.46	$0.00	$10,289.47
101516	Post Tension Tendons – Floor Beams	TON	$7,877.01	$2,412.46	$0.00	$10,289.47
101517	Post Tension Tendons – Roof Beams	TON	$7,877.01	$2,412.46	$0.00	$10,289.47

03-24-00 Fibrous Reinforcing

03-24-00 Fibrous Reinforcing

101518	Fiber Reinforcement-Slab On Grade Price based on fiber with a typical distribution of 24#/CY	LB	$0.00	$1.73	$0.00	$1.73
101519	Fiber Reinforcement-Floor Slab Price based on fiber with a typical distribution of 24#/CY	LB	$0.00	$1.73	$0.00	$1.73
101520	Fiber Reinforcement-Roof Slab Price based on fiber with a typical distribution of 24#/CY	LB	$0.00	$1.73	$0.00	$1.73

03-30-00 Cast-in-Place Concrete

Cast-in-place concrete is based on 2,500 PSI normal weight air entrained concrete. Baseline pricing is for concrete quantities greater than or equal to seven cubic yards.

03-30-00 Cast-in-Place Concrete

Cast-in-place concrete is based on 2,500 PSI normal weight air entrained concrete. Baseline pricing is for concrete quantities greater than or equal to seven cubic yards.

03-30-53 Miscellaneous Cast-in-Place Concrete

101521	Hand Mix and Place Concrete - Wheelbarrow	CF	$10.50	$14.09	$0.00	$24.59
101522	Hand Mix and Place Concrete - Power Buggy	CF	$7.87	$14.09	$1.50	$23.46

03-31-00 Structural Concrete

03-31-13 Normalweight Structural Concrete

101523	2,500 PSI Normal Weight Structural Concrete Infill - Structural Deck (< Or = To 10 SF) Cast-in-place (CIP), precast or composite deck infill of existing construction. Metal deck, tie-in accessories, and formwork included.	EA	$1,574.21	$856.21	$0.00	$2,430.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101524	2,500 PSI Normal Weight Structural Concrete Infill - Structural Deck (11-25 SF) Cast-in-place (CIP), precast or composite deck infill of existing construction. Metal deck, tie-in accessories, and formwork included.	EA	$2,203.89	$1,198.70	$0.00	$3,402.59
101525	2,500 PSI Normal Weight Structural Concrete Infill - Structural Deck (26-50 SF) Cast-in-place (CIP), precast or composite deck infill of existing construction. Metal deck, tie-in accessories, and formwork included.	EA	$3,148.41	$1,712.43	$0.00	$4,860.84
101526	2,500 PSI Normal Weight Structural Concrete Infill - Structural Deck (51-100 SF) Cast-in-place (CIP), precast or composite deck infill of existing construction. Metal deck, tie-in accessories, and formwork included.	EA	$4,722.62	$2,568.64	$0.00	$7,291.26
101527	2,500 PSI Normal Weight Structural Concrete Infill - Structural Deck (101-500 SF) Cast-in-place (CIP), precast or composite deck infill of existing construction. Metal deck, tie-in accessories, and formwork included. Metal deck, tie-in accessories, and formwork included. For areas > 500 SF select the individual line items.	SF	$44.08	$23.98	$0.00	$68.06
101528	2,500 PSI Normal Weight Structural Concrete Infill - Slab-on-Grade (< Or = To 10 SF) Includes full depth infill of cast-in-place (CIP) flatwork, formwork, repair of substrates, moisture barriers and matching finish.	EA	$629.68	$342.49	$0.00	$972.17
101529	2,500 PSI Normal Weight Structural Concrete Infill - Slab-on-Grade (11-25 SF) Includes full depth infill of cast-in-place (CIP) flatwork, formwork, repair of substrates, moisture barriers and matching finish.	EA	$944.53	$513.72	$0.00	$1,458.25
101530	2,500 PSI Normal Weight Structural Concrete Infill - Slab-on-Grade (26-50 SF) Includes full depth infill of cast-in-place (CIP) flatwork, formwork, repair of substrates, moisture barriers and matching finish.	EA	$1,259.36	$684.97	$0.00	$1,944.33
101531	2,500 PSI Normal Weight Structural Concrete Infill - Slab-on-Grade (51-100 SF) Includes full depth infill of cast-in-place (CIP) flatwork, formwork, repair of substrates, moisture barriers and matching finish.	EA	$1,574.21	$856.21	$0.00	$2,430.42
101532	2,500 PSI Normal Weight Structural Concrete Infill - Slab-on-Grade (101-500 SF) Includes full depth infill of cast-in-place (CIP) flatwork, formwork, repair of substrates, moisture barriers and matching finish. For areas > 500 SF select the individual line items.	SF	$12.59	$6.85	$0.00	$19.44
101533	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Fill at Metal Floor Deck	CY	$75.53	$185.57	$0.00	$261.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101534	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Fill at Metal Roof Deck	CY	$75.53	$185.57	$0.00	$261.10
101535	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Wall Footings	CY	$88.16	$233.54	$0.00	$321.70
101536	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Spread Footings	CY	$96.93	$233.54	$0.00	$330.47
101537	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Pile Caps	CY	$80.78	$233.54	$0.00	$314.32
101538	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Foundation Wall	CY	$104.67	$233.54	$0.00	$338.21
101539	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Exterior Wall	CY	$104.67	$233.54	$0.00	$338.21
101540	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Interior Wall	CY	$104.67	$233.54	$0.00	$338.21
101541	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Pilaster	CY	$156.79	$233.54	$0.00	$390.33
101542	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Column Piers	CY	$156.79	$233.54	$0.00	$390.33
101543	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Columns	CY	$156.79	$233.54	$0.00	$390.33
101544	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Slab on Grade	CY	$73.81	$233.54	$0.00	$307.35
101545	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Thickened Slab	LF	$26.15	$13.02	$0.00	$39.17
101546	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Elevator Pit	CY	$104.67	$233.54	$0.00	$338.21
101547	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Floor Slab	CY	$122.69	$233.54	$0.00	$356.23
101548	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Roof Slab	CY	$122.69	$233.54	$0.00	$356.23
101549	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Floor Drop Panel Column reinforcement.	CY	$122.69	$233.54	$0.00	$356.23
101550	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Roof Drop Panel Column reinforcement.	CY	$122.69	$233.54	$0.00	$356.23
101551	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Floor Beam	CY	$154.27	$233.54	$0.00	$387.81
101552	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Roof Beam	CY	$154.27	$233.54	$0.00	$387.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101553	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Grade Beams	CY	$76.88	$233.54	$0.00	$310.42
101554	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Floor Topping	CY	$323.76	$233.58	$0.00	$557.34
101555	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Roof Topping	CY	$323.76	$233.58	$0.00	$557.34
101556	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - On Grade Exterior Stairs Includes formwork and reinforcement.	LF	$131.54	$62.53	$0.00	$194.07
101557	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - On Grade Interior Stairs Includes formwork and reinforcement.	LF	$131.54	$62.53	$0.00	$194.07
101558	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Elevated Interior Stairs Includes formwork and reinforcement.	LF	$134.93	$67.35	$0.00	$202.28
101559	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Interior Stair Landings Includes formwork and reinforcement.	SF	$123.84	$90.80	$0.00	$214.64
101560	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Floor Equipment Pads (Up To 8" Thick) Includes formwork and reinforcement.	SF	$19.68	$10.28	$0.00	$29.96
101561	2,500 PSI Normal Weight Cast-in-Place (CIP) Structural Concrete - Roof Equipment Pads (Up to 8" Thick) Includes formwork and reinforcement.	SF	$25.30	$10.28	$0.00	$35.58
101562	2,500 PSI Light Weight Cast-in-Place (CIP) Structural Concrete - Fill at Metal Floor Deck	CY	$75.53	$236.75	$0.00	$312.28
101563	2,500 PSI Light Weight Cast-in-Place (CIP) Structural Concrete - Fill at Metal Roof Deck	CY	$75.53	$236.75	$0.00	$312.28
101564	Concrete Pump Trailer Rates include grout for priming, excludes operator, Reed B50 Series or equal, concrete output up to 50 cyd/hour	DY	$0.00	$25.00	$1,620.00	$1,645.00
101565	[Modifier] Concrete Pumping (Less than 4 CY) Includes Pump Prime	CY	$51.16	$0.00	$0.00	$51.16
101566	[Modifier] Concrete Pumping (4 to 6 CY) Includes Pump Prime	CY	$25.59	$0.00	$0.00	$25.59
101567	[Modifier] Concrete Pumping (Greater than 6 CY) Includes Pump Prime	CY	$8.71	$0.00	$0.00	$8.71
101568	[Modifier] 2,500 PSI to 3,000 PSI Concrete	CY	$0.00	$4.00	$0.00	$4.00
101569	[Modifier] 2,500 PSI to 3,500 PSI Concrete	CY	$0.00	$5.49	$0.00	$5.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101570	[Modifier] 2,500 PSI to 4,000 PSI Concrete	CY	$0.00	$9.59	$0.00	$9.59
101571	[Modifier] 2,500 PSI to 4,500 PSI Concrete	CY	$0.00	$15.07	$0.00	$15.07
101572	[Modifier] 2,500 PSI to 5,000 PSI Concrete	CY	$0.00	$20.55	$0.00	$20.55
101573	[Modifier] Quantity Premium - Concrete (< Or = To 3 CY) This line item can be used if the total cubic yardage of structural concrete is less than or equal to 3 cubic yards. It Can be applied cumulatively to applicable line items. No premium for INFILL line items	LS	$899.54	$1,141.62	$0.00	$2,041.16
101574	[Modifier] Quantity Premium - Concrete (4-6 CY) This line item can be used if the total cubic yardage of structural concrete falls within 4-6 cubic yards. It Can be applied cumulatively to applicable line items. No premium for INFILL line items	LS	$449.78	$1,141.62	$0.00	$1,591.40
101575	[Modifier] Integral Color Concrete Includes truck wash out	CY	$0.00	$13.70	$0.00	$13.70
101576	[Modifier] Non-Chloride Concrete Accelerator – Up to 1% by Weight	CY	$0.00	$10.51	$0.00	$10.51
101577	[Modifier] Non-Chloride Concrete Accelerator – 2% by Weight	CY	$0.00	$21.00	$0.00	$21.00
101578	[Modifier] Non-Chloride Concrete Accelerator – 3% by Weight	CY	$0.00	$31.51	$0.00	$31.51
101579	[Modifier] Concrete Retarder – Up to 2.5 OZ / CWT (Fluid Ounces per 100 Pounds of Cement)	CY	$0.00	$7.22	$0.00	$7.22
101580	[Modifier] Mid-Range Concrete Water Reducer	CY	$0.00	$6.56	$0.00	$6.56
101581	[Modifier] High-Range Concrete Water Reducer	CY	$0.00	$10.51	$0.00	$10.51
101582	[Modifier] Cold Weather Concrete Curing Blankets R-Value up to 2.8. Includes installation and removal	SF	$0.58	$1.15	$0.00	$1.73
	03-35-00 Concrete Finishing					
	03-35-23 Exposed Aggregate Concrete Finishing					
101583	Concrete Finish - Exposed Aggregate	SF	$2.39	$0.48	$0.00	$2.87
	03-35-29 Tooled Concrete Finishing					
101584	Concrete Sawcut Control Joint	LF	$1.24	$0.41	$0.00	$1.65
101585	Concrete Broom Finish or Equal - Slab on Grade	SF	$1.00	$0.00	$0.00	$1.00
101586	Concrete Broom Finish or Equal - Elevated Slab	SF	$1.00	$0.00	$0.00	$1.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101587	Concrete Broom Finish or Equal - Roof Slab	SF	$1.00	$0.00	$0.00	$1.00
101588	Concrete Broom Finish or Equal - Metal Pan Stair	SF	$1.00	$0.00	$0.00	$1.00
101589	Concrete Smooth Trowel Finish or Equal - Slab on Grade	SF	$1.45	$0.00	$0.00	$1.45
101590	Concrete Smooth Trowel Finish or Equal - Elevated Slab	SF	$1.45	$0.00	$0.00	$1.45
101591	Concrete Smooth Trowel Finish or Equal - Roof Slab	SF	$1.45	$0.00	$0.00	$1.45
101592	Concrete Smooth Trowel Finish or Equal - Metal Pan Stair	SF	$1.45	$0.00	$0.00	$1.45
101593	Concrete Finish - Rubbing	SF	$2.10	$0.21	$0.00	$2.31
101594	Concrete Finish - Slip Resistant Treatment Broadcast metallic abrasive particles added to concrete finish.	SF	$1.05	$1.15	$0.00	$2.20
101595	Concrete Finish - Glass Aggregate Broadcast glass aggregate added to concrete finish.	SF	$1.21	$2.36	$0.00	$3.57
101596	Concrete Finish - Salt	SF	$1.21	$0.85	$0.00	$2.06
101597	Concrete Finish - Stained (1 Color) Shake On and Trowel In Includes follow up seal coat.	SF	$2.17	$1.43	$0.00	$3.60
101598	Concrete Finish - Stained (2 Color) Shake On and Trowel In Includes follow up seal coat.	SF	$2.71	$2.28	$0.00	$4.99
	03-35-33 Stamped Concrete Finishing					
101599	Stamped Concrete Finish Includes follow up seal coat	SF	$3.62	$2.28	$0.00	$5.90
101600	Stamped Concrete Finish – Shake On Color Includes follow up seal coat	SF	$4.35	$3.43	$0.00	$7.78
	03-35-43 Polished Concrete Finishing					
101601	Polished Concrete Finish Includes grinding, edging, densifiers, and cleaning. Cost includes two passes	SF	$4.50	$2.28	$0.00	$6.78
101602	Polished Concrete Finish With Color Includes grinding, edging, densifiers, and cleaning. Cost includes two passes	SF	$5.39	$3.43	$0.00	$8.82
101603	[Modifier] For Greater Than Two Passes	SF	$1.58	$0.28	$0.00	$1.86
	03-35-46 Concrete Topical Treatments					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101604	Concrete Sealer Penetrating water-based silane concrete sealer	SF	$0.30	$0.21	$0.00	$0.51
101605	[Modifier] For Waterproofing Admixture Includes both hydrostatic and non-hydrostatic applications	CY	$0.00	$85.62	$0.00	$85.62

03-37-00 Specialty Placed Concrete

03-37-00 Specialty Placed Concrete

101606	Gunite / Shotcrete with Fiber-1" thick	SF	$2.09	$0.89	$0.00	$2.98
101607	Gunite / Shotcrete with Fiber-2" thick	SF	$4.08	$1.73	$0.00	$5.81
101608	Gunite / Shotcrete with Fiber-3" thick	SF	$5.03	$2.12	$0.00	$7.15
101609	Gunite / Shotcrete with Fiber-4" thick	SF	$5.97	$2.52	$0.00	$8.49
101610	Gunite / Shotcrete with Welded Wire Fabric (W.W.F) Mesh-1" thick	SF	$2.58	$1.40	$0.00	$3.98
101611	Gunite / Shotcrete with Welded Wire Fabric (W.W.F) Mesh-2" thick	SF	$4.44	$2.41	$0.00	$6.85
101612	Gunite / Shotcrete with Welded Wire Fabric (W.W.F) Mesh-3" thick	SF	$5.31	$2.89	$0.00	$8.20
101613	Gunite / Shotcrete with Welded Wire Fabric (W.W.F) Mesh-4" thick	SF	$6.20	$3.36	$0.00	$9.56
101614	Gunite / Shotcrete with Welded Wire Fabric (W.W.F) Mesh-6" thick	SF	$9.49	$5.24	$0.00	$14.73
101615	Gunite / Shotcrete with Rebar-1" thick	SF	$3.15	$1.71	$0.00	$4.86
101616	Gunite / Shotcrete with Rebar-2" thick	SF	$5.00	$2.73	$0.00	$7.73
101617	Gunite / Shotcrete with Rebar-3" thick	SF	$5.89	$3.19	$0.00	$9.08
101618	Gunite / Shotcrete with Rebar-4" thick	SF	$6.76	$3.68	$0.00	$10.44
101619	[Modifier] Small Quantity of Gunite / Shotcrete <200 SF	SF	$5.43	$0.00	$0.00	$5.43

03-39-00 Concrete Curing

Protections from excess water, stains and damage by use of film forming or penetrating curing compounds and temporary cover. Includes wet curing

03-39-00 Concrete Curing

Protections from excess water, stains and damage by use of film forming or penetrating curing compounds and temporary cover. Includes wet curing

101620	Cure and Protect Concrete	SF	$0.28	$0.17	$0.00	$0.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101621	Cure and Protect Conc To Stairs	SF	$0.44	$0.39	$0.00	$0.83

03-40-00 Precast Concrete

03-41-00 Precast Structural Concrete

Shop fabricated concrete components, reinforcing to suit requirements. Includes fabricator engineering and compliance certification. Items in this section are Pre-Stressed or Post Tensioned unless noted otherwise. Includes delivery, unload at site, labor to set and bracing. Crane to be selected from Division 1

03-41-00 Precast Structural Concrete

Shop fabricated concrete components, reinforcing to suit requirements. Includes fabricator engineering and compliance certification. Items in this section are Pre-Stressed or Post Tensioned unless noted otherwise. Includes delivery, unload at site, labor to set and bracing. Crane to be selected from Division 1

101622	Precast Floor Beams	LF	$53.46	$128.12	$0.00	$181.58
101623	Precast Roof Beams	LF	$53.46	$128.12	$0.00	$181.58
101624	Precast Concrete Floor Plank 4"	SF	$11.71	$6.39	$0.00	$18.10
101625	Precast Concrete Floor Plank 6"	SF	$12.40	$8.00	$0.00	$20.40
101626	Precast Concrete Floor Plank 8"	SF	$12.40	$9.59	$0.00	$21.99
101627	Precast Concrete Floor Plank 10"	SF	$16.19	$8.00	$0.00	$24.19
101628	Precast Concrete Floor Plank 12"	SF	$16.19	$14.38	$0.00	$30.57
101629	Precast Concrete Roof Plank 4"	SF	$11.71	$6.39	$0.00	$18.10
101630	Precast Concrete Roof Plank 6"	SF	$12.40	$8.00	$0.00	$20.40
101631	Precast Concrete Roof Plank 8"	SF	$12.40	$9.59	$0.00	$21.99
101632	Precast Concrete Roof Plank 10"	SF	$16.19	$8.00	$0.00	$24.19
101633	Precast Concrete Roof Plank 12"	SF	$16.19	$14.38	$0.00	$30.57
101634	Precast Foundation Wall System Advanced Concrete Systems/XI+; Superior Wall Systems or equal	SF	$0.84	$18.07	$1.15	$20.06
101635	Precast Columns	LF	$45.67	$184.95	$0.00	$230.62
101636	Precast Structural Wall Panel	SF	$20.55	$48.41	$0.00	$68.96
101637	Precast Seating Riser and Tread (LF) Precast "L" shaped tread and riser. Tread = 35", Riser = 17", Thickness = 6".	LF	$22.64	$174.67	$0.00	$197.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101638	Precast Lintel	LF	$13.04	$44.52	$0.00	$57.56
101639	Precast Double-T Floor Beams	LF	$8.22	$93.61	$0.00	$101.83
101640	Precast Inverted-T Floor Beams	LF	$10.96	$131.29	$0.00	$142.25
101641	Precast L-Shaped Floor Beams	LF	$10.96	$114.16	$0.00	$125.12
101642	Precast Rectangular Floor Beams	LF	$9.81	$154.12	$0.00	$163.93
101643	Precast T-Shaped Floor Beams	LF	$9.81	$256.87	$0.00	$266.68
101644	Precast Double-T Roof Beams	LF	$8.22	$93.61	$0.00	$101.83
101645	Precast Inverted-T Roof Beams	LF	$10.96	$131.29	$0.00	$142.25
101646	Precast L-Shaped Roof Beams	LF	$10.96	$114.16	$0.00	$125.12
101647	Precast Rectangular Roof Beams	LF	$9.81	$154.12	$0.00	$163.93
101648	Precast T-Shaped Roof Beams	LF	$9.81	$256.87	$0.00	$266.68
101649	Metal Edge Conc Floor Plank	SF	$9.25	$7.77	$0.00	$17.02
101650	Metal Edge Conc Roof Plank	SF	$9.25	$7.77	$0.00	$17.02

03-45-00 Precast Architectural Concrete

Shop fabricated concrete components with integral color, smooth face, and reinforcing to suit requirements. Includes fabricator engineering and compliance certification

03-45-00 Precast Architectural Concrete

Shop fabricated concrete components with integral color, smooth face, and reinforcing to suit requirements. Includes fabricator engineering and compliance certification

101651	Precast Wall Panel w/ 2" Insulation 10" Precast sandwich panel (4" Precast, 2" Rigid Insulation, 4" Precast) - Smooth face	SF	$22.24	$44.63	$0.00	$66.87
101652	Precast Wall Panel 6" Architectural precast wall panel - Smooth face	SF	$20.55	$42.70	$0.00	$63.25
101653	Precast Wall Panel High Articulation 6" Architectural precast wall panel - Smooth face	SF	$22.24	$68.01	$0.00	$90.25
101654	Precast Wall Panel Interior 6" Architectural precast wall panel - Smooth face	SF	$20.55	$42.70	$0.00	$63.25
101655	Precast Concrete Banding - Up To 9" Wide x 16" High Includes mortor setting bed	LF	$0.82	$116.60	$0.00	$117.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101656	Precast Sill	LF	$13.04	$44.52	$0.00	$57.56
101657	Precast Header	LF	$13.04	$44.52	$0.00	$57.56
101658	Precast Corbel	EA	$242.73	$456.65	$0.00	$699.38
101659	Precast Column Cap Or Base	EA	$242.73	$599.35	$0.00	$842.08
101660	Precast Railing Includes top rail, bottom rail, and balusters	LF	$141.82	$513.72	$0.00	$655.54
101661	Precast Cap at Site Wall - Up to 2' Wide	LF	$13.03	$44.52	$0.00	$57.55
101662	Precast Splash Block	EA	$9.11	$52.51	$0.00	$61.62
101663	[Modifier] For Stainless Steel Clips	SF	$0.00	$1.95	$0.00	$1.95
101664	[Modifier] For Exposed Face Textures / Reveals	SF	$0.00	$5.70	$0.00	$5.70
101665	Infill Precast Wall Panel (< Or = 10 SF) Includes labor material and small tools for infilling a precast wall panel. Includes matching depth and finish, all anchors and supports	EA	$1,965.66	$856.21	$0.00	$2,821.87
101666	Infill Precast Wall Panel (11-25 SF) Includes labor material and small tools for infilling a precast wall panel. Includes matching depth and finish, all anchors and supports	EA	$2,751.92	$1,198.70	$0.00	$3,950.62
101667	Infill Precast Wall Panel (26-50 SF) Includes labor material and small tools for infilling a precast wall panel. Includes matching depth and finish, all anchors and supports	EA	$3,931.30	$1,712.43	$0.00	$5,643.73
101668	Infill Precast Wall Panel (51-100 SF) Includes labor material and small tools for infilling a precast wall panel. Includes matching depth and finish, all anchors and supports	EA	$5,896.98	$2,568.64	$0.00	$8,465.62
101669	Infill Precast Wall Panel (101-300 SF) Includes labor material and small tools for infilling a precast wall panel. Includes matching depth and finish, all anchors and supports. For areas > 300 SF select the individual line items	SF	$55.04	$23.98	$0.00	$79.02
	03-47-00 Site-Cast Concrete					
	03-47-13 Tilt-Up Concrete					
101670	Concrete Tilt-Up	SF	$20.22	$30.83	$0.00	$51.05
	03-49-00 Glass-Fiber-Reinforced Concrete					
	03-49-00 Glass-Fiber-Reinforced Concrete					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101671	Glass Fiber Reinforced Concrete (GFRC)	SF	$6.08	$18.66	$0.00	$24.74
101672	Glass Fiber Reinforced Concrete (GFRC) Banding	LF	$10.86	$25.68	$0.00	$36.54
101673	Glass Fiber Reinforced Concrete (GFRC) Coping	LF	$10.86	$25.68	$0.00	$36.54
101674	Glass Fiber Reinforced Concrete (GFRC) Sill	LF	$10.86	$25.68	$0.00	$36.54
101675	Glass Fiber Reinforced Concrete (GFRC) Header	LF	$10.86	$25.68	$0.00	$36.54
101676	Glass Fiber Reinforced Concrete (GFRC) Corbel	EA	$181.01	$285.40	$0.00	$466.41
101677	Glass Fiber Reinforced Concrete (GFRC) Railing Includes top rail, bottom rail, and balusters	LF	$90.50	$285.40	$0.00	$375.90
101678	Glass Fiber Reinforced Concrete (GFRC) Column Cap Or Base	EA	$112.44	$456.65	$0.00	$569.09
101679	Glass Fiber Reinforced Concrete (GFRC) Cap at Site Wall	LF	$10.86	$25.68	$0.00	$36.54
03-50-00	**Cast Decks and Underlayment**					
03-54-00	**Cast Underlayment**					
03-54-00	**Cast Underlayment**					
101680	Self Leveling Underlayment – 1/8" Cementitious based	SF	$1.37	$2.19	$0.00	$3.56
101681	Thick Set Underlayment Cementitious based	SF	$4.11	$3.95	$0.00	$8.06
03-60-00	**Grouting**					
03-62-00	**Non-Shrink Grouting**					
03-62-00	**Non-Shrink Grouting**					
101682	Grout Steel Base Plates	EA	$112.45	$20.10	$0.00	$132.55
03-80-00	**Concrete Cutting and Boring**					
03-82-00	**Concrete Boring**					
03-82-13	**Concrete Core Drilling**					
101683	2" Diameter and Down Floor Core Drill - Up to 6" Deep (Each)	EA	$58.57	$18.87	$0.00	$77.44
101684	[Modifier] 2" Diameter and Down Floor Core Drill - Over 6" Deep (Per Inch) Per Drilled Inch Over 6" Deep	IN	$11.66	$3.75	$0.00	$15.41
101685	[Modifier] 2" Diameter and Down Wall Core Drill (Per Inch) Per Total Drilled Inch	IN	$2.91	$0.93	$0.00	$3.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101686	2-1/2" to 6" Diameter Floor Core Drill - Up to 6" Deep (Each)	EA	$99.31	$32.00	$0.00	$131.31
101687	[Modifier] 2-1/2" to 6" Diameter Floor Core Drill - Over 6" Deep (Per Inch) Per Drilled Inch Over 6" Deep	IN	$14.82	$4.78	$0.00	$19.60
101688	[Modifier] 2-1/2" to 6" Diameter Wall Core Drill (Per Inch) Per Total Drilled Inch	IN	$3.70	$1.19	$0.00	$4.89
101689	8" to 12" Diameter Floor Core Drill - Up to 6" Deep (Each)	EA	$156.62	$50.44	$0.00	$207.06
101690	[Modifier] 8" to 12" Diameter Floor Core Drill - Over 6" Deep (Per Inch) Per Drilled Inch Over 6" Deep	IN	$29.28	$9.42	$0.00	$38.70
101691	[Modifier] 8" to 12" Diameter Wall Core Drill (Per Inch) Per Total Drilled Inch	IN	$7.33	$2.36	$0.00	$9.69

04-00-00 Masonry

The entire Masonry section estimating base costs are for 60 Wall Square Feet (SF) or more of continuous work. Any masonry scope less than 60 SF is considered a masonry infill and will receive a lump sum cost per occurrence

04-00-00 Masonry

The entire Masonry section estimating base costs are for 60 Wall Square Feet (SF) or more of continuous work. Any masonry scope less than 60 SF is considered a masonry infill and will receive a lump sum cost per occurrence

04-01-00 Maintenance of Masonry

The Maintenance of Masonry section estimating base costs are for 200 Wall Square Feet or more. Any continuous cleaning scope that is less than 200 SF is considered spot cleaning and will receive a lump sum cost per occurrence. Includes all cleaning material including but not limited to acid-detergents, water, abrasives, and any application tools required. Includes required presoaking and cleanup.

04-01-20 Maintenance of Unit Masonry

101692	Masonry Infill (2 SF or Less) Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$971.01	$335.81	$0.00	$1,306.82
101693	Masonry Infill (2 SF or Less) – Historical Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$2,427.55	$671.62	$0.00	$3,099.17
101694	Masonry Infill (3 – 10 SF) Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$1,844.78	$671.62	$0.00	$2,516.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101695	Masonry Infill (3 – 10 SF) – Historical Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$4,611.95	$1,343.23	$0.00	$5,955.18
101696	Masonry Infill (11 – 30 SF) Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$2,815.23	$1,007.43	$0.00	$3,822.66
101697	Masonry Infill (11 – 30 SF) – Historical Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$7,038.08	$2,014.85	$0.00	$9,052.93
101698	Masonry Infill (31 – 59 SF) Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$3,690.75	$1,410.40	$0.00	$5,101.15
101699	Masonry Infill (31 – 59 SF) – Historical Includes all masonry materials used for infilling or replacement including but not limited to clay, concrete, glass, adobe, stone, refractory or manufactured	EA	$9,226.89	$2,820.79	$0.00	$12,047.68
101700	Spot Masonry Cleaning (< 50 SF)	EA	$170.21	$55.96	$0.00	$226.17
101701	Spot Masonry Cleaning (< 50 SF) – Historical	EA	$405.05	$111.94	$0.00	$516.99
101702	Spot Masonry Cleaning (50 – 100 SF)	EA	$285.19	$89.55	$0.00	$374.74
101703	Spot Masonry Cleaning (50 – 100 SF) – Historical	EA	$696.61	$179.10	$0.00	$875.71
101704	Spot Masonry Cleaning (101 – 199 SF) For quantities greater than or equal to 200 SF use the individual line items	EA	$439.04	$111.94	$0.00	$550.98
101705	Spot Masonry Cleaning (101 – 199 SF) – Historical For quantities greater than or equal to 200 SF use the individual line items	EA	$1,079.91	$223.87	$0.00	$1,303.78
101706	Abrasive Sand Blasting	SF	$1.70	$0.56	$0.00	$2.26
101707	Abrasive Sand Blasting – Historical	SF	$4.07	$1.12	$0.00	$5.19
101708	Acid – Detergent Clean Brick	SF	$1.12	$0.45	$0.00	$1.57
101709	Acid – Detergent Clean Brick – Historical	SF	$2.74	$0.89	$0.00	$3.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101710	Pressure Washing Brick	SF	$0.74	$0.17	$0.00	$0.91
101711	Pressure Washing Brick – Historical	SF	$1.92	$0.34	$0.00	$2.26
101712	Brick Repointing Includes removal of existing joint material	SF	$26.04	$6.31	$0.00	$32.35
101713	Brick Repointing – Historical Includes removal of existing joint material	SF	$65.10	$12.63	$0.00	$77.73
101714	Concrete Masonry Unit (CMU Block) Repointing Includes removal of existing joint material	SF	$11.72	$6.31	$0.00	$18.03
101715	Concrete Masonry Unit (CMU Block) Repointing – Historical Includes removal of existing joint material	SF	$29.30	$12.63	$0.00	$41.93
101716	Stone Repointing Includes removal of existing joint material	SF	$34.50	$4.00	$0.00	$38.50
101717	Stone Repointing – Historical Includes removal of existing joint material	SF	$86.25	$7.98	$0.00	$94.23
101718	Remove and Replace Brick Includes removal and replacement of brick including all joint	EA	$39.30	$2.24	$0.00	$41.54
	04-05-00 Common Work Results for Masonry					
	04-05-23 Masonry Accessories					
101719	Copper Flashing	LF	$7.31	$10.85	$0.00	$18.16
101720	Copper Flashing – Historical	LF	$18.30	$21.69	$0.00	$39.99
101721	Aluminum Flashing	LF	$5.40	$7.85	$0.00	$13.25
101722	Aluminum Flashing – Historical	LF	$13.51	$15.71	$0.00	$29.22
101723	Stainless Steel Flashing	LF	$5.39	$10.62	$0.00	$16.01
101724	Stainless Steel Flashing – Historical	LF	$13.49	$21.22	$0.00	$34.71
101725	Rubberized Asphalt and Butyl Rubber Flashing	LF	$3.65	$4.25	$0.00	$7.90
101726	Rubberized Asphalt and Butyl Rubber Flashing – Historical	LF	$9.11	$8.51	$0.00	$17.62
101727	Elastomeric Thermo Plastic Flashing	LF	$3.89	$5.85	$0.00	$9.74
101728	Elastomeric Thermo Plastic Flashing – Historical	LF	$9.71	$11.70	$0.00	$21.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101729	Lead Coated Copper Flashing	LF	$4.66	$14.15	$0.00	$18.81
101730	Lead Coated Copper Flashing – Historical	LF	$11.65	$28.32	$0.00	$39.97
101731	Masonry Anchor- Expansion – Historical Hilti type stainless steel masonry expansion anchor or equal	EA	$19.69	$11.17	$0.00	$30.86
101732	Brick Stabilization Retro Fit Halfen Helifix system or equal. Includes grinding out joint, install anchor and grout / adhesive joint replacement	SF	$17.00	$13.99	$0.00	$30.99
101733	Brick Stabilization Retro Fit – Historical Halfen Helifix system or equal. Includes grinding out joint, install anchor and grout / adhesive joint replacement	SF	$42.48	$27.99	$0.00	$70.47
101734	1/4" Wedge Anchor - Up to 2-1/2" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$11.81	$1.63	$0.00	$13.44
101735	3/8" Wedge Anchor - Up to 3" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$11.81	$2.33	$0.00	$14.14
101736	1/2" Wedge Anchor - Up to 3-3/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$4.14	$0.00	$21.85
101737	5/8" Wedge Anchor - Up to 4-1/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$6.59	$0.00	$24.30
101738	3/4" Wedge Anchor - Up to 4-3/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$11.24	$0.00	$28.95
101739	1/4" Wedge Anchor - 304 Stainless Steel, Up to 2-1/2" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$11.81	$5.53	$0.00	$17.34
101740	3/8" Wedge Anchor - 304 Stainless Steel, Up to 3" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$11.81	$11.12	$0.00	$22.93
101741	1/2" Wedge Anchor - 304 Stainless Steel, Up to 3-3/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$22.25	$0.00	$39.96
101742	5/8" Wedge Anchor - 304 Stainless Steel, Up to 4-1/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$37.46	$0.00	$55.17
101743	3/4" Wedge Anchor - 304 Stainless Steel, Up to 4-3/4" Length Hilti Kwik Bolt TZ2 wedge anchor or equal	EA	$17.71	$62.41	$0.00	$80.12
101744	1/4" Sleeve Anchor - Up to 2-1/2" Length Hilti HLC-H sleeve anchor or equal	EA	$11.81	$2.86	$0.00	$14.67
101745	3/8" Sleeve Anchor - Up to 3" Length Hilti HLC-H sleeve anchor or equal	EA	$11.81	$4.61	$0.00	$16.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101746	1/2" Sleeve Anchor - Up to 3-3/4" Length Hilti HLC-H sleeve anchor or equal	EA	$17.71	$6.58	$0.00	$24.29
101747	5/8" Sleeve Anchor - Up to 4-1/4" Length Hilti HLC-H sleeve anchor or equal	EA	$17.71	$8.78	$0.00	$26.49
101748	3/4" Sleeve Anchor - Up to 4-3/4" Length Hilti HLC-H sleeve anchor or equal	EA	$17.71	$12.04	$0.00	$29.75
101749	1/4" Drop-In Anchor Hilti HDI+/HDI drop in anchor or equal	EA	$11.81	$2.23	$0.00	$14.04
101750	5/16" Drop-In Anchor Hilti HDI+/HDI drop in anchor or equal	EA	$11.81	$3.02	$0.00	$14.83
101751	1/2" Drop-In Anchor Hilti HDI+/HDI drop in anchor or equal	EA	$17.71	$5.33	$0.00	$23.04
101752	3/4" Drop-In Anchor Hilti HDI+/HDI drop in anchor or equal	EA	$17.71	$9.68	$0.00	$27.39

04-20-00 Unit Masonry

Pricing includes all masonry joint reinforcement, including but not limited to horizontal ladder reinforcement, anchors, and supports. Includes all mortar and grout with applicable admixtures, weeps, cavity vents, bond breaker strips, masonry trims, reveals, joint tooling, and cleaning.

04-21-00 Clay Unit Masonry

04-21-13 Brick Masonry

Standard size modular brick = 2-1/4" x 3-5/8" x 7-5/8". Standard brick patterns include Running Bond, Common Bond, Flemish Bond, English Bond, and Stacked Bond.

101753	Standard Brick	SF	$14.56	$16.79	$0.00	$31.35
101754	Standard Brick – Historical	SF	$36.41	$33.58	$0.00	$69.99
101755	Standard Brick Column and Chimney – Veneer	SF	$32.82	$14.65	$0.00	$47.47
101756	Standard Brick Column and Chimney – Veneer – Historical	SF	$82.04	$29.30	$0.00	$111.34
101757	Brick Toothing Toothing linear footage is based up a straight vertical line of work. Cost includes cutting and reinstalling of masonry units along the lines work	LF	$33.98	$13.99	$0.00	$47.97
101758	Brick Toothing – Historical Toothing linear footage is based up a straight vertical line of work. Cost includes cutting and reinstalling of masonry units along the lines work	LF	$84.96	$27.99	$0.00	$112.95
101759	[Modifier] Non Standard Brick Can be used for a significant variance from the 2-1/4" x 3-5/8" x 7-5/8 Standard Brick Sizing	SF	$0.00	$5.03	$0.00	$5.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101760	[Modifier] Non Standard Brick – Historical Can be used for a significant variance from the 2-1/4" x 3-5/8" x 7-5/8 Standard Brick Sizing	SF	$0.00	$10.07	$0.00	$10.07
101761	[Modifier] Non Standard Brick Patterns Can be used for a significant variance from the Standard Brick Patterns - Running Bond, Common Bond, Flemish Bond, English Bond, and Stacked Bond	SF	$4.73	$0.00	$0.00	$4.73
101762	[Modifier] Non Standard Brick Patterns – Historical Can be used for a significant variance from the Standard Brick Patterns - Running Bond, Common Bond, Flemish Bond, English Bond, and Stacked Bond	SF	$11.82	$0.00	$0.00	$11.82
	04-21-16 Ceramic Glazed Clay Masonry					
101763	Structural Glazed-Face Tile	SF	$31.07	$16.79	$0.00	$47.86
101764	Structural Glazed-Face Tile – Historical	SF	$77.67	$33.58	$0.00	$111.25
101765	Structural Clay Tile	SF	$29.13	$13.99	$0.00	$43.12
101766	Structural Clay Tile – Historical	SF	$72.82	$27.99	$0.00	$100.81
	04-21-29 Terra Cotta Masonry					
101767	Terra Cotta Masonry	SF	$24.28	$44.77	$0.00	$69.05
101768	Terra Cotta Masonry – Historical	SF	$60.69	$89.55	$0.00	$150.24
101769	Terra Cotta Rain Screen and Aluminum Track Sub Framing Terra Cotta thickness up to 4"	SF	$24.28	$44.77	$0.00	$69.05
101770	Terra Cotta Rain Screen and Aluminum Track Sub Framing – Historical Terra Cotta thickness up to 4"	SF	$60.69	$89.55	$0.00	$150.24
101771	Terra Cotta Rain Screen Greater Than 4" and Aluminum Track Sub Framing Terra Cotta thickness up to 4"	SF	$24.28	$67.17	$0.00	$91.45
101772	Terra Cotta Rain Screen Greater Than 4" and Aluminum Track Sub Framing – Historical Terra Cotta thickness up to 4"	SF	$60.69	$134.32	$0.00	$195.01
	04-22-00 Concrete Unit Masonry					
	04-22-00 Concrete Unit Masonry					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101773	4" Concrete Masonry Unit (CMU Block) Partition	SF	$13.59	$9.42	$0.00	$23.01
101774	4" Concrete Masonry Unit (CMU Block) Partition – Historical	SF	$33.98	$18.83	$0.00	$52.81
101775	4" Concrete Masonry Unit (CMU Block) Back-Up	SF	$10.68	$9.42	$0.00	$20.10
101776	4" Concrete Masonry Unit (CMU Block) Back-Up – Historical	SF	$26.70	$18.83	$0.00	$45.53
101777	4" Concrete Masonry Unit (CMU Block) Foundation Wall	SF	$12.52	$9.70	$0.00	$22.22
101778	4" Concrete Masonry Unit (CMU Block) Foundation Wall – Historical	SF	$31.31	$19.41	$0.00	$50.72
101779	4" Concrete Masonry Unit (CMU Block) Exposed Exterior	SF	$12.52	$9.70	$0.00	$22.22
101780	4" Concrete Masonry Unit (CMU Block) Exposed Exterior – Historical	SF	$31.31	$19.41	$0.00	$50.72
101781	[Modifier] -4" Concrete Masonry Unit (CMU Block) Bond Beam Grouting Includes grouting and reinforcing	LF	$10.60	$7.42	$0.00	$18.02
101782	[Modifier] -4" Concrete Masonry Unit (CMU Block) Bond Beam Grouting – Historical Includes grouting and reinforcing	LF	$26.51	$14.84	$0.00	$41.35
101783	[Modifier] -Grout Solid 4" Concrete Masonry Unit (CMU Block) Includes grouting and reinforcing	SF	$3.89	$0.57	$0.00	$4.46
101784	[Modifier] -Grout Solid 4" Concrete Masonry Unit (CMU Block) – Historical Includes grouting and reinforcing	SF	$9.71	$1.15	$0.00	$10.86
101785	6" Concrete Masonry Unit (CMU Block) Partition	SF	$14.49	$10.85	$0.00	$25.34
101786	6" Concrete Masonry Unit (CMU Block) Partition – Historical	SF	$36.21	$21.69	$0.00	$57.90
101787	6"Concrete Masonry Unit (CMU Block) Back-Up	SF	$11.57	$9.70	$0.00	$21.27
101788	6"Concrete Masonry Unit (CMU Block) Back-Up – Historical	SF	$28.92	$19.41	$0.00	$48.33
101789	6" Concrete Masonry Unit (CMU Block) Foundation Wall	SF	$13.03	$9.70	$0.00	$22.73
101790	6" Concrete Masonry Unit (CMU Block) Foundation Wall – Historical	SF	$32.58	$19.41	$0.00	$51.99
101791	6" Concrete Masonry Unit (CMU Block) Exposed Exterior	SF	$13.03	$9.70	$0.00	$22.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101792	6" Concrete Masonry Unit (CMU Block) Exposed Exterior – Historical	SF	$32.58	$19.41	$0.00	$51.99
101793	[Modifier] -6" Concrete Masonry Unit (CMU Block) Bond Beam Grouting Includes grouting and reinforcing	LF	$11.09	$8.56	$0.00	$19.65
101794	[Modifier] -6" Concrete Masonry Unit (CMU Block) Bond Beam Grouting – Historical Includes grouting and reinforcing	LF	$27.72	$17.13	$0.00	$44.85
101795	[Modifier] -Grout Solid 6" Concrete Masonry Unit (CMU Block) Includes grouting and reinforcing	SF	$4.13	$1.15	$0.00	$5.28
101796	[Modifier] -Grout Solid 6" Concrete Masonry Unit (CMU Block) – Historical Includes grouting and reinforcing	SF	$10.32	$2.28	$0.00	$12.60
101797	8" Concrete Masonry Unit (CMU Block) Partition	SF	$14.98	$12.56	$0.00	$27.54
101798	8" Concrete Masonry Unit (CMU Block) Partition – Historical	SF	$37.46	$25.11	$0.00	$62.57
101799	8"Concrete Masonry Unit (CMU Block) Back-Up	SF	$12.08	$10.28	$0.00	$22.36
101800	8"Concrete Masonry Unit (CMU Block) Back-Up – Historical	SF	$30.18	$20.55	$0.00	$50.73
101801	8" Concrete Masonry Unit (CMU Block) Foundation Wall	SF	$13.52	$10.28	$0.00	$23.80
101802	8" Concrete Masonry Unit (CMU Block) Foundation Wall – Historical	SF	$33.81	$20.55	$0.00	$54.36
101803	8" Concrete Masonry Unit (CMU Block) Exposed Exterior	SF	$13.52	$10.28	$0.00	$23.80
101804	8" Concrete Masonry Unit (CMU Block) Exposed Exterior – Historical	SF	$33.81	$20.55	$0.00	$54.36
101805	[Modifier] -8" Concrete Masonry Unit (CMU Block) Bond Beam Grouting Includes grouting and reinforcing	LF	$11.58	$10.28	$0.00	$21.86
101806	[Modifier] -8"Concrete Masonry Unit (CMU Block) Bond Beam Grouting – Historical Includes grouting and reinforcing	LF	$28.96	$20.55	$0.00	$49.51
101807	[Modifier] -Grout Solid 8" Concrete Masonry Unit (CMU Block) Includes grouting and reinforcing	SF	$4.37	$1.71	$0.00	$6.08
101808	[Modifier] -Grout Solid 8" Concrete Masonry Unit (CMU Block) – Historical Includes grouting and reinforcing	SF	$10.92	$3.43	$0.00	$14.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101809	10" Concrete Masonry Unit (CMU Block) Partition	SF	$15.49	$10.68	$0.00	$26.17
101810	10" Concrete Masonry Unit (CMU Block) Partition – Historical	SF	$38.72	$21.34	$0.00	$60.06
101811	10"Concrete Masonry Unit (CMU Block) Back-Up	SF	$12.57	$10.68	$0.00	$23.25
101812	10"Concrete Masonry Unit (CMU Block) Back-Up – Historical	SF	$31.44	$21.34	$0.00	$52.78
101813	10" Concrete Masonry Unit (CMU Block) Foundation Wall	SF	$14.03	$10.68	$0.00	$24.71
101814	10" Concrete Masonry Unit (CMU Block) Foundation Wall – Historical	SF	$35.08	$21.34	$0.00	$56.42
101815	10" Concrete Masonry Unit (CMU Block) Exposed Exterior	SF	$14.03	$10.68	$0.00	$24.71
101816	10" Concrete Masonry Unit (CMU Block) Exposed Exterior – Historical	SF	$35.08	$21.34	$0.00	$56.42
101817	[Modifier] -10" Concrete Masonry Unit (CMU Block) Bond Beam Grouting Includes grouting and reinforcing	LF	$11.17	$7.64	$0.00	$18.81
101818	[Modifier] -10" Concrete Masonry Unit (CMU Block) Bond Beam Grouting – Historical Includes grouting and reinforcing	LF	$27.91	$15.30	$0.00	$43.21
101819	[Modifier] -Grout Solid 10" Concrete Masonry Unit (CMU Block) Includes grouting and reinforcing	SF	$4.61	$2.28	$0.00	$6.89
101820	[Modifier] -Grout Solid 10" Concrete Masonry Unit (CMU Block) – Historical Includes grouting and reinforcing	SF	$11.53	$4.57	$0.00	$16.10
101821	12" Concrete Masonry Unit (CMU Block) Partition	SF	$16.00	$11.13	$0.00	$27.13
101822	12" Concrete Masonry Unit (CMU Block) Partition – Historical	SF	$39.97	$22.26	$0.00	$62.23
101823	12" Concrete Masonry Unit (CMU Block) Back-Up	SF	$13.08	$11.13	$0.00	$24.21
101824	12" Concrete Masonry Unit (CMU Block) Back-Up – Historical	SF	$32.69	$22.26	$0.00	$54.95
101825	12" Concrete Masonry Unit (CMU Block) Foundation Wall	SF	$14.54	$11.13	$0.00	$25.67
101826	12"Concrete Masonry Unit (CMU Block) Foundation Wall – Historical	SF	$36.34	$22.26	$0.00	$58.60
101827	12" Concrete Masonry Unit (CMU Block) Exposed Exterior	SF	$14.54	$11.13	$0.00	$25.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101828	12" Concrete Masonry Unit (CMU Block) Exposed Exterior – Historical	SF	$36.34	$22.26	$0.00	$58.60
101829	[Modifier] for 12" Concrete Masonry Unit (CMU Block) Bond Beam Includes grouting and reinforcing	LF	$11.65	$8.79	$0.00	$20.44
101830	[Modifier] for 12" Concrete Masonry Unit (CMU Block) Bond Beam – Historical Includes grouting and reinforcing	LF	$29.13	$17.58	$0.00	$46.71
101831	[Modifier] -Grout Solid 12" Concrete Masonry Unit (CMU Block) Includes grouting and reinforcing	SF	$4.85	$2.85	$0.00	$7.70
101832	[Modifier] -Grout Solid 12" Concrete Masonry Unit (CMU Block) – Historical Includes grouting and reinforcing	SF	$12.13	$5.70	$0.00	$17.83
101833	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 1 Hour Rating	SF	$0.48	$1.15	$0.00	$1.63
101834	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 1 Hour Rating – Historical	SF	$1.22	$2.28	$0.00	$3.50
101835	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 2 Hour Rating	SF	$0.97	$2.28	$0.00	$3.25
101836	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 2 Hour Rating – Historical	SF	$2.43	$4.57	$0.00	$7.00
101837	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 3 Hour Rating	SF	$1.46	$3.43	$0.00	$4.89
101838	[Modifier] For Concrete Masonry Unit Assembly (CMU Block) 3 Hour Rating – Historical	SF	$3.65	$6.85	$0.00	$10.50
101839	[Modifier] for Concrete Masonry Unit Assembly (CMU Block) 4 Hour Rating	SF	$1.94	$5.70	$0.00	$7.64
101840	[Modifier] for Concrete Masonry Unit Assembly (CMU Block) 4 Hour Rating – Historical	SF	$4.85	$11.42	$0.00	$16.27
101841	[Modifier] for Concrete Masonry Unit Assembly (CMU Block) Light Weight Units	SF	$0.00	$5.70	$0.00	$5.70
101842	[Modifier] for Concrete Masonry Unit (CMU Block) Light Weight Units – Historical	SF	$0.00	$11.42	$0.00	$11.42
101843	[Modifier] For Glazed Concrete Masonry Unit Assembly (CMU Block)	SF	$1.46	$4.85	$0.00	$6.31
101844	[Modifier] For Glazed Concrete Masonry Unit Assembly (CMU Block) – Historical	SF	$3.65	$9.70	$0.00	$13.35
101845	[Modifier] For Ground Face Concrete Masonry Unit Assembly (CMU Block)	SF	$1.46	$4.74	$0.00	$6.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101846	[Modifier] For Ground Face Concrete Masonry Unit Assembly (CMU Block) – Historical	SF	$3.65	$9.48	$0.00	$13.13
101847	[Modifier] For Split Face Concrete Masonry Unit Assembly (CMU Block)	SF	$0.72	$1.43	$0.00	$2.15
101848	[Modifier] For Split Face Concrete Masonry Unit Assembly (CMU Block) – Historical	SF	$1.82	$2.85	$0.00	$4.67
101849	[Modifier] For Colored Concrete Masonry Unit Assembly (CMU Block) Regular Or Split Face	SF	$0.72	$2.28	$0.00	$3.00
101850	[Modifier] For Colored Concrete Masonry Unit Assembly (CMU Block) Regular Or Split Face – Historical	SF	$1.82	$4.57	$0.00	$6.39
101851	[Modifier] For Ribbed Face Sound Block	SF	$1.46	$4.47	$0.00	$5.93
101852	[Modifier] For Ribbed Face Sound Block – Historical	SF	$3.65	$8.96	$0.00	$12.61

04-23-00 Glass Unit Masonry

04-23-00 Glass Unit Masonry

101853	Glass Block Up To 12" x 12" x 4"	SF	$18.15	$27.15	$0.00	$45.30
101854	Glass Block Up To 12" x 12" x 4" – Historical	SF	$45.38	$54.31	$0.00	$99.69
101855	Glass Block Up To 8" x 8" x 4"	SF	$18.15	$26.06	$0.00	$44.21
101856	Glass Block Up To 8" x 8" x 4" – Historical	SF	$45.38	$52.14	$0.00	$97.52
101857	Glass Block Up To 6" x 8" x 4"	SF	$18.15	$24.98	$0.00	$43.13
101858	Glass Block Up To 6" x 8" x 4" – Historical	SF	$45.38	$49.95	$0.00	$95.33
101859	Glass Block Up To 4" x 8" x 4"	SF	$18.15	$23.89	$0.00	$42.04
101860	Glass Block Up To 4" x 8" x 4" – Historical	SF	$45.38	$47.78	$0.00	$93.16
101861	Glass Block Up To 6" x 6" x 4"	SF	$18.15	$22.81	$0.00	$40.96
101862	Glass Block Up To 6" x 6" x 4" – Historical	SF	$45.38	$45.61	$0.00	$90.99
101863	Glass Block Up To 4" x 4" x 4"	SF	$18.15	$21.72	$0.00	$39.87
101864	Glass Block Up To 4" x 4" x 4" – Historical	SF	$45.38	$43.45	$0.00	$88.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

04-40-00 Stone Assemblies

Pricing includes all masonry joint reinforcement, including but not limited to horizontal ladder reinforcement, anchors, and supports. Includes all mortar and grout with applicable admixtures along with all weeps, cavity vents, bond breaker strips, and masonry trims and reveals.

04-43-00 Stone Masonry

04-43-13 Stone Masonry Veneer

		Units	Labor	Material	Equipment	Total
101865	Remove and Reinstall Existing Masonry Coping Stone Caps / Seats - 32" long x 16" wide x 3" thick Includes removal of cap / clean bed / clean stone / reset in mortar bed - point up joints - clean stone	EA	$114.91	$1.62	$0.00	$116.53
101866	Stone Veneer-Ashlar Pat	SF	$48.55	$19.46	$0.00	$68.01
101867	Stone Veneer-Ashlar Pat – Historical	SF	$121.37	$38.90	$0.00	$160.27
101868	Granite Panel	SF	$24.62	$47.08	$0.00	$71.70
101869	Granite Panel – Historical	SF	$61.56	$94.14	$0.00	$155.70
101870	Exterior Limestone Panel	SF	$28.31	$23.67	$0.00	$51.98
101871	Exterior Limestone Panel – Historical	SF	$70.78	$47.35	$0.00	$118.13
101872	Interior Limestone Panel	SF	$28.31	$23.67	$0.00	$51.98
101873	Interior Limestone Panel – Historical	SF	$70.78	$47.35	$0.00	$118.13
101874	Stone Wall Panel The unit cost is represented as a blended average for the wall which would include the corners.	SF	$24.62	$53.79	$0.00	$78.41
101875	Stone Wall Panel – Historical The unit cost is represented as a blended average for the wall which would include the corners.	SF	$61.56	$107.59	$0.00	$169.15
101876	Manufactured Adhered Stone (Random Cobbles) With Drainage Mat Includes scrim, drainage matt and thick set mortar to set stone to substrate	SF	$29.30	$36.37	$0.00	$65.67
101877	Manufactured Adhered Stone (Random Cobbles) With Drainage Mat – Historical Includes scrim, drainage matt and thick set mortar to set stone to substrate	SF	$73.27	$72.76	$0.00	$146.03
101878	Manufactured Adhered Stone (Random Cobbles) No Drainage Mat Includes scrim, drainage matt and thick set mortar to set stone to substrate	SF	$27.84	$34.96	$0.00	$62.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101879	Manufactured Adhered Stone (Random Cobbles) No Drainage Mat – Historical Includes scrim, drainage matt and thick set mortar to set stone to substrate	SF	$69.60	$69.91	$0.00	$139.51
	04-43-16 Stone Fabrications					
101880	Stone Sills	LF	$29.13	$55.57	$0.00	$84.70
101881	Stone Sills – Historical	LF	$72.82	$111.15	$0.00	$183.97
101882	Stone Stairs	LF	$58.97	$116.39	$0.00	$175.36
101883	Stone Stairs – Historical	LF	$147.42	$232.79	$0.00	$380.21
101884	Stone Header	LF	$33.98	$61.13	$0.00	$95.11
101885	Stone Header – Historical	LF	$84.96	$122.27	$0.00	$207.23
101886	Stone Parapet	LF	$19.42	$38.90	$0.00	$58.32
101887	Stone Parapet – Historical	LF	$48.55	$77.81	$0.00	$126.36
101888	Stone Jamb	LF	$26.70	$38.90	$0.00	$65.60
101889	Stone Jamb – Historical	LF	$66.76	$77.81	$0.00	$144.57
101890	Stone Banding / Cornice up to 4" Built up combinations may be added cumulatively	LF	$34.04	$40.01	$0.00	$74.05
101891	Stone Banding / Cornice up to 4" – Historical Built up combinations may be added cumulatively	LF	$85.09	$80.03	$0.00	$165.12
101892	Stone Banding / Cornice up to 6" Built up combinations may be added cumulatively	LF	$37.82	$53.36	$0.00	$91.18
101893	Stone Banding / Cornice up to 6" – Historical Built up combinations may be added cumulatively	LF	$94.54	$106.70	$0.00	$201.24
101894	Stone Banding / Cornice up to 8" Built up combinations may be added cumulatively	LF	$42.55	$66.69	$0.00	$109.24
101895	Stone Banding / Cornice up to 8" – Historical Built up combinations may be added cumulatively	LF	$106.36	$133.38	$0.00	$239.74
101896	Stone Banding / Cornice up to 12" Built up combinations may be added cumulatively	LF	$56.73	$80.03	$0.00	$136.76
101897	Stone Banding / Cornice up to 12" – Historical Built up combinations may be added cumulatively	LF	$141.82	$160.05	$0.00	$301.87
101898	Cast Stone Sills	LF	$29.13	$34.25	$0.00	$63.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101899	Cast Stone Sills – Historical	LF	$72.82	$68.50	$0.00	$141.32
101900	Cast Stone Stairs	LF	$58.97	$71.73	$0.00	$130.70
101901	Cast Stone Stairs – Historical	LF	$147.44	$143.46	$0.00	$290.90
101902	Cast Stone Header	LF	$33.98	$37.68	$0.00	$71.66
101903	Cast Stone Header – Historical	LF	$84.96	$75.35	$0.00	$160.31
101904	Cast Stone Parapet	LF	$19.42	$23.98	$0.00	$43.40
101905	Cast Stone Parapet – Historical	LF	$48.55	$47.94	$0.00	$96.49
101906	Cast Stone Jamb	LF	$26.70	$23.98	$0.00	$50.68
101907	Cast Stone Jamb – Historical	LF	$66.76	$47.94	$0.00	$114.70
101908	Cast Stone Banding / Cornice up to 4" Built up combinations may be added cumulatively	LF	$34.04	$30.83	$0.00	$64.87
101909	Cast Stone Banding / Cornice up to 4" – Historical Built up combinations may be added cumulatively	LF	$85.09	$61.64	$0.00	$146.73
101910	Cast Stone Banding / Cornice up to 6" Built up combinations may be added cumulatively	LF	$37.82	$41.09	$0.00	$78.91
101911	Cast Stone Banding / Cornice up to 6" – Historical Built up combinations may be added cumulatively	LF	$94.54	$82.20	$0.00	$176.74
101912	Cast Stone Banding / Cornice up to 8" Built up combinations may be added cumulatively	LF	$42.55	$51.37	$0.00	$93.92
101913	Cast Stone Banding / Cornice up to 8" – Historical Built up combinations may be added cumulatively	LF	$106.36	$102.75	$0.00	$209.11
101914	Cast Stone Banding / Cornice up to 12" Built up combinations may be added cumulatively	LF	$56.73	$61.64	$0.00	$118.37
101915	Cast Stone Banding / Cornice up to 12" – Historical Built up combinations may be added cumulatively	LF	$141.82	$123.30	$0.00	$265.12

05-00-00 Metals

05-00-00 Metals

05-01-00 Maintenance of Metals

05-01-10 Maintenance of Structural Metal Framing

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101916	Surface Preparation For Corroded / Deteriorated Steel SFCA – Square foot contact areas incudes the total area which requires surface preparation of corroded steel due to extensive water damage or chlorine. Includes, but not limited to a combination of cutting, sandblasting, bead blasting, heating, etc. and structural repair. Cannot be used for standard surface preparation. Cost includes application of corrosion inhibiting sealant	SFCA	$29.35	$8.73	$0.00	$38.08
	05-05-00 Common Work Results for Metals					
	05-05-13 Shop-Applied Coatings for Metal					
101917	[Modifier] For Galvanized Steel Hot dipped galvanized	TON	$0.00	$893.50	$0.00	$893.50
101918	[Modifier] For Shop Primed Steel	TON	$0.00	$335.07	$0.00	$335.07
	05-05-23 Metal Fastenings					
101919	Spot Welding - Field Welding, Up to 1" Long, Less Than or Equal To 20	EA	$5.57	$0.37	$0.87	$6.81
101920	Spot Welding - Field Welding, Up to 1" Long, Greater Than 20	EA	$4.63	$0.32	$0.72	$5.67
101921	Steel Spatt Door Frame Repair Includes cutting out damaged area of jamb base install of new spat welded and primed	EA	$1,179.89	$735.64	$0.00	$1,915.53
101922	Fillet Welds - 1/4" Field Welding Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$2.64	$0.13	$0.41	$3.18
101923	Fillet Welds - 1/4" Field Welding Aluminum Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$3.05	$0.16	$0.47	$3.68
101924	Fillet Welds - 1/4" Field Welding Stainless Steel Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$3.31	$0.17	$0.51	$3.99
101925	Fillet Welds - 3/8" Field Welding Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$3.71	$0.24	$0.58	$4.53
101926	Fillet Welds - 3/8" Field Welding Aluminum Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$4.27	$0.28	$0.67	$5.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101927	Fillet Welds - 3/8" Field Welding Stainless Steel Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$4.63	$0.32	$0.72	$5.67
101928	Fillet Welds - 1/2" Field Welding Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$4.40	$0.32	$0.69	$5.41
101929	Fillet Welds - 1/2" Field Welding Aluminum Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$5.07	$0.35	$0.79	$6.21
101930	Fillet Welds - 1/2" Field Welding Stainless Steel Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$5.51	$0.39	$0.86	$6.76
101931	Fillet Welds - 3/4" Field Welding Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$7.06	$0.52	$1.10	$8.68
101932	Fillet Welds - 3/4" Field Welding Aluminum Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$8.12	$0.60	$1.26	$9.98
101933	Fillet Welds - 3/4" Field Welding Stainless Steel Includes tack welds for proper alignment, for use with vertical or horizontal welds. For use with stick, IG, TIG and flux core arc welding	IN	$8.82	$0.66	$1.38	$10.86

05-10-00 Structural Metal Framing

05-12-00 Structural Steel Framing

05-12-13 Architecturally-Exposed Structural Steel Framing

101934	[Modifier] For Architecturally – Exposed Structural Steel – Conventional Steel Wide flange, Angles, Plates, Channel,and Tees.	TON	$264.43	$111.68	$0.00	$376.11
101935	[Modifier] For Architecturally – Exposed Structural Steel – Unusual Shapes Tubes and Pipes	TON	$376.75	$614.28	$0.00	$991.03

05-12-23 Structural Steel for Buildings

Baseline pricing for Renovation structural steel is greater than or equal to two tons. Baseline pricing for New Construction structural steel is greater than or equal to twenty tons. Baseline structural steel pricing is for unprimed steel. Cost includes required steel to steel standard bolted and welded connections, bracing, base plates, top plates, side plates, stiffener plates, and anchor bolts.

101936	Wide Flange Beam (WFB) Structural Steel Column – New Construction	TON	$2,896.17	$2,548.92	$0.00	$5,445.09
101937	Hollow Structural Sections (HSS) Structural Steel Column – New Construction	TON	$2,896.17	$2,761.33	$0.00	$5,657.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101938	Wide Flange Beam (WFB) Structural Steel Beam – New Construction	TON	$2,632.96	$2,548.92	$0.00	$5,181.88
101939	Hollow Structural Sections (HSS) Structural Steel Beam – New Construction	TON	$2,632.96	$2,761.33	$0.00	$5,394.29
101940	Structural Steel Angles / Channels / Tees – New Construction	TON	$2,936.76	$2,867.54	$0.00	$5,804.30
101941	Structural Steel Plate – New Construction	TON	$2,936.76	$2,867.54	$0.00	$5,804.30
101942	Wide Flange Beam (WFB) Structural Steel Column – Exterior Renovation	TON	$3,475.40	$3,058.70	$0.00	$6,534.10
101943	Hollow Structural Sections (HSS) Structural Steel Column – Exterior Renovation	TON	$3,475.40	$3,313.60	$0.00	$6,789.00
101944	Wide Flange Beam (WFB) Structural Steel Beam – Exterior Renovation	TON	$3,159.56	$3,058.70	$0.00	$6,218.26
101945	Hollow Structural Sections (HSS) Structural Steel Beam – Exterior Renovation	TON	$3,159.56	$3,313.60	$0.00	$6,473.16
101946	Structural Steel Angles / Channels / Tees – Exterior Renovation	TON	$3,524.11	$3,441.04	$0.00	$6,965.15
101947	Structural Steel Plate – Exterior Renovation	TON	$3,524.11	$3,441.04	$0.00	$6,965.15
101948	Wide Flange Beam (WFB) Structural Steel Column – Interior Renovation	TON	$5,560.64	$3,058.70	$0.00	$8,619.34
101949	Hollow Structural Sections (HSS) Structural Steel Column – Interior Renovation	TON	$5,560.64	$3,313.60	$0.00	$8,874.24
101950	Wide Flange Beam (WFB) Structural Steel Beam – Interior Renovation	TON	$5,055.27	$3,058.70	$0.00	$8,113.97
101951	Hollow Structural Sections (HSS) Structural Steel Beam – Interior Renovation	TON	$5,055.27	$3,313.60	$0.00	$8,368.87
101952	Structural Steel Angles / Channels / Tees – Interior Renovation	TON	$5,638.60	$3,441.04	$0.00	$9,079.64
101953	Structural Steel Plate – Interior Renovation	TON	$5,638.60	$3,441.04	$0.00	$9,079.64
101954	Elevator Structural Steel Hoist Beam	TON	$5,055.27	$3,058.70	$0.00	$8,113.97
101955	Structural Steel at Precast Risers	TON	$5,055.27	$3,313.60	$0.00	$8,368.87
101956	Structural Steel Elevator Sill Angle Replacement	LF	$58.41	$31.27	$0.00	$89.68
101957	Structural Steel Moment Connections Includes all welds and bolted connections	EA	$1,095.16	$586.36	$0.00	$1,681.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101958	Connect Structural Steel To Existing Structure Includes surface preparation, plates, clips, angles, bots, pockets, and welds	EA	$547.57	$293.18	$0.00	$840.75
101959	Embed Structural Steel Plates	EA	$131.51	$167.53	$0.00	$299.04
101960	Loose Structural Steel Lintels at Masonry	LF	$24.09	$12.90	$0.00	$36.99
101961	Welded Structural Steel Shear Connections (< 10 EA)	EA	$17.41	$2.57	$0.00	$19.98
101962	Welded Structural Steel Shear Connections (11 – 50 EA)	EA	$7.14	$1.61	$0.00	$8.75
101963	Welded Structural Steel Shear Connections (50 – 100 EA)	EA	$5.07	$1.61	$0.00	$6.68
101964	Welded Structural Steel Shear Connections (> 100 EA)	EA	$2.90	$1.61	$0.00	$4.51
101965	Structural Steel Strengthening – Cover Plate Cost includes surface preparation to existing steel, new plate steel, welding and connections to strengthen steel	LF	$134.79	$33.51	$0.00	$168.30
101966	Structural Steel Strengthening – Connection Modification Cost includes surface preparation to existing steel, required new steel, welding and connections to strengthen steel	EA	$1,095.16	$586.36	$0.00	$1,681.52
101967	Structural Steel Strengthening – Base Plate Modification Cost includes surface preparation to existing steel, required new steel, welding and connections to strengthen steel	EA	$876.78	$586.36	$0.00	$1,463.14
101968	Structural Steel Strengthening – Add Welded Shear Connections Cost includes required concrete cutout, surface preparation to existing steel, adding required welded shear connections, and infilling core with cementitious material	EA	$657.58	$167.53	$0.00	$825.11
101969	Structural Steel Strengthening – Replace Connection Cost includes removal of existing connection, surface preparation to existing steel, required new steel, welding and connections to strengthen steel	EA	$1,315.17	$837.66	$0.00	$2,152.83
101970	[Modifier] Quantity Premium - Structural Steel (10 To < 20 TN) For New Construction Steel Only This line item can be used if the total tonnage of structural steel is within stated quantity. It can be applied in addition to selecting the individual line items	TON	$263.30	$254.89	$0.00	$518.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101971	[Modifier] Quantity Premium - Structural Steel (< 10 TN) For New Construction Steel Only This line item can be used if the total tonnage of structural steel is within stated quantity. It can be applied in addition to selecting the individual line items	TON	$658.25	$637.23	$0.00	$1,295.48
101972	[Modifier] Quantity Premium - Structural Steel (< 2 TN) For Renovation Steel Only This line item can be used if the total tonnage of structural steel is less than 2 tons. It can be applied in addition to selecting the individual line items	LS	$1,123.23	$1,116.88	$0.00	$2,240.11
101973	[Modifier] For Cambered Structural Steel Beam	TON	$0.00	$837.66	$0.00	$837.66
101974	[Modifier] Cold Rolling Structural Steel – Easy Way	TON	$0.00	$1,116.88	$0.00	$1,116.88
101975	[Modifier] Cold Rolling Structural Steel – Hard Way	TON	$0.00	$1,675.32	$0.00	$1,675.32

05-14-00 Structural Aluminum Framing

05-14-00 Structural Aluminum Framing

101976	Structural Aluminum Framing Cost includes required aluminum to aluminum standard bolted and welded connections, bracing, base plates, top plates, side plates, stiffener plates, and anchor bolts.	TON	$5,055.27	$14,476.44	$0.00	$19,531.71

05-15-00 Wire Rope Assemblies

Cost includes required connections, posts, plates, anchor bolts, turn buckles, and any other miscellaneous hardware

05-15-00 Wire Rope Assemblies

Cost includes required connections, posts, plates, anchor bolts, turn buckles, and any other miscellaneous hardware

101977	Steel Wire Rope System – Galvanized	LF	$9.89	$12.01	$0.00	$21.90
101978	Aluminum Wire Rope System	LF	$9.89	$17.41	$0.00	$27.30
101979	Stainless Steel Wire Rope System	LF	$9.89	$24.03	$0.00	$33.92

05-20-00 Metal Joists

05-21-00 Steel Joist Framing

Baseline pricing for Renovation steel joist framing is greater than or equal to one ton. Baseline pricing for New Construction joist framing is greater than or equal to ten tons. Cost includes required steel to steel standard bolted and welded connections, bracing, bridging, base plates, top plates, side plates, stiffener plates, and anchor bolts.

05-21-00 Steel Joist Framing

Baseline pricing for Renovation steel joist framing is greater than or equal to one ton. Baseline pricing for New Construction joist framing is greater than or equal to ten tons. Cost includes required steel to steel standard bolted and welded connections, bracing, bridging, base plates, top plates, side plates, stiffener plates, and anchor bolts.

101980	Steel Joist-K Series – New Construction	TON	$2,157.99	$2,297.64	$0.00	$4,455.63
101981	Steel Joist-LH Series – New Construction	TON	$2,157.99	$2,412.52	$0.00	$4,570.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101982	Steel Joist-DLH Series – New Construction	TON	$2,157.99	$2,527.40	$0.00	$4,685.39
101983	Steel Joist-SLH Series – New Construction	TON	$2,265.82	$2,774.41	$0.00	$5,040.23
101984	Steel Joist-Custom – New Construction	TON	$2,373.72	$3,032.88	$0.00	$5,406.60
101985	Steel Joist-K Series – Exterior Renovation	TON	$2,589.58	$2,757.17	$0.00	$5,346.75
101986	Steel Joist-LH Series – Exterior Renovation	TON	$2,589.58	$2,895.03	$0.00	$5,484.61
101987	Steel Joist-DLH Series – Exterior Renovation	TON	$2,589.58	$3,032.87	$0.00	$5,622.45
101988	Steel Joist-SLH Series – Exterior Renovation	TON	$2,718.99	$3,329.28	$0.00	$6,048.27
101989	Steel Joist-Custom – Exterior Renovation	TON	$2,848.47	$3,639.46	$0.00	$6,487.93
101990	Steel Joist-K Series – Interior Renovation	TON	$4,143.34	$2,757.17	$0.00	$6,900.51
101991	Steel Joist-LH Series – Interior Renovation	TON	$4,143.34	$2,895.03	$0.00	$7,038.37
101992	Steel Joist-DLH Series – Interior Renovation	TON	$4,143.34	$3,032.87	$0.00	$7,176.21
101993	Steel Joist-SLH Series – Interior Renovation	TON	$4,350.37	$3,329.28	$0.00	$7,679.65
101994	Steel Joist-Custom – Interior Renovation	TON	$4,557.54	$3,639.46	$0.00	$8,197.00
101995	Steel Joist Strengthening – Chord Reinforcement Cost includes surface preparation to existing steel, new steel, welding and connections to strengthen steel joist	LF	$134.79	$33.51	$0.00	$168.30
101996	Steel Joist Strengthening – Web Reinforcement Cost includes surface preparation to existing steel, new steel, welding and connections to strengthen steel joist	EA	$328.80	$111.68	$0.00	$440.48
101997	[Modifier] Quantity Premium - Steel Joist (5 To < 10 TN) For New Construction Joist Only This line item can be used if the total tonnage of steel joist is within stated quantity. It can be applied in addition to selecting the individual line items	TON	$215.80	$252.74	$0.00	$468.54
101998	[Modifier] Quantity Premium - Steel Joist (< 5 TN) For New Construction Joist Only This line item can be used if the total tonnage of steel joist is within stated quantity. It can be applied in addition to selecting the individual line items	TON	$539.50	$631.84	$0.00	$1,171.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
101999	[Modifier] Quantity Premium - Steel Joist (< 1 TN) For Renovation Joist Only This line item can be used if the total tonnage of steel joist is less than 1 ton. It can be applied cumulatively to applicable line items.	LS	$1,123.23	$1,116.88	$0.00	$2,240.11

05-30-00 Metal Decking

Pricing includes any required crimping, welding, and fasteners to complete the installation of Metal Decking

05-31-00 Steel Decking

05-31-13 Steel Floor Decking

Galvanized composite steel floor decking

102000	Steel Floor Decking – Up To 18 GA (> 500 SF)	SF	$1.31	$3.23	$0.00	$4.54
102001	Steel Floor Decking – Up To 18 GA (101 – 500 SF) This line item can be used if the total square footage of steel floor decking falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$3.94	$3.52	$0.00	$7.46
102002	Steel Floor Decking – Up To 18 GA (51 – 100 SF) This line item can be used if the total square footage of steel floor decking falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$7.89	$3.82	$0.00	$11.71
102003	Steel Floor Decking – Up To 18 GA (< Or = To 50 SF) This line item can be used if the total square footage of steel floor decking is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$14.47	$4.11	$0.00	$18.58

05-31-23 Steel Roof Decking

Galvanized composite steel roof decking

102004	Steel Roof Decking – Up To 18 GA (> 500 SF)	SF	$1.31	$3.23	$0.00	$4.54
102005	Steel Roof Decking – Up To 18 GA (101 – 500 SF) This line item can be used if the total square footage of steel floor decking falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$3.94	$3.52	$0.00	$7.46
102006	Steel Roof Decking – Up To 18 GA (51 – 100 SF) This line item can be used if the total square footage of steel floor decking falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$7.89	$3.82	$0.00	$11.71
102007	Steel Roof Decking – Up To 18 GA (< Or = To 50 SF) This line item can be used if the total square footage of steel floor decking is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$14.47	$4.11	$0.00	$18.58
102008	Steel Roof Decking – Up To 20 GA (> 500 SF)	SF	$1.06	$2.91	$0.00	$3.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102009	Steel Roof Decking – Up To 20 GA (101 – 500 SF) This line item can be used if the total square footage of steel roof decking falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$3.68	$3.21	$0.00	$6.89
102010	Steel Roof Decking – Up To 20 GA (51 – 100 SF) This line item can be used if the total square footage of steel roof decking falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$7.62	$3.50	$0.00	$11.12
102011	Steel Roof Decking – Up To 20 GA (< Or = To 50 SF) This line item can be used if the total square footage of steel roof decking is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$14.21	$3.79	$0.00	$18.00
	05-31-33 Steel Form Decking					
	Galvanized form decking					
102012	Steel Form Decking – Up To 18 GA (> 500 SF)	SF	$1.06	$2.91	$0.00	$3.97
102013	Steel Form Decking – Up To 18 GA (101 – 500 SF) This line item can be used if the total square footage of steel form decking falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$3.68	$3.21	$0.00	$6.89
102014	Steel Form Decking – Up To 18 GA (51 – 100 SF) This line item can be used if the total square footage of steel form decking falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$7.62	$3.50	$0.00	$11.12
102015	Steel Form Decking – Up To 18 GA (< Or = To 50 SF) This line item can be used if the total square footage of steel form decking is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$14.21	$3.79	$0.00	$18.00
	05-34-00 Acoustical Metal Decking					
	05-34-00 Acoustical Metal Decking					
102016	Steel Acoustic Decking (> 500 SF) Acoustical B-Deck, with perforations and acoustical insulation	SF	$1.70	$7.35	$0.00	$9.05
102017	Steel Acoustic Decking – (101 – 500 SF) This line item can be used if the total square footage of steel acoustic decking falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$4.34	$7.64	$0.00	$11.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102018	Steel Acoustic Decking – (51 – 100 SF) This line item can be used if the total square footage of steel acoustic decking falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$8.28	$7.94	$0.00	$16.22
102019	Steel Acoustic Decking – (< Or = To 50 SF) This line item can be used if the total square footage of steel acoustic decking is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$14.86	$8.23	$0.00	$23.09
102020	Steel Acoustic Decking – Long Span	SF	$4.17	$17.47	$0.00	$21.64
102021	Steel Acoustic Decking – Long Span – (101 – 500 SF) This line item can be used if the total square footage of steel acoustic decking - long span falls within 101-500 square feet. This item cannot be used with any of the INFILL line items.	SF	$6.81	$17.75	$0.00	$24.56
102022	Steel Acoustic Decking – Long Span – (51 – 100 SF) This line item can be used if the total square footage of steel acoustic decking - long span falls within 51-100 square feet. This item cannot be used with any of the INFILL line items.	SF	$10.75	$18.05	$0.00	$28.80
102023	Steel Acoustic Decking – Long Span – (< Or = To 50 SF) This line item can be used if the total square footage of steel acoustic decking - long span is less than or equal to 50 square feet. This item cannot be used with any of the INFILL line items.	SF	$17.33	$18.35	$0.00	$35.68

05-40-00 Cold-Formed Metal Framing

Includes all tracks, headers, clips, fasteners, connections, welding, framed openings, runners, curves, bracing, straps, bridging, purlins, stiffeners, doublers for both between story and curtain framing

05-41-00 Structural Metal Stud Framing

05-41-00 Structural Metal Stud Framing

102024	Metal Stud Up To 4", 18 GA, 12" O.C. (> 500 SF)	SF	$4.14	$5.92	$0.00	$10.06
102025	Metal Stud Up To 4", 18 GA, 16" O.C. (> 500 SF)	SF	$3.19	$4.56	$0.00	$7.75
102026	Metal Stud Up To 4", 18 GA, 24" O.C. (> 500 SF)	SF	$2.45	$2.82	$0.00	$5.27
102027	Metal Stud Up To 6", 18 GA, 12" O.C. (> 500 SF)	SF	$4.35	$6.97	$0.00	$11.32
102028	Metal Stud Up To 6", 18 GA, 16" O.C. (> 500 SF)	SF	$3.35	$5.36	$0.00	$8.71
102029	Metal Stud Up To 6", 18 GA, 24" O.C. (> 500 SF)	SF	$2.58	$3.32	$0.00	$5.90
102030	Metal Stud Up To 8", 18 GA, 12" O.C. (> 500 SF)	SF	$4.83	$8.01	$0.00	$12.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102031	Metal Stud Up To 8", 18 GA, 16" O.C. (> 500 SF)	SF	$3.71	$6.17	$0.00	$9.88
102032	Metal Stud Up To 8", 18 GA, 24" O.C. (> 500 SF)	SF	$2.85	$3.80	$0.00	$6.65
102033	Metal Stud Up To 4", 16 GA, 12" O.C. (> 500 SF)	SF	$4.94	$6.68	$0.00	$11.62
102034	Metal Stud Up To 4", 16 GA, 16" O.C. (> 500 SF)	SF	$3.81	$5.14	$0.00	$8.95
102035	Metal Stud Up To 4", 16 GA, 24" O.C. (> 500 SF)	SF	$2.93	$3.18	$0.00	$6.11
102036	Metal Stud Up To 6", 16 GA, 12" O.C. (> 500 SF)	SF	$5.21	$7.69	$0.00	$12.90
102037	Metal Stud Up To 6", 16 GA, 16" O.C. (> 500 SF)	SF	$4.01	$5.91	$0.00	$9.92
102038	Metal Stud Up To 6", 16 GA, 24" O.C. (> 500 SF)	SF	$3.08	$3.67	$0.00	$6.75
102039	Metal Stud Up To 8", 16 GA, 12" O.C. (> 500 SF)	SF	$5.78	$8.84	$0.00	$14.62
102040	Metal Stud Up To 8", 16 GA, 16" O.C. (> 500 SF)	SF	$4.45	$6.80	$0.00	$11.25
102041	Metal Stud Up To 8", 16 GA, 24" O.C. (> 500 SF)	SF	$3.43	$4.22	$0.00	$7.65
102042	[Modifier] Quantity Premium - Structural Metal Stud Framing (101-500 SF) Quantity premium can be used when Total square footage in section 05-41-00 Structural Metal Stud Framing are within stated quantities. Can be applied cumulatively To base line items.	SF	$2.17	$0.00	$0.00	$2.17
102043	[Modifier] Quantity Premium - Structural Metal Stud Framing (51-100 SF) Quantity premium can be used when Total square footage in section 05-41-00 Structural Metal Stud Framing are within stated quantities. Can be applied cumulatively To base line items.	SF	$5.43	$0.00	$0.00	$5.43
102044	[Modifier] Quantity Premium - Structural Metal Stud Framing (< or = To 50 SF) Quantity premium can be used when Total square footage in section 05-41-00 Structural Metal Stud Framing are within stated quantities. Can be applied cumulatively To base line items.	SF	$10.86	$0.00	$0.00	$10.86
	05-42-00 Cold-Formed Metal Joist Framing					
	05-42-00 Cold-Formed Metal Joist Framing					
102045	Cold-Formed Metal Floor / Roof Joist Up To 4", 18 GA, 12" O.C. (> 500 SF)	SF	$5.18	$6.51	$0.00	$11.69
102046	Cold-Formed Metal Floor / Roof Joist Up To 4", 18 GA, 16" O.C. (> 500 SF)	SF	$3.98	$5.01	$0.00	$8.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102047	Cold-Formed Metal Floor / Roof Joist Up To 4", 18 GA, 24" O.C. (> 500 SF)	SF	$3.06	$3.10	$0.00	$6.16
102048	Cold-Formed Metal Floor / Roof Joist Up To 6", 18 GA, 12" O.C. (> 500 SF)	SF	$5.44	$7.67	$0.00	$13.11
102049	Cold-Formed Metal Floor / Roof Joist Up To 6", 18 GA, 16" O.C. (> 500 SF)	SF	$4.17	$5.90	$0.00	$10.07
102050	Cold-Formed Metal Floor / Roof Joist Up To 6", 18 GA, 24" O.C. (> 500 SF)	SF	$3.22	$3.64	$0.00	$6.86
102051	Cold-Formed Metal Floor / Roof Joist Up To 8", 18 GA, 12" O.C. (> 500 SF)	SF	$6.04	$8.81	$0.00	$14.85
102052	Cold-Formed Metal Floor / Roof Joist Up To 8", 18 GA, 16" O.C. (> 500 SF)	SF	$4.65	$6.78	$0.00	$11.43
102053	Cold-Formed Metal Floor / Roof Joist Up To 8", 18 GA, 24" O.C. (> 500 SF)	SF	$3.58	$4.19	$0.00	$7.77
102054	Cold-Formed Metal Floor / Roof Joist Up To 10", 18 GA, 12" O.C. (> 500 SF)	SF	$6.36	$9.69	$0.00	$16.05
102055	Cold-Formed Metal Floor / Roof Joist Up To 10", 18 GA, 16" O.C. (> 500 SF)	SF	$4.89	$7.46	$0.00	$12.35
102056	Cold-Formed Metal Floor / Roof Joist Up To 10", 18 GA, 24" O.C. (> 500 SF)	SF	$3.76	$4.61	$0.00	$8.37
102057	Cold-Formed Metal Floor / Roof Joist Up To 12", 18 GA, 12" O.C. (> 500 SF)	SF	$6.69	$10.67	$0.00	$17.36
102058	Cold-Formed Metal Floor / Roof Joist Up To 12", 18 GA, 16" O.C. (> 500 SF)	SF	$5.14	$8.20	$0.00	$13.34
102059	Cold-Formed Metal Floor / Roof Joist Up To 12", 18 GA, 24" O.C. (> 500 SF)	SF	$3.96	$5.07	$0.00	$9.03
102060	Cold-Formed Metal Floor / Roof Joist Up To 4", 16 GA, 12" O.C. (> 500 SF)	SF	$7.02	$9.01	$0.00	$16.03
102061	Cold-Formed Metal Floor / Roof Joist Up To 4", 16 GA, 16" O.C. (> 500 SF)	SF	$5.39	$6.92	$0.00	$12.31
102062	Cold-Formed Metal Floor / Roof Joist Up To 4", 16 GA, 24" O.C. (> 500 SF)	SF	$4.15	$4.29	$0.00	$8.44
102063	Cold-Formed Metal Floor / Roof Joist Up To 6", 16 GA, 12" O.C. (> 500 SF)	SF	$7.36	$10.59	$0.00	$17.95
102064	Cold-Formed Metal Floor / Roof Joist Up To 6", 16 GA, 16" O.C. (> 500 SF)	SF	$5.67	$8.16	$0.00	$13.83
102065	Cold-Formed Metal Floor / Roof Joist Up To 6", 16 GA, 24" O.C. (> 500 SF)	SF	$4.36	$5.06	$0.00	$9.42
102066	Cold-Formed Metal Floor / Roof Joist Up To 8", 16 GA, 12" O.C. (> 500 SF)	SF	$8.18	$12.19	$0.00	$20.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102067	Cold-Formed Metal Floor / Roof Joist Up To 8", 16 GA, 16" O.C. (> 500 SF)	SF	$6.30	$9.37	$0.00	$15.67
102068	Cold-Formed Metal Floor / Roof Joist Up To 8", 16 GA, 24" O.C. (> 500 SF)	SF	$4.84	$5.81	$0.00	$10.65
102069	Cold-Formed Metal Floor / Roof Joist Up To 10", 16 GA, 12" O.C. (> 500 SF)	SF	$8.61	$13.41	$0.00	$22.02
102070	Cold-Formed Metal Floor / Roof Joist Up To 10", 16 GA, 16" O.C. (> 500 SF)	SF	$6.62	$10.31	$0.00	$16.93
102071	Cold-Formed Metal Floor / Roof Joist Up To 10", 16 GA, 24" O.C. (> 500 SF)	SF	$5.09	$6.40	$0.00	$11.49
102072	Cold-Formed Metal Floor / Roof Joist Up To 12", 16 GA, 12" O.C. (> 500 SF)	SF	$9.06	$14.75	$0.00	$23.81
102073	Cold-Formed Metal Floor / Roof Joist Up To 12", 16 GA, 16" O.C. (> 500 SF)	SF	$6.98	$11.35	$0.00	$18.33
102074	Cold-Formed Metal Floor / Roof Joist Up To 12", 16 GA, 24" O.C. (> 500 SF)	SF	$5.37	$7.03	$0.00	$12.40
102075	[Modifier] Quantity Premium - Cold-Formed Metal Joist Framing (101-500 SF) Quantity premium can be used when total square footage in section 05-42-00 Cold-Formed Metal Joist Framing are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102076	[Modifier] Quantity Premium - Cold-Formed Metal Joist Framing (51-100 SF) Quantity premium can be used when total square footage in section 05-42-00 Cold-Formed Metal Joist Framing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102077	[Modifier] Quantity Premium - Cold-Formed Metal Joist Framing (< or = To 50 SF) Quantity premium can be used when Total square footage in section 05-42-00 Cold-Formed Metal Joist Framing are within stated quantities. Can be applied cumulatively To base line items.	SF	$10.86	$0.00	$0.00	$10.86
	05-44-00 Cold-Formed Metal Trusses					
	05-44-00 Cold-Formed Metal Trusses					
102078	Cold-Formed Metal Roof Trusses Up To 4", 18 GA, 12" O.C. (> 500 SF)	SFRA	$5.75	$6.51	$0.00	$12.26
102079	Cold-Formed Metal Roof Trusses Up To 4", 18 GA, 16" O.C. (> 500 SF)	SFRA	$4.43	$5.01	$0.00	$9.44
102080	Cold-Formed Metal Roof Trusses Up To 4", 18 GA, 24" O.C. (> 500 SF)	SFRA	$3.40	$3.10	$0.00	$6.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102081	Cold-Formed Metal Roof Trusses Up To 6", 18 GA, 12" O.C. (> 500 SF)	SFRA	$6.04	$7.67	$0.00	$13.71
102082	Cold-Formed Metal Roof Trusses Up To 6", 18 GA, 16" O.C. (> 500 SF)	SFRA	$4.65	$5.90	$0.00	$10.55
102083	Cold-Formed Metal Roof Trusses Up To 6", 18 GA, 24" O.C. (> 500 SF)	SFRA	$3.58	$3.64	$0.00	$7.22
102084	Cold-Formed Metal Roof Trusses Up To 8", 18 GA, 12" O.C. (> 500 SF)	SFRA	$6.72	$8.81	$0.00	$15.53
102085	Cold-Formed Metal Roof Trusses Up To 8", 18 GA, 16" O.C. (> 500 SF)	SFRA	$5.16	$6.78	$0.00	$11.94
102086	Cold-Formed Metal Roof Trusses Up To 8", 18 GA, 24" O.C. (> 500 SF)	SFRA	$3.97	$4.19	$0.00	$8.16
102087	Cold-Formed Metal Roof Trusses Up To 10", 18 GA, 12" O.C. (> 500 SF)	SFRA	$7.06	$9.69	$0.00	$16.75
102088	Cold-Formed Metal Roof Trusses Up To 10", 18 GA, 16" O.C. (> 500 SF)	SFRA	$5.43	$7.46	$0.00	$12.89
102089	Cold-Formed Metal Roof Trusses Up To 10", 18 GA, 24" O.C. (> 500 SF)	SFRA	$4.17	$4.61	$0.00	$8.78
102090	Cold-Formed Metal Roof Trusses Up To 12", 18 GA, 12" O.C. (> 500 SF)	SFRA	$7.44	$10.67	$0.00	$18.11
102091	Cold-Formed Metal Roof Trusses Up To 12", 18 GA, 16" O.C. (> 500 SF)	SFRA	$5.72	$8.20	$0.00	$13.92
102092	Cold-Formed Metal Roof Trusses Up To 12", 18 GA, 24" O.C. (> 500 SF)	SFRA	$4.39	$5.07	$0.00	$9.46
102093	Cold-Formed Metal Roof Trusses Up To 4", 16 GA, 12" O.C. (> 500 SF)	SFRA	$7.79	$9.01	$0.00	$16.80
102094	Cold-Formed Metal Roof Trusses Up To 4", 16 GA, 16" O.C. (> 500 SF)	SFRA	$5.99	$6.92	$0.00	$12.91
102095	Cold-Formed Metal Roof Trusses Up To 4", 16 GA, 24" O.C. (> 500 SF)	SFRA	$4.61	$4.29	$0.00	$8.90
102096	Cold-Formed Metal Roof Trusses Up To 6", 16 GA, 12" O.C. (> 500 SF)	SFRA	$8.18	$10.59	$0.00	$18.77
102097	Cold-Formed Metal Roof Trusses Up To 6", 16 GA, 16" O.C. (> 500 SF)	SFRA	$6.30	$8.16	$0.00	$14.46
102098	Cold-Formed Metal Roof Trusses Up To 6", 16 GA, 24" O.C. (> 500 SF)	SFRA	$4.84	$5.06	$0.00	$9.90
102099	Cold-Formed Metal Roof Trusses Up To 8", 16 GA, 12" O.C. (> 500 SF)	SFRA	$9.08	$12.19	$0.00	$21.27
102100	Cold-Formed Metal Roof Trusses Up To 8", 16 GA, 16" O.C. (> 500 SF)	SFRA	$6.99	$9.37	$0.00	$16.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102101	Cold-Formed Metal Roof Trusses Up To 8", 16 GA, 24" O.C. (> 500 SF)	SFRA	$5.38	$5.81	$0.00	$11.19
102102	Cold-Formed Metal Roof Trusses Up To 10", 16 GA, 12" O.C. (> 500 SF)	SFRA	$9.57	$13.41	$0.00	$22.98
102103	Cold-Formed Metal Roof Trusses Up To 10", 16 GA, 16" O.C. (> 500 SF)	SFRA	$7.36	$10.31	$0.00	$17.67
102104	Cold-Formed Metal Roof Trusses Up To 10", 16 GA, 24" O.C. (> 500 SF)	SFRA	$5.67	$6.40	$0.00	$12.07
102105	Cold-Formed Metal Roof Trusses Up To 12", 16 GA, 12" O.C. (> 500 SF)	SFRA	$10.06	$14.75	$0.00	$24.81
102106	Cold-Formed Metal Roof Trusses Up To 12", 16 GA, 16" O.C. (> 500 SF)	SFRA	$7.75	$11.35	$0.00	$19.10
102107	Cold-Formed Metal Roof Trusses Up To 12", 16 GA, 24" O.C. (> 500 SF)	SFRA	$5.97	$7.03	$0.00	$13.00
102108	[Modifier] Quantity Premium - Cold-Formed Metal Trusses (101-500 SF) Quantity premium can be used when total square footage in section 05-44-00 Cold-Formed Metal Trusses are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102109	[Modifier] Quantity Premium - Cold-Formed Metal Trusses (51-100 SF) Quantity premium can be used when total square footage in section 05-44-00 Cold-Formed Metal Trusses are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102110	[Modifier] Quantity Premium - Cold-Formed Metal Trusses (< or = to 50 SF) Quantity premium can be used when total square footage in section 05-44-00 Cold-Formed Metal Trusses are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

05-45-00 Metal Support Assemblies

For General Trades miscellaneous use only. Not to be combined with any of the MEP trades, since supports are covered in the MEP trades unit pricing. Includes all connectors, fasteners, and miscellaneous plates, posts, angles, tees, etc.

05-45-00 Metal Support Assemblies

For General Trades miscellaneous use only. Not to be combined with any of the MEP trades, since supports are covered in the MEP trades unit pricing. Includes all connectors, fasteners, and miscellaneous plates, posts, angles, tees, etc.

102111	Unistrut - 12 Gauge, Hot Dipped Galvanized, Up To 1 5/8" x 1 5/8" Channel Includes clamps, fittings, brackets, and hardware	LF	$6.03	$6.16	$0.00	$12.19
102112	Unistrut - 12 Gauge, Pre-Galvanized, Up To 1 5/8" x 1 5/8" Channel Includes clamps, fittings, brackets, and hardware	LF	$6.03	$4.29	$0.00	$10.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102113	Unistrut - 12 Gauge, 304 Stainless Steel, Up To 1 5/8" x 1 5/8" Channel Includes clamps, fittings, brackets, and hardware	LF	$6.93	$17.75	$0.00	$24.68
102114	Unistrut - Threaded Rod, Galvanized, Up To 5/8" Diameter Includes threaded rod, concrete inserts and/or beam clamps, hex nuts and washers	LF	$15.08	$14.62	$0.00	$29.70
102115	Unistrut - Threaded Rod, Stainless Steel, Up To 5/8" Diameter Includes threaded rod, concrete inserts and/or beam clamps, hex nuts and washers	LF	$15.08	$28.39	$0.00	$43.47
102116	Unistrut - 2" Electric Conduit Hanger J1220	EA	$15.55	$8.16	$0.00	$23.71
102117	Metal Support Assembly – Folding Partition	LF	$46.45	$39.09	$0.00	$85.54
102118	Metal Support Assembly – Toilet Partition	EA	$209.02	$120.62	$0.00	$329.64
102119	Metal Support Assembly – Projection Screen	LF	$34.06	$17.59	$0.00	$51.65
102120	Metal Support Assembly – TV	EA	$116.13	$167.53	$0.00	$283.66
102121	Metal Support Assembly - Patient Lifts	EA	$8,424.21	$8,376.60	$0.00	$16,800.81
102122	Metal Support Assembly - Healthcare Boom, Standard For the support of vibration sensitive medical equipment, such as surgical lights and equipment booms	EA	$16,848.60	$22,337.59	$0.00	$39,186.19
102123	Metal Support Assembly - Healthcare Boom, Extended For the support of vibration sensitive medical equipment, such as surgical lights and equipment booms. Can be used when finish floor to underside of structure exceeds 15'-0"	EA	$28,080.26	$33,506.38	$0.00	$61,586.64
102124	Metal Support Assembly - Jack Post	EA	$219.19	$279.22	$0.00	$498.41

05-50-00 Metal Fabrications

05-51-00 Metal Stairs

05-51-00 Metal Stairs

102125	Steel Ladder Bolted Includes fastener method determined by project specifications and or engineering requirements	LF	$41.77	$72.59	$0.00	$114.36
102126	Steel Ladder Bolted With Cage Includes fastener method determined by project specifications and or engineering requirements	LF	$41.78	$100.52	$0.00	$142.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102127	Stair – Alternating Tread – LF of Stair Rise Cost includes railing. Includes fastener method determined by project specifications and or engineering requirements	LF	$41.78	$256.88	$0.00	$298.66
102128	Metal Pan Stairs – Includes Concrete – LF of Stair Tread Cost includes primed steel framing for the stair system. Including, but not limited to stringers, plates, angles, channels, connections, etc.	LF	$69.93	$82.83	$0.00	$152.76
102129	Metal Pan Stairs (Galvanized) – Includes Concrete – LF of Stair Tread Cost includes galvanized steel framing for the stair system. Including, but not limited to stringers, plates, angles, channels, connections, etc.	LF	$69.93	$99.40	$0.00	$169.33
102130	Metal Pan Landings – Includes Concrete Cost includes primed steel framing for the stair landing system. Including, but not limited to stringers, plates, angles, channels, connections, etc. Includes concrete fill for landings	SF	$40.26	$55.56	$0.00	$95.82
102131	Metal Pan Landings (Galvanized) – Includes Concrete Cost includes galvanized steel framing for the stair landing system. Including, but not limited to stringers, plates, angles, channels, connections, etc. Includes concrete fill for landings	SF	$40.26	$66.68	$0.00	$106.94
102132	Metal Grating Stair – LF of Stair Tread Cost includes primed steel framing for the stair system. Including, but not limited to stringers, plates, angles, channels, connections, etc.	LF	$50.13	$64.34	$0.00	$114.47
102133	Metal Grating Stair Landing Cost includes steel framing for the stair landing system. Including, but not limited to stringers, plates, angles, channels, connections, etc.	SF	$28.19	$38.90	$0.00	$67.09
102134	Custom Public Stair – LF of Stair Tread Cost is for a public communicating stair which will be wider and require a higher level of finish as compared to an egress stair. Includes primed steel framing for the stair system. Including, but not limited to stringers, plates, angles, channels, connections, etc.	LF	$85.81	$110.12	$0.00	$195.93
102135	Custom Public Stair Landings Cost includes primed steel framing for the stair landing system. Including, but not limited to stringers, plates, angles, channels, connections, etc. Includes concrete fill for landings	SF	$48.31	$66.68	$0.00	$114.99
102136	[Modifier] Small Stairs <20 LF of Tread Quantity premium can be used when total quantity in section 05-51-00 Metal Stairs are within stated quantity. Can be applied cumulatively to base line items.	LF	$32.88	$0.00	$0.00	$32.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	05-51-33 Metal Ladders					
102137	Folding Access Ladder Precision Ladders Super Simplex with fold assist or equal. Floor to floor height 11'-7". Ceiling opening size 30"w x 64"l	EA	$376.19	$6,767.13	$0.00	$7,143.32
102138	Aluminum Access Ladder Includes all angles, brackets, clips and fasteners required for a complete and secure installation	LF	$51.27	$86.87	$0.00	$138.14
	05-51-36 Metal Walkways					
102139	Catwalk System Cost includes the entire catwalk system. Including, but not limited to required steel framing, connections, grating, railings, stairs, etc.	SF	$41.10	$153.01	$0.00	$194.11
	05-52-00 Metal Railings					
	Metal railings are shop fabricated, primed, and painted					
	05-52-00 Metal Railings					
	Metal railings are shop fabricated, primed, and painted					
102140	Wall Railing – Steel	LF	$26.30	$49.92	$0.00	$76.22
102141	Wall Railing – Galvanized	LF	$26.30	$59.90	$0.00	$86.20
102142	Wall Railing – Aluminum	LF	$26.30	$87.35	$0.00	$113.65
102143	Wall Railing – Stainless Steel	LF	$26.30	$137.27	$0.00	$163.57
102144	Two Line Railing – Steel	LF	$49.82	$96.64	$0.00	$146.46
102145	Two Line Railing – Galvanized	LF	$49.82	$115.98	$0.00	$165.80
102146	Two Line Railing – Aluminum	LF	$49.82	$169.12	$0.00	$218.94
102147	Two Line Railing – Stainless Steel	LF	$49.82	$265.77	$0.00	$315.59
102148	Three Line Railing – Steel	LF	$54.80	$120.80	$0.00	$175.60
102149	Three Line Railing – Galvanized	LF	$54.80	$144.96	$0.00	$199.76
102150	Three Line Railing – Aluminum	LF	$54.80	$211.40	$0.00	$266.20
102151	Three Line Railing – Stainless Steel	LF	$54.80	$332.20	$0.00	$387.00
102152	Four Line Railing – Steel	LF	$59.78	$144.98	$0.00	$204.76
102153	Four Line Railing – Galvanized	LF	$59.78	$173.96	$0.00	$233.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102154	Four Line Railing – Aluminum	LF	$59.78	$253.70	$0.00	$313.48
102155	Four Line Railing – Stainless Steel	LF	$59.78	$398.67	$0.00	$458.45
102156	Five Line Railing – Steel	LF	$66.42	$166.08	$0.00	$232.50
102157	Five Line Railing – Galvanized	LF	$66.42	$199.29	$0.00	$265.71
102158	Five Line Railing – Aluminum	LF	$66.42	$290.63	$0.00	$357.05
102159	Five Line Railing – Stainless Steel	LF	$66.42	$456.72	$0.00	$523.14
102160	Handrail w/ Mesh Panels – Steel	LF	$73.01	$195.45	$0.00	$268.46
102161	Handrail w/ Mesh Panels – Galvanized	LF	$73.01	$234.55	$0.00	$307.56
102162	Handrail w/ Mesh Panels – Aluminum	LF	$73.01	$342.04	$0.00	$415.05
102163	Handrail w/ Mesh Panels – Stainless Steel	LF	$73.01	$537.49	$0.00	$610.50
102164	Handrail w/ Vertical Pickets – Steel	LF	$73.01	$184.29	$0.00	$257.30
102165	Handrail w/ Vertical Pickets – Galvanized	LF	$73.01	$221.14	$0.00	$294.15
102166	Handrail w/ Vertical Pickets – Aluminum	LF	$73.01	$322.50	$0.00	$395.51
102167	Handrail w/ Vertical Pickets – Stainless Steel	LF	$73.01	$506.79	$0.00	$579.80
102168	1.5" Keystone Medallion Welded To Pipe Rail Custom made medallions, fabricated and welded to pipe rails. Bronze material	EA	$350.07	$611.00	$0.00	$961.07
	05-53-00 Metal Gratings					
	05-53-00 Metal Gratings					
102169	Aluminum Grating	SF	$15.78	$37.69	$0.00	$53.47
102170	Steel Grating – Galvanized	SF	$15.78	$28.65	$0.00	$44.43
102171	Aluminum Diamond Plate	SF	$13.16	$18.42	$0.00	$31.58
102172	Steel Expanded Metal Grating	SF	$15.78	$9.65	$0.00	$25.43
102173	Aluminum Expanded Metal Grating	SF	$15.78	$12.73	$0.00	$28.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102174	[Modifier] Quantity Premium - Metal Grating (101 – 500 SF) Quantity premium can be used when total square footage in section 05-53-00 Metal Grating are within stated quantity. Can be applied cumulatively to applicable line items. No premium for INFILL line items	SF	$2.63	$0.00	$0.00	$2.63
102175	[Modifier] Quantity Premium - Metal Grating (51 – 100 SF) Quantity premium can be used when total square footage in section 05-53-00 Metal Grating are within stated quantity. Can be applied cumulatively to applicable line items. No premium for INFILL line items	SF	$6.58	$0.00	$0.00	$6.58
102176	[Modifier] Quantity Premium - Metal Grating (< Or = To 50 SF) Quantity premium can be used when total square footage in section 05-53-00 Metal Grating are within stated quantity. Can be applied cumulatively to applicable line items. No premium for INFILL line items	SF	$13.16	$0.00	$0.00	$13.16
	05-55-00 Metal Stair Treads and Nosings					
	05-55-16 Metal Stair Nosings					
102177	Metal Stair Nosing – One Piece Extruded aluminum or equal	LF	$13.16	$11.65	$0.00	$24.81
102178	Metal Stair Nosing – Two Piece Extruded aluminum or equal	LF	$14.62	$13.96	$0.00	$28.58
	05-58-00 Formed Metal Fabrications					
	05-58-00 Formed Metal Fabrications					
102179	Aluminum Column Cover	SF	$13.57	$39.31	$0.00	$52.88
102180	Galvanized V-Track Cast in place or mechanically fastened	LF	$9.87	$16.75	$0.00	$26.62
	05-59-00 Metal Specialties					
	05-59-00 Metal Specialties					
102181	Davit Sleeve	EA	$338.80	$530.52	$0.00	$869.32
	05-70-00 Decorative Metal					
	05-71-00 Decorative Metal Stairs					
	05-71-13 Fabricated Metal Spiral Stairs					
102182	Pre-Fabricated Spiral Stairs – Riser Count Based on aluminum construction, 48" diameter, 18 RI	EA	$75.93	$695.60	$4.36	$775.89
	05-73-00 Decorative Metal Railings					
	05-73-00 Decorative Metal Railings					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102183	Glass and Stainless Steel Railing	LF	$99.34	$470.79	$0.00	$570.13
102184	Steel Wire Rope Railing – Galvanized	LF	$59.78	$144.98	$0.00	$204.76
102185	Aluminum Wire Rope Railing	LF	$59.78	$211.41	$0.00	$271.19
102186	Stainless Steel Wire Rope Railing	LF	$59.78	$332.21	$0.00	$391.99

06-00-00 Wood, Plastics, and Composites

Items in this category include all connections, fasteners, and anchors

06-00-00 Wood, Plastics, and Composites

Items in this category include all connections, fasteners, and anchors

06-01-00 Maintenance of Wood, Plastics, and Composites

06-01-20 Maintenance of Finish Carpentry

102187	Finish Carpentry Restoration – Casework Refinishing includes re-securing woodwork, selective patch and replace in kind, profile and finish	SF	$54.30	$5.70	$0.00	$60.00
102188	Finish Carpentry Restoration – Wall / Ceiling Paneling Refinishing includes re-securing woodwork, selective patch and replace in kind, profile and finish	SF	$36.20	$5.70	$0.00	$41.90
102189	Finish Carpentry Restoration – Trim Refinishing includes re-securing woodwork, selective patch and replace in kind, profile and finish	LF	$18.10	$2.28	$0.00	$20.38
102190	Finish Carpentry Preservation – Casework Removal of soil and stains, light sanding, with repaint or re-stain without stripping finish	SF	$7.24	$5.70	$0.00	$12.94
102191	Finish Carpentry Preservation – Wall / Ceiling Paneling Removal of soil and stains, light sanding, with repaint or re-stain without stripping finish	SF	$5.43	$5.70	$0.00	$11.13
102192	Finish Carpentry Preservation – Trim Removal of soil and stains, light sanding, with repaint or re-stain without stripping finish	LF	$3.10	$2.28	$0.00	$5.38
102193	Replace Existing Cabinet Hardware Includes one full set of cabinetry hardware. Includes up to locksets, pulls, hinges, and closers. Includes all types of standard manufacture hardware and finish	SET	$134.93	$279.22	$0.00	$414.15

06-01-80 Maintenance of Composite Assemblies

102194	Composite Rehabilitation Cleaning, re-securing, and application of surface protectant	SF	$1.48	$0.38	$0.00	$1.86

06-10-00 Rough Carpentry

06-10-00 Rough Carpentry

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	06-10-53 Miscellaneous Rough Carpentry					
	Structural framing lumber includes but not limited to, regionally available, Kiln dried, PS DOC 2 graded dimensional solid wood in Pine, Spruce, Douglas-Fir or Hem-Fir, No. 2 or better. Costs are per LF of member unless noted otherwise					
102195	2X4 Wood Blocking or Bridging Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$0.52	$0.00	$2.46
102196	2X4 Wood Blocking or Bridging – Pressure Treated Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$0.63	$0.00	$2.57
102197	2X6 Wood Blocking or Bridging Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$0.91	$0.00	$2.85
102198	2X6 Wood Blocking or Bridging – Pressure Treated Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$1.08	$0.00	$3.02
102199	2X8 Wood Blocking or Bridging Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$0.96	$0.00	$2.90
102200	2X8 Wood Blocking or Bridging – Pressure Treated Structural Support Bracing, Fastening, or Anchor	LF	$1.94	$1.15	$0.00	$3.09
102201	2X10 Wood Blocking or Bridging Structural Support Bracing, Fastening, or Anchor	LF	$2.27	$1.44	$0.00	$3.71
102202	2X10 Wood Blocking or Bridging – Pressure Treated Structural Support Bracing, Fastening, or Anchor	LF	$2.27	$1.72	$0.00	$3.99
102203	2X12 Wood Blocking or Bridging Structural Support Bracing, Fastening, or Anchor	LF	$2.27	$1.96	$0.00	$4.23
102204	2X12 Wood Blocking or Bridging – Pressure Treated Structural Support Bracing, Fastening, or Anchor	LF	$2.27	$2.35	$0.00	$4.62
102205	1X Wood Bridging 2 Piece Structural Support Bracing	LF	$2.05	$0.94	$0.00	$2.99
102206	1X Wood Bridging 2 Piece – Pressure Treated Structural Support Bracing	LF	$2.05	$1.13	$0.00	$3.18
102207	Metal Bridging Set	LF	$1.15	$3.29	$0.00	$4.44
102208	1x2 Furring	LF	$0.75	$0.87	$0.00	$1.62
102209	1x2 Furring – Pressure Treated	LF	$0.75	$1.04	$0.00	$1.79
102210	1x3 Furring	LF	$0.75	$0.88	$0.00	$1.63
102211	1x3 Furring – Pressure Treated	LF	$0.75	$1.06	$0.00	$1.81

06-11-00 Wood Framing

06-11-16 Graded Lumber

Structural framing lumber includes but not limited to, regionally available, Kiln dried, PS DOC 2 graded dimensional solid wood in Pine, Spruce, Douglas-Fir or Hem-Fir, No. 2 or better. Pricing includes all plates, clips, fasteners,

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	connections, curves, bracing, straps, and bridging					
102212	2X4 Partitions Studs and Plates – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.85	$1.08	$0.00	$2.93
102213	2X4 Partitions Studs and Plates – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.85	$1.29	$0.00	$3.14
102214	2X4 Partitions Studs and Plates – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.69	$0.99	$0.00	$2.68
102215	2X4 Partitions Studs and Plates – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.69	$1.18	$0.00	$2.87
102216	2X4 Partitions Studs and Plates – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.52	$0.88	$0.00	$2.40
102217	2X4 Partitions Studs and Plates – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.52	$1.06	$0.00	$2.58
102218	2X6 Partitions Studs and Plates – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.23	$1.40	$0.00	$3.63
102219	2X6 Partitions Studs and Plates – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.23	$1.68	$0.00	$3.91
102220	2X6 Partitions Studs and Plates – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.02	$1.28	$0.00	$3.30
102221	2X6 Partitions Studs and Plates – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.02	$1.54	$0.00	$3.56
102222	2X6 Partitions Studs and Plates – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.82	$1.15	$0.00	$2.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102223	2X6 Partitions Studs and Plates – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.82	$1.38	$0.00	$3.20
102224	2X8 Partitions Studs and Plates – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.60	$1.73	$0.00	$4.33
102225	2X8 Partitions Studs and Plates – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.60	$2.07	$0.00	$4.67
102226	2X8 Partitions Studs and Plates – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.36	$1.57	$0.00	$3.93
102227	2X8 Partitions Studs and Plates – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.36	$1.89	$0.00	$4.25
102228	2X8 Partitions Studs and Plates – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.13	$1.41	$0.00	$3.54
102229	2X8 Partitions Studs and Plates – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.13	$1.69	$0.00	$3.82
102230	2X10 Partitions Studs and Plates – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.15	$2.16	$0.00	$5.31
102231	2X10 Partitions Studs and Plates – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.15	$2.60	$0.00	$5.75
102232	2X10 Partitions Studs and Plates – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.86	$1.96	$0.00	$4.82
102233	2X10 Partitions Studs and Plates – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.86	$2.35	$0.00	$5.21
102234	2X10 Partitions Studs and Plates – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.58	$1.77	$0.00	$4.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102235	2X10 Partitions Studs and Plates – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.58	$2.12	$0.00	$4.70
102236	2X12 Partitions Studs and Plates – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.71	$2.60	$0.00	$6.31
102237	2X12 Partitions Studs and Plates – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.71	$3.11	$0.00	$6.82
102238	2X12 Partitions Studs and Plates – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.37	$2.35	$0.00	$5.72
102239	2X12 Partitions Studs and Plates – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.37	$2.83	$0.00	$6.20
102240	2X12 Partitions Studs and Plates – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.04	$2.12	$0.00	$5.16
102241	2X12 Partitions Studs and Plates – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.04	$2.55	$0.00	$5.59
102242	Frame In Door Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$4.31	$1.35	$0.00	$5.66
102243	Frame In Window Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$4.31	$1.57	$0.00	$5.88
102244	Infill Door Opening Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$4.50	$1.35	$0.00	$5.85
102245	Infill Window Opening Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$4.50	$1.57	$0.00	$6.07
102246	2X4 Floor Or Roof Joist – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.14	$1.08	$0.00	$3.22
102247	2X4 Floor Or Roof Joist – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.14	$1.29	$0.00	$3.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102248	2X4 Floor Or Roof Joist – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.94	$0.99	$0.00	$2.93
102249	2X4 Floor Or Roof Joist – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.94	$1.18	$0.00	$3.12
102250	2X4 Floor Or Roof Joist – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$1.75	$0.88	$0.00	$2.63
102251	2X4 Floor Or Roof Joist – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$1.75	$1.06	$0.00	$2.81
102252	2X6 Floor Or Roof Joist – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.56	$1.40	$0.00	$3.96
102253	2X6 Floor Or Roof Joist – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.56	$1.68	$0.00	$4.24
102254	2X6 Floor Or Roof Joist – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.32	$1.28	$0.00	$3.60
102255	2X6 Floor Or Roof Joist – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.32	$1.54	$0.00	$3.86
102256	2X6 Floor Or Roof Joist – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.09	$1.15	$0.00	$3.24
102257	2X6 Floor Or Roof Joist – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.09	$1.38	$0.00	$3.47
102258	2X8 Floor Or Roof Joist – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.99	$1.73	$0.00	$4.72
102259	2X8 Floor Or Roof Joist – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.99	$2.07	$0.00	$5.06
102260	2X8 Floor Or Roof Joist – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.71	$1.57	$0.00	$4.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102261	2X8 Floor Or Roof Joist – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.71	$1.89	$0.00	$4.60
102262	2X8 Floor Or Roof Joist – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.45	$1.41	$0.00	$3.86
102263	2X8 Floor Or Roof Joist – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.45	$1.69	$0.00	$4.14
102264	2X10 Floor Or Roof Joist – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.62	$2.16	$0.00	$5.78
102265	2X10 Floor Or Roof Joist – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.62	$2.60	$0.00	$6.22
102266	2X10 Floor Or Roof Joist – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.30	$1.96	$0.00	$5.26
102267	2X10 Floor Or Roof Joist – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.30	$2.35	$0.00	$5.65
102268	2X10 Floor Or Roof Joist – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$2.97	$1.77	$0.00	$4.74
102269	2X10 Floor Or Roof Joist – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$2.97	$2.12	$0.00	$5.09
102270	2X12 Floor Or Roof Joist – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$4.27	$2.60	$0.00	$6.87
102271	2X12 Floor Or Roof Joist – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$4.27	$3.11	$0.00	$7.38
102272	2X12 Floor Or Roof Joist – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.88	$2.35	$0.00	$6.23
102273	2X12 Floor Or Roof Joist – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.88	$2.83	$0.00	$6.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102274	2X12 Floor Or Roof Joist – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SF	$3.50	$2.12	$0.00	$5.62
102275	2X12 Floor Or Roof Joist – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SF	$3.50	$2.55	$0.00	$6.05
102276	2X4 Rafter – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.42	$1.08	$0.00	$3.50
102277	2X4 Rafter – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.42	$1.29	$0.00	$3.71
102278	2X4 Rafter – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.20	$0.99	$0.00	$3.19
102279	2X4 Rafter – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.20	$1.18	$0.00	$3.38
102280	2X4 Rafter – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$1.98	$0.88	$0.00	$2.86
102281	2X4 Rafter – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$1.98	$1.06	$0.00	$3.04
102282	2X6 Rafter – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.90	$1.40	$0.00	$4.30
102283	2X6 Rafter – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.90	$1.68	$0.00	$4.58
102284	2X6 Rafter – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.63	$1.28	$0.00	$3.91
102285	2X6 Rafter – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.63	$1.54	$0.00	$4.17
102286	2X6 Rafter – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.37	$1.15	$0.00	$3.52
102287	2X6 Rafter – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.37	$1.38	$0.00	$3.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102288	2X8 Rafter – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$3.38	$1.73	$0.00	$5.11
102289	2X8 Rafter – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$3.38	$2.07	$0.00	$5.45
102290	2X8 Rafter – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$3.07	$1.57	$0.00	$4.64
102291	2X8 Rafter – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$3.07	$1.89	$0.00	$4.96
102292	2X8 Rafter – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$2.76	$1.41	$0.00	$4.17
102293	2X8 Rafter – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$2.76	$1.69	$0.00	$4.45
102294	2X10 Rafter – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$4.11	$2.16	$0.00	$6.27
102295	2X10 Rafter – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$4.11	$2.60	$0.00	$6.71
102296	2X10 Rafter – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$3.73	$1.96	$0.00	$5.69
102297	2X10 Rafter – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$3.73	$2.35	$0.00	$6.08
102298	2X10 Rafter – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$3.36	$1.77	$0.00	$5.13
102299	2X10 Rafter – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$3.36	$2.12	$0.00	$5.48
102300	2X12 Rafter – 12" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$4.82	$2.60	$0.00	$7.42
102301	2X12 Rafter – 12" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$4.82	$3.11	$0.00	$7.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102302	2X12 Rafter – 16" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$4.38	$2.35	$0.00	$6.73
102303	2X12 Rafter – 16" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$4.38	$2.83	$0.00	$7.21
102304	2X12 Rafter – 24" O.C. (> 500 SF) Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	SFRA	$3.94	$2.12	$0.00	$6.06
102305	2X12 Rafter – 24" O.C. (> 500 SF) – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	SFRA	$3.94	$2.55	$0.00	$6.49
102306	2x6 Built-Up Header or Beam w/ Plywood Filler Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$3.58	$1.69	$0.00	$5.27
102307	2x6 Built-Up Header or Beam w/ Plywood Filler – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$3.58	$2.04	$0.00	$5.62
102308	2x8 Built-Up Header or Beam w/ Plywood Filler Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.31	$1.74	$0.00	$6.05
102309	2x8 Built-Up Header or Beam w/ Plywood Filler – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.31	$2.10	$0.00	$6.41
102310	2x10 Built-Up Header or Beam w/ Plywood Filler Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.93	$2.22	$0.00	$7.15
102311	2x10 Built-Up Header or Beam w/ Plywood Filler – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.93	$2.66	$0.00	$7.59
102312	2x12 Built-Up Header or Beam w/ Plywood Filler Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$5.22	$2.74	$0.00	$7.96
102313	2x12 Built-Up Header or Beam w/ Plywood Filler – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$5.22	$3.30	$0.00	$8.52
102314	4x4 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.28	$2.28	$0.00	$6.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102315	4x4 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.28	$2.73	$0.00	$7.01
102316	4x6 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.28	$3.00	$0.00	$7.28
102317	4x6 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.28	$3.60	$0.00	$7.88
102318	4x8 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.76	$3.89	$0.00	$8.65
102319	4x8 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.76	$4.67	$0.00	$9.43
102320	6x6 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$5.18	$5.74	$0.00	$10.92
102321	6x6 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$5.18	$6.90	$0.00	$12.08
102322	6x8 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$4.76	$9.86	$0.00	$14.62
102323	6x8 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$4.76	$11.82	$0.00	$16.58
102324	6x10 Post Or Column Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber	LF	$5.43	$12.32	$0.00	$17.75
102325	6x10 Post Or Column – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber	LF	$5.43	$14.79	$0.00	$20.22
102326	Prefabricated Rough Framed Stair – LF of Tread Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber. Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$2.25	$8.63	$0.00	$10.88
102327	Prefabricated Rough Framed Stair – LF of Tread – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber. Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$2.25	$10.36	$0.00	$12.61
102328	Site Built Rough Framed Stair – LF of Tread Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber. Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$4.73	$6.28	$0.00	$11.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102329	Site Built Rough Framed Stair – LF of Tread – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber. Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$4.73	$7.53	$0.00	$12.26
102330	Prefabricated Rough Framed Stair Landing Section Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber. Includes, framing, sheathing, posts, fasteners, blocking, hangers	SF	$9.89	$69.07	$0.00	$78.96
102331	Prefabricated Rough Framed Stair Landing Section – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber. Includes, framing, sheathing, posts, fasteners, blocking, hangers	SF	$9.89	$82.88	$0.00	$92.77
102332	Site Built Rough Framed Stair Landing Section Wood Framing, #2 Grade or Better, Spruce/Pine/Fir (SPF) Dimensional Lumber. Includes, framing, sheathing, posts, fasteners, blocking, hangers	SF	$27.89	$48.66	$0.00	$76.55
102333	Site Built Rough Framed Stair Landing Section – Pressure Treated Wood Framing, #1 Grade or Better, Southern Yellow Pine (SYP) Dimensional Lumber. Includes, framing, sheathing, posts, fasteners, blocking, hangers	SF	$27.89	$58.39	$0.00	$86.28
102334	[Modifier] Small Stairs <20 LF of Tread Quantity premium can be used when total quantity in section 06-11-16 Mechanically Graded Lumber are within stated quantity. Can be applied cumulatively to base line items.	LF	$27.15	$0.00	$0.00	$27.15
102335	[Modifier] Small Quantity Framing <60 LF Quantity premium can be used when total quantity in section 06-11-16 Mechanically Graded Lumber are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05
102336	[Modifier] Quantity Premium - Graded Lumber (101-500 SF) Quantity premium can be used when total square footage in section 06-11-16 Graded Lumber are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102337	[Modifier] Quantity Premium - Graded Lumber (51-100 SF) Quantity premium can be used when total square footage in section 06-11-16 Graded Lumber are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102338	[Modifier] Quantity Premium - Graded Lumber (< or = to 50 SF) Quantity premium can be used when total square footage in section 06-11-16 Graded Lumber are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102339	[Modifier] Seismic Framing Hardware For Roof Framing Seismic Framing Hardware/SF. Can apply where applicable by code. Includes required embeds for concrete and masonry for both horizontal and vertical applications	SF	$0.56	$0.93	$0.00	$1.49
102340	[Modifier] Seismic Framing Hardware For Wall Framing Seismic Framing Hardware/SF. Can apply where applicable by code. Includes required embeds for concrete and masonry for both horizontal and vertical applications	SF	$0.26	$0.50	$0.00	$0.76
102341	[Modifier] Seismic Framing Hardware For Floor Framing Seismic Framing Hardware/SF. Can apply where applicable by code. Includes required embeds for concrete and masonry for both horizontal and vertical applications	SF	$0.31	$0.65	$0.00	$0.96
	06-12-00 Structural Panels					
	06-12-00 Structural Panels					
102342	Up to 4.5in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R16	SF	$2.52	$9.79	$0.00	$12.31
102343	Up to 4.5in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R16 – Pressure Treated	SF	$2.52	$11.75	$0.00	$14.27
102344	Up to 6.5in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R24	SF	$2.52	$10.64	$0.00	$13.16
102345	Up to 6.5in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R24 – Pressure Treated	SF	$2.52	$12.78	$0.00	$15.30
102346	Up to 8.25in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R32	SF	$2.52	$11.56	$0.00	$14.08
102347	Up to 8.25in Structural Insulated Panels (SIPs) Panels 1/2" OSB 2 Sides EPS Core R32 – Pressure Treated	SF	$2.52	$13.87	$0.00	$16.39
102348	Structural Insulated Panels (SIPs) Panels Raceway Routing	LF	$2.71	$0.00	$0.00	$2.71
102349	[Modifier] Structural Insulated Panels (SIPs) Panels Size Adjustment Line item can be used to account for larger panel sizes. Can be applied cumulatively to base line items	SF	$1.67	$4.57	$0.00	$6.24
102350	[Modifier] Small Quantity of Structural Insulated Panels (SIPs) <200 SF Quantity premium can be used when total quantity in section 06-12-00 Structural Panels are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	06-13-00 Heavy Timber Construction					
	Items in this category include all connections, fasteners, and anchors					
	06-13-00 Heavy Timber Construction					
	Items in this category include all connections, fasteners, and anchors					
102351	Up to 4x6 Timber Framing	LF	$10.05	$2.07	$0.00	$12.12
102352	Up to 4x6 Timber Framing – Pressure Treated	LF	$10.05	$2.49	$0.00	$12.54
102353	Up to 4x8 Timber Framing	LF	$10.05	$2.73	$0.00	$12.78
102354	Up to 4x8 Timber Framing – Pressure Treated	LF	$10.05	$3.27	$0.00	$13.32
102355	Up to 4x10 Timber Framing	LF	$11.09	$3.54	$0.00	$14.63
102356	Up to 4x10 Timber Framing – Pressure Treated	LF	$11.09	$4.24	$0.00	$15.33
102357	Up to 4x12 Timber Framing	LF	$12.06	$5.23	$0.00	$17.29
102358	Up to 4x12 Timber Framing – Pressure Treated	LF	$12.06	$6.27	$0.00	$18.33
102359	Up to 6x8 Timber Framing	LF	$11.09	$8.96	$0.00	$20.05
102360	Up to 6x8 Timber Framing – Pressure Treated	LF	$11.09	$10.75	$0.00	$21.84
102361	Up to 6x10 Timber Framing	LF	$12.63	$11.20	$0.00	$23.83
102362	Up to 6x10 Timber Framing – Pressure Treated	LF	$12.63	$13.45	$0.00	$26.08
102363	Up to 6x12 Timber Framing	LF	$20.88	$13.45	$0.00	$34.33
102364	Up to 6x12 Timber Framing – Pressure Treated	LF	$20.88	$16.13	$0.00	$37.01
102365	Timber Roof Truss Scissors truss, up to 40' span, up to 9/12 pitch, with overhangs. Includes 3rd party engineering, fabrication, delivery and installation.	EA	$2,041.57	$11,320.58	$0.00	$13,362.15
102366	Timber Roof Truss – Pressure Treated Scissors truss, up to 40' span, up to 9/12 pitch, with overhangs. Includes 3rd party engineering, fabrication, delivery and installation.	EA	$2,041.57	$13,584.71	$0.00	$15,626.28
102367	[Modifier] Timber Framing Size Adjustment Line item can be used to account for larger beam sizes. Can be applied cumulatively to base line items	LF	$7.24	$2.85	$0.00	$10.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102368	[Modifier] Small Quantity Timber Framing <60 LF Quantity premium can be used when total quantity in section 06-13-00 Heavy Timber Construction are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05
	06-15-00 Wood Decking					
	06-15-00 Wood Decking					
102369	Deck Pier - Metal, 32" High Includes furnish and installation of tie down adjustable deck pier, ABS pad, adjustable post cap, Minute Man (or equal) cross drive anchor with tie down straps	EA	$125.00	$264.12	$8.83	$397.95
102370	Car Decking Tongue and Groove (T and G) 2 x 6 Tight Knot	SF	$1.36	$4.71	$0.00	$6.07
102371	Car Decking Tongue and Groove (T and G) 3 x 6 Tight Knot	SF	$1.67	$5.89	$0.00	$7.56
102372	Car Decking Tongue and Groove (T and G) Pressure Treated 5/4 x 6 Tight Knot	SF	$1.28	$4.32	$0.00	$5.60
102373	Car Decking Tongue and Groove (T and G) Pressure Treated 2 x 6 Tight Knot	SF	$1.36	$6.67	$0.00	$8.03
102374	Car Decking Tongue and Groove (T and G) Pressure Treated 3 x 6 Tight Knot	SF	$1.67	$7.85	$0.00	$9.52
102375	Car Decking Tongue and Groove (T and G) 1 x 6 Tight Knot	SF	$0.94	$1.08	$0.00	$2.02
102376	4" Laminated Wood Roof Deck	SF	$3.20	$16.21	$0.00	$19.41
102377	[Modifier] Small Quantity of Decking <200 SF Quantity premium can be used when total quantity in section 06-15-00 Wood Decking are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
	06-16-00 Sheathing					
	06-16-00 Sheathing					
102378	1/4" Grade AC Plywood Sheathing	SF	$0.95	$1.44	$0.00	$2.39
102379	1/4" Grade AC Plywood Sheathing – Pressure Treated	SF	$0.95	$1.73	$0.00	$2.68
102380	3/8" Grade AC Plywood Sheathing	SF	$1.02	$1.54	$0.00	$2.56
102381	3/8" Grade AC Plywood Sheathing – Pressure Treated	SF	$1.02	$1.84	$0.00	$2.86
102382	1/2" Grade AC Plywood Sheathing	SF	$1.10	$1.85	$0.00	$2.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102383	1/2" Grade AC Plywood Sheathing – Pressure Treated	SF	$1.10	$2.22	$0.00	$3.32
102384	1/2" Grade CDX Exterior Plywood Sheathing	SF	$1.10	$0.99	$0.00	$2.09
102385	1/2" Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.10	$1.18	$0.00	$2.28
102386	5/8" Grade CDX Exterior Plywood Sheathing	SF	$1.17	$1.28	$0.00	$2.45
102387	5/8" Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.17	$1.93	$0.00	$3.10
102388	3/4" Grade CDX Exterior Plywood Sheathing	SF	$1.24	$1.67	$0.00	$2.91
102389	3/4" Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.24	$2.50	$0.00	$3.74
102390	5/8" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing	SF	$1.28	$1.60	$0.00	$2.88
102391	5/8" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.28	$3.55	$0.00	$4.83
102392	3/4" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing	SF	$1.35	$2.08	$0.00	$3.43
102393	3/4" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.35	$1.66	$0.00	$3.01
102394	1-1/8" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing	SF	$1.48	$2.95	$0.00	$4.43
102395	1-1/8" Tongue and Groove (T&G) Grade CDX Exterior Plywood Sheathing – Pressure Treated	SF	$1.48	$2.15	$0.00	$3.63
102396	1/2" Grade BC Fire Retardant Plywood Sheathing	SF	$1.10	$1.38	$0.00	$2.48
102397	1/2" Grade BC Fire Retardant Plywood Sheathing – Pressure Treated	SF	$1.10	$2.79	$0.00	$3.89
102398	5/8" Grade BC Fire Retardant Plywood Sheathing	SF	$1.17	$1.79	$0.00	$2.96
102399	5/8" Grade BC Fire Retardant Plywood Sheathing – Pressure Treated	SF	$1.17	$3.50	$0.00	$4.67
102400	3/4" Grade BC Fire Retardant Plywood Sheathing	SF	$1.24	$2.33	$0.00	$3.57
102401	3/4" Grade BC Fire Retardant Plywood Sheathing – Pressure Treated	SF	$1.24	$1.00	$0.00	$2.24
102402	3/4" Tongue and Groove (T&G) Grade BC Fire Retardant Plywood Sheathing	SF	$1.35	$2.91	$0.00	$4.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102403	3/4" Tongue and Groove ((T&G) Grade BC Fire Retardant Plywood Sheathing – Pressure Treated	SF	$1.35	$1.04	$0.00	$2.39
102404	7/16" Oriented Strand Board (OSB) Sheathing	SF	$1.06	$0.83	$0.00	$1.89
102405	7/16" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.06	$1.24	$0.00	$2.30
102406	1/2" Oriented Strand Board (OSB) Sheathing	SF	$1.10	$0.87	$0.00	$1.97
102407	1/2" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.10	$1.49	$0.00	$2.59
102408	9/16" Oriented Strand Board (OSB) Sheathing	SF	$1.14	$1.04	$0.00	$2.18
102409	9/16" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.14	$1.79	$0.00	$2.93
102410	5/8" Oriented Strand Board (OSB) Sheathing	SF	$1.17	$1.24	$0.00	$2.41
102411	5/8" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.17	$2.89	$0.00	$4.06
102412	3/4" Oriented Strand Board (OSB) Sheathing	SF	$1.24	$1.50	$0.00	$2.74
102413	3/4" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.24	$1.40	$0.00	$2.64
102414	1-1/8" Oriented Strand Board (OSB) Sheathing	SF	$1.38	$2.40	$0.00	$3.78
102415	1-1/8" Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.38	$2.61	$0.00	$3.99
102416	7/16" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.06	$1.17	$0.00	$2.23
102417	7/16" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.06	$1.54	$0.00	$2.60
102418	15/32" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.06	$1.18	$0.00	$2.24
102419	15/32" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.06	$1.43	$0.00	$2.49
102420	1/2" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.10	$1.21	$0.00	$2.31
102421	1/2" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.10	$2.00	$0.00	$3.10
102422	9/16" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.14	$1.45	$0.00	$2.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102423	9/16" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.14	$1.45	$0.00	$2.59
102424	5/8" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.17	$1.74	$0.00	$2.91
102425	5/8" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.17	$1.74	$0.00	$2.91
102426	3/4" Structural Oriented Strand Board (OSB) Sheathing	SF	$1.24	$2.10	$0.00	$3.34
102427	3/4" Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.24	$2.08	$0.00	$3.32
102428	5/8" Tongue and Groove (T&G) Structural Oriented Strand Board (OSB) Sheathing	SF	$1.28	$2.18	$0.00	$3.46
102429	5/8" Tongue and Groove (T&G) Structural Oriented Strand Board (OSB) Sheathing – Pressure Treated	SF	$1.28	$2.51	$0.00	$3.79
102430	1/4" Fiber Cement Board Sheathing	SF	$1.06	$1.77	$0.00	$2.83
102431	1/2" Fiber Cement Board Sheathing	SF	$1.28	$2.04	$0.00	$3.32
102432	5/8" Gypsum Exterior Sheathing	SF	$0.94	$0.54	$0.00	$1.48
102433	5/8" Fiberglass Reinforced Gypsum Sheathing	SF	$0.94	$0.61	$0.00	$1.55
102434	1/2" Fiberglass Reinforced Gypsum Sheathing	SF	$0.94	$0.77	$0.00	$1.71
102435	1/8" Masonite Sheathing	SF	$0.80	$0.52	$0.00	$1.32
102436	[Modifier] Small Quantity of Sheathing <200 SF Quantity premium can be used when total quantity in section 06-16-00 Sheathing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

06-17-00 Shop-Fabricated Structural Wood

06-17-11 Laminated Strand Lumber

Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102437	Up to 9.5" Deep Laminated Strand Lumber (LSL)	LF	$1.06	$3.18	$0.00	$4.24
102438	Up to 9.5" Deep Laminated Strand Lumber (LSL) – Pressure Treated	LF	$1.06	$3.82	$0.00	$4.88
102439	Over 9.5" and up to 12" Deep Laminated Strand Lumber (LSL)	LF	$1.06	$3.54	$0.00	$4.60
102440	Over 9.5" and up to 12" Deep Laminated Strand Lumber (LSL) – Pressure Treated	LF	$1.06	$4.24	$0.00	$5.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102441	Over 12" and up to 14" Deep Laminated Strand Lumber (LSL)	LF	$1.06	$4.24	$0.00	$5.30
102442	Over 12" and up to 14" Deep Laminated Strand Lumber (LSL) – Pressure Treated	LF	$1.06	$5.08	$0.00	$6.14
102443	Over 14" and up to 16" Deep Laminated Strand Lumber (LSL)	LF	$1.31	$4.71	$0.00	$6.02
102444	Over 14" and up to 16" Deep Laminated Strand Lumber (LSL) – Pressure Treated	LF	$1.31	$5.64	$0.00	$6.95
102445	[Modifier] Laminated Strand Lumber (LSL) Size Adjustment Line item can be used to account for larger sizes. Can be applied cumulatively to base line items	LF	$0.84	$2.06	$0.00	$2.90
102446	[Modifier] Laminated Strand Lumber (LSL) <60 LF Quantity premium can be used when total quantity in section 06-17-11 Laminated Strand Lumber are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-17-13 Laminated Veneer Lumber

Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102447	Up to 9.5" Laminated Veneer Lumber (LVL)	LF	$1.06	$3.54	$0.00	$4.60
102448	Up to 9.5" Laminated Veneer Lumber (LVL) – Pressure Treated	LF	$1.06	$4.24	$0.00	$5.30
102449	Over 9.5" and up to 12" Laminated Veneer Lumber (LVL)	LF	$1.06	$3.93	$0.00	$4.99
102450	Over 9.5" and up to 12" Laminated Veneer Lumber (LVL) – Pressure Treated	LF	$1.06	$4.71	$0.00	$5.77
102451	Over 12" and up to 14" Laminated Veneer Lumber (LVL)	LF	$1.06	$4.71	$0.00	$5.77
102452	Over 12" and up to 14" Laminated Veneer Lumber (LVL) – Pressure Treated	LF	$1.06	$5.66	$0.00	$6.72
102453	Over 14" and up to 16" Laminated Veneer Lumber (LVL)	LF	$1.31	$5.23	$0.00	$6.54
102454	Over 14" and up to 16" Laminated Veneer Lumber (LVL) – Pressure Treated	LF	$1.31	$6.28	$0.00	$7.59
102455	[Modifier] Laminated Veneer Lumber (LVL) Size Adjustment Line item can be used to account for larger sizes. Can be applied cumulatively to base line items	LF	$0.84	$2.28	$0.00	$3.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102456	[Modifier] Laminated Veneer Lumber (LVL) < 60 LF Quantity premium can be used when total quantity in section 06-17-13 Laminated Veneer Lumber are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-17-23 Parallel Strand Lumber

Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102457	Up to 6" Parallel Laminated Strand Lumber (LSL)3-1/2"	LF	$7.07	$21.98	$0.00	$29.05
102458	Up to 6" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$7.07	$26.37	$0.00	$33.44
102459	Up to 8" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$7.07	$25.11	$0.00	$32.18
102460	Up to 8" Parallel Laminated Strand Lumber (LSL) – Pressure Treated	LF	$7.07	$30.13	$0.00	$37.20
102461	Up to 12" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$6.29	$28.26	$0.00	$34.55
102462	Up to 12" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$6.29	$33.90	$0.00	$40.19
102463	Up to 14" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$6.29	$34.53	$0.00	$40.82
102464	Up to 14" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$6.29	$41.45	$0.00	$47.74
102465	Up to 16" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$6.29	$58.09	$0.00	$64.38
102466	Up to 16" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$6.29	$69.70	$0.00	$75.99
102467	Up to 18" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$5.66	$59.65	$0.00	$65.31
102468	Up to 18" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$5.66	$71.58	$0.00	$77.24
102469	Up to 20" Parallel Laminated Strand Lumber (LSL) 3-1/2"	LF	$5.66	$65.92	$0.00	$71.58
102470	Up to 20" Parallel Laminated Strand Lumber (LSL) 3-1/2" – Pressure Treated	LF	$5.66	$79.11	$0.00	$84.77
102471	Up to 4" x 4" Parallel Laminated Strand Lumber (LSL)	LF	$7.07	$21.98	$0.00	$29.05
102472	Up to 4" x 4" Parallel Laminated Strand Lumber (LSL) – Pressure Treated	LF	$7.07	$26.37	$0.00	$33.44
102473	Up to 6" x 6" Parallel Laminated Strand Lumber (LSL)	LF	$7.07	$25.11	$0.00	$32.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102474	Up to 6" x 6" Parallel Laminated Strand Lumber (LSL) – Pressure Treated	LF	$7.07	$30.13	$0.00	$37.20
102475	Up to 8" x 8" Parallel Laminated Strand Lumber (LSL)	LF	$6.29	$28.26	$0.00	$34.55
102476	Up to 8" x 8" Parallel Laminated Strand Lumber (LSL) – Pressure Treated	LF	$6.29	$33.90	$0.00	$40.19
102477	[Modifier] Parallel Strand Size Adjustment Line item can be used to account for larger sizes. Can be applied cumulatively to base line items	LF	$3.62	$11.42	$0.00	$15.04
102478	[Modifier] Parallel Strand Adjustment for Small Quantity <60 LF Quantity premium can be used when total quantity in section 06-17-23 Parallel Strand Lumber are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-17-33 Truss Joist

TJI or equal. Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102479	Up to 9.5" Truss Joist TJI 210 Joist	LF	$3.01	$5.17	$0.00	$8.18
102480	Up to 9.5" Truss Joist TJI 210 Joist – Pressure Treated	LF	$3.01	$6.19	$0.00	$9.20
102481	Up to 12" Truss Joist TJI 210 Joist	LF	$3.02	$5.70	$0.00	$8.72
102482	Up to 12" Truss Joist TJI 210 Joist – Pressure Treated	LF	$3.02	$6.84	$0.00	$9.86
102483	Up to 14" Truss Joist TJI 210 Joist	LF	$3.56	$6.51	$0.00	$10.07
102484	Up to 14" Truss Joist TJI 210 Joist – Pressure Treated	LF	$3.56	$7.81	$0.00	$11.37
102485	Up to 16" Truss Joist TJI 210 Joist	LF	$3.58	$7.34	$0.00	$10.92
102486	Up to 16" Truss Joist TJI 210 Joist – Pressure Treated	LF	$3.58	$8.80	$0.00	$12.38
102487	Up to 9.5" Truss Joist TJI 230 Joist	LF	$3.01	$6.51	$0.00	$9.52
102488	Up to 9.5" Truss Joist TJI 230 Joist – Pressure Treated	LF	$3.01	$7.81	$0.00	$10.82
102489	Up to 12" Truss Joist TJI 230 Joist	LF	$3.02	$7.34	$0.00	$10.36
102490	Up to 12" Truss Joist TJI 230 Joist – Pressure Treated	LF	$3.02	$8.80	$0.00	$11.82
102491	Up to 14" Truss Joist TJI 230 Joist	LF	$3.56	$8.14	$0.00	$11.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102492	Up to 14" Truss Joist TJI 230 Joist – Pressure Treated	LF	$3.56	$9.78	$0.00	$13.34
102493	Up to 16" Truss Joist TJI 230 Joist	LF	$3.58	$8.96	$0.00	$12.54
102494	Up to 16" Truss Joist TJI 230 Joist – Pressure Treated	LF	$3.58	$10.75	$0.00	$14.33
102495	Up to 9.5" Open Web TJL Wood Joist	LF	$3.01	$5.68	$0.00	$8.69
102496	Up to 9.5" Open Web TJL Wood Joist – Pressure Treated	LF	$3.01	$6.81	$0.00	$9.82
102497	Up to 12" Open Web TJL Wood Joist	LF	$3.02	$6.27	$0.00	$9.29
102498	Up to 12" Open Web TJL Wood Joist – Pressure Treated	LF	$3.02	$7.52	$0.00	$10.54
102499	Up to 14" Open Web TJL Wood Joist	LF	$3.56	$7.17	$0.00	$10.73
102500	Up to 14" Open Web TJL Wood Joist – Pressure Treated	LF	$3.56	$8.61	$0.00	$12.17
102501	Up to 16" Open Web TJL Wood Joist	LF	$3.58	$8.06	$0.00	$11.64
102502	Up to 16" Open Web TJL Wood Joist – Pressure Treated	LF	$3.58	$9.68	$0.00	$13.26
102503	Up to 9.5" Open Web TJW Wood Joist	LF	$3.01	$7.17	$0.00	$10.18
102504	Up to 9.5" Open Web TJW Wood Joist – Pressure Treated	LF	$3.01	$8.61	$0.00	$11.62
102505	Up to 12" Open Web TJW Wood Joist	LF	$3.02	$8.06	$0.00	$11.08
102506	Up to 12" Open Web TJW Wood Joist – Pressure Treated	LF	$3.02	$9.68	$0.00	$12.70
102507	Up to 14" Open Web TJW Wood Joist	LF	$3.56	$8.96	$0.00	$12.52
102508	Up to 14" Open Web TJW Wood Joist – Pressure Treated	LF	$3.56	$10.75	$0.00	$14.31
102509	Up to 16" Open Web TJW Wood Joist	LF	$3.58	$9.86	$0.00	$13.44
102510	Up to 16" Open Web TJW Wood Joist – Pressure Treated	LF	$3.58	$11.84	$0.00	$15.42
102511	[Modifier] Truss and Open Web Wood Joist Size Adjustment Line item can be used to account for larger sizes. Can be applied cumulatively to base line items	LF	$2.17	$4.00	$0.00	$6.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102512	[Modifier] Truss and Open Web Wood Joist <60 LF Quantity premium can be used when total quantity in section 06-17-33 Wood I-Joists are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-17-53 Shop-Fabricated Wood Trusses

2x dimensional lumber construction with framing connectors, sized to carry design loads. Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102513	Pre-Assembled Wood Truss Up To 4/12 Pitch 0-14 FT Span	EA	$84.85	$171.10	$0.00	$255.95
102514	Pre-Assembled Wood Truss Up To 4/12 Pitch 0-14 FT Span – Pressure Treated	EA	$84.85	$205.32	$0.00	$290.17
102515	Pre-Assembled Wood Truss Up To 4/12 Pitch 14-18 FT Span	EA	$89.02	$219.76	$0.00	$308.78
102516	Pre-Assembled Wood Truss Up To 4/12 Pitch 14-18 FT Span – Pressure Treated	EA	$89.02	$263.72	$0.00	$352.74
102517	Pre-Assembled Wood Truss Up To 4/12 Pitch 18-22 FT Span	EA	$92.05	$266.85	$0.00	$358.90
102518	Pre-Assembled Wood Truss Up To 4/12 Pitch 18-22 FT Span – Pressure Treated	EA	$92.05	$320.22	$0.00	$412.27
102519	Pre-Assembled Wood Truss Up To 4/12 Pitch 22-26 FT Span	EA	$96.97	$315.51	$0.00	$412.48
102520	Pre-Assembled Wood Truss Up To 4/12 Pitch 22-26 FT Span – Pressure Treated	EA	$96.97	$378.62	$0.00	$475.59
102521	Pre-Assembled Wood Truss Up To 4/12 Pitch 26-30 FT Span	EA	$102.46	$364.18	$0.00	$466.64
102522	Pre-Assembled Wood Truss Up To 4/12 Pitch 26-30 FT Span – Pressure Treated	EA	$102.46	$437.01	$0.00	$539.47
102523	Pre-Assembled Wood Truss Up To 4/12 Pitch 34-38 FT Span	EA	$113.14	$461.50	$0.00	$574.64
102524	Pre-Assembled Wood Truss Up To 4/12 Pitch 34-38 FT Span – Pressure Treated	EA	$113.14	$553.80	$0.00	$666.94
102525	Pre-Assembled Wood Truss Up To 4/12 Pitch 38-50 FT Span	EA	$118.05	$607.49	$0.00	$725.54
102526	Pre-Assembled Wood Truss Up To 4/12 Pitch 38-50 FT Span – Pressure Treated	EA	$118.05	$728.99	$0.00	$847.04
102527	Pre-Assembled Wood Truss Up To 7/12- Pitch 0-14 FT Span	EA	$92.05	$226.04	$0.00	$318.09
102528	Pre-Assembled Wood Truss Up To 7/12- Pitch 0-14 FT Span – Pressure Treated	EA	$92.05	$271.25	$0.00	$363.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102529	Pre-Assembled Wood Truss Up To 7/12- Pitch 14-18 FT Span	EA	$96.97	$290.40	$0.00	$387.37
102530	Pre-Assembled Wood Truss Up To 7/12- Pitch 14-18 FT Span – Pressure Treated	EA	$96.97	$348.48	$0.00	$445.45
102531	Pre-Assembled Wood Truss Up To 7/12- Pitch 18-22 FT Span	EA	$102.46	$356.33	$0.00	$458.79
102532	Pre-Assembled Wood Truss Up To 7/12- Pitch 18-22 FT Span – Pressure Treated	EA	$102.46	$427.60	$0.00	$530.06
102533	Pre-Assembled Wood Truss Up To 7/12- Pitch 22-26 FT Span	EA	$106.48	$420.69	$0.00	$527.17
102534	Pre-Assembled Wood Truss Up To 7/12- Pitch 22-26 FT Span – Pressure Treated	EA	$106.48	$504.82	$0.00	$611.30
102535	Pre-Assembled Wood Truss Up To 7/12- Pitch 26-30 FT Span	EA	$113.14	$485.05	$0.00	$598.19
102536	Pre-Assembled Wood Truss Up To 7/12- Pitch 26-30 FT Span – Pressure Treated	EA	$113.14	$582.06	$0.00	$695.20
102537	Pre-Assembled Wood Truss Up To 7/12 Pitch 34-38 FT Span	EA	$123.42	$613.77	$0.00	$737.19
102538	Pre-Assembled Wood Truss Up To 7/12 Pitch 34-38 FT Span – Pressure Treated	EA	$123.42	$736.52	$0.00	$859.94
102539	Pre-Assembled Wood Truss Up To 7/12 Pitch 38-50 FT Span	EA	$129.29	$806.84	$0.00	$936.13
102540	Pre-Assembled Wood Truss Up To 7/12 Pitch 38-50 FT Span – Pressure Treated	EA	$129.29	$968.20	$0.00	$1,097.49
102541	Pre-Assembled Wood Truss Up To 8/12 Pitch 0-14 FT Span	EA	$96.97	$282.55	$0.00	$379.52
102542	Pre-Assembled Wood Truss Up To 8/12 Pitch 0-14 FT Span – Pressure Treated	EA	$96.97	$339.06	$0.00	$436.03
102543	Pre-Assembled Wood Truss Up To 8/12 Pitch 14-18 FT Span	EA	$102.46	$364.18	$0.00	$466.64
102544	Pre-Assembled Wood Truss Up To 8/12 Pitch 14-18 FT Span – Pressure Treated	EA	$102.46	$437.01	$0.00	$539.47
102545	Pre-Assembled Wood Truss Up To 8/12 Pitch 18-22 FT Span	EA	$106.48	$444.23	$0.00	$550.71
102546	Pre-Assembled Wood Truss Up To 8/12 Pitch 18-22 FT Span – Pressure Treated	EA	$106.48	$533.08	$0.00	$639.56
102547	Pre-Assembled Wood Truss Up To 8/12 Pitch 22-26 FT Span	EA	$113.14	$525.86	$0.00	$639.00
102548	Pre-Assembled Wood Truss Up To 8/12 Pitch 22-26 FT Span – Pressure Treated	EA	$113.14	$631.03	$0.00	$744.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102549	Pre-Assembled Wood Truss Up To 8/12 Pitch 26-30 FT Span	EA	$118.05	$605.92	$0.00	$723.97
102550	Pre-Assembled Wood Truss Up To 8/12 Pitch 26-30 FT Span – Pressure Treated	EA	$118.05	$727.10	$0.00	$845.15
102551	Pre-Assembled Wood Truss Up To 8/12 Pitch 34-38 FT Span	EA	$129.29	$767.59	$0.00	$896.88
102552	Pre-Assembled Wood Truss Up To 8/12 Pitch 34-38 FT Span – Pressure Treated	EA	$129.29	$921.11	$0.00	$1,050.40
102553	Pre-Assembled Wood Truss Up To 8/12 Pitch 38-50 FT Span	EA	$135.76	$1,009.33	$0.00	$1,145.09
102554	Pre-Assembled Wood Truss Up To 8/12 Pitch 38-50 FT Span – Pressure Treated	EA	$135.76	$1,211.20	$0.00	$1,346.96
102555	Pre-Assembled Wood Truss Flat Or Tapered Up To 38-50 FT Span	EA	$123.42	$646.73	$0.00	$770.15
102556	Pre-Assembled Wood Truss Flat Or Tapered Up To 38-50 FT Span – Pressure Treated	EA	$123.42	$776.08	$0.00	$899.50
102557	Pre-Assembled Wood Truss Flat Or Tapered Up To 34-38 FT Span	EA	$118.05	$516.44	$0.00	$634.49
102558	Pre-Assembled Wood Truss Flat Or Tapered Up To 34-38 FT Span – Pressure Treated	EA	$118.05	$619.73	$0.00	$737.78
102559	Pre-Assembled Wood Truss Flat Or Tapered Up To 30-34 FT Span	EA	$106.48	$389.29	$0.00	$495.77
102560	Pre-Assembled Wood Truss Flat Or Tapered Up To 30-34 FT Span – Pressure Treated	EA	$106.48	$467.15	$0.00	$573.63
102561	Open Web Trusses Flat Or Tapered Up To 14-24 FT Span	SF	$1.59	$6.05	$0.00	$7.64
102562	Open Web Trusses Flat Or Tapered Up To 14-24 FT Span – Pressure Treated	SF	$1.59	$7.25	$0.00	$8.84
102563	Open Web Trusses Flat Or Tapered Up To 26-36 FT Span	SF	$2.62	$7.25	$0.00	$9.87
102564	Open Web Trusses Flat Or Tapered Up To 26-36 FT Span – Pressure Treated	SF	$2.62	$8.70	$0.00	$11.32
102565	Open Web Trusses Flat Or Tapered Up To 38-50 FT Span	SF	$3.97	$8.72	$0.00	$12.69
102566	Open Web Trusses Flat Or Tapered Up To 38-50 FT Span – Pressure Treated	SF	$3.97	$10.46	$0.00	$14.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102567	[Modifier] Open Web Truss Adjustment for Small Quantity <200 SF Quantity premium can be used when total quantity in section 06-17-53 Shop-Fabricated Wood Trusses are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102568	[Modifier] Add for Small Quantity of Roof Truss Work <6 EA Quantity premium can be used when total quantity in section 06-17-53 Shop-Fabricated Wood Trusses are within stated quantity. Can be applied cumulatively to base line items.	EA	$90.50	$0.00	$0.00	$90.50

06-18-00 Glued-Laminated Construction

06-18-13 Glued-Laminated Beams

Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections. Includes Labor and Material for system in place including blocking, bridging, fasteners, and connections

102569	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 12" Architectural	LF	$8.69	$35.68	$0.00	$44.37
102570	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 12" Architectural – Pressure Treated	LF	$8.69	$42.81	$0.00	$51.50
102571	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 12" Industrial	LF	$8.69	$15.70	$0.00	$24.39
102572	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 12" Industrial – Pressure Treated	LF	$8.69	$18.83	$0.00	$27.52
102573	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 18" Architectural	LF	$9.65	$49.94	$0.00	$59.59
102574	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 18" Architectural – Pressure Treated	LF	$9.65	$59.94	$0.00	$69.59
102575	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 18" Industrial	LF	$9.65	$21.98	$0.00	$31.63
102576	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 18" Industrial – Pressure Treated	LF	$9.65	$26.37	$0.00	$36.02
102577	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 24" Architectural	LF	$10.86	$60.65	$0.00	$71.51
102578	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 24" Architectural – Pressure Treated	LF	$10.86	$72.77	$0.00	$83.63
102579	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 24" Industrial	LF	$10.86	$26.68	$0.00	$37.54
102580	Glue-Laminated Beam (GLB) - Up To 3-1/2" x 24" Industrial – Pressure Treated	LF	$10.86	$32.02	$0.00	$42.88
102581	Glue-Laminated Beam (GLB) - 5-1/2" x 12" Architectural	LF	$8.69	$45.66	$0.00	$54.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102582	Glue-Laminated Beam (GLB) - 5-1/2" x 12" Architectural – Pressure Treated	LF	$8.69	$54.79	$0.00	$63.48
102583	Glue-Laminated Beam (GLB) - 5-1/2" x 12" Industrial	LF	$8.69	$34.25	$0.00	$42.94
102584	Glue-Laminated Beam (GLB) - 5-1/2" x 12" Industrial – Pressure Treated	LF	$8.69	$41.09	$0.00	$49.78
102585	Glue-Laminated Beam (GLB) - 5-1/2" x 18" Architectural	LF	$9.65	$57.09	$0.00	$66.74
102586	Glue-Laminated Beam (GLB) - 5-1/2" x 18" Architectural – Pressure Treated	LF	$9.65	$68.50	$0.00	$78.15
102587	Glue-Laminated Beam (GLB) - 5-1/2" x 18" Industrial	LF	$9.65	$42.81	$0.00	$52.46
102588	Glue-Laminated Beam (GLB) - 5-1/2" x 18" Industrial – Pressure Treated	LF	$9.65	$51.37	$0.00	$61.02
102589	Glue-Laminated Beam (GLB) - 5-1/2" x 24" Architectural	LF	$10.86	$68.50	$0.00	$79.36
102590	Glue-Laminated Beam (GLB) - 5-1/2" x 24" Architectural – Pressure Treated	LF	$10.86	$82.20	$0.00	$93.06
102591	Glue-Laminated Beam (GLB) - 5-1/2" x 24" Industrial	LF	$10.86	$51.37	$0.00	$62.23
102592	Glue-Laminated Beam (GLB) - 5-1/2" x 24" Industrial – Pressure Treated	LF	$10.86	$61.64	$0.00	$72.50
102593	Glue-Laminated Beam (GLB) - 5-1/2" x 30" Architectural	LF	$12.41	$77.63	$0.00	$90.04
102594	Glue-Laminated Beam (GLB) - 5-1/2" x 30" Architectural – Pressure Treated	LF	$12.41	$93.16	$0.00	$105.57
102595	Glue-Laminated Beam (GLB) - 5-1/2" x 30" Industrial	LF	$12.41	$58.22	$0.00	$70.63
102596	Glue-Laminated Beam (GLB) - 5-1/2" x 30" Industrial – Pressure Treated	LF	$12.41	$69.87	$0.00	$82.28
102597	Glue-Laminated Beam (GLB) - 5-1/2" x 36" Architectural	LF	$14.48	$91.33	$0.00	$105.81
102598	Glue-Laminated Beam (GLB) - 5-1/2" x 36" Architectural – Pressure Treated	LF	$14.48	$109.60	$0.00	$124.08
102599	Glue-Laminated Beam (GLB) - 5-1/2" x 36" Industrial	LF	$14.48	$68.50	$0.00	$82.98
102600	Glue-Laminated Beam (GLB) - 5-1/2" x 36" Industrial – Pressure Treated	LF	$14.48	$82.20	$0.00	$96.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102601	Glue-Laminated Beam (GLB) - Up To 4" x 6" Architectural Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$35.68	$0.00	$44.37
102602	Glue-Laminated Beam (GLB) - Up To 4" x 6" Architectural – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$42.81	$0.00	$51.50
102603	Glue-Laminated Beam (GLB) - Up To 4" x 6" Industrial Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$15.70	$0.00	$24.39
102604	Glue-Laminated Beam (GLB) - Up To 4" x 6" Industrial – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$18.83	$0.00	$27.52
102605	Glue-Laminated Beam (GLB) - 4" x 8" Architectural Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$9.65	$49.94	$0.00	$59.59
102606	Glue-Laminated Beam (GLB) - 4" x 8" Architectural – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$9.65	$59.94	$0.00	$69.59
102607	Glue-Laminated Beam (GLB) - 4" x 8" Industrial Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$9.65	$21.98	$0.00	$31.63
102608	Glue-Laminated Beam (GLB) - 4" x 8" Industrial – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$9.65	$26.37	$0.00	$36.02
102609	Glue-Laminated Beam (GLB) - 6" x 6" Architectural Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$10.86	$60.65	$0.00	$71.51
102610	Glue-Laminated Beam (GLB) - 6" x 6" Architectural – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$10.86	$72.77	$0.00	$83.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102611	Glue-Laminated Beam (GLB) - 6" x 6" Industrial Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$10.86	$26.68	$0.00	$37.54
102612	Glue-Laminated Beam (GLB) - 6" x 6" Industrial – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$10.86	$32.02	$0.00	$42.88
102613	Glue-Laminated Beam (GLB) - 6" x 12" Architectural Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$45.66	$0.00	$54.35
102614	Glue-Laminated Beam (GLB) - 6" x 12" Architectural – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$54.79	$0.00	$63.48
102615	Glue-Laminated Beam (GLB) - 6" x 12" Industrial Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$34.25	$0.00	$42.94
102616	Glue-Laminated Beam (GLB) - 6" x 12" Industrial – Pressure Treated Includes Labor & Material for system in place including blocking, bridging, fasteners, and connections	LF	$8.69	$41.09	$0.00	$49.78
102617	[Modifier] Glue-Laminated Beam Size Adjustment Line item can be used to account for larger beam sizes. Can be applied cumulatively to base line items	LF	$7.20	$8.00	$0.00	$15.20
102618	[Modifier] Glue-Laminated Beam <60 LF Quantity premium can be used when total quantity in section 06-18-13 Glued-Laminated Beams are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-20-00 Finish Carpentry

Softwood or hardwood, paint grade, unless otherwise indicated. Includes all hangers, fasteners and supports

06-22-00 Millwork

06-22-13 Standard Pattern Wood Trim

All items in Pine, plain sawn, common 1 or 2, stain grade unless otherwise indicated

102619	Banding / Cornice, Up To 4" Wide – Stain Grade Built up combinations may be added cumulatively	LF	$5.43	$4.57	$0.00	$10.00
102620	Banding / Cornice, Up To 4" Wide – Paint Grade Built up combinations may be added cumulatively	LF	$5.43	$3.66	$0.00	$9.09
102621	Banding / Cornice, Up To 4" Wide – Red Oak, White Oak, Walnut or Cherry Built up combinations may be added cumulatively	LF	$5.43	$6.85	$0.00	$12.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102622	Banding / Cornice, Up To 4" Wide – Mahogany Built up combinations may be added cumulatively	LF	$5.43	$9.13	$0.00	$14.56
102623	Banding / Cornice, Up To 4" Wide – Exotic Wood Built up combinations may be added cumulatively	LF	$5.43	$13.70	$0.00	$19.13
102624	Banding / Cornice, 6" Wide – Stain Grade Built up combinations may be added cumulatively	LF	$6.04	$6.85	$0.00	$12.89
102625	Banding / Cornice, 6" Wide – Paint Grade Built up combinations may be added cumulatively	LF	$6.04	$5.49	$0.00	$11.53
102626	Banding / Cornice, 6" Wide – Red Oak, White Oak, Walnut or Cherry Built up combinations may be added cumulatively	LF	$6.04	$10.28	$0.00	$16.32
102627	Banding / Cornice, 6" Wide – Mahogany Built up combinations may be added cumulatively	LF	$6.04	$13.70	$0.00	$19.74
102628	Banding / Cornice, 6" Wide – Exotic Wood Built up combinations may be added cumulatively	LF	$6.04	$20.55	$0.00	$26.59
102629	Banding / Cornice, 8" Wide – Stain Grade Built up combinations may be added cumulatively	LF	$6.78	$9.13	$0.00	$15.91
102630	Banding / Cornice, 8" Wide – Paint Grade Built up combinations may be added cumulatively	LF	$6.78	$7.30	$0.00	$14.08
102631	Banding / Cornice, 8" Wide – Red Oak, White Oak, Walnut or Cherry Built up combinations may be added cumulatively	LF	$6.78	$13.70	$0.00	$20.48
102632	Banding / Cornice, 8" Wide – Mahogany Built up combinations may be added cumulatively	LF	$6.78	$18.27	$0.00	$25.05
102633	Banding / Cornice, 8" Wide – Exotic Wood Built up combinations may be added cumulatively	LF	$6.78	$27.40	$0.00	$34.18
102634	Banding / Cornice, 12" Wide – Stain Grade Built up combinations may be added cumulatively	LF	$9.05	$11.42	$0.00	$20.47
102635	Banding / Cornice, 12" Wide – Paint Grade Built up combinations may be added cumulatively	LF	$9.05	$9.13	$0.00	$18.18
102636	Banding / Cornice, 12" Wide – Red Oak, White Oak, Walnut or Cherry Built up combinations may be added cumulatively	LF	$9.05	$17.13	$0.00	$26.18
102637	Banding / Cornice, 12" Wide – Mahogany Built up combinations may be added cumulatively	LF	$9.05	$22.83	$0.00	$31.88
102638	Banding / Cornice, 12" Wide – Exotic Wood Built up combinations may be added cumulatively	LF	$9.05	$34.25	$0.00	$43.30
102639	Crown Molding, Complex Profile, Up To 8" Wide – Stain Grade	LF	$2.71	$6.85	$0.00	$9.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102640	Crown Molding, Complex Profile, Up To 8" Wide – Paint Grade	LF	$2.71	$5.49	$0.00	$8.20
102641	Crown Molding, Complex Profile, Up To 8" Wide – Red Oak, White Oak, Walnut or Cherry	LF	$2.71	$10.28	$0.00	$12.99
102642	Crown Molding, Complex Profile, Up To 8" Wide – Mahogany	LF	$2.71	$13.70	$0.00	$16.41
102643	Crown Molding, Complex Profile, Up To 8" Wide – Exotic Wood	LF	$2.71	$20.55	$0.00	$23.26
102644	Cove Molding, Simple Concave, Up To 5" Wide – Stain Grade	LF	$2.47	$4.57	$0.00	$7.04
102645	Cove Molding, Simple Concave, Up To 5" Wide – Paint Grade	LF	$2.47	$3.66	$0.00	$6.13
102646	Cove Molding, Simple Concave, Up To 5" Wide – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$6.85	$0.00	$9.32
102647	Cove Molding, Simple Concave, Up To 5" Wide – Mahogany	LF	$2.47	$9.13	$0.00	$11.60
102648	Cove Molding, Simple Concave, Up To 5" Wide – Exotic Wood	LF	$2.47	$13.70	$0.00	$16.17
102649	Picture Rail, Up To 2" Wide – Stain Grade	LF	$2.47	$3.43	$0.00	$5.90
102650	Picture Rail, Up To 2" Wide – Paint Grade	LF	$2.47	$2.74	$0.00	$5.21
102651	Picture Rail, Up To 2" Wide – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$5.14	$0.00	$7.61
102652	Picture Rail, Up To 2" Wide – Mahogany	LF	$2.47	$6.85	$0.00	$9.32
102653	Picture Rail, Up To 2" Wide – Exotic Wood	LF	$2.47	$10.28	$0.00	$12.75
102654	Casing, Flat Profile, Up To 6" Wide – Stain Grade	LF	$2.47	$5.13	$0.00	$7.60
102655	Casing, Flat Profile, Up To 6" Wide – Paint Grade	LF	$2.47	$4.11	$0.00	$6.58
102656	Casing, Flat Profile, Up To 6" Wide – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$7.70	$0.00	$10.17
102657	Casing, Flat Profile, Up To 6" Wide – Mahogany	LF	$2.47	$10.28	$0.00	$12.75
102658	Casing, Flat Profile, Up To 6" Wide – Exotic Wood	LF	$2.47	$15.41	$0.00	$17.88
102659	Chair Rail, Ogee Profile, Up To 4" Wide – Stain Grade	LF	$2.47	$4.57	$0.00	$7.04
102660	Chair Rail, Ogee Profile, Up To 4" Wide – Paint Grade	LF	$2.47	$3.66	$0.00	$6.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102661	Chair Rail, Ogee Profile, Up To 4" Wide – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$6.85	$0.00	$9.32
102662	Chair Rail, Ogee Profile, Up To 4" Wide – Mahogany	LF	$2.47	$9.13	$0.00	$11.60
102663	Chair Rail, Ogee Profile, Up To 4" Wide – Exotic Wood	LF	$2.47	$13.70	$0.00	$16.17
102664	Sill Apron, Ogee Profile – Stain Grade	LF	$2.47	$4.57	$0.00	$7.04
102665	Sill Apron, Ogee Profile – Paint Grade	LF	$2.47	$3.66	$0.00	$6.13
102666	Sill Apron, Ogee Profile – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$6.85	$0.00	$9.32
102667	Sill Apron, Ogee Profile – Mahogany	LF	$2.47	$9.13	$0.00	$11.60
102668	Sill Apron, Ogee Profile – Exotic Wood	LF	$2.47	$13.70	$0.00	$16.17
102669	Panel Molding, Ogee Profile, Up To 2-1/2" – Stain Grade	LF	$2.47	$4.00	$0.00	$6.47
102670	Panel Molding, Ogee Profile, Up To 2-1/2" – Paint Grade	LF	$2.47	$3.19	$0.00	$5.66
102671	Panel Molding, Ogee Profile, Up To 2-1/2" – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$6.00	$0.00	$8.47
102672	Panel Molding, Ogee Profile, Up To 2-1/2" – Mahogany	LF	$2.47	$7.98	$0.00	$10.45
102673	Panel Molding, Ogee Profile, Up To 2-1/2" – Exotic Wood	LF	$2.47	$11.98	$0.00	$14.45
102674	Baseboard, Flat Profile, Up To 6" High – Stain Grade	LF	$2.47	$4.91	$0.00	$7.38
102675	Baseboard, Flat Profile, Up To 6" High – Paint Grade	LF	$2.47	$3.93	$0.00	$6.40
102676	Baseboard, Flat Profile, Up To 6" High – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$7.36	$0.00	$9.83
102677	Baseboard, Flat Profile, Up To 6" High – Mahogany	LF	$2.47	$9.81	$0.00	$12.28
102678	Baseboard, Flat Profile, Up To 6" High – Exotic Wood	LF	$2.47	$14.73	$0.00	$17.20
102679	Base Cap, Ogee, Up To 1-1/2" High – Stain Grade	LF	$2.47	$3.43	$0.00	$5.90
102680	Base Cap, Ogee, Up To 1-1/2" High – Paint Grade	LF	$2.47	$2.74	$0.00	$5.21
102681	Base Cap, Ogee, Up To 1-1/2" High – Red Oak, White Oak, Walnut or Cherry	LF	$2.47	$5.14	$0.00	$7.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102682	Base Cap, Ogee, Up To 1-1/2" High – Mahogany	LF	$2.47	$6.85	$0.00	$9.32
102683	Base Cap, Ogee, Up To 1-1/2" High – Exotic Wood	LF	$2.47	$10.28	$0.00	$12.75
102684	Quarter Round, Up To 3/4" – Stain Grade	LF	$2.17	$2.85	$0.00	$5.02
102685	Quarter Round, Up To 3/4" – Paint Grade	LF	$2.17	$2.28	$0.00	$4.45
102686	Quarter Round, Up To 3/4" – Red Oak, White Oak, Walnut or Cherry	LF	$2.17	$4.28	$0.00	$6.45
102687	Quarter Round, Up To 3/4" – Mahogany	LF	$2.17	$5.70	$0.00	$7.87
102688	Quarter Round, Up To 3/4" – Exotic Wood	LF	$2.17	$8.56	$0.00	$10.73
102689	Plinth Block – Stain Grade	EA	$27.15	$17.13	$0.00	$44.28
102690	Plinth Block – Paint Grade	EA	$27.15	$13.70	$0.00	$40.85
102691	Plinth Block – Red Oak, White Oak, Walnut or Cherry	EA	$27.15	$25.68	$0.00	$52.83
102692	Plinth Block – Mahogany	EA	$27.15	$34.24	$0.00	$61.39
102693	Plinth Block – Exotic Wood	EA	$27.15	$51.37	$0.00	$78.52
102694	[Modifier] Interior Trim Add for Small Quantity <60 LF Quantity premium can be used when total quantity in section 06-22-13 Standard Pattern Wood Trim are within stated quantity. Can be applied cumulatively to base line items.	LF	$9.05	$0.00	$0.00	$9.05

06-25-00 Prefinished Paneling

All items in Pine, plain sawn, common 1 or 2, stain grade unless otherwise indicated

06-25-00 Prefinished Paneling

All items in Pine, plain sawn, common 1 or 2, stain grade unless otherwise indicated

102695	Ship Lap Paneling, 1/2" Min, Up To 8" Wide – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$16.32	$0.00	$19.94
102696	Ship Lap Paneling, 1/2" Min, Up To 8" Wide – Paint Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$13.06	$0.00	$16.68
102697	Ship Lap Paneling, 1/2" Min, Up To 8" Wide – Red Oak, White Oak, Walnut or Cherry Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$24.49	$0.00	$28.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102698	Ship Lap Paneling, 1/2" Min, Up To 8" Wide – Mahogany Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$32.64	$0.00	$36.26
102699	Ship Lap Paneling, 1/2" Min, Up To 8" Wide – Exotic Wood Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$48.98	$0.00	$52.60
102700	Board and Batten Paneling, 5/16" Min, Up To 24" Wide Panels – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$17.96	$0.00	$21.58
102701	Board and Batten Paneling, 5/16" Min, Up To 24" Wide Panels – Paint Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$14.37	$0.00	$17.99
102702	Board and Batten Paneling, 5/16" Min, Up To 24" Wide Panels – Red Oak, White Oak, Walnut or Cherry Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$26.94	$0.00	$30.56
102703	Board and Batten Paneling, 5/16" Min, Up To 24" Wide Panels – Mahogany Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$35.91	$0.00	$39.53
102704	Board and Batten Paneling, 5/16" Min, Up To 24" Wide Panels – Exotic Wood Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$53.88	$0.00	$57.50
102705	Beadboard Paneling, 3/8" Min. , Up To 24" Wide – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$11.43	$0.00	$15.05
102706	Beadboard Paneling, 3/8" Min. , Up To 24" Wide – Paint Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$9.14	$0.00	$12.76
102707	Beadboard Paneling, 3/8" Min. , Up To 24" Wide – Red Oak, White Oak, Walnut or Cherry Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$17.14	$0.00	$20.76
102708	Beadboard Paneling, 3/8" Min. , Up To 24" Wide – Mahogany Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$22.86	$0.00	$26.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102709	Beadboard Paneling, 3/8" Min. , Up To 24" Wide – Exotic Wood Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$34.29	$0.00	$37.91
102710	Flat Panel Paneling, 3/8" Min, Random Sizes – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$13.06	$0.00	$16.68
102711	Flat Panel Paneling, 3/8" Min, Random Sizes – Paint Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$10.45	$0.00	$14.07
102712	Flat Panel Paneling, 3/8" Min, Random Sizes – Red Oak, White Oak, Walnut or Cherry Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$19.59	$0.00	$23.21
102713	Flat Panel Paneling, 3/8" Min, Random Sizes – Mahogany Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$26.12	$0.00	$29.74
102714	Flat Panel Paneling, 3/8" Min, Random Sizes – Exotic Wood Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$39.18	$0.00	$42.80
102715	Slat Wall Melamine Paneling 3/4" – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$8.17	$0.00	$11.79
102716	Wood Veneer Wall Paneling – Stain Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$22.60	$0.00	$26.22
102717	Wood Veneer Wall Paneling – Paint Grade Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$18.08	$0.00	$21.70
102718	Wood Veneer Wall Paneling – Red Oak, White Oak, Walnut or Cherry Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$33.90	$0.00	$37.52
102719	Wood Veneer Wall Paneling – Mahogany Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$45.21	$0.00	$48.83
102720	Wood Veneer Wall Paneling – Exotic Wood Includes a fully finished paneling system with all trim pieces. Includes painting or staining and sealing	SF	$3.62	$67.81	$0.00	$71.43
102721	Clear Plexiglass Panel Up To 1/8" Thick Includes mounting in metal channel frame, hardware and fasteners	SF	$1.64	$6.22	$0.00	$7.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102722	[Modifier] Small Quantity <200 SF Quantity premium can be used when total quantity in section 06-25-00 Prefinished Paneling are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

06-40-00 Architectural Woodwork

06-41-00 Architectural Wood Casework

All casework AWI "Custom" grade unless otherwise indicated. Casework includes all blocking and finish hardware

06-41-13 Wood Faced Architectural Cabinets

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels. Includes painting or staining and sealing

102723	Architectural Custom Wood Wall Cabinets – Up To 30" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$152.22	$0.00	$188.42
102724	Architectural Custom Wood Wall Cabinets – Up To 36" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$182.65	$0.00	$218.85
102725	Architectural Custom Wood Wall Cabinets – Up To 42" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$213.11	$0.00	$249.31
102726	Architectural Custom Wood Wall Cabinets – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$243.54	$0.00	$279.74
102727	Architectural Custom Wood Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$182.65	$0.00	$218.85
102728	Architectural Custom Wood Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$219.19	$0.00	$255.39
102729	Architectural Custom Wood Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$255.72	$0.00	$291.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102730	Architectural Custom Wood Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$292.26	$0.00	$328.46
102731	Architectural Custom Wood Shelving Cubbies – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, shelving, trim pieces and related hardware	LF	$36.20	$125.58	$0.00	$161.78
102732	Architectural Custom Wood Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$150.69	$0.00	$186.89
102733	Architectural Custom Wood Base Cabinets – Up To 36" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$273.99	$0.00	$328.29
102734	Architectural Custom Wood Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$328.79	$0.00	$383.09
102735	Architectural Custom Wood Full Height Cabinets – Up To 96" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$513.72	$0.00	$568.02
102736	Architectural Custom Wood Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$616.47	$0.00	$670.77
102737	Architectural Custom Wood Display Cabinets – Up To 72" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$456.65	$0.00	$510.95
102738	Architectural Custom Wood Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$547.98	$0.00	$602.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102739	Architectural Custom Wood Reception Station Including Solid Surface Counter – Up To 48" Tall and 36" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware. Includes quartz or equal counterTop	LF	$67.88	$513.72	$0.00	$581.60
102740	Architectural Custom Wood Reception Station Including Solid Surface Counter (Premium) – Up To 48" Tall and 36" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal. Includes granite or equal counterTop	LF	$67.88	$616.47	$0.00	$684.35
102741	Architectural Custom Wood Wardrobe Cabinet – Up To 72" tall, 28" Deep, and 72' Wide All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	EA	$181.01	$456.65	$0.00	$637.66
102742	Architectural Custom Wood Wardrobe Cabinet (Premium) – Up To 72" tall, 28" Deep, and 72' Wide All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	EA	$181.01	$547.98	$0.00	$728.99
102743	Architectural Custom Wood Lectern – Up To 48" tall, 28" Deep, and 36" Wide All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces and related hardware	EA	$135.76	$1,655.35	$0.00	$1,791.11
102744	Architectural Custom Wood Lectern (Premium) – Up To 48" tall, 28" Deep, and 36" Wide All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	EA	$135.76	$2,854.04	$0.00	$2,989.80
102745	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 06-41-13 Wood Faced Architectural Cabinets are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

06-41-16 Plastic-Laminate-Clad Architectural Cabinets

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels

102746	Architectural Custom Plastic Laminate Wall Cabinets – Up To 30" Tall and 16" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$121.77	$0.00	$157.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102747	Architectural Custom Plastic Laminate Wall Cabinets – Up To 36" Tall and 16" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$146.12	$0.00	$182.32
102748	Architectural Custom Plastic Laminate Wall Cabinets – Up To 42" Tall and 16" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$170.49	$0.00	$206.69
102749	Architectural Custom Plastic Laminate Wall Cabinets – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$36.20	$194.83	$0.00	$231.03
102750	Architectural Custom Plastic Laminate Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$146.12	$0.00	$182.32
102751	Architectural Custom Plastic Laminate Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$175.35	$0.00	$211.55
102752	Architectural Custom Plastic Laminate Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$204.60	$0.00	$240.80
102753	Architectural Custom Plastic Laminate Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$233.80	$0.00	$270.00
102754	Architectural Custom Plastic Laminate Shelving Cubbies – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, shelving, trim pieces and related hardware	LF	$36.20	$100.46	$0.00	$136.66
102755	Architectural Custom Plastic Laminate Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, shelving, trim pieces and related brass hardware or equal	LF	$36.20	$120.56	$0.00	$156.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102756	Architectural Custom Plastic Laminate Base Cabinets – Up To 36" Tall and 28" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$219.19	$0.00	$273.49
102757	Architectural Custom Plastic Laminate Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$263.02	$0.00	$317.32
102758	Architectural Custom Plastic Laminate Full Height Cabinets – Up To 96" Tall and 28" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$410.99	$0.00	$465.29
102759	Architectural Custom Plastic Laminate Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$493.18	$0.00	$547.48
102760	Architectural Custom Plastic Laminate Display Cabinets – Up To 72" Tall and 28" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	LF	$54.30	$365.32	$0.00	$419.62
102761	Architectural Custom Plastic Laminate Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	LF	$54.30	$438.38	$0.00	$492.68
102762	Architectural Custom Plastic Laminate Reception Station Including Solid Surface Counter – Up To 48" Tall and 36" Deep All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware. Includes quartz or equal counterTop	LF	$67.88	$410.99	$0.00	$478.87
102763	Architectural Custom Plastic Laminate Reception Station Including Solid Surface Counter (Premium) – Up To 48" Tall and 36" Deep All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal. Includes granite or equal counterTop	LF	$67.88	$493.18	$0.00	$561.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102764	Architectural Custom Nurse Station Including Solid Surface Counter – Up To 48" Tall and 36" Deep All plastic laminate veneer with plywood core and solid surface accents. Includes all draws, doors, glass, shelving, trim pieces and related hardware. Includes quartz or equal counterTop	LF	$67.88	$570.81	$0.00	$638.69
102765	Architectural Custom Nurse Station Including Solid Surface Counter (Premium) – Up To 48" Tall and 36" Deep All solid surface construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal. Includes granite or equal counterTop	LF	$67.88	$684.97	$0.00	$752.85
102766	Plastic Laminate Wardrobe Cabinet – Up To 72" tall, 28" Deep, and 72' Wide All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	EA	$181.01	$365.32	$0.00	$546.33
102767	Plastic Laminate Wardrobe Cabinet (Premium) – Up To 72" tall, 28" Deep, and 72' Wide All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	EA	$181.01	$438.38	$0.00	$619.39
102768	Plastic Laminate Lectern – Up To 48" tall, 28" Deep, and 36" Wide All plastic laminate veneer with MDF Core and melamine interior. Includes all draws, doors, glass, shelving, trim pieces and related hardware	EA	$135.76	$1,324.29	$0.00	$1,460.05
102769	Plastic Laminate Lectern (Premium) – Up To 48" tall, 28" Deep, and 36" Wide All premium grade plastic laminate with plywood core and enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces and related brass hardware or equal	EA	$135.76	$2,283.24	$0.00	$2,419.00
102770	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when total quantity in section 06-41-16 Plastic-Laminate-Clad Architectural Cabinets are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

06-43-00 Wood Stairs and Railings

Items in this section are premium grade hardwood

06-43-00 Wood Stairs and Railings

Items in this section are premium grade hardwood

102771	Wood Handrail Wall Mounted Includes a fully finished rail system with all trim pieces, hardware. Includes painting or staining and sealing	LF	$21.72	$39.96	$0.00	$61.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102772	Wood Handrail With Balusters Includes a fully finished rail system with all trim pieces, hardware. Includes painting or staining and sealing	LF	$21.72	$148.41	$0.00	$170.13
102773	Wood Handrail With Banister and Newels Includes a fully finished rail system with all trim pieces, hardware. Includes painting or staining and sealing	LF	$108.61	$485.19	$0.00	$593.80
102774	Wood Attic Access Stairs Includes insulated lid, wood steps, for ceiling height up to 10'	EA	$156.98	$793.00	$0.00	$949.98
102775	Site Built Arch Stair System Custom – LF of Tread Includes fully finished architectural stair system. Including, frame, stringers, treads, riser, fasteners, blocking, hangers, trim pieces, painting or staining and sealing	LF	$67.88	$82.20	$0.00	$150.08
102776	Site Built Arch Landing Custom Includes fully finished architectural landing system. Includes, framing, sheathing, posts, fasteners, blocking, hangers, trim pieces, painting or staining and sealing	SF	$112.45	$142.71	$0.00	$255.16
102777	[Modifier] Small Quantity <20 LF of Tread Quantity premium can be used when total quantity in section 06-43-00 Wood Stairs and Railings are within stated quantity. Can be applied cumulatively to base line items.	LF	$27.15	$0.00	$0.00	$27.15
	06-44-00 Ornamental Woodwork					
	06-44-39 Wood Posts and Columns					
102778	KD 8' x 8' x10' Douglas Fur S4S #1 Grade - FOHC Milled with 3/4" Chamfered Edges	EA	$336.48	$1,473.32	$0.00	$1,809.80
	06-48-00 Wood Frames					
	06-48-00 Wood Frames					
102779	Wood Frame Single Up to 4' Wide	EA	$135.76	$173.29	$0.00	$309.05
102780	Wood Frame Double Up to 8' Wide	EA	$162.92	$202.18	$0.00	$365.10
	06-70-00 Structural Composites					
	06-72-00 Composite Structural Assemblies					
	06-72-00 Composite Structural Assemblies					
102781	Fiberglass Reinforced Plastic (FRP) Grating 1-1/2" Deep and Square Gritted Includes frame and anchorage system	SF	$8.22	$20.72	$0.00	$28.94
102782	Fiberglass Reinforced Plastic (FRP) Grating 2" Deep and Square Gritted Includes frame and anchorage system	SF	$8.22	$27.62	$0.00	$35.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102783	Fiberglass Reinforced Plastic (FRP) Grating Stair Treads – LF of Tread Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$6.87	$17.26	$0.00	$24.13
102784	[Modifier] Small Quantity <20 LF of Tread Quantity premium can be used when total quantity in section 06-72-00 Composite Structural Assemblies are within stated quantity. Can be applied cumulatively to base line items.	LF	$27.15	$0.00	$0.00	$27.15
102785	[Modifier] Small Quantity <200 SF Quantity premium can be used when total quantity in section 06-72-00 Composite Structural Assemblies are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

06-73-00 Composite Decking

Polyethylene wood fiber composites, 2-sided, unless otherwise noted. Decking as complete finish assemblies includes matching edge trim boards and aprons. Stair treads and risers built from decking components. Structural sub-frame added cumulatively

06-73-00 Composite Decking

Polyethylene wood fiber composites, 2-sided, unless otherwise noted. Decking as complete finish assemblies includes matching edge trim boards and aprons. Stair treads and risers built from decking components. Structural sub-frame added cumulatively

102786	Composite Wood Decking - Wood Grain Finish Includes 1 x 6 composite decking, fully capped finish, exposed deck screw fastening, manufacturers standard color; Similar or equal to TimberTech Composite Prime Plus. Excludes railings and sub-structure	SF	$4.75	$10.48	$0.00	$15.23
102787	Composite Wood Decking - Cathedral Grain Finish Includes 1 x 6 composite decking, fully capped finish, exposed deck screw fastening, manufacturers standard color; Similar or equal to TimberTech Terrain Collection. Excludes railings and sub-structure	SF	$4.75	$13.08	$0.00	$17.83
102788	Composite Wood Decking - Reclaimed Wood Finish Includes 1 x 6 composite decking, fully capped finish, exposed deck screw fastening, manufacturers standard color; Similar or equal to TimberTech Reserve Collection. Excludes railings and sub-structure	SF	$4.75	$18.98	$0.00	$23.73
102789	Composite Wood Decking - Hand-Scraped Finish Includes 1 x 6 composite decking, fully capped finish, exposed deck screw fastening, manufacturers standard color; Similar or equal to TimberTech Legacy Collection. Excludes railings and sub-structure	SF	$4.75	$22.71	$0.00	$27.46
102790	[Modifier] Add Concealed Fasteners	SF	$0.00	$0.88	$0.00	$0.88

06-80-00 Composite Fabrications

06-81-00 Composite Railings

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	06-81-00 Composite Railings					
102791	Composite Railing with Balusters	LF	$15.51	$149.64	$0.00	$165.15
102792	Composite Stair 4' Wide – LF of Tread Includes, stringers, treads, riser, fasteners, blocking, hangers	LF	$22.63	$17.26	$0.00	$39.89
102793	[Modifier] Small Quantity <20 LF of Tread Quantity premium can be used when total quantity in section 06-81-00 Composite Railings are within stated quantity. Can be applied cumulatively to base line items.	LF	$27.15	$0.00	$0.00	$27.15
	06-81-13 Glass-Fiber-Reinforced Plastic					
102794	Glass Fiber Reinforced Polymer (GFRP) Column Covers	SF	$4.48	$19.89	$0.00	$24.37
102795	Glass Fiber Reinforced Polymer (GFRP) Banding / Cornice up to 4" Built up combinations may be added cumulatively	LF	$6.52	$8.29	$0.00	$14.81
102796	Glass Fiber Reinforced Polymer (GFRP) Banding / Cornice up to 6" Built up combinations may be added cumulatively	LF	$7.24	$11.06	$0.00	$18.30
102797	Glass Fiber Reinforced Polymer (GFRP) Banding / Cornice up to 8" Built up combinations may be added cumulatively	LF	$8.14	$13.81	$0.00	$21.95
102798	Glass Fiber Reinforced Polymer (GFRP) Banding / Cornice up to 12" Built up combinations may be added cumulatively	LF	$10.86	$16.58	$0.00	$27.44
102799	Glass Fiber Reinforced Polymer (GFRP) Sill Built up combinations may be added cumulatively	LF	$6.52	$8.98	$0.00	$15.50
102800	Glass Fiber Reinforced Polymer (GFRP) Header Built up combinations may be added cumulatively	LF	$8.14	$14.51	$0.00	$22.65
102801	Glass Fiber Reinforced Polymer (GFRP) Corbel Built up combinations may be added cumulatively	EA	$161.92	$227.93	$0.00	$389.85
102802	Glass Fiber Reinforced Polymer (GFRP) Column Cap Or Base Fiberglass Reinforced Panel (FRP)	EA	$161.92	$276.27	$0.00	$438.19
	06-82-00 Composite Trim					
	06-82-00 Composite Trim					
102803	Composite Trim - Crown Molding 9/16" x 3-5/8" Azek or Equal	LF	$7.58	$3.06	$0.00	$10.64
102804	Composite Trim - Bed Molding 9/16" x 1-3/4" Azek or Equal	LF	$7.22	$1.87	$0.00	$9.09
102805	Composite Trim - Board 1" x 4" Azek or Equal	LF	$7.03	$3.55	$0.00	$10.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102806	Composite Trim - Board 1" x 6" Azek or Equal	LF	$7.36	$4.90	$0.00	$12.26
102807	Composite Trim - Board 1" x 8" Azek or Equal	LF	$7.36	$6.88	$0.00	$14.24
102808	Composite Trim - Board 1" x 10" Azek or Equal	LF	$7.54	$8.86	$0.00	$16.40
102809	Composite Trim - Board 1" x 12" Azek or Equal	LF	$7.54	$10.91	$0.00	$18.45

06-83-00 Composite Paneling

06-83-16 Fiberglass Reinforced Paneling

102810	Fiberglass Reinforced Paneling (FRP) - Smooth Finish, Class A Includes adhesives and trim	SF	$1.89	$8.36	$0.00	$10.25
102811	Fiberglass Reinforced Paneling (FRP) - Pebbled Finish, Class A Includes adhesives and trim	SF	$1.89	$5.79	$0.00	$7.68
102812	Fiberglass Reinforced Paneling (FRP) - Smooth Finish, Class C Includes adhesives and trim	SF	$1.89	$4.10	$0.00	$5.99
102813	Fiberglass Reinforced Paneling (FRP) - Pebbled Finish, Class C Includes adhesives and trim	SF	$1.89	$3.29	$0.00	$5.18

07-00-00 Thermal and Moisture Protection

Includes fasteners and clips to substrate and standard prefinished trim pieces in manufacturers standard color selection. Division Seven quantities are based on greater than 500 square feet unless otherwise noted. Utilize applicable modifiers

07-00-00 Thermal and Moisture Protection

Includes fasteners and clips to substrate and standard prefinished trim pieces in manufacturers standard color selection. Division Seven quantities are based on greater than 500 square feet unless otherwise noted. Utilize applicable modifiers

07-01-00 Operation and Maintenance of Thermal and Moisture Protection

07-01-50 Maintenance of Membrane Roofing

Includes roof preparation including, but not limited to cleaning, seam and flashing repair, sealing penetrations. Recoating with a compatible elastomer, includes separations, flashing, sealing, and cleanup.

102814	Recoat Existing Roof (> 500 SF)	SF	$8.18	$5.11	$0.00	$13.29
102815	Recoat Existing Roof (101-500 SF) Quantity premium can be used when total square footage in section 07-01-50 Maintenance of Membrane Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$10.51	$5.38	$0.00	$15.89
102816	Recoat Existing Roof (51-100 SF) Quantity premium can be used when total square footage in section 07-01-50 Maintenance of Membrane Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$14.02	$5.64	$0.00	$19.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102817	Recoat existing roof (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-01-50 Maintenance of Membrane Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$19.86	$5.90	$0.00	$25.76

07-10-00 Dampproofing and Waterproofing

07-11-00 Dampproofing

Materials for vapor permeable, moisture resistant, non-hydrostatic applications. Above or below grade. Includes surface and joint preparation per system used.

07-11-00 Dampproofing

Materials for vapor permeable, moisture resistant, non-hydrostatic applications. Above or below grade. Includes surface and joint preparation per system used.

102818	Bituminous Liquid Applied Spray Dampproffing Includes bituminous and asphaltic emulsions	SF	$1.36	$0.41	$0.00	$1.77
102819	Bituminous Liquid Applied Brush Dampproffing Includes bituminous and asphaltic emulsions	SF	$1.67	$0.41	$0.00	$2.08
102820	Troweled Asphaltic Dampproffing Includes both fibered and non fibered formulations	SF	$2.32	$0.93	$0.00	$3.25
102821	Cementitious Dampproofing	SF	$4.63	$1.84	$0.00	$6.47
102822	[Modifier] Quantity Premium - Dampproofing (101-500 SF) Quantity premium can be used when total square footage in section 07-11-13 Dampproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102823	[Modifier] Quantity Premium - Dampproofing (51-100 SF) Quantity premium can be used when total square footage in section 07-11-13 Dampproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102824	[Modifier] Quantity Premium - Dampproofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-11-13 Dampproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
102825	Vapor Barrier 6 Mil Includes taped seams	SF	$0.91	$0.16	$0.00	$1.07
102826	Vapor Barrier 10 Mil Includes taped seams	SF	$0.91	$0.21	$0.00	$1.12
102827	Vapor Barrier 15 Mil Includes taped seams	SF	$0.91	$0.27	$0.00	$1.18
102828	Virgin Yellow Sheet Vapor Barrier 10 Mil Includes taped seams and mastic emulsion. Stego wrap or equal	SF	$1.36	$0.43	$0.00	$1.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102829	Virgin Yellow Sheet Vapor Barrier 15 Mil Includes taped seams and mastic emulsion. Stego wrap or equal	SF	$1.36	$0.54	$0.00	$1.90
102830	Virgin Yellow Sheet Vapor Barrier 20 Mil Includes taped seams and mastic emulsion. Stego wrap or equal	SF	$1.36	$0.63	$0.00	$1.99

07-13-00 Sheet Waterproofing

Semi and non permeable applications with or without hydrostatic pressure. Above or below grade. Includes surface and joint preparations.

07-13-00 Sheet Waterproofing

Semi and non permeable applications with or without hydrostatic pressure. Above or below grade. Includes surface and joint preparations.

102831	Asphaltic Composite Sheet Waterproofing Self adhering modified sheet, up to 60 mils total	SF	$5.22	$1.37	$0.00	$6.59
102832	Elastomeric Sheet Waterproofing Self adhered or fastened, rubberized asphaltic up to 60 mils	SF	$5.22	$1.34	$0.00	$6.56
102833	Thermoplastic Sheet Waterproofing (TPO) Fastened or adhered, modified PVC sheet, up to 80 mils. Reinforced or unreinforced	SF	$5.22	$1.46	$0.00	$6.68
102834	Drainage Panel Thermoplastic profiled panels bonded to porous mesh or filter fabric	SF	$5.22	$1.60	$0.00	$6.82
102835	Effluent Liner Liner of NQ45B polypropylene, includes pipe boots	SF	$0.86	$1.45	$0.18	$2.49
102836	[Modifier] Quantity Premium - Sheet Waterproofing (101-500 SF) Quantity premium can be used when total square footage in section 07-13-53 Sheet Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102837	[Modifier] Quantity Premium - Sheet Waterproofing (51-100 SF) Quantity premium can be used when total square footage in section 07-13-53 Sheet Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102838	[Modifier] Quantity Premium - Sheet Waterproofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-13-53 Sheet Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

07-14-00 Fluid-Applied Waterproofing

Non permeable, hydrostatic applications. Above or below grade. Horizontal or vertical applications. Includes surface and joint preparations and protection boards

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	07-14-00 Fluid-Applied Waterproofing					
	Non permeable, hydrostatic applications. Above or below grade. Horizontal or vertical applications. Includes surface and joint preparations and protection boards					
102839	Bituminous Built-Up Waterproofing Multi-layer application with felts.	SF	$2.28	$1.07	$0.00	$3.35
102840	Modified Asphaltic Waterproofing Rubberized compound. Includes flashing for transitions, corners, and joints	SF	$1.89	$0.99	$0.00	$2.88
102841	[Modifier] Quantity Premium - Fluid-Applied Waterproofing (101-500 SF) Quantity premium can be used when total square footage in section 07-14-00 Fluid-Applied Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102842	[Modifier] Quantity Premium - Fluid-Applied Waterproofing (51-100 SF) Quantity premium can be used when total square footage in section 07-14-00 Fluid-Applied Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102843	[Modifier] Quantity Premium - Fluid-Applied Waterproofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-14-00 Fluid-Applied Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	07-16-00 Cementitious and Reactive Waterproofing					
	07-16-00 Cementitious and Reactive Waterproofing					
102844	Metal Oxide Waterproofing	SF	$6.59	$4.19	$0.00	$10.78
102845	Crystalline Waterproofing	SF	$6.59	$4.01	$0.00	$10.60
102846	[Modifier] Quantity Premium - Cementitious and Reactive Waterproofing (101-500 SF) Quantity premium can be used when total square footage in section 07-16-16 Cementitious and Reactive Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102847	[Modifier] Quantity Premium - Cementitious and Reactive Waterproofing (51-100 SF) Quantity premium can be used when total square footage in section 07-16-16 Cementitious and Reactive Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102848	[Modifier] Quantity Premium - Cementitious and Reactive Waterproofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-16-16 Cementitious and Reactive Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	07-17-00 Bentonite Waterproofing					
	07-17-00 Bentonite Waterproofing					
102849	Bentonite Panel Cost includes panels, rolls, sheets, and trowel applications with or without reinforcement fabric	SF	$3.96	$1.40	$0.00	$5.36
102850	Granular Bentonite Clay – Pond Sealer	LB	$0.48	$0.56	$0.00	$1.04
102851	Liquid Bentonite Clay – Pond Sealer Based on an application rate of one gallon per 2,000 gallons of water	SF	$0.48	$1.12	$0.00	$1.60
102852	[Modifier] Quantity Premium - Bentonite Waterproofing (101-500 SF) Quantity premium can be used when total square footage in section 07-17-00 Bentonite Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102853	[Modifier] Quantity Premium - Bentonite Waterproofing (51-100 SF) Quantity premium can be used when total square footage in section 07-17-00 Bentonite Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102854	[Modifier] Quantity Premium - Bentonite Waterproofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-17-00 Bentonite Waterproofing are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	07-18-00 Traffic Coatings					
	07-18-00 Traffic Coatings					
102855	Vehicular Traffic Coating	SF	$9.49	$6.39	$0.00	$15.88
102856	Pedestrian Traffic Coating	SF	$7.59	$5.11	$0.00	$12.70
102857	[Modifier] Quantity Premium - Traffic Coatings (101-500 SF) Quantity premium can be used when total square footage in section 07-18-13 Traffic Coatings are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102858	[Modifier] Quantity Premium - Traffic Coatings (51-100 SF) Quantity premium can be used when total square footage in section 07-18-13 Traffic Coatings are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102859	[Modifier] Quantity Premium - Traffic Coatings (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-18-13 Traffic Coatings are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

07-19-00 Water Repellents

Fluid applied water resistive coatings for new or remedial, vertical application, with selective horizontal use to complete coverage. Spray, roller or brush. UV resistant for exposed locations

07-19-13 Water Repellents

102860	Water Repellents Includes modified silicone, Silane/Siloxane, and Acrylic applications	SF	$0.79	$0.43	$0.00	$1.22
102861	[Modifier] Quantity Premium - Water Repellents (101-500 SF) Quantity premium can be used when total square footage in section 07-19-00 Water Repellents are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102862	[Modifier] Quantity Premium - Water Repellents (51-100 SF) Quantity premium can be used when total square footage in section 07-19-00 Water Repellents are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102863	[Modifier] Quantity Premium - Water Repellents (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-19-00 Water Repellents are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

07-20-00 Thermal Protection

07-21-00 Thermal Insulation

07-21-13 Board Insulation

Includes compressive strength of up to 50 PSI

102864	1/2" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.04	$1.22	$0.00	$2.26
102865	1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.04	$1.46	$0.00	$2.50
102866	1" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.04	$1.54	$0.00	$2.58
102867	1" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.04	$1.84	$0.00	$2.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102868	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.09	$1.91	$0.00	$3.00
102869	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.09	$2.30	$0.00	$3.39
102870	2" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.09	$2.39	$0.00	$3.48
102871	2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.09	$2.88	$0.00	$3.97
102872	2 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.09	$2.65	$0.00	$3.74
102873	2 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.09	$3.17	$0.00	$4.26
102874	3" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.21	$2.89	$0.00	$4.10
102875	3" Rigid Insulation -Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.21	$3.47	$0.00	$4.68
102876	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.21	$3.18	$0.00	$4.39
102877	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.21	$3.82	$0.00	$5.03
102878	4" Rigid Insulation – Extruded Polystyrene (XPS) R Value - 5 per inch	SF	$1.21	$3.50	$0.00	$4.71
102879	4" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R Value - 5 per inch	SF	$1.21	$4.21	$0.00	$5.42
102880	1/2" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.04	$1.11	$0.00	$2.15
102881	1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.04	$1.33	$0.00	$2.37
102882	1" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.04	$1.38	$0.00	$2.42
102883	1" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.04	$1.66	$0.00	$2.70
102884	1 1/2" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.09	$1.72	$0.00	$2.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102885	1 1/2" Rigid Insulation -Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.09	$2.07	$0.00	$3.16
102886	2" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.09	$2.16	$0.00	$3.25
102887	2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.09	$2.60	$0.00	$3.69
102888	2 1/2" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.09	$2.38	$0.00	$3.47
102889	2 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.09	$2.85	$0.00	$3.94
102890	3" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.21	$2.61	$0.00	$3.82
102891	3" Rigid Insulation -Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.21	$3.13	$0.00	$4.34
102892	3 1/2" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.21	$2.88	$0.00	$4.09
102893	3 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.21	$3.45	$0.00	$4.66
102894	4" Rigid Insulation – Polyisocyanurate R Value - 5 to 5.6 per inch	SF	$1.21	$3.15	$0.00	$4.36
102895	4" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R Value - 5 to 5.6 per inch	SF	$1.21	$3.78	$0.00	$4.99
102896	1/2" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.04	$0.88	$0.00	$1.92
102897	1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.04	$1.06	$0.00	$2.10
102898	1" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.04	$1.11	$0.00	$2.15
102899	1" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.04	$1.33	$0.00	$2.37
102900	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.09	$1.38	$0.00	$2.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102901	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.09	$1.66	$0.00	$2.75
102902	2" Rigid Insulation -Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.09	$1.72	$0.00	$2.81
102903	2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.09	$2.07	$0.00	$3.16
102904	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.09	$1.89	$0.00	$2.98
102905	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.09	$2.28	$0.00	$3.37
102906	3" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.21	$2.08	$0.00	$3.29
102907	3" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.21	$2.50	$0.00	$3.71
102908	3 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.21	$2.30	$0.00	$3.51
102909	3 1/2" Rigid Insulation -Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.21	$2.75	$0.00	$3.96
102910	4" Rigid Insulation – Expanded Polystyrene Expanded Polystyrene (EPS) R Value - 3.6 to 4.2 per inch	SF	$1.21	$2.52	$0.00	$3.73
102911	4" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R Value - 3.6 to 4.2 per inch	SF	$1.21	$3.02	$0.00	$4.23
102912	1/2" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.04	$1.13	$0.00	$2.17
102913	1/2" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.04	$1.35	$0.00	$2.39
102914	1" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.04	$1.41	$0.00	$2.45
102915	1" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.04	$1.69	$0.00	$2.73
102916	1 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.09	$1.77	$0.00	$2.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102917	1 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.09	$2.13	$0.00	$3.22
102918	2" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.09	$2.21	$0.00	$3.30
102919	2" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.09	$2.66	$0.00	$3.75
102920	2 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.09	$2.44	$0.00	$3.53
102921	2 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.09	$2.93	$0.00	$4.02
102922	3" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.21	$2.68	$0.00	$3.89
102923	3" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.21	$3.22	$0.00	$4.43
102924	3 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.21	$2.95	$0.00	$4.16
102925	3 1/2" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.21	$3.54	$0.00	$4.75
102926	4" Rigid Insulation – Semi-Rigid Mineral Fiber R Value - 3.7 to 4.2 per inch	SF	$1.21	$3.24	$0.00	$4.45
102927	4" Rigid Insulation – Semi-Rigid Mineral Fiber – Compressive Strength > 50 Psi R Value - 3.7 to 4.2 per inch	SF	$1.21	$3.90	$0.00	$5.11
102928	[Modifier] Quantity Premium - Board Insulation (101-500 SF) Quantity premium can be used when total square footage in section 07-21-13 Board Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
102929	[Modifier] Quantity Premium - Board Insulation (51-100 SF) Quantity premium can be used when total square footage in section 07-21-13 Board Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102930	[Modifier] Quantity Premium - Board Insulation (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-21-13 Board Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	07-21-16 Blanket Insulation					
	Insulation includes facing in either paper or foil where applicable					
102931	R-8 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.63	$0.00	$1.54
102932	R-8 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.60	$0.00	$1.51
102933	R-11 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.69	$0.00	$1.60
102934	R-11 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.66	$0.00	$1.57
102935	R-13 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.74	$0.00	$1.65
102936	R-13 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.71	$0.00	$1.62
102937	R-16 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.84	$0.00	$1.75
102938	R-16 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.79	$0.00	$1.70
102939	R-19 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.90	$0.00	$1.81
102940	R-19 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.85	$0.00	$1.76
102941	R-20 Fiberglass Batt Insulation - Faced	SF	$0.91	$0.98	$0.00	$1.89
102942	R-20 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$0.93	$0.00	$1.84
102943	R-21 Fiberglass Batt Insulation - Faced	SF	$0.91	$1.07	$0.00	$1.98
102944	R-21 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$1.02	$0.00	$1.93
102945	R-25 Fiberglass Batt Insulation - Faced	SF	$0.91	$1.15	$0.00	$2.06
102946	R-25 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$1.10	$0.00	$2.01
102947	R-30 Fiberglass Batt Insulation - Faced	SF	$0.91	$1.32	$0.00	$2.23
102948	R-30 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$1.24	$0.00	$2.15
102949	R-38 Fiberglass Batt Insulation - Faced	SF	$0.91	$1.43	$0.00	$2.34
102950	R-38 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$1.35	$0.00	$2.26
102951	R-49 Fiberglass Batt Insulation - Faced	SF	$0.91	$2.01	$0.00	$2.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102952	R-49 Fiberglass Batt Insulation - Unfaced	SF	$0.91	$1.91	$0.00	$2.82
102953	R-15 Mineral Fiber Batt Insulation - Faced	SF	$0.91	$1.56	$0.00	$2.47
102954	R-15 Mineral Fiber Batt Insulation - Unfaced	SF	$0.91	$1.47	$0.00	$2.38
102955	R-23 Mineral Fiber Batt Insulation - Faced	SF	$0.91	$2.01	$0.00	$2.92
102956	R-23 Mineral Fiber Batt Insulation - Unfaced	SF	$0.91	$1.91	$0.00	$2.82
102957	R-24 Mineral Fiber Batt Insulation - Faced	SF	$0.91	$2.05	$0.00	$2.96
102958	R-24 Mineral Fiber Batt Insulation - Unfaced	SF	$0.91	$1.95	$0.00	$2.86
102959	R-30 Mineral Fiber Batt Insulation - Faced	SF	$0.91	$2.15	$0.00	$3.06
102960	R-30 Mineral Fiber Batt Insulation - Unfaced	SF	$0.91	$2.04	$0.00	$2.95
102961	R-13 Recycled Cotton Fiber Insulation - Faced	SF	$0.91	$1.15	$0.00	$2.06
102962	R-13 Recycled Cotton Fiber Insulation - Unfaced	SF	$0.91	$1.10	$0.00	$2.01
102963	R-19 Recycled Cotton Fiber Insulation - Faced	SF	$0.91	$1.37	$0.00	$2.28
102964	R-19 Recycled Cotton Fiber Insulation - Unfaced	SF	$0.91	$1.30	$0.00	$2.21
102965	R-21 Recycled Cotton Fiber Insulation - Faced	SF	$0.91	$1.63	$0.00	$2.54
102966	R-21 Recycled Cotton Fiber Insulation - Unfaced	SF	$0.91	$1.55	$0.00	$2.46
102967	R-30 Recycled Cotton Fiber Insulation - Faced	SF	$0.91	$2.69	$0.00	$3.60
102968	R-30 Recycled Cotton Fiber Insulation - Unfaced	SF	$0.91	$2.56	$0.00	$3.47
102969	Fire Safing Wool Batt	LF	$3.61	$2.88	$0.00	$6.49
102970	[Modifier] Quantity Premium - Blanket Insulation (101 -500 SF) – Faced Or Unfaced Quantity premium can be used when total square footage in section 07-21-16 Blanket Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102971	[Modifier] Quantity Premium - Blanket Insulation (51-100 SF) – Faced Or Unfaced Quantity premium can be used when total square footage in section 07-21-16 Blanket Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
102972	[Modifier] Quantity Premium - Blanket Insulation (< Or = to 50 SF) – Faced Or Unfaced Quantity premium can be used when total square footage in section 07-21-16 Blanket Insulation are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	07-21-26 Blown Insulation					
102973	Cellulose Loose/Blown-In Insulation R-3.5 per inch	CF	$0.90	$1.73	$0.00	$2.63
102974	Cellulose Loose/Blown-In Insulation – Installation In Existing Framing – Includes Coring and Patching R-3.5 per inch	CF	$3.60	$1.73	$0.00	$5.33
102975	Cellulose Loose/Blown-In Insulation – Installation In Existing Concrete Masonry Unit (CMU Block) Partition- Includes Coring and Patching R-3.5 per inch	CF	$7.20	$1.73	$0.00	$8.93
102976	Fiberglass Loose/Blown-In Insulation R-2.5 per inch	CF	$0.98	$1.87	$0.00	$2.85
102977	Fiberglass Loose/Blown-In Insulation – Installation In Existing Framing – Includes Coring and Patching R-2.5 per inch	CF	$3.90	$1.87	$0.00	$5.77
102978	Fiberglass Loose/Blown-In Insulation – Installation In Existing Concrete Masonry Unit (CMU Block) Partition – Includes Coring and Patching R-2.5 per inch	CF	$7.80	$1.87	$0.00	$9.67
102979	Mineral Fiber Loose/Blown-In Insulation R-2.8 per inch	CF	$1.07	$2.05	$0.00	$3.12
102980	Mineral Fiber Loose/Blown-In Insulation – Installation In Existing Framing – Includes Coring and Patching R-2.8 per inch	CF	$4.28	$2.05	$0.00	$6.33
102981	Mineral Fiber Loose/Blown-In Insulation – Installation In Existing Concrete Masonry Unit (CMU Block) Partition- Includes Coring and Patching R-2.8 per inch	CF	$8.57	$2.05	$0.00	$10.62
102982	[Modifier] Quantity Premium - Loose/Blown-In Insulation (101-125 CF) Quantity premium can be used when total cubic footage in section 07-21-26 Blown Insulation are within stated quantity. Can be applied cumulatively to applicable line items. Applies to all installation applications.	CF	$4.81	$0.00	$0.00	$4.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102983	[Modifier] Quantity Premium - Loose/Blown-In Insulation (26-100 CF) Quantity premium can be used when total cubic footage in section 07-21-26 Blown Insulation are within stated quantity. Can be applied cumulatively to applicable line items. Applies to all installation applications.	CF	$8.69	$0.00	$0.00	$8.69
102984	[Modifier] Quantity Premium - Loose/Blown-In Insulation (< or = to 25 CF) Quantity premium can be used when total cubic footage in section 07-21-26 Blown Insulation are within stated quantity. Can be applied cumulatively to applicable line items. Applies to all installation applications.	CF	$21.72	$0.00	$0.00	$21.72
	07-21-29 Sprayed Insulation					
102985	Spray Foam Insulation – Open Cell R-3.6 per inch	CF	$4.32	$5.75	$0.00	$10.07
102986	Spray Foam Insulation – Open Cell – Installation In Existing Framing – Includes Coring and Patching R-3.6 per inch	CF	$17.31	$5.75	$0.00	$23.06
102987	Spray Foam Insulation – Open Cell – Installation In Existing Concrete Masonry Unit (CMU Block) Partition- Includes Coring and Patching R-3.6 per inch	CF	$34.62	$5.75	$0.00	$40.37
102988	Spray Foam Insulation – Closed Cell R-5.9 per inch	CF	$5.42	$9.59	$0.00	$15.01
102989	Spray Foam Insulation – Closed Cell – Installation In Existing Framing – Includes Coring and Patching R-5.9 per inch	CF	$21.67	$9.59	$0.00	$31.26
102990	Spray Foam Insulation – Closed Cell – Installation In Existing Concrete Masonry Unit (CMU Block) Partition- Includes Coring and Patching R-5.9 per inch	CF	$43.32	$9.59	$0.00	$52.91
102991	[Modifier] Quantity Premium - Sprayed Insulation (101-125 CF) Quantity premium can be used when total cubic footage in section 07-21-29 Sprayed Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all installation applications.	CF	$4.81	$0.00	$0.00	$4.81
102992	[Modifier] Quantity Premium - Sprayed Insulation (26 -100 CF) Quantity premium can be used when total cubic footage in section 07-21-29 Sprayed Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all installation applications.	CF	$8.69	$0.00	$0.00	$8.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
102993	[Modifier] Quantity Premium - Sprayed Insulation (< or = to 25 CF) Quantity premium can be used when total cubic footage in section 07-21-29 Sprayed Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all installation applications.	CF	$21.72	$0.00	$0.00	$21.72

07-22-00 Roof and Deck Insulation

Includes compressive strength of up to 50 PSI

07-22-00 Roof and Deck Insulation

Includes compressive strength of up to 50 PSI

102994	1/2" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.12	$1.22	$0.00	$2.34
102995	1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.12	$1.46	$0.00	$2.58
102996	1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.12	$1.46	$0.00	$2.58
102997	1/2" Rigid Insulation -Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.12	$1.65	$0.00	$2.77
102998	1" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.12	$1.54	$0.00	$2.66
102999	1" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.12	$1.84	$0.00	$2.96
103000	1" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.12	$1.84	$0.00	$2.96
103001	1" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.12	$2.07	$0.00	$3.19
103002	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.17	$1.91	$0.00	$3.08
103003	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.17	$2.30	$0.00	$3.47
103004	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$2.30	$0.00	$3.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103005	1 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$2.58	$0.00	$3.75
103006	2" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.17	$2.39	$0.00	$3.56
103007	2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.17	$2.88	$0.00	$4.05
103008	2" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$2.88	$0.00	$4.05
103009	2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$3.23	$0.00	$4.40
103010	2 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.17	$2.65	$0.00	$3.82
103011	2 1/2" Rigid Insulation -Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.17	$3.17	$0.00	$4.34
103012	2 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$3.17	$0.00	$4.34
103013	2 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.17	$3.56	$0.00	$4.73
103014	3" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.30	$2.89	$0.00	$4.19
103015	3" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.30	$3.47	$0.00	$4.77
103016	3" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$3.47	$0.00	$4.77
103017	3" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$3.91	$0.00	$5.21
103018	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.30	$3.18	$0.00	$4.48
103019	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.30	$3.82	$0.00	$5.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103020	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$3.82	$0.00	$5.12
103021	3 1/2" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$4.30	$0.00	$5.60
103022	4" Rigid Insulation – Extruded Polystyrene (XPS) R-4.8 to 5 per inch	SF	$1.30	$3.50	$0.00	$4.80
103023	4" Rigid Insulation – Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi R-4.8 to 5 per inch	SF	$1.30	$4.21	$0.00	$5.51
103024	4" Rigid Insulation – Extruded Polystyrene (XPS) – Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$4.21	$0.00	$5.51
103025	4" Rigid Insulation -Extruded Polystyrene (XPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-4.8 to 5 per inch	SF	$1.30	$4.73	$0.00	$6.03
103026	1/2" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.12	$1.11	$0.00	$2.23
103027	1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.12	$1.33	$0.00	$2.45
103028	1/2" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.12	$1.33	$0.00	$2.45
103029	1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.12	$1.49	$0.00	$2.61
103030	1" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.12	$1.38	$0.00	$2.50
103031	1" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.12	$1.66	$0.00	$2.78
103032	1" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.12	$1.66	$0.00	$2.78
103033	1" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.12	$1.87	$0.00	$2.99
103034	1 1/2" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.17	$1.72	$0.00	$2.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103035	1 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.17	$2.07	$0.00	$3.24
103036	1 1/2" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$2.07	$0.00	$3.24
103037	1 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$2.33	$0.00	$3.50
103038	2" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.17	$2.16	$0.00	$3.33
103039	2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.17	$2.60	$0.00	$3.77
103040	2" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$2.60	$0.00	$3.77
103041	2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$2.91	$0.00	$4.08
103042	2 1/2" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.17	$2.38	$0.00	$3.55
103043	2 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.17	$2.85	$0.00	$4.02
103044	2 1/2" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$2.85	$0.00	$4.02
103045	2 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.17	$3.21	$0.00	$4.38
103046	3" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.30	$2.61	$0.00	$3.91
103047	3" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.30	$3.13	$0.00	$4.43
103048	3" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$3.13	$0.00	$4.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103049	3" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$3.52	$0.00	$4.82
103050	3 1/2" Rigid Insulation -Polyisocyanurate R-5 to 5.6 per inch	SF	$1.30	$2.88	$0.00	$4.18
103051	3 1/2" Rigid Insulation -Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.30	$3.45	$0.00	$4.75
103052	3 1/2" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$3.45	$0.00	$4.75
103053	3 1/2" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$3.88	$0.00	$5.18
103054	4" Rigid Insulation – Polyisocyanurate R-5 to 5.6 per inch	SF	$1.30	$3.15	$0.00	$4.45
103055	4" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi R-5 to 5.6 per inch	SF	$1.30	$3.78	$0.00	$5.08
103056	4" Rigid Insulation – Polyisocyanurate – Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$3.78	$0.00	$5.08
103057	4" Rigid Insulation – Polyisocyanurate – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-5 to 5.6 per inch	SF	$1.30	$4.25	$0.00	$5.55
103058	1/2" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.12	$0.88	$0.00	$2.00
103059	1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.12	$1.06	$0.00	$2.18
103060	1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.12	$1.06	$0.00	$2.18
103061	1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.12	$1.19	$0.00	$2.31
103062	1" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.12	$1.11	$0.00	$2.23
103063	1" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.12	$1.33	$0.00	$2.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103064	1" Rigid Insulation -Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.12	$1.33	$0.00	$2.45
103065	1" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.12	$1.49	$0.00	$2.61
103066	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.17	$1.38	$0.00	$2.55
103067	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.17	$1.66	$0.00	$2.83
103068	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$1.66	$0.00	$2.83
103069	1 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$1.87	$0.00	$3.04
103070	2" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.17	$1.72	$0.00	$2.89
103071	2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.17	$2.07	$0.00	$3.24
103072	2" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$2.07	$0.00	$3.24
103073	2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$2.33	$0.00	$3.50
103074	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.17	$1.89	$0.00	$3.06
103075	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.17	$2.28	$0.00	$3.45
103076	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$2.28	$0.00	$3.45
103077	2 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.17	$2.56	$0.00	$3.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103078	3" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.30	$2.08	$0.00	$3.38
103079	3" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.30	$2.50	$0.00	$3.80
103080	3" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$2.50	$0.00	$3.80
103081	3" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$2.82	$0.00	$4.12
103082	3 1/2" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.30	$2.30	$0.00	$3.60
103083	3 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.30	$2.75	$0.00	$4.05
103084	3 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$2.75	$0.00	$4.05
103085	3 1/2" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$3.11	$0.00	$4.41
103086	4" Rigid Insulation – Expanded Polystyrene (EPS) R-3.6 to 4.2 per inch	SF	$1.30	$2.52	$0.00	$3.82
103087	4" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi R-3.6 to 4.2 per inch	SF	$1.30	$3.02	$0.00	$4.32
103088	4" Rigid Insulation – Expanded Polystyrene (EPS) – Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$3.02	$0.00	$4.32
103089	4" Rigid Insulation – Expanded Polystyrene (EPS) – Compressive Strength > 50 Psi and Tapered Rigid Roof Insulation R-3.6 to 4.2 per inch	SF	$1.30	$3.41	$0.00	$4.71
103090	Roof Cover / Protection Board Includes, asphaltic, gypsum, perlite, and fiberglass cover boards	SF	$1.12	$1.40	$0.00	$2.52
103091	Roof Crickets	EA	$194.27	$196.88	$0.00	$391.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103092	[Modifier] Quantity Premium - Roof and Deck Insulation (101-500 SF) Quantity premium can be used when total square footage in section 07-22-00 Roof and Deck Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all insulation types.	SF	$2.33	$0.00	$0.00	$2.33
103093	[Modifier] Quantity Premium - Roof and Deck Insulation (51-100 SF) Quantity premium can be used when total square footage in section 07-22-00 Roof and Deck Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all insulation types.	SF	$5.84	$0.00	$0.00	$5.84
103094	[Modifier] Quantity Premium - Roof and Deck Insulation (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-22-00 Roof and Deck Insulation are within stated quantity. Can be applied cumulatively to base line items. Applies to all insulation types.	SF	$11.70	$0.00	$0.00	$11.70

07-24-00 Exterior Insulation and Finish Systems

Complete system finished and textured at all exposed surfaces. Includes standard weight impact reinforcing mesh, flashings, control and expansion joints and sealants, colors and textures. Quantity based on SFCA - square foot contact area

07-24-00 Exterior Insulation and Finish Systems

Complete system finished and textured at all exposed surfaces. Includes standard weight impact reinforcing mesh, flashings, control and expansion joints and sealants, colors and textures. Quantity based on SFCA - square foot contact area

103095	Exterior Insulation Finishing System (EIFS) System With 2" Insulation	SF	$8.05	$7.17	$0.00	$15.22
103096	Exterior Insulation Finishing System (EIFS) System With 3" Insulation	SF	$8.95	$9.31	$0.00	$18.26
103097	Exterior Insulation Finishing System (EIFS) System With 4" Insulation	SF	$9.66	$12.19	$0.00	$21.85
103098	Exterior Insulation Finishing System (EIFS) - Soffits	SF	$11.27	$9.31	$0.00	$20.58
103099	Exterior Insulation Finishing System (EIFS) - Column Cover	SF	$12.90	$8.59	$0.00	$21.49
103100	Exterior Insulation Finishing System (EIFS) - Banding / Cornice up to 4" Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$5.43	$4.25	$0.00	$9.68
103101	Exterior Insulation Finishing System (EIFS) - Banding / Cornice up to 6" Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$6.04	$6.39	$0.00	$12.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103102	Exterior Insulation Finishing System (EIFS) - Banding / Cornice up to 8" Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$6.78	$8.51	$0.00	$15.29
103103	Exterior Insulation Finishing System (EIFS) - Banding / Cornice up to 12" Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$9.05	$10.64	$0.00	$19.69
103104	Exterior Insulation Finishing System (EIFS) - Sill Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$5.43	$5.85	$0.00	$11.28
103105	Exterior Insulation Finishing System (EIFS) - Header Foam with cementitious coating. Built up combinations may be added cumulatively	LF	$6.78	$9.58	$0.00	$16.36
103106	Exterior Insulation Finishing System (EIFS) - Corbel Foam with cementitious coating. Built up combinations may be added cumulatively	EA	$135.08	$159.64	$0.00	$294.72
103107	Exterior Insulation Finishing System (EIFS) - Column Cap Or Base Foam with cementitious coating. Built up combinations may be added cumulatively	EA	$135.08	$186.24	$0.00	$321.32
103108	[Modifier] Quantity Premium - Exterior Insulation and Finish Systems (101-500 SF) Quantity premium can be used when total square footage in section 07-24-00 Exterior Insulation and Finish Systems are within stated quantity. Can be applied cumulatively to base line items.	SF	$4.27	$0.00	$0.00	$4.27
103109	[Modifier] Quantity Premium - Exterior Insulation and Finish Systems (51-100 SF) Quantity premium can be used when total square footage in section 07-24-00 Exterior Insulation and Finish Systems are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.87	$0.00	$0.00	$10.87
103110	[Modifier] Quantity Premium - Exterior Insulation and Finish Systems (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-24-00 Exterior Insulation and Finish Systems are within stated quantity. Can be applied cumulatively to base line items.	SF	$23.13	$0.00	$0.00	$23.13
103111	[Modifier] Heavy Weight Reinforcement Mesh > 15#	SF	$0.90	$1.12	$0.00	$2.02

07-25-00 Weather Barriers

Water impermeable, vapor semi-permeable barriers, unless otherwise noted.

07-25-00 Weather Barriers

Water impermeable, vapor semi-permeable barriers, unless otherwise noted.

103112	Sheet Membrane Air / Vapor Barrier	SF	$2.16	$2.13	$0.00	$4.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103113	Fluid Applied Air / Vapor Barrier	SF	$0.92	$1.60	$0.00	$2.52
103114	Building Wrap Air / Vapor Barrier Tyvek or equal	SF	$0.92	$0.27	$0.00	$1.19
103115	Asphalt Saturated Building Paper 15# Can use this line items when it's not included as part of a system unit price	SF	$0.77	$0.20	$0.00	$0.97
103116	Asphalt Saturated Building Paper 30# Can use this line items when it's not included as part of a system unit price	SF	$0.80	$0.38	$0.00	$1.18
103117	Asphalt Saturated Building Paper Double Layer Can use this line items when it's not included as part of a system unit price	SF	$0.84	$0.77	$0.00	$1.61
103118	Roof Vapor Barrier Water and Vapor impermeable	SF	$0.92	$0.27	$0.00	$1.19
103119	[Modifier] Quantity Premium - Weather Barriers (101-500 SF) Quantity premium can be used when total square footage in section 07-25-00 Weather Barriers are within stated quantity. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
103120	[Modifier] Quantity Premium - Weather Barriers (51-100 SF) Quantity premium can be used when total square footage in section 07-25-00 Weather Barriers are within stated quantity. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
103121	[Modifier] Quantity Premium - Weather Barriers (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-25-00 Weather Barriers are within stated quantity. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

07-30-00 Steep Slope Roofing

07-31-00 Shingles and Shakes

07-31-13 Asphalt Shingles

103122	Asphalt Saturated Building Paper 15# Can use this line items when it's not included as part of a system unit price	SF	$0.84	$0.20	$0.00	$1.04
103123	Asphalt Saturated Building Paper 15# – Roof Pitch Of 6/12 Or Greater Can use this line items when it's not included as part of a system unit price	SF	$1.21	$0.20	$0.00	$1.41
103124	Asphalt Saturated Building Paper 30# Can use this line items when it's not included as part of a system unit price	SF	$0.86	$0.38	$0.00	$1.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103125	Asphalt Saturated Building Paper 30# – Roof Pitch Of 6/12 Or Greater Can use this line items when it's not included as part of a system unit price	SF	$1.25	$0.38	$0.00	$1.63
103126	Synthetic Roofing Underlayment 30 Mil Can use this line items when it's not included as part of a system unit price. Titanium UDL 30 or equal	SF	$0.86	$0.37	$0.00	$1.23
103127	Synthetic Roofing Underlayment 30 Mil – Roof Pitch Of 6/12 Or Greater Can use this line items when it's not included as part of a system unit price. Titanium UDL 30 or equal	SF	$1.25	$0.37	$0.00	$1.62
103128	Self-Adhered Roofing Underlayment 30 Mil Ice and water shield/barrier similar or equal to Grace Ice and Water Shield Ultra. Can use this line items when it's not included as part of a system unit price	SF	$1.22	$2.39	$0.00	$3.61
103129	Self-Adhered Roofing Underlayment 30 Mil - Roof Pitch Of 6/12 Or Greater Ice and water shield/barrier similar or equal to Grace Ice and Water Shield Ultra. Can use this line items when it's not included as part of a system unit price	SF	$1.77	$2.39	$0.00	$4.16
103130	Self-Adhered Roofing Underlayment 40 Mil Ice and water shield/barrier similar or equal to Grace Ice and Water Shield Ultra. Can use this line items when it's not included as part of a system unit price	SF	$1.22	$1.52	$0.00	$2.74
103131	Self-Adhered Roofing Underlayment 40 Mil - Roof Pitch Of 6/12 Or Greater Ice and water shield/barrier similar or equal to Grace Ice and Water Shield Ultra. Can use this line items when it's not included as part of a system unit price	SF	$1.77	$1.52	$0.00	$3.29
103132	Asphalt Shingle 20 Year Architectural Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.12	$0.00	$5.46
103133	Asphalt Shingle 20 Year Architectural – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.12	$0.00	$6.96
103134	Asphalt Shingle 25 Year Architectural Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.27	$0.00	$5.61
103135	Asphalt Shingle 25 Year Architectural – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.27	$0.00	$7.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103136	Asphalt Shingle 30 Year Architectural Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.43	$0.00	$5.77
103137	Asphalt Shingle 30 Year Architectural – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.43	$0.00	$7.27
103138	Asphalt Shingle Limited Lifetime Architectural Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.88	$0.00	$6.22
103139	Asphalt Shingle Limited Lifetime Architectural – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.88	$0.00	$7.72
103140	Asphalt Shingle 20 Year Three Tab Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$1.79	$0.00	$5.13
103141	Asphalt Shingle 20 Year Three Tab – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$1.79	$0.00	$6.63
103142	Asphalt Shingle 25 Year Three Tab Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$1.93	$0.00	$5.27
103143	Asphalt Shingle 25 Year Three Tab – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$1.93	$0.00	$6.77
103144	Asphalt Shingle 30 Year Three Tab Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.07	$0.00	$5.41
103145	Asphalt Shingle 30 Year Three Tab – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.07	$0.00	$6.91
103146	Asphalt Shingle Limited Lifetime Three Tab Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$3.34	$2.45	$0.00	$5.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103147	Asphalt Shingle Limited Lifetime Three Tab – Roof Pitch Of 6 To 12 Or Greater Class A Shingles. Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.84	$2.45	$0.00	$7.29
103148	[Modifier] Quantity Premium - Asphalt Shingles (101-500 SF) Quantity premium can be used when total square footage in section 07-31-13 Asphalt Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103149	[Modifier] Quantity Premium - Asphalt Shingles (51-100 SF) Quantity premium can be used when total square footage in section 07-31-13 Asphalt Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103150	[Modifier] Quantity Premium - Asphalt Shingles (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-31-13 Asphalt Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$11.70	$0.00	$0.00	$11.70
	07-31-16 Metal Shingles					
103151	Metal Roof Shingles – Steel Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$5.00	$6.92	$0.00	$11.92
103152	Metal Roof Shingles – Steel – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$7.26	$6.92	$0.00	$14.18
103153	Metal Roof Shingles – Aluminum Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$5.00	$8.37	$0.00	$13.37
103154	Metal Roof Shingles – Aluminum – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$7.26	$8.37	$0.00	$15.63
103155	[Modifier] Quantity Premium - Metal Shingles (101-500 SF) Quantity premium can be used when total square footage in section 07-31-16 Metal Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation types.	SF	$2.33	$0.00	$0.00	$2.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103156	[Modifier] Quantity Premium - Metal Shingles (51-100 SF) Quantity premium can be used when total square footage in section 07-31-16 Metal Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation types.	SF	$5.84	$0.00	$0.00	$5.84
103157	[Modifier] Quantity Premium - Metal Shingles (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-31-16 Metal Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation types.	SF	$11.70	$0.00	$0.00	$11.70
	07-31-26 Slate Shingles					
103158	Natural Slate Shingles – Class A Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$14.01	$7.34	$0.00	$21.35
103159	Natural Slate Shingles – Class A – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$20.31	$7.34	$0.00	$27.65
103160	Natural Slate Shingles – Class C Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$14.01	$4.22	$0.00	$18.23
103161	Natural Slate Shingles – Class C – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$20.31	$4.22	$0.00	$24.53
103162	Synthetic Slate Shingles – Class A Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$7.34	$0.00	$16.67
103163	Synthetic Slate Shingles – Class A – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$7.34	$0.00	$20.86
103164	Synthetic Slate Shingles – Class C Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$4.22	$0.00	$13.55
103165	Synthetic Slate Shingles – Class C – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$4.22	$0.00	$17.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103166	Synthetic Slate Shingles – Class A – Custom Color Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$8.23	$0.00	$17.56
103167	Synthetic Slate Shingles – Class A – Custom Color – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$8.23	$0.00	$21.75
103168	Synthetic Slate Shingles – Class C – Custom Color Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$5.17	$0.00	$14.50
103169	Synthetic Slate Shingles – Class C – Custom Color – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$5.17	$0.00	$18.69
103170	[Modifier] Quantity Premium - Slate Shingles (101-500 SF) Quantity premium can be used when total square footage in section 07-31-26 Slate Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103171	[Modifier] Quantity Premium - Slate Shingles (51-100 SF) Quantity premium can be used when total square footage in section 07-31-26 Slate Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103172	[Modifier] Quantity Premium - Slate Shingles (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-31-26 Slate Shingles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$11.70	$0.00	$0.00	$11.70
	07-31-29 Wood Shingles and Shakes					
103173	Cedar Shingles Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$4.77	$5.94	$0.00	$10.71
103174	Cedar Shingles – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$6.92	$5.94	$0.00	$12.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103175	[Modifier] Quantity Premium - Wood Shingles and Shakes (101-500 SF) Quantity premium can be used when total square footage in section 07-31-29 Wood Shingles and Shakes are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103176	[Modifier] Quantity Premium - Wood Shingles and Shakes (51-100 SF) Quantity premium can be used when total square footage in section 07-31-29 Wood Shingles and Shakes are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103177	[Modifier] Quantity Premium - Wood Shingles and Shakes (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-31-29 Wood Shingles and Shakes are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$11.70	$0.00	$0.00	$11.70

07-32-00 Roof Tiles

07-32-13 Clay Roof Tiles

103178	Clay Roof Tiles Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$8.51	$0.00	$17.84
103179	Clay Roof Tiles – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$8.51	$0.00	$22.03
103180	[Modifier] Quantity Premium - Clay Roof Tiles (101-500 SF) Quantity premium can be used when total square footage in section 07-32-13 Clay Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103181	[Modifier] Quantity Premium - Clay Roof Tiles (51-100 SF) Quantity premium can be used when total square footage in section 07-32-13 Clay Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103182	[Modifier] Quantity Premium - Clay Roof Tiles (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-32-13 Clay Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$11.70	$0.00	$0.00	$11.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	07-32-16 Concrete Roof Tiles					
103183	Concrete Roof Tiles Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$9.33	$7.53	$0.00	$16.86
103184	Concrete Roof Tiles – Roof Pitch Of 6 To 12 Or Greater Cost includes installation of shingles, including, caps, ridge vents, flashing, fasteners, drip and rake edge, pipe sleeves	SF	$13.52	$7.53	$0.00	$21.05
103185	[Modifier] Quantity Premium - Concrete Roof Tiles (101-500 SF) Quantity premium can be used when total square footage in section 07-32-16 Concrete Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103186	[Modifier] Quantity Premium - Concrete Roof Tiles (51-100 SF) Quantity premium can be used when total square footage in section 07-32-16 Concrete Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103187	[Modifier] Quantity Premium - Concrete Roof Tiles (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-32-16 Concrete Roof Tiles are within stated quantities. Can be applied cumulatively to base line items. Applies to all installation applications.	SF	$11.70	$0.00	$0.00	$11.70
	07-33-00 Natural Roof Coverings					
	07-33-00 Natural Roof Coverings					
103188	Green Roof System – Extensive Entire system from the deck up. Waterproofing membrane, protection course, root barrier, insulation, moisture retention/drainage panel, filter fabric, growing media, and extensive vegetation plantings	SF	$27.24	$17.03	$0.00	$44.27
103189	Green Roof System – Intensive Entire system from the deck up. Waterproofing membrane, protection course, root barrier, insulation, moisture retention/drainage panel, filter fabric, 2' of growing media, and intensive vegetation plantings.	SF	$57.88	$36.18	$0.00	$94.06
103190	Green Roof Trays (Excludes Roof System) Self-contained vegetative modules in aluminum frame. Includes root barrier, moisture retention/drainage panel, filter fabric, growing media, and extensive vegetation plantings	SF	$8.51	$18.63	$0.00	$27.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103191	[Modifier] Quantity Premium - Natural Roof Coverings (101-500 SF) Quantity premium can be used when total square footage in section 07-33-00 Natural Roof Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.33	$0.00	$0.00	$2.33
103192	[Modifier] Quantity Premium - Natural Roof Coverings (51-100 SF) Quantity premium can be used when total square footage in section 07-33-00 Natural Roof Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.84	$0.00	$0.00	$5.84
103193	[Modifier] Quantity Premium - Natural Roof Coverings (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-33-00 Natural Roof Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.70	$0.00	$0.00	$11.70

07-40-00 Roofing and Siding Panels

07-41-00 Roof Panels

07-41-13 Metal Roof Panels

All steel panels to be galvalume with manufacturers standard paint color and finish. Systems include metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)

103194	Steel Corrugated Roof Panels – 26 Gauge, Painted Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.27	$4.30	$0.00	$9.57
103195	Steel Corrugated Roof Panels – 26 Gauge, Painted Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.64	$4.30	$0.00	$11.94
103196	Steel Corrugated Roof Panels – 24 Gauge, Painted Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.27	$4.95	$0.00	$10.22
103197	Steel Corrugated Roof Panels – 24 Gauge, Painted Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.64	$4.95	$0.00	$12.59
103198	Copper Corrugated Roof Panels – 26 Gauge (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.27	$9.08	$0.00	$14.35
103199	Copper Corrugated Roof Panels – 26 Gauge (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.64	$9.08	$0.00	$16.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103200	Copper Corrugated Roof Panels – 24 Gauge (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.27	$10.45	$0.00	$15.72
103201	Copper Corrugated Roof Panels – 24 Gauge (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.64	$10.45	$0.00	$18.09
103202	[Modifier] Quantity Premium - Metal Roof Panels (101-500 SF) Quantity premium can be used when total square footage in section 07-41-13 Metal Roof Panels are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103203	[Modifier] Quantity Premium - Metal Roof Panels (51-100 SF) Quantity premium can be used when total square footage in section 07-41-13 Metal Roof Panels are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103204	[Modifier] Quantity Premium - Metal Roof Panels (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-41-13 Metal Roof Panels are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$11.70	$0.00	$0.00	$11.70

07-42-00 Wall Panels

07-42-13 Metal Wall Panels

Vertical or horizontal laid, exterior grade, formed metal sheets. All panels installed including color matched closure top and bottom trims, and all sealants or flashing required by panel manufacturer. Factory prefinished with manufacturer's powder coat or PVDF 2-coat unless otherwise noted. Includes subgirt framing system, with rails or supports

103205	Formed Metal Wall Panels – Economy – Up To 1-1/2" Deep, 24 Gauge	SF	$10.03	$16.75	$0.00	$26.78
103206	Formed Metal Wall Panels – Standard – Up To 4" Deep, 24 Gauge	SF	$14.12	$22.33	$0.00	$36.45
103207	Formed Metal Wall Panels – Premium – Up To 2" Deep, 22 Gauge	SF	$18.91	$27.93	$0.00	$46.84
103208	Formed Metal Wall Panels Soffit – Economy – Up To 1-1/2" Deep, 24 Gauge	SF	$10.03	$16.75	$0.00	$26.78
103209	Formed Metal Wall Panels Soffit – Standard – Up To 4" Deep, 24 Gauge	SF	$14.12	$22.33	$0.00	$36.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103210	Perforated Metal Soffit Panel – Up To 50% Perforation Includes galvanized perforated panel, 20 gauge, trim and sub-framing (furring channels)	SF	$5.31	$9.54	$0.00	$14.85
103211	Formed Metal Wall Panels Soffit – Premium – Up To 2" Deep, 22 Gauge	SF	$18.91	$27.93	$0.00	$46.84
103212	[Modifier] Quantity Premium - Metal Wall Panels (101 -500 SF) Quantity premium can be used when total square footage in section 07-42-13 Metal Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
103213	[Modifier] Quantity Premium - Metal Wall Panels (51-100 SF) Quantity premium can be used when total square footage in section 07-42-13 Metal Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
103214	[Modifier] Quantity Premium - Metal Wall Panels (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-42-13 Metal Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
103215	[Modifier] For Thermal Break Subframing	SF	$3.65	$3.35	$0.00	$7.00
103216	[Modifier] For Concealed Fastener	SF	$0.00	$5.58	$0.00	$5.58

07-42-43 Composite Wall Panels

Factory formed, face sheets bonded to thermoplastic core material, with flat profiles, and modular face sizes. Factory prefinished with manufacturer's powder coat or PVDF 2-coat unless otherwise noted. Includes subgirt framing system, with rails or supports. Color matched closure trim and flashing, including sealants for a complete assembly

103217	Composite Metal Panel – Economy Alucobond Alucore or equal	SF	$10.03	$13.40	$0.00	$23.43
103218	Composite Metal Panel – Standard Alucobond A2 or equal	SF	$14.12	$25.12	$0.00	$39.24
103219	Composite Metal Panel – Premium Alucobond A2 with exotic face materials or equal	SF	$18.91	$36.02	$0.00	$54.93
103220	High Pressure Laminate Wall Panel HPL exposed face with inner liner bonded to resin core. Factory formed corners and accessories included	SF	$21.17	$13.84	$0.00	$35.01
103221	Composite Wall Panel Rainscreen System Includes composite panels (Trespa Meteon or equal), panel clips, support rails and vent screens	SF	$23.05	$62.41	$21.60	$107.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103222	Zinc Wall Panel Zinc exposed face with inner liner bonded to resin core. Factory formed corners and accessories included	SF	$18.91	$36.02	$0.00	$54.93
103223	Fiberglass Sandwich Wall Panel and Frame – Up To 2.75” Thick Kalwall or equal. Factory formed corners and accessories included	SF	$12.06	$23.93	$0.00	$35.99
103224	Fiberglass Sandwich Wall Panel and Frame – Up To 4” Thick Kalwall or equal. Factory formed corners and accessories included	SF	$13.58	$26.59	$0.00	$40.17
103225	[Modifier] Quantity Premium - Composite Wall Panels (101-500 SF) Quantity premium can be used when total square footage in section 07-42-43 Composite Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
103226	[Modifier] Quantity Premium - Composite Wall Panels (51-100 SF) Quantity premium can be used when total square footage in section 07-42-43 Composite Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
103227	[Modifier] Quantity Premium - Composite Wall Panels (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-42-43 Composite Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
103228	[Modifier] For Thermal Break Subframing	SF	$3.65	$3.35	$0.00	$7.00
103229	[Modifier] For Concealed Fastener	SF	$0.00	$5.58	$0.00	$5.58

07-42-46 Cementitious Wall Panels

Fiber cement composite panels, with or without interlocking edges. All factory formed transitions, metal trims, subgirt framing system, and flashings included

103230	Fiber Cement Panel – Economy Range Residential use, fiber cement cladding. 5/16” to 1/2” thick, direct nailed in traditional lap, board or shingle siding, or large panels mimicking profiles. Hardi Board or equal	SF	$10.02	$17.26	$0.00	$27.28
103231	Fiber Cement Panel – Standard Range High-end Residential and Commercial use, 1/2 – 5/8” thick, modular boards or larger cladding panels with smooth or lightly embossed faces, up to 32 sf panel sizes, with engineered backing and mounting system included. Standard face color, pattern and textures, limited to using one or two colors. Includes all accessory trims, sealants and flashing. Nichiha or equal	SF	$14.12	$31.19	$0.00	$45.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103232	Fiber Cement Panel – Premium Range Fully engineered modular system with engineered backing and mounting system included to provide panels, trims and accessories for water managed design, including compliance with commercial wind loads and fire-resistance. Includes panel thicknesses up to 5/8” to provide decorative non-traditional pattern and textures, asymmetrical panel sizing, and multiple colors in same facade. Swisspearl or equal	SF	$18.91	$39.08	$0.00	$57.99
103233	[Modifier] Quantity Premium - Cementitious Wall Panels (101-500 SF) Quantity premium can be used when total square footage in section 07-42-46 Cementitious Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
103234	[Modifier] Quantity Premium - Cementitious Wall Panels (51-100 SF) Quantity premium can be used when total square footage in section 07-42-46 Cementitious Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
103235	[Modifier] Quantity Premium - Cementitious Wall Panels (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-42-46 Cementitious Wall Panels are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
103236	[Modifier] For Thermal Break Subframing	SF	$3.65	$3.35	$0.00	$7.00
103237	[Modifier] For Concealed Fastener	SF	$0.00	$5.58	$0.00	$5.58

07-46-00 Siding

Includes system, flashings, trims, corners, soffits. Finish selections from full range of manufacturer's colors and textures. Widths from 4" to 24"

07-46-00 Siding

Includes system, flashings, trims, corners, soffits. Finish selections from full range of manufacturer's colors and textures. Widths from 4" to 24"

103238	Aluminum Siding Interlocking panels flat or ship lap profiles, 44 gauge.	SF	$4.31	$9.31	$0.00	$13.62
103239	Wood Lap Siding Bevel lap or groove lap 3/4" thick, primed for paint, unfinished for stain.	SF	$4.31	$8.22	$0.00	$12.53
103240	Wood Shingle Siding Redwood or cedar machine cut. Includes underlayment and oil sealer.	SF	$5.31	$10.51	$0.00	$15.82
103241	Beaded Vinyl Soffit - Vented	SF	$1.02	$3.13	$0.00	$4.15
103242	3/8" x 12'-6" Vinyl Channel	SF	$1.02	$0.98	$0.00	$2.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103243	Plastic Siding Horizontal Lap or vertical batten, .046 thick minimum. Vinyl or Polymer.	SF	$3.24	$5.75	$0.00	$8.99
103244	Fiber Cement Siding Clapboard, 5/6 thick, smooth or textured face. Ready for finish paint. Includes PVC trim	SF	$4.31	$8.94	$0.00	$13.25
103245	Corrugated Siding Panels - Steel, 22 Gauge Steel panels to be galvalume with manufacturers standard paint color and finish. Includes metal panel, fasteners and trim	SF	$5.08	$4.73	$0.00	$9.81
103246	Corrugated Siding Panels - Steel, 24 Gauge Steel panels to be galvalume with manufacturers standard paint color and finish. Includes metal panel, fasteners and trim	SF	$5.08	$4.30	$0.00	$9.38
103247	Corrugated Siding Panels - Steel, 26 Gauge or less Steel panels to be galvalume with manufacturers standard paint color and finish. Includes metal panel, fasteners and trim	SF	$5.08	$3.91	$0.00	$8.99
103248	[Modifier] Quantity Premium - Siding (101-500 SF) Quantity premium can be used when total square footage in section 07-46-16 Siding are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
103249	[Modifier] Quantity Premium - Siding (51-100 SF) Quantity premium can be used when total square footage in section 07-46-16 Siding are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
103250	[Modifier] Quantity Premium - Siding (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-46-16 Siding are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

07-50-00 Membrane Roofing

07-50-00 Membrane Roofing

07-50-00 Membrane Roofing

103251	[Modifier] Clean Roof Surfaces of Sealants and Adhesives	DY	$530.76	$0.00	$0.00	$530.76

07-51-00 Built-Up Bituminous Roofing

Includes felts, hot or cold mopping, cants, penetration flashing, fasteners, and cap sheet. Includes color matched coping and edge flashing where mopped into roofing assembly. Insulation and protection board added cumulatively.

07-51-00 Built-Up Bituminous Roofing

Includes felts, hot or cold mopping, cants, penetration flashing, fasteners, and cap sheet. Includes color matched coping and edge flashing where mopped into roofing assembly. Insulation and protection board added cumulatively.

103252	Built Up Roofing (BUR) - Hot Or Cold – 4 Ply	SF	$4.31	$4.55	$0.00	$8.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103253	Built Up Roofing (BUR) - Hot Or Cold – 3 Ply	SF	$4.06	$4.29	$0.00	$8.35
103254	[Modifier] Quantity Premium - Built-Up Bituminous Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-51-00 Built-Up Bituminous Roofing are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.33	$0.00	$0.00	$2.33
103255	[Modifier] Quantity Premium - Built-Up Bituminous Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-51-00 Built-Up Bituminous Roofing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.84	$0.00	$0.00	$5.84
103256	[Modifier] Quantity Premium - Built-Up Bituminous Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-51-00 Built-Up Bituminous Roofing are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.70	$0.00	$0.00	$11.70
103257	[Modifier] Stone Ballast	SF	$0.49	$0.95	$0.00	$1.44

07-52-00 Modified Bituminous Membrane Roofing

Includes cap sheet (granular or smooth), heat welded or self adhearing, cants, penetration flashing, and fasteners. Includes color matched coping and edge flashing. Insulation and protection board added cumulatively.

07-52-00 Modified Bituminous Membrane Roofing

Includes cap sheet (granular or smooth), heat welded or self adhearing, cants, penetration flashing, and fasteners. Includes color matched coping and edge flashing. Insulation and protection board added cumulatively.

103258	Modified Bituminous Roofing – APP – Granular or Smooth Cap Sheet, Membrane Thickness - 160 mil (4 mm), Single Layer	SF	$1.72	$2.73	$0.00	$4.45
103259	Modified Bituminous Roofing – SBS – Granular or Smooth Cap Sheet, Membrane Thickness - 160 mil (4 mm), Single Layer	SF	$1.76	$3.64	$0.00	$5.40
103260	Torch Applied SBS Base Flashing	SF	$5.31	$5.83	$0.00	$11.14
103261	[Modifier] Add Base Sheet, Single Layer, Self-Adhered, Membrane Thickness - 80 mil (2 mm) Quantity premium can be used when total square footage in section 07-52-00 Modified Bituminous Membrane Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$1.72	$1.62	$0.00	$3.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103262	[Modifier] Quantity Premium - Modified Bituminous Membrane Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-52-00 Modified Bituminous Membrane Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$2.33	$0.00	$0.00	$2.33
103263	[Modifier] Quantity Premium - Modified Bituminous Membrane Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-52-00 Modified Bituminous Membrane Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$5.84	$0.00	$0.00	$5.84
103264	[Modifier] Quantity Premium - Modified Bituminous Membrane Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-52-00 Modified Bituminous Membrane Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$11.70	$0.00	$0.00	$11.70
103265	[Modifier] Stone Ballast	SF	$0.49	$0.95	$0.00	$1.44

07-53-00 Elastomeric Membrane Roofing

07-53-23 Ethylene-Propylene-Diene-Monomer Roofing

All membrane roofing includes the membrane, seaming, adhering and/or fastening systems appropriate to the use, including sealants, and color compatible membrane and/or metal edge and penetration flashing where system requires direct bond or fastening to the membrane.

103266	EPDM Roofing – Membrane Thickness - 45 Mils (< or = to 2,500 SF)	SF	$3.21	$3.21	$0.00	$6.42
103267	EPDM Roofing – Membrane Thickness - 45 Mils (2,501 - 5,000 SF)	SF	$3.21	$3.10	$0.00	$6.31
103268	EPDM Roofing – Membrane Thickness - 45 Mils (5,001 - 10,000 SF)	SF	$3.06	$3.05	$0.00	$6.11
103269	EPDM Roofing – Membrane Thickness - 45 Mils (Over 10,001 SF)	SF	$3.00	$2.97	$0.00	$5.97
103270	EPDM Roofing – Membrane Thickness - 60 Mils (< or = to 2,500 SF)	SF	$3.39	$3.60	$0.00	$6.99
103271	EPDM Roofing – Membrane Thickness - 60 Mils (2,501 - 5,000 SF)	SF	$3.35	$3.49	$0.00	$6.84
103272	EPDM Roofing – Membrane Thickness - 60 Mils (5,001 - 10,000 SF)	SF	$3.27	$3.41	$0.00	$6.68
103273	EPDM Roofing – Membrane Thickness - 60 Mils (Over 10,001 SF)	SF	$3.21	$3.34	$0.00	$6.55
103274	EPDM Roofing – Membrane Thickness - 90 Mils (< or = to 2,500 SF)	SF	$3.56	$4.83	$0.00	$8.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103275	EPDM Roofing – Membrane Thickness - 90 Mils (2,501 - 5,000 SF)	SF	$3.50	$4.68	$0.00	$8.18
103276	EPDM Roofing – Membrane Thickness - 90 Mils (5,001 - 10,000 SF)	SF	$3.43	$4.58	$0.00	$8.01
103277	EPDM Roofing – Membrane Thickness - 90 Mils (Over 10,001 SF)	SF	$3.36	$4.50	$0.00	$7.86
103278	[Modifier] Quantity Premium - Ethylene-Propylene-Diene-Monomer Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-53-23 Ethylene-Propylene-Diene-Monomer Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$2.33	$0.00	$0.00	$2.33
103279	[Modifier] Quantity Premium - Ethylene-Propylene-Diene-Monomer Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-53-23 Ethylene-Propylene-Diene-Monomer Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$5.84	$0.00	$0.00	$5.84
103280	[Modifier] Quantity Premium - Ethylene-Propylene-Diene-Monomer Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-53-23 Ethylene-Propylene-Diene-Monomer Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$11.70	$0.00	$0.00	$11.70
103281	[Modifier] Stone Ballast	SF	$0.49	$0.95	$0.00	$1.44

07-54-00 Thermoplastic Membrane Roofing

07-54-19 Polyvinyl-Chloride Roofing

All membrane roofing includes the membrane, seaming, adhering and/or fastening systems appropriate to the use, including sealants, and color compatible membrane and/or metal edge and penetration flashing where system requires direct bond or fastening to the membrane.

103282	PVC Roofing – Membrane Thickness = 60 Mils	SF	$3.10	$5.24	$0.00	$8.34
103283	PVC Roofing – Membrane Thickness < 60 Mils	SF	$3.10	$4.45	$0.00	$7.55
103284	PVC Roofing – Membrane Thickness > 60 Mils	SF	$3.10	$6.02	$0.00	$9.12
103285	[Modifier] Quantity Premium - Polyvinyl-Chloride Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-54-19 Polyvinyl-Chloride Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$2.33	$0.00	$0.00	$2.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103286	[Modifier] Quantity Premium - Polyvinyl-Chloride Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-54-19 Polyvinyl-Chloride Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$5.84	$0.00	$0.00	$5.84
103287	[Modifier] Quantity Premium - Polyvinyl-Chloride Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-54-19 Polyvinyl-Chloride Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$11.70	$0.00	$0.00	$11.70
103288	[Modifier] Stone Ballast	SF	$0.49	$0.95	$0.00	$1.44
103289	[Modifier] Add Fleece Backing to PVC Roof Membrane	SF	$0.00	$6.02	$0.00	$6.02

07-54-23 Thermoplastic-Polyolefin Roofing

All membrane roofing includes the membrane, seaming, adhering and/or fastening systems appropriate to the use, including sealants, and color compatible membrane and/or metal edge and penetration flashing where system requires direct bond or fastening to the membrane.

103290	TPO Roofing – Membrane Thickness - 45 Mils (< or = to 2,500 SF)	SF	$3.56	$3.10	$0.00	$6.66
103291	TPO Roofing – Membrane Thickness - 45 Mils (2,501 - 5,000 SF)	SF	$3.50	$3.00	$0.00	$6.50
103292	TPO Roofing – Membrane Thickness - 45 Mils (5,001 - 10,000 SF)	SF	$3.43	$2.94	$0.00	$6.37
103293	TPO Roofing – Membrane Thickness - 45 Mils (Over 10,001 SF)	SF	$3.36	$2.89	$0.00	$6.25
103294	TPO Roofing – Membrane Thickness - 60 Mils (< or = to 2,500 SF)	SF	$3.56	$3.47	$0.00	$7.03
103295	TPO Roofing – Membrane Thickness - 60 Mils (2,501 - 5,000 SF)	SF	$3.50	$3.36	$0.00	$6.86
103296	TPO Roofing – Membrane Thickness - 60 Mils (5,001 - 10,000 SF)	SF	$3.43	$3.30	$0.00	$6.73
103297	TPO Roofing – Membrane Thickness - 60 Mils (Over 10,001 SF)	SF	$3.36	$3.23	$0.00	$6.59
103298	TPO Roofing – Membrane Thickness - 80 Mils (< or = to 2,500 SF)	SF	$3.56	$4.67	$0.00	$8.23
103299	TPO Roofing – Membrane Thickness - 80 Mils (2,501 - 5,000 SF)	SF	$3.42	$4.68	$0.00	$8.10
103300	TPO Roofing – Membrane Thickness - 80 Mils (5,001 - 10,000 SF)	SF	$3.43	$4.44	$0.00	$7.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103301	TPO Roofing – Membrane Thickness - 80 Mils (Over 10,001 SF)	SF	$3.36	$4.34	$0.00	$7.70
103302	[Modifier] Quantity Premium - Thermoplastic-Polyolefin Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-54-23 Thermoplastic-Polyolefin Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$2.33	$0.00	$0.00	$2.33
103303	[Modifier] Quantity Premium - Thermoplastic-Polyolefin Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-54-23 Thermoplastic-Polyolefin Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$5.84	$0.00	$0.00	$5.84
103304	[Modifier] Quantity Premium - Thermoplastic-Polyolefin Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-54-23 Thermoplastic-Polyolefin Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all membrane thicknesses.	SF	$11.70	$0.00	$0.00	$11.70
103305	[Modifier] Stone Ballast	SF	$0.49	$0.95	$0.00	$1.44

07-56-00 Fluid-Applied Roofing

Includes roof preparation including, but not limited to cleaning, seam and flashing repair, sealing penetrations, and roof primer. Recoating with a compatible elastomer, includes separations, flashing, sealing, cleanup, and warranty

07-56-00 Fluid-Applied Roofing

Includes roof preparation including, but not limited to cleaning, seam and flashing repair, sealing penetrations, and roof primer. Recoating with a compatible elastomer, includes separations, flashing, sealing, cleanup, and warranty

103306	Fluid-Applied Roofing Primer Coat – Per Coat If required by contract documents	SF	$1.46	$0.43	$0.00	$1.89
103307	Fluid-Applied Roofing Foundation Coat – Per Coat Each coat includes, a foundation coat, fabric layer, and top coat	SF	$3.90	$4.25	$0.00	$8.15
103308	Fluid-Applied Roofing Finish Coat – Per Coat UV Coating	SF	$1.46	$0.54	$0.00	$2.00
103309	Fluid Applied Roofing System - (2) Coats, Base + Finish Cool Roof or equal	SF	$1.10	$1.49	$0.00	$2.59
103310	[Modifier] Quantity Premium - Fluid-Applied Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-56-00 Fluid-Applied Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$2.33	$0.00	$0.00	$2.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103311	[Modifier] Quantity Premium - Fluid-Applied Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-56-00 Fluid-Applied Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$5.84	$0.00	$0.00	$5.84
103312	[Modifier] Quantity Premium - Fluid-Applied Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-56-00 Fluid-Applied Roofing are within stated quantity. Can be applied cumulatively to applicable line items	SF	$11.70	$0.00	$0.00	$11.70

07-60-00 Flashing and Sheet Metal

07-61-00 Sheet Metal Roofing

All steel panels to be galvalume with manufacturers standard paint color and finish. Systems include metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)

07-61-13 Standing Seam Sheet Metal Roofing

All steel panels to be galvalume with manufacturers standard paint color and finish. Standing seam system items/assemblies include metal panels, lock strips, clips, fasteners, flashings, and trim including but not limited to drip edge, z-bars, ridges, hips, valleys, rakes, eaves, etc.

103313	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Snap Lock Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.29	$7.96	$0.00	$13.25
103314	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Snap Lock Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.61	$7.96	$0.00	$15.57
103315	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Mechanical Single Lock Seam Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.73	$7.96	$0.00	$13.69
103316	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Mechanical Single Lock Seam Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$8.23	$7.96	$0.00	$16.19
103317	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Mechanical Double Lock Seam Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$6.88	$7.96	$0.00	$14.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103318	Steel Standing Seam Roof System – 26 Gauge Galvalume, Painted Finish, 18" Wide Mechanical Double Lock Seam Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$9.89	$7.96	$0.00	$17.85
103319	[Modifier] Steel Standing Seam Roof System – Add for PVDF Finish In-Lieu-Of Painted Finish Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$0.00	$2.47	$0.00	$2.47
103320	[Modifier] Steel Standing Seam Roof System – Add for 16" Wide Panels In-Lieu-Of 18" Wide Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.47	$0.00	$0.00	$1.47
103321	[Modifier] Steel Standing Seam Roof System – Add for 24 Gauge Panels In-Lieu-Of 26 Gauge Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.10	$1.60	$0.00	$2.70
103322	[Modifier] Steel Standing Seam Roof System – Add for 22 Gauge Panels In-Lieu-Of 26 Gauge Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.45	$3.51	$0.00	$4.96
103323	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Snap Lock Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.29	$13.59	$0.00	$18.88
103324	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Snap Lock Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$7.61	$13.59	$0.00	$21.20
103325	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Mechanical Single Lock Seam Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$5.73	$13.59	$0.00	$19.32
103326	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Mechanical Single Lock Seam Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$8.23	$13.59	$0.00	$21.82
103327	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Mechanical Double Lock Seam Panels (Roof Pitch of 6/12 or Less) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$6.88	$13.59	$0.00	$20.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103328	Copper Standing Seam Roof System – 26 Gauge, 18" Wide Mechanical Double Lock Seam Panels (Roof Pitch Greater Than 6/12) Includes metal panel, fasteners, and trim (ridge/hips, valleys, rakes, eaves, etc.)	SF	$9.89	$13.59	$0.00	$23.48
103329	[Modifier] Copper Standing Seam Roof System – Add for 16" Wide Panels In-Lieu-Of 18" Wide Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.47	$0.00	$0.00	$1.47
103330	[Modifier] Copper Standing Seam Roof System – Add for 24 Gauge Panels In-Lieu-Of 26 Gauge Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.10	$3.02	$0.00	$4.12
103331	[Modifier] Copper Standing Seam Roof System – Add for 22 Gauge Panels In-Lieu-Of 26 Gauge Panels Can be applied cumulatively to Steel Standing Seam Roof System items.	SF	$1.45	$5.52	$0.00	$6.97
103332	[Modifier] Quantity Premium - Sheet Metal Roofing (101-500 SF) Quantity premium can be used when total square footage in section 07-61-13 Sheet Metal Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$2.33	$0.00	$0.00	$2.33
103333	[Modifier] Quantity Premium - Sheet Metal Roofing (51-100 SF) Quantity premium can be used when total square footage in section 07-61-13 Sheet Metal Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$5.84	$0.00	$0.00	$5.84
103334	[Modifier] Quantity Premium - Sheet Metal Roofing (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-61-13 Sheet Metal Roofing are within stated quantities. Can be applied cumulatively to base line items. Applies to all material types and installation applications.	SF	$11.70	$0.00	$0.00	$11.70

07-62-00 Sheet Metal Flashing and Trim

Shop or field formed to profiles indicated with all fasteners, sealants and splicing to provide watertight assembly

07-62-00 Sheet Metal Flashing and Trim

Shop or field formed to profiles indicated with all fasteners, sealants and splicing to provide watertight assembly

103335	Copper Flashing, Up To 16 Oz	SFCA	$8.56	$10.85	$0.00	$19.41
103336	Copper Flashing, Up To 20 Oz	SFCA	$8.56	$11.32	$0.00	$19.88
103337	Aluminum Flashing, Up To .032"	SFCA	$6.32	$7.85	$0.00	$14.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103338	Aluminum Flashing, Up To .040"	SFCA	$6.32	$8.18	$0.00	$14.50
103339	Galvalume Steel Flashing, Up To 24 Ga	SFCA	$6.32	$7.44	$0.00	$13.76
103340	Galvalume Steel Flashing, Up To 22 Ga	SFCA	$6.32	$7.78	$0.00	$14.10
103341	Stainless Steel Flashing, Up To 24 Ga	SFCA	$6.32	$10.62	$0.00	$16.94
103342	Stainless Steel Flashing, Up To 22 Ga	SFCA	$6.32	$11.06	$0.00	$17.38

07-65-00 Flexible Flashing

60 mils, unless otherwise noted

07-65-00 Flexible Flashing

60 mils, unless otherwise noted

103343	Rubber Sheet Flashing	SFCA	$5.84	$3.40	$0.00	$9.24
103344	Modified Bituminous Sheet Flashing	SFCA	$5.84	$4.79	$0.00	$10.63
103345	Self Adhering Sheet Flashing	SFCA	$5.84	$5.85	$0.00	$11.69

07-70-00 Roof and Wall Specialties and Accessories

07-71-00 Roof Specialties

Shop or field formed to profiles indicated with all fasteners, sealants and splicing to provide watertight assembly. Includes factory PVFD or equal coating unless noted otherwise

07-71-00 Roof Specialties

Shop or field formed to profiles indicated with all fasteners, sealants and splicing to provide watertight assembly. Includes factory PVFD or equal coating unless noted otherwise

103346	Metal Coping – Galvanized Steel, Up To 24 Ga	SFCA	$6.59	$7.98	$0.00	$14.57
103347	Metal Coping – Galvanized Steel, 22 Ga	SFCA	$6.59	$8.39	$0.00	$14.98
103348	Metal Coping – Galvanized Steel, Up To 24 Ga – Unfinished	SFCA	$6.59	$6.39	$0.00	$12.98
103349	Metal Coping – Galvanized Steel, 22 Ga – Unfinished	SFCA	$6.59	$6.70	$0.00	$13.29
103350	Aluminum Coping / Facia, Up To .032"	SFCA	$6.59	$9.22	$0.00	$15.81
103351	Aluminum Coping / Facia, Up To .040"	SFCA	$6.59	$9.68	$0.00	$16.27
103352	Aluminum Coping / Facia, Up To .032" – Unfinished	SFCA	$6.59	$7.37	$0.00	$13.96
103353	Aluminum Coping / Facia, Up To .040" – Unfinished	SFCA	$6.59	$7.74	$0.00	$14.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103354	Etch, Prime, and Paint Coping	SFCA	$1.70	$0.27	$0.00	$1.97
103355	Reglet	LF	$13.18	$14.74	$0.00	$27.92
103356	Galvanized Gutter - Up To 4"	LF	$6.42	$3.74	$0.00	$10.16
103357	Galvanized Gutter - 6"	LF	$6.42	$5.05	$0.00	$11.47
103358	Galvanized Gutter - Up To 4" – Unfinished	LF	$6.42	$3.00	$0.00	$9.42
103359	Galvanized Gutter - 6" – Unfinished	LF	$6.42	$4.03	$0.00	$10.45
103360	Galvanized Downspouts - Up To 4" - Finished	LF	$6.42	$3.74	$0.00	$10.16
103361	Galvanized Downspouts - 6" - Finished	LF	$6.42	$5.05	$0.00	$11.47
103362	Galvanized Downspouts - Up To 4" – Unfinished	LF	$6.42	$3.00	$0.00	$9.42
103363	Galvanized Downspouts - 6" – Unfinished	LF	$6.42	$4.03	$0.00	$10.45
103364	Galvanized Conductor Head - Up To 4"	EA	$73.08	$63.16	$0.00	$136.24
103365	Galvanized Conductor Head - 6"	EA	$73.08	$68.02	$0.00	$141.10
103366	Galvanized Conductor Head - Up To 4" – Unfinished	EA	$73.08	$50.53	$0.00	$123.61
103367	Galvanized Conductor Head - 6" – Unfinished	EA	$73.08	$54.42	$0.00	$127.50
103368	Aluminum Gutter - Up To 4"	LF	$6.42	$4.30	$0.00	$10.72
103369	Aluminum Gutter - 6"	LF	$6.42	$5.80	$0.00	$12.22
103370	Aluminum Gutter - 7"	LF	$10.61	$23.98	$0.00	$34.59
103371	Aluminum Gutter - Up To 4" – Unfinished	LF	$6.42	$3.44	$0.00	$9.86
103372	Aluminum Gutter - 6" – Unfinished	LF	$6.42	$4.64	$0.00	$11.06
103373	Aluminum Downspouts - Up To 4" - Finished	LF	$6.42	$4.30	$0.00	$10.72
103374	Aluminum Downspouts - 6" - Finished	LF	$6.42	$5.80	$0.00	$12.22
103375	Aluminum Downspouts - Up To 4" – Unfinished	LF	$6.42	$3.44	$0.00	$9.86
103376	Aluminum Downspouts - 6" – Unfinished	LF	$6.42	$4.64	$0.00	$11.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103377	Aluminum Conductor Head - Up To 4"	EA	$73.08	$72.59	$0.00	$145.67
103378	Aluminum Conductor Head - 6"	EA	$73.08	$78.19	$0.00	$151.27
103379	Aluminum Conductor Head - Up To 4" – Unfinished	EA	$73.08	$58.07	$0.00	$131.15
103380	Aluminum Conductor Head - 6" – Unfinished	EA	$73.08	$62.55	$0.00	$135.63
103381	Copper Gutter – Integral Up To 20 oz	LF	$99.11	$117.97	$0.00	$217.08
103382	Copper Gutter – Surface Mounted Up To 20 oz	LF	$24.77	$17.70	$0.00	$42.47
103383	Copper Downspouts Up To 20 oz	LF	$24.77	$17.70	$0.00	$42.47
103384	Copper Conductor Head Up To 20 oz	EA	$97.44	$176.96	$0.00	$274.40
103385	Etch, Prime, and Paint Gutter / Downspouts - Up To 4"	LF	$2.92	$0.27	$0.00	$3.19
103386	Etch, Prime, and Paint Gutter / Downspouts - 6"	LF	$3.34	$0.37	$0.00	$3.71
103387	Etch, Prime, and Paint Conductor Head - Up To 4"	EA	$32.48	$5.33	$0.00	$37.81
103388	Etch, Prime, and Paint Conductor Head - 6"	EA	$36.54	$5.33	$0.00	$41.87
103389	Gravel Stop	LF	$9.41	$11.06	$0.00	$20.47
103390	Scuppers Up To 6" x 8"	EA	$194.88	$195.45	$0.00	$390.33
103391	Scuppers Greater Than 6" x 8"	EA	$292.32	$223.38	$0.00	$515.70
103392	Gutter Leaf Guards	LF	$0.92	$29.54	$0.00	$30.46
103393	Rooftop Pipe Support B-Line Dura-Blok #DB20 or equal	EA	$94.43	$169.62	$0.00	$264.05

07-72-00 Roof Accessories

Includes all fasteners, flashing, sealants and splicing to provide watertight assembly. Includes factory PVFD or equal coating unless noted otherwise

07-72-00 Roof Accessories

Includes all fasteners, flashing, sealants and splicing to provide watertight assembly. Includes factory PVFD or equal coating unless noted otherwise

103394	Termination Bars Required to Seal Additional Roof Penetrations Additional termination bar for sealing penetrations not included in the EPDM unit price	LF	$1.26	$3.05	$0.00	$4.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103395	Smoke Vent Galvanized Up To 48" x 48" Bilco automatic smoke vent or equal	EA	$584.63	$2,749.93	$0.00	$3,334.56
103396	Smoke Vent Galvanized Up To 48" x 72" Bilco automatic smoke vent or equal	EA	$584.63	$2,925.89	$0.00	$3,510.52
103397	Smoke Vent Galvanized Up To 48" x 96" Bilco automatic smoke vent or equal	EA	$584.63	$3,403.69	$0.00	$3,988.32
103398	Smoke Vent Galvanized Greater Than 48" x 96" (By SF) Bilco automatic smoke vent or equal	SF	$18.27	$106.36	$0.00	$124.63
103399	Smoke Vent Aluminum Up To 48" x 48" Bilco automatic smoke vent or equal	EA	$584.63	$3,024.91	$0.00	$3,609.54
103400	Smoke Vent Aluminum Up To 48" x 72" Bilco automatic smoke vent or equal	EA	$584.63	$3,218.48	$0.00	$3,803.11
103401	Smoke Vent Aluminum Up To 48" x 96" Bilco automatic smoke vent or equal	EA	$584.63	$3,744.06	$0.00	$4,328.69
103402	Smoke Vent Aluminum Greater Than 48" x 96" (By SF) Bilco automatic smoke vent or equal	SF	$18.27	$117.00	$0.00	$135.27
103403	Smoke Vent Translucent Up To 48" x 48" Bilco Daylighting smoke vent or equal	EA	$584.63	$2,801.46	$0.00	$3,386.09
103404	Smoke Vent Translucent Up To 48" x 72" Bilco Daylighting smoke vent or equal	EA	$584.63	$3,517.90	$0.00	$4,102.53
103405	Smoke Vent Translucent Up To 48" x 96" Bilco Daylighting smoke vent or equal	EA	$584.63	$3,696.11	$0.00	$4,280.74
103406	Smoke Vent Translucent Greater Than 48" x 96" (By SF) Bilco Daylighting smoke vent or equal	SF	$18.27	$115.50	$0.00	$133.77
103407	Roof Hatch Galvanized Up To 48" x 48" Bilco roof hatch or equal	EA	$584.63	$2,351.18	$0.00	$2,935.81
103408	Roof Hatch Galvanized Up To 48" x 72" Bilco roof hatch or equal	EA	$584.63	$2,501.63	$0.00	$3,086.26
103409	Roof Hatch Galvanized Up To 48" x 96" Bilco roof hatch or equal	EA	$584.63	$2,910.16	$0.00	$3,494.79
103410	Roof Hatch Galvanized Greater Than 48" x 96" (By SF) Bilco roof hatch or equal	SF	$18.27	$90.94	$0.00	$109.21
103411	Roof Hatch Aluminum Up To 48" x 48" Bilco roof hatch or equal	EA	$584.63	$2,586.30	$0.00	$3,170.93
103412	Roof Hatch Aluminum Up To 48" x 72" Bilco roof hatch or equal	EA	$584.63	$2,751.79	$0.00	$3,336.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103413	Roof Hatch Aluminum Up To 48" x 96" Bilco roof hatch or equal	EA	$584.63	$3,201.17	$0.00	$3,785.80
103414	Roof Hatch Aluminum Greater Than 48" x 96" (By SF) Bilco roof hatch or equal	SF	$18.27	$100.03	$0.00	$118.30
103415	Smoke Vent / Roof Hatch Safety Rail System Bilco Rail System RL2-S or equal	LF	$24.36	$177.58	$0.00	$201.94
103416	Safety Tie-Off Anchor	EA	$116.92	$223.38	$0.00	$340.30
103417	Roof Walkway Pads Rubber walkway pads	SF	$2.92	$5.33	$0.00	$8.25
103418	Ember Resistant Vents Up To 2" Wide Vulcan Vent or equal	LF	$2.06	$18.66	$0.00	$20.72
103419	Ember Resistant Vents Up To 4" Wide Vulcan Vent or equal	LF	$2.06	$20.41	$0.00	$22.47
103420	Ember Resistant Vents Up To 6" Wide Vulcan Vent or equal	LF	$2.06	$22.33	$0.00	$24.39
	07-72-13 Manufactured Curbs					
103421	4"-8" Pipe Diameter Prefabricated EPDM Pitch Pocket Pipe Boot	EA	$14.50	$48.00	$0.25	$62.75
	07-72-53 Snow Guards					
103422	Snow Guard Pad - Clamp Style, Aluminum For use on standing seam metal roofing, 6 1/8"L x 3 9/32"W, based on 4/12 pitch, staggered spacing, starting 12" from eave edge	EA	$8.90	$17.97	$0.00	$26.87
103423	Snow Guard Half Round Pad - Mechanically Fastened, Aluminum For use with cedar, asphalt, slate and tile roofing, 2 3/8" x 2 3/8"W x 15 5/8"L, based on 4/12 pitch, staggered spacing, starting 12" from eave edge	EA	$6.36	$8.33	$0.00	$14.69
103424	Snow Guard Pad - Mechanically Fastened, Aluminum For use on metal roofing, 2 3/8" x 2 3/8"W x 3 7/16"L, based on 4/12 pitch, staggered spacing, starting 12" from eave edge	EA	$6.36	$7.05	$0.00	$13.41
103425	Snow Guard - 2 Pipe Assembly, Aluminum Includes clamps @ 2' oc, pipe, collars and couplings, based on 4/12 pitch, starting 12" from eave edge	LF	$13.35	$25.67	$0.00	$39.02
103426	Snow Guard - 1 Pipe Assembly, Aluminum Includes clamps @ 2' oc, pipe, collars and couplings, based on 4/12 pitch, starting 12" from eave edge	LF	$11.44	$23.55	$0.00	$34.99

07-76-00 Roof Pavers

Pre-fabricated pavers installed, with edge profiles to suit conditions, pedestal or direct laid. Ballast applications to meet wind load resistance requirements

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	07-76-00 Roof Pavers					
	Pre-fabricated pavers installed, with edge profiles to suit conditions, pedestal or direct laid. Ballast applications to meet wind load resistance requirements					
103427	Precast Roof Paver – Ballast	SF	$7.95	$10.00	$0.00	$17.95
103428	Precast Roof Paver On Pedestals Decorative textures and colors for pedestrian traffic	SF	$12.57	$27.96	$0.00	$40.53
	07-80-00 Fire and Smoke Protection					
	07-81-00 Applied Fire Protection					
	07-81-16 Cementitious Fire Protection					
	Pricing based on SFCA – Square foot contact area. 40 PCF minimum					
103429	Spray Fireproof Structural Steel – Per Inch	SFCA	$1.70	$0.77	$0.00	$2.47
103430	Spray Fireproof Steel Joist – Per Inch	SFCA	$2.20	$0.77	$0.00	$2.97
103431	Spray Fireproof Metal Deck – Per Inch	SFCA	$0.89	$0.77	$0.00	$1.66
103432	[Modifier] Quantity Premium - Cementitious Fire Protection (101-500 SF) Quantity premium can be used when total square footage in section 07-81-16 Cementitious Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$2.63	$0.00	$0.00	$2.63
103433	[Modifier] Quantity Premium - Cementitious Fire Protection (51-100 SF) Quantity premium can be used when total square footage in section 07-81-16 Cementitious Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$6.58	$0.00	$0.00	$6.58
103434	[Modifier] Quantity Premium - Cementitious Fire Protection (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-81-16 Cementitious Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$13.16	$0.00	$0.00	$13.16
	07-81-23 Intumescent Fire Protection					
	Pricing based on SFCA – Square foot contact area					
103435	Troweled Intumescent Fireproofing – 1Hr	SFCA	$17.05	$7.69	$0.00	$24.74
103436	Spray Intumescent Fireproofing – 1Hr	SFCA	$2.31	$6.53	$0.00	$8.84
103437	Spray Intumescent Fireproofing – 2Hr	SFCA	$4.61	$8.81	$0.00	$13.42
103438	Spray Intumescent Fireproofing – 3Hr	SFCA	$6.92	$10.02	$0.00	$16.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103439	[Modifier] Quantity Premium - Intumescent Fire Protection (101-500 SF) Quantity premium can be used when total square footage in section 07-81-23 Intumescent Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$2.18	$0.00	$0.00	$2.18
103440	[Modifier] Quantity Premium - Intumescent Fire Protection (51-100 SF) Quantity premium can be used when total square footage in section 07-81-23 Intumescent Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$5.46	$0.00	$0.00	$5.46
103441	[Modifier] Quantity Premium - Intumescent Fire Protection (< or = to 50 SF) Quantity premium can be used when total square footage in section 07-81-23 Intumescent Fireproofing are within stated quantities. Can be applied cumulatively to base line items.	SFCA	$10.91	$0.00	$0.00	$10.91

07-84-00 Firestopping

07-84-00 Firestopping

103442	Fire-Safing For use at slab edge where condition occurs	LF	$7.26	$12.21	$0.00	$19.47
103443	3M Fire Barrier Putty Red, Intumescent, 0.27 pound bar	EA	$25.51	$8.41	$0.00	$33.92

07-90-00 Joint Protection

07-92-00 Joint Sealants

Only for use where sealants are not already included in assembled systems

07-92-00 Joint Sealants

Only for use where sealants are not already included in assembled systems

103444	Interior Caulking Acrylic and siliconized acrylic	LF	$0.79	$0.40	$0.00	$1.19
103445	Exterior Caulking Polyurethane or silicone. Color matched to substrate	LF	$0.94	$0.48	$0.00	$1.42
103446	Backer Rod at Caulking Joint	LF	$0.55	$0.26	$0.00	$0.81
103447	Remove Existing Caulk Joint, Seal and Replace with New Caulk Joints at Existing Stone / Masonry Caps & Steps Includes 1/2" x 1/2" by various lengths	LF	$6.62	$2.27	$0.00	$8.89

07-95-00 Expansion Control

Includes all system components for installation per manufacturers recommendations

07-95-00 Expansion Control

Includes all system components for installation per manufacturers recommendations

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103448	Expansion Joints - Interior Walls / Ceilings – Frameless Compression Seals, Up To 6” Joints, Non-Traffic Includes joint preparation	LF	$19.44	$31.93	$0.00	$51.37
103449	Expansion Joints - Interior Walls / Ceilings – Interior Framed With Resilient Sheet Filler, Up To 12” Joints, Non-Traffic Includes joint preparation	LF	$19.44	$42.57	$0.00	$62.01
103450	Expansion Joints - Exterior Walls – Frameless Compression Seals With Silicone Face, Up To 6” Joints, Non-Traffic Includes joint preparation	LF	$19.44	$63.85	$0.00	$83.29
103451	Expansion Joints - Exterior Walls – Single Direction Sliding Aluminum Plate, Anodized, Joints Up To 15”, Traffic Bearing Includes joint preparation	LF	$19.44	$79.82	$0.00	$99.26
103452	Expansion Joints - Floors – Elastomeric Seals With Edge Retainer, Up To 6" Joints, Traffic Bearing Includes joint preparation	LF	$19.44	$74.49	$0.00	$93.93
103453	Expansion Joints - Floors – Cover Plate With Edge Retainer, Up To 15" Joints, Traffic Bearing Includes joint preparation	LF	$19.44	$95.78	$0.00	$115.22
103454	Expansion Joints - Roofs – Neoprene Half Round Bellows Type With Integral Flanges, Up To 12” Widths, Non-Traffic Includes joint preparation	LF	$19.44	$127.71	$0.00	$147.15
103455	Expansion Joints - Roofs – Framed With Raised Curb, Three Way Sliding Plate Or Cover, All Aluminum With Internal Weather Secondary Seal, Up To 15” Width, Non Traffic Includes joint preparation	LF	$19.44	$159.64	$0.00	$179.08
103456	Expansion Joints - Parking Decks – Recessed Sub-Frame With Solid Or Cellular Neoprene Rubber Seal, For Joints Up To 12”, Traffic Bearing Includes joint preparation	LF	$19.44	$106.42	$0.00	$125.86
103457	Expansion Joints - Parking Decks – Framed, Cast In Place, With Solid Traffic Bearing Cover Plate, With Internal 2-Way Movement, Joints Up To 18”, Heavy Duty Traffic Bearing Includes joint preparation	LF	$19.44	$159.64	$0.00	$179.08

08-00-00 Openings

08-10-00 Doors and Frames

All Doors are prepped for hinges, locksets and closer. All Frames are prepped for hinges, strike and closer, with rabbeted profile

08-11-00 Metal Doors and Frames

08-11-66 Metal Screen Doors and Frames

Extruded or Stamped frames and styles. Manual opening, entry or exit rating, heavy duty Grade 1 or equal. Includes

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	sliding screen insert, continuous hinge, door closer, latch and lockset in a 626 finish or equal. Includes manufactures standard clear anodized or powder coated finish					
103458	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$181.01	$885.84	$0.00	$1,066.85
103459	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$181.01	$973.74	$0.00	$1,154.75
103460	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$181.01	$1,071.11	$0.00	$1,252.12
103461	Aluminum Entrance Storm Door and Frame, Double, Narrow Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$241.35	$1,439.05	$0.00	$1,680.40
103462	Aluminum Entrance Storm Door and Frame, Double, Narrow Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$241.35	$1,582.96	$0.00	$1,824.31
103463	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$181.01	$841.55	$0.00	$1,022.56
103464	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$181.01	$925.05	$0.00	$1,106.06
103465	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$181.01	$1,017.55	$0.00	$1,198.56
103466	Aluminum Entrance Storm Door and Frame, Double, Medium Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$241.35	$1,367.11	$0.00	$1,608.46
103467	Aluminum Entrance Storm Door and Frame, Double, Medium Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$241.35	$1,503.82	$0.00	$1,745.17
103468	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$181.01	$799.47	$0.00	$980.48
103469	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$181.01	$878.79	$0.00	$1,059.80
103470	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$181.01	$966.68	$0.00	$1,147.69
103471	Aluminum Entrance Storm Door and Frame, Double, Wide Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$241.35	$1,298.75	$0.00	$1,540.10
103472	Aluminum Entrance Storm Door and Frame, Double, Wide Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$241.35	$1,428.62	$0.00	$1,669.97
103473	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$181.01	$393.70	$0.00	$574.71
103474	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$181.01	$432.77	$0.00	$613.78
103475	Aluminum Entrance Storm Door and Frame, Single, Narrow Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$181.01	$476.04	$0.00	$657.05
103476	Aluminum Entrance Storm Door and Frame, Double, Narrow Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$241.35	$639.58	$0.00	$880.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103477	Aluminum Entrance Storm Door and Frame, Double, Narrow Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$241.35	$703.53	$0.00	$944.88
103478	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$181.01	$374.03	$0.00	$555.04
103479	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$181.01	$411.13	$0.00	$592.14
103480	Aluminum Entrance Storm Door and Frame, Single, Medium Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$181.01	$452.25	$0.00	$633.26
103481	Aluminum Entrance Storm Door and Frame, Double, Medium Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$241.35	$607.60	$0.00	$848.95
103482	Aluminum Entrance Storm Door and Frame, Double, Medium Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$241.35	$668.37	$0.00	$909.72
103483	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$181.01	$355.33	$0.00	$536.34
103484	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$181.01	$390.58	$0.00	$571.59
103485	Aluminum Entrance Storm Door and Frame, Single, Wide Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$181.01	$429.64	$0.00	$610.65
103486	Aluminum Entrance Storm Door and Frame, Double, Wide Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$241.35	$577.22	$0.00	$818.57
103487	Aluminum Entrance Storm Door and Frame, Double, Wide Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$241.35	$634.94	$0.00	$876.29
103488	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$144.81	$442.92	$0.00	$587.73
103489	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$144.81	$486.87	$0.00	$631.68
103490	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$144.81	$535.56	$0.00	$680.37
103491	Aluminum Entrance Screen Door and Frame, Double, Narrow Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$181.01	$719.53	$0.00	$900.54
103492	Aluminum Entrance Screen Door and Frame, Double, Narrow Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$181.01	$791.48	$0.00	$972.49
103493	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$144.81	$420.77	$0.00	$565.58
103494	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$144.81	$462.53	$0.00	$607.34
103495	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$144.81	$508.77	$0.00	$653.58
103496	Aluminum Entrance Screen Door and Frame, Double, Medium Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$181.01	$683.55	$0.00	$864.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103497	Aluminum Entrance Screen Door and Frame, Double, Medium Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$181.01	$751.90	$0.00	$932.91
103498	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$144.81	$399.73	$0.00	$544.54
103499	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$144.81	$439.40	$0.00	$584.21
103500	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$144.81	$483.33	$0.00	$628.14
103501	Aluminum Entrance Screen Door and Frame, Double, Wide Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$181.01	$649.37	$0.00	$830.38
103502	Aluminum Entrance Screen Door and Frame, Double, Wide Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$181.01	$714.31	$0.00	$895.32
103503	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$144.81	$196.86	$0.00	$341.67
103504	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$144.81	$216.38	$0.00	$361.19
103505	Aluminum Entrance Screen Door and Frame, Single, Narrow Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$144.81	$238.02	$0.00	$382.83
103506	Aluminum Entrance Screen Door and Frame, Double, Narrow Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$181.01	$319.79	$0.00	$500.80
103507	Aluminum Entrance Screen Door and Frame, Double, Narrow Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$181.01	$351.77	$0.00	$532.78
103508	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$144.81	$187.01	$0.00	$331.82
103509	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$144.81	$205.56	$0.00	$350.37
103510	Aluminum Entrance Screen Door and Frame, Single, Medium Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$144.81	$226.12	$0.00	$370.93
103511	Aluminum Entrance Screen Door and Frame, Double, Medium Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$181.01	$303.80	$0.00	$484.81
103512	Aluminum Entrance Screen Door and Frame, Double, Medium Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$181.01	$334.18	$0.00	$515.19
103513	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$144.81	$177.66	$0.00	$322.47
103514	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$144.81	$195.28	$0.00	$340.09
103515	Aluminum Entrance Screen Door and Frame, Single, Wide Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$144.81	$214.81	$0.00	$359.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103516	Aluminum Entrance Screen Door and Frame, Double, Wide Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$181.01	$288.61	$0.00	$469.62
103517	Aluminum Entrance Screen Door and Frame, Double, Wide Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$181.01	$317.48	$0.00	$498.49
103518	[Modifier] Panic Device Operational portion of all panic devices to cover half the width of specified door, minimum. Chassis may be longer. Medium stile unless otherwise noted. Fire rating of exit devices by UL or testing agency acceptable to AHJ. All devices are Grade 1 unless otherwise noted. Touch or crash bars finished in satin stainless steel with chassis in satin aluminum, or plated brass/bronze as standard with manufacturer. Touch Bar or Crash Bar	EA	$76.49	$295.51	$0.00	$372.00

08-12-00 Metal Frames

08-12-13 Hollow Metal Frames

Hollow metal frames for doors and lites, prepped for hinges, strike and closer, with rabbeted profile. All frames are welded unless noted otherwise and fire rated up to 90 minutes.

103519	Hollow Metal Door Frame (Welded) - Up To 2' X 6' 8" : 4" Throat	EA	$138.46	$216.63	$0.00	$355.09
103520	Hollow Metal Door Frame (Welded) - 2' 6" X 6' 8" : 4" Throat	EA	$138.46	$228.03	$0.00	$366.49
103521	Hollow Metal Door Frame (Welded) - 3' X 6' 8" : 4" Throat	EA	$138.46	$240.03	$0.00	$378.49
103522	Hollow Metal Door Frame (Welded) - 3' 6" X 6' 8" : 4" Throat	EA	$138.46	$248.03	$0.00	$386.49
103523	Hollow Metal Door Frame (Welded) - 4' X 6' 8" : 4" Throat	EA	$169.69	$264.04	$0.00	$433.73
103524	Hollow Metal Door Frame (Welded) - 5' X 6' 8" : 4" Throat	EA	$169.69	$272.03	$0.00	$441.72
103525	Hollow Metal Door Frame (Welded) - 6' X 6' 8" : 4" Throat	EA	$169.69	$280.03	$0.00	$449.72
103526	Hollow Metal Door Frame (Welded) - 7' X 6' 8" : 4" Throat	EA	$169.69	$296.03	$0.00	$465.72
103527	Hollow Metal Door Frame (Welded) - Up To 2' X 6' 8" : 6" Throat	EA	$138.46	$228.03	$0.00	$366.49
103528	Hollow Metal Door Frame (Welded) - 2' 6" X 6' 8" : 6" Throat	EA	$138.46	$240.03	$0.00	$378.49
103529	Hollow Metal Door Frame (Welded) - 3' X 6' 8" : 6" Throat	EA	$138.46	$252.66	$0.00	$391.12
103530	Hollow Metal Door Frame (Welded) - 3' 6" X 6' 8" : 6" Throat	EA	$138.46	$261.09	$0.00	$399.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103531	Hollow Metal Door Frame (Welded) - 4' X 6' 8" : 6" Throat	EA	$169.69	$277.93	$0.00	$447.62
103532	Hollow Metal Door Frame (Welded) - 5' X 6' 8" : 6" Throat	EA	$169.69	$286.36	$0.00	$456.05
103533	Hollow Metal Door Frame (Welded) - 6' X 6' 8" : 6" Throat	EA	$169.69	$294.78	$0.00	$464.47
103534	Hollow Metal Door Frame (Welded) - 7' X 6' 8" : 6" Throat	EA	$169.69	$311.61	$0.00	$481.30
103535	Hollow Metal Door Frame (Welded) - Up To 2' X 6' 8" : 8" Throat	EA	$138.46	$238.77	$0.00	$377.23
103536	Hollow Metal Door Frame (Welded) - 2' 6" X 6' 8" : 8" Throat	EA	$138.46	$252.03	$0.00	$390.49
103537	Hollow Metal Door Frame (Welded) - 3' X 6' 8" : 8" Throat	EA	$138.46	$265.29	$0.00	$403.75
103538	Hollow Metal Door Frame (Welded) - 3' 6" X 6' 8" : 8" Throat	EA	$138.46	$274.14	$0.00	$412.60
103539	Hollow Metal Door Frame (Welded) - 4' X 6' 8" : 8" Throat	EA	$169.69	$291.83	$0.00	$461.52
103540	Hollow Metal Door Frame (Welded) - 5' X 6' 8" : 8" Throat	EA	$169.69	$300.67	$0.00	$470.36
103541	Hollow Metal Door Frame (Welded) - 6' X 6' 8" : 8" Throat	EA	$169.69	$309.52	$0.00	$479.21
103542	Hollow Metal Door Frame (Welded) - 7' X 6' 8" : 8" Throat	EA	$169.69	$327.19	$0.00	$496.88
103543	Hollow Metal Door Frame (Knock Down) - Up To 2' X 6' 8" : 4" Throat	EA	$138.46	$194.97	$0.00	$333.43
103544	Hollow Metal Door Frame (Knock Down) - 2' 6" X 6' 8" : 4" Throat	EA	$138.46	$205.23	$0.00	$343.69
103545	Hollow Metal Door Frame (Knock Down) - 3' X 6' 8" : 4" Throat	EA	$138.46	$216.03	$0.00	$354.49
103546	Hollow Metal Door Frame (Knock Down) - 3' 6" X 6' 8" : 4" Throat	EA	$138.46	$223.22	$0.00	$361.68
103547	Hollow Metal Door Frame (Knock Down) - 4' X 6' 8" : 4" Throat	EA	$169.69	$237.63	$0.00	$407.32
103548	Hollow Metal Door Frame (Knock Down) - 5' X 6' 8" : 4" Throat	EA	$169.69	$244.82	$0.00	$414.51
103549	Hollow Metal Door Frame (Knock Down) - 6' X 6' 8" : 4" Throat	EA	$169.69	$252.03	$0.00	$421.72
103550	Hollow Metal Door Frame (Knock Down) - 7' X 6' 8" : 4" Throat	EA	$169.69	$266.44	$0.00	$436.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103551	Hollow Metal Door Frame (Knock Down) - Up to 2' X 6' 8" : 6" Throat	EA	$138.46	$205.22	$0.00	$343.68
103552	Hollow Metal Door Frame (Knock Down) - 2' 6" X 6' 8" : 6" Throat	EA	$138.46	$216.03	$0.00	$354.49
103553	Hollow Metal Door Frame (Knock Down) - 3' X 6' 8" : 6" Throat	EA	$138.46	$227.39	$0.00	$365.85
103554	Hollow Metal Door Frame (Knock Down) - 3' 6" X 6' 8" : 6" Throat	EA	$138.46	$234.97	$0.00	$373.43
103555	Hollow Metal Door Frame (Knock Down) - 4' X 6' 8" : 6" Throat	EA	$169.69	$250.14	$0.00	$419.83
103556	Hollow Metal Door Frame (Knock Down) - 5' X 6' 8" : 6" Throat	EA	$169.69	$257.72	$0.00	$427.41
103557	Hollow Metal Door Frame (Knock Down) - 6' X 6' 8" : 6" Throat	EA	$169.69	$265.29	$0.00	$434.98
103558	Hollow Metal Door Frame (Knock Down) - 7' X 6' 8" : 6" Throat	EA	$169.69	$280.46	$0.00	$450.15
103559	Hollow Metal Door Frame (Knock Down) - Up To 2' X 6' 8" : 8" Throat	EA	$138.46	$214.89	$0.00	$353.35
103560	Hollow Metal Door Frame (Knock Down) - 2' 6" X 6' 8" : 8" Throat	EA	$138.46	$226.83	$0.00	$365.29
103561	Hollow Metal Door Frame (Knock Down) - 3' X 6' 8" : 8" Throat	EA	$138.46	$238.77	$0.00	$377.23
103562	Hollow Metal Door Frame (Knock Down) - 3' 6" X 6' 8" : 8" Throat	EA	$138.46	$246.73	$0.00	$385.19
103563	Hollow Metal Door Frame (Knock Down) - 4' X 6' 8" : 8" Throat	EA	$169.69	$262.65	$0.00	$432.34
103564	Hollow Metal Door Frame (Knock Down) - 5' X 6' 8" : 8" Throat	EA	$169.69	$270.61	$0.00	$440.30
103565	Hollow Metal Door Frame (Knock Down) - 6' X 6' 8" : 8" Throat	EA	$169.69	$278.57	$0.00	$448.26
103566	Hollow Metal Door Frame (Knock Down) - 7' X 6' 8" : 8" Throat	EA	$169.69	$294.47	$0.00	$464.16
103567	Hollow Metal Door Frame (Welded) - Up To 2' X 7' : 4" Throat	EA	$138.46	$228.03	$0.00	$366.49
103568	Hollow Metal Door Frame (Welded) - 2' 6" X 7' : 4" Throat	EA	$138.46	$240.03	$0.00	$378.49
103569	Hollow Metal Door Frame (Welded) - 3' X 7' : 4" Throat	EA	$138.46	$252.66	$0.00	$391.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103570	Hollow Metal Door Frame (Welded) - 3' 6" X 7' : 4" Throat	EA	$138.46	$261.09	$0.00	$399.55
103571	Hollow Metal Door Frame (Welded) - 4' X 7' : 4" Throat	EA	$169.69	$277.93	$0.00	$447.62
103572	Hollow Metal Door Frame (Welded) - 5' X 7' : 4" Throat	EA	$169.69	$286.36	$0.00	$456.05
103573	Hollow Metal Door Frame (Welded) - 6' X 7' : 4" Throat	EA	$169.69	$294.78	$0.00	$464.47
103574	Hollow Metal Door Frame (Welded) - 7' X 7' : 4" Throat	EA	$169.69	$311.61	$0.00	$481.30
103575	Hollow Metal Door Frame (Welded) - Up To 2' X 7' : 6" Throat	EA	$138.46	$240.03	$0.00	$378.49
103576	Hollow Metal Door Frame (Welded) - 2' 6" X 7' : 6" Throat	EA	$138.46	$252.66	$0.00	$391.12
103577	Hollow Metal Door Frame (Welded) - 3' X 7' : 6" Throat	EA	$138.46	$265.96	$0.00	$404.42
103578	Hollow Metal Door Frame (Welded) - 3' 6" X 7' : 6" Throat	EA	$138.46	$274.82	$0.00	$413.28
103579	Hollow Metal Door Frame (Welded) - 4' X 7' : 6" Throat	EA	$169.69	$292.56	$0.00	$462.25
103580	Hollow Metal Door Frame (Welded) - 5' X 7' : 6" Throat	EA	$169.69	$301.42	$0.00	$471.11
103581	Hollow Metal Door Frame (Welded) - 6' X 7' : 6" Throat	EA	$169.69	$310.28	$0.00	$479.97
103582	Hollow Metal Door Frame (Welded) - 7' X 7' : 6" Throat	EA	$169.69	$328.02	$0.00	$497.71
103583	Hollow Metal Door Frame (Welded) - Up To 2' X 7' : 8" Throat	EA	$138.46	$251.33	$0.00	$389.79
103584	Hollow Metal Door Frame (Welded) - 2' 6" X 7' : 8" Throat	EA	$138.46	$265.29	$0.00	$403.75
103585	Hollow Metal Door Frame (Welded) - 3' X 7' : 8" Throat	EA	$138.46	$279.26	$0.00	$417.72
103586	Hollow Metal Door Frame (Welded) - 3' 6" X 7' : 8" Throat	EA	$138.46	$288.56	$0.00	$427.02
103587	Hollow Metal Door Frame (Welded) - 4' X 7' : 8" Throat	EA	$169.69	$307.19	$0.00	$476.88
103588	Hollow Metal Door Frame (Welded) - 5' X 7' : 8" Throat	EA	$169.69	$316.49	$0.00	$486.18
103589	Hollow Metal Door Frame (Welded) - 6' X 7' : 8" Throat	EA	$169.69	$325.80	$0.00	$495.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103590	Hollow Metal Door Frame (Welded) - 7' X 7' : 8" Throat	EA	$169.69	$344.42	$0.00	$514.11
103591	Hollow Metal Door Frame (Knock Down) - Up To 2' X 7' : 4" Throat	EA	$138.46	$205.23	$0.00	$343.69
103592	Hollow Metal Door Frame (Knock Down) - 2' 6" X 7' : 4" Throat	EA	$138.46	$216.03	$0.00	$354.49
103593	Hollow Metal Door Frame (Knock Down) - 3' X 7' : 4" Throat	EA	$138.46	$227.39	$0.00	$365.85
103594	Hollow Metal Door Frame (Knock Down) - 3' 6" X 7' : 4" Throat	EA	$138.46	$234.97	$0.00	$373.43
103595	Hollow Metal Door Frame (Knock Down) - 4' X 7' : 4" Throat	EA	$169.69	$250.14	$0.00	$419.83
103596	Hollow Metal Door Frame (Knock Down) - 5' X 7' : 4" Throat	EA	$169.69	$257.72	$0.00	$427.41
103597	Hollow Metal Door Frame (Knock Down) - 6' X 7' : 4" Throat	EA	$169.69	$265.29	$0.00	$434.98
103598	Hollow Metal Door Frame (Knock Down) - 7' X 7' : 4" Throat	EA	$169.69	$280.46	$0.00	$450.15
103599	Hollow Metal Door Frame (Knock Down) - Up To 2' X 7' : 6" Throat	EA	$138.46	$216.03	$0.00	$354.49
103600	Hollow Metal Door Frame (Knock Down) - 2' 6" X 7' : 6" Throat	EA	$138.46	$227.39	$0.00	$365.85
103601	Hollow Metal Door Frame (Knock Down) - 3' X 7' : 6" Throat	EA	$138.46	$239.36	$0.00	$377.82
103602	Hollow Metal Door Frame (Knock Down) - 3' 6" X 7' : 6" Throat	EA	$138.46	$247.35	$0.00	$385.81
103603	Hollow Metal Door Frame (Knock Down) - 4' X 7' : 6" Throat	EA	$169.69	$263.30	$0.00	$432.99
103604	Hollow Metal Door Frame (Knock Down) - 5' X 7' : 6" Throat	EA	$169.69	$271.28	$0.00	$440.97
103605	Hollow Metal Door Frame (Knock Down) - 6' X 7' : 6" Throat	EA	$169.69	$279.26	$0.00	$448.95
103606	Hollow Metal Door Frame (Knock Down) - 7' X 7' : 6" Throat	EA	$169.69	$295.22	$0.00	$464.91
103607	Hollow Metal Door Frame (Knock Down) - Up to 2' X 7' : 8" Throat	EA	$138.46	$226.20	$0.00	$364.66
103608	Hollow Metal Door Frame (Knock Down) - 2' 6" X 7' : 8" Throat	EA	$138.46	$238.77	$0.00	$377.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103609	Hollow Metal Door Frame (Knock Down) - 3' X 7' : 8" Throat	EA	$138.46	$251.33	$0.00	$389.79
103610	Hollow Metal Door Frame (Knock Down) - 3' 6" X 7' : 8" Throat	EA	$138.46	$259.71	$0.00	$398.17
103611	Hollow Metal Door Frame (Knock Down) - 4' X 7' : 8" Throat	EA	$169.69	$276.47	$0.00	$446.16
103612	Hollow Metal Door Frame (Knock Down) - 5' X 7' : 8" Throat	EA	$169.69	$284.84	$0.00	$454.53
103613	Hollow Metal Door Frame (Knock Down) - 6' X 7' : 8" Throat	EA	$169.69	$293.22	$0.00	$462.91
103614	Hollow Metal Door Frame (Knock Down) - 7' X 7' : 8" Throat	EA	$169.69	$309.98	$0.00	$479.67
103615	Hollow Metal Door Frame - Up To 2' X 8' : 4" Throat	EA	$138.46	$250.83	$0.00	$389.29
103616	Hollow Metal Door Frame - 2' 6" X 8' : 4" Throat	EA	$138.46	$264.04	$0.00	$402.50
103617	Hollow Metal Door Frame - 3' X 8' : 4" Throat	EA	$138.46	$277.93	$0.00	$416.39
103618	Hollow Metal Door Frame - 3' 6" X 8' : 4" Throat	EA	$138.46	$287.20	$0.00	$425.66
103619	Hollow Metal Door Frame - 4' X 8' : 4" Throat	EA	$169.69	$305.73	$0.00	$475.42
103620	Hollow Metal Door Frame - 5' X 8' : 4" Throat	EA	$169.69	$314.99	$0.00	$484.68
103621	Hollow Metal Door Frame - 6' X 8' : 4" Throat	EA	$169.69	$324.25	$0.00	$493.94
103622	Hollow Metal Door Frame - 7' X 8' : 4" Throat	EA	$169.69	$342.78	$0.00	$512.47
103623	Hollow Metal Door Frame - Up To 2' X 8' : 6" Throat	EA	$138.46	$264.04	$0.00	$402.50
103624	Hollow Metal Door Frame - 2' 6" X 8' : 6" Throat	EA	$138.46	$277.93	$0.00	$416.39
103625	Hollow Metal Door Frame - 3' X 8' : 6" Throat	EA	$138.46	$292.56	$0.00	$431.02
103626	Hollow Metal Door Frame - 3' 6" X 8' : 6" Throat	EA	$138.46	$302.31	$0.00	$440.77
103627	Hollow Metal Door Frame - 4' X 8' : 6" Throat	EA	$169.69	$321.82	$0.00	$491.51
103628	Hollow Metal Door Frame - 5' X 8' : 6" Throat	EA	$169.69	$331.57	$0.00	$501.26
103629	Hollow Metal Door Frame - 6' X 8' : 6" Throat	EA	$169.69	$341.32	$0.00	$511.01
103630	Hollow Metal Door Frame - 7' X 8' : 6" Throat	EA	$169.69	$360.82	$0.00	$530.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103631	Hollow Metal Door Frame - Up To 2' X 8' : 8" Throat	EA	$138.46	$276.47	$0.00	$414.93
103632	Hollow Metal Door Frame - 2' 6" X 8' : 8" Throat	EA	$138.46	$291.83	$0.00	$430.29
103633	Hollow Metal Door Frame - 3' X 8' : 8" Throat	EA	$138.46	$307.19	$0.00	$445.65
103634	Hollow Metal Door Frame - 3' 6" X 8' : 8" Throat	EA	$138.46	$317.43	$0.00	$455.89
103635	Hollow Metal Door Frame - 4' X 8' : 8" Throat	EA	$169.69	$337.91	$0.00	$507.60
103636	Hollow Metal Door Frame - 5' X 8' : 8" Throat	EA	$169.69	$348.15	$0.00	$517.84
103637	Hollow Metal Door Frame - 6' X 8' : 8" Throat	EA	$169.69	$358.39	$0.00	$528.08
103638	Hollow Metal Door Frame - 7' X 8' : 8" Throat	EA	$169.69	$378.87	$0.00	$548.56
103639	Hollow Metal Door Frame (Knock Down) - Up To 2' X 8' : 4" Throat	EA	$138.46	$225.75	$0.00	$364.21
103640	Hollow Metal Door Frame (Knock Down) - 2' 6" X 8' : 4" Throat	EA	$138.46	$237.63	$0.00	$376.09
103641	Hollow Metal Door Frame (Knock Down) - 3' X 8' : 4" Throat	EA	$138.46	$250.14	$0.00	$388.60
103642	Hollow Metal Door Frame (Knock Down) - 3' 6" X 8' : 4" Throat	EA	$138.46	$258.48	$0.00	$396.94
103643	Hollow Metal Door Frame (Knock Down) - 4' X 8' : 4" Throat	EA	$169.69	$275.15	$0.00	$444.84
103644	Hollow Metal Door Frame (Knock Down) - 5' X 8' : 4" Throat	EA	$169.69	$283.49	$0.00	$453.18
103645	Hollow Metal Door Frame (Knock Down) - 6' X 8' : 4" Throat	EA	$169.69	$291.83	$0.00	$461.52
103646	Hollow Metal Door Frame (Knock Down) - 7' X 8' : 4" Throat	EA	$169.69	$308.50	$0.00	$478.19
103647	Hollow Metal Door Frame (Knock Down) - Up To 2' X 8' : 6" Throat	EA	$138.46	$237.63	$0.00	$376.09
103648	Hollow Metal Door Frame (Knock Down) - 2' 6" X 8' : 6" Throat	EA	$138.46	$250.14	$0.00	$388.60
103649	Hollow Metal Door Frame (Knock Down) - 3' X 8' : 6" Throat	EA	$138.46	$263.30	$0.00	$401.76
103650	Hollow Metal Door Frame (Knock Down) - 3' 6" X 8' : 6" Throat	EA	$138.46	$272.08	$0.00	$410.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103651	Hollow Metal Door Frame (Knock Down) - 4' X 8' : 6" Throat	EA	$169.69	$289.63	$0.00	$459.32
103652	Hollow Metal Door Frame (Knock Down) - 5' X 8' : 6" Throat	EA	$169.69	$298.41	$0.00	$468.10
103653	Hollow Metal Door Frame (Knock Down) - 6' X 8' : 6" Throat	EA	$169.69	$307.19	$0.00	$476.88
103654	Hollow Metal Door Frame (Knock Down) - 7' X 8' : 6" Throat	EA	$169.69	$324.74	$0.00	$494.43
103655	Hollow Metal Door Frame (Knock Down) - Up To 2' X 8' : 8" Throat	EA	$138.46	$248.82	$0.00	$387.28
103656	Hollow Metal Door Frame (Knock Down) - 2' 6" X 8' : 8" Throat	EA	$138.46	$262.65	$0.00	$401.11
103657	Hollow Metal Door Frame (Knock Down) - 3' X 8' : 8" Throat	EA	$138.46	$276.47	$0.00	$414.93
103658	Hollow Metal Door Frame (Knock Down) - 3' 6" X 8' : 8" Throat	EA	$138.46	$285.68	$0.00	$424.14
103659	Hollow Metal Door Frame (Knock Down) - 4' X 8' : 8" Throat	EA	$169.69	$304.12	$0.00	$473.81
103660	Hollow Metal Door Frame (Knock Down) - 5' X 8' : 8" Throat	EA	$169.69	$313.33	$0.00	$483.02
103661	Hollow Metal Door Frame (Knock Down) - 6' X 8' : 8" Throat	EA	$169.69	$322.55	$0.00	$492.24
103662	Hollow Metal Door Frame (Knock Down) - 7' X 8' : 8" Throat	EA	$169.69	$340.98	$0.00	$510.67
103663	[Modifier] Hollow Metal Door Frame - Add for Center Mullion	EA	$54.30	$76.83	$0.00	$131.13
103664	[Modifier] Hollow Metal Door Frame - Add for Grouting – Single Door	EA	$54.30	$49.65	$0.00	$103.95
103665	[Modifier] Hollow Metal Door Frame - Add for Grouting – Double Door	EA	$77.58	$64.53	$0.00	$142.11
103666	[Modifier] Hollow Metal Door Frame - Add Glass for Borrowed Lights	SF	$10.45	$23.64	$0.00	$34.09
103667	[Modifier] Hollow Metal Door Frame - Add for Glazing Tint Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$2.53	$6.18	$0.00	$8.71
103668	[Modifier] Hollow Metal Door Frame - Add for Borrowed Light, Up To 2' x 7'	EA	$0.00	$148.72	$0.00	$148.72

08-12-14 Steel Channel Frames

Steel channel frames for doors and lites, prepped for hinges, strike and closer. Rabbeted profile and standard

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	throats. All frames are welded unless noted otherwise and fire rated up to 90 minutes.					
103669	Steel Channel Door Frame Up To 3' x 7' Including anchors, bar stops	EA	$192.50	$290.78	$0.00	$483.28
103670	Steel Channel Door Frame Up To 6' x 8' Including anchors, bar stops	EA	$280.66	$563.84	$0.00	$844.50
103671	Steel Channel Door Frame Up To 8' x 12' Including anchors, bar stops	EA	$394.90	$830.98	$0.00	$1,225.88
103672	Steel Channel Door Frame Up To 10' x 10' Including anchors, bar stops	EA	$408.40	$1,023.66	$0.00	$1,432.06
103673	Steel Channel Door Frame Up To 12' x 12' Including anchors, bar stops	EA	$447.97	$1,539.02	$0.00	$1,986.99
103674	Steel Channel Door Frame Up To 12' x 16' Including anchors, bar stops	EA	$631.48	$2,073.30	$0.00	$2,704.78
103675	[Modifier] Center Mullion	EA	$54.30	$76.83	$0.00	$131.13
103676	[Modifier] Frame Grouting – Single Door	EA	$54.30	$49.65	$0.00	$103.95
103677	[Modifier] Frame Grouting – Double Door	EA	$77.58	$64.53	$0.00	$142.11
	08-12-16 Aluminum Frames					
	Extruded Aluminum frames for doors and lites, prepped for hinges, strike and closer, with rabbeted profile. All frames are welded unless noted otherwise and fire rated up to 90 minutes.					
103678	Aluminum Frame - Up To 2' X 6' 8" : 4" Throat	EA	$138.46	$324.94	$0.00	$463.40
103679	Aluminum Frame - 2' 6" X 6' 8" : 4" Throat	EA	$138.46	$342.04	$0.00	$480.50
103680	Aluminum Frame - 3' X 6' 8" : 4" Throat	EA	$138.46	$360.04	$0.00	$498.50
103681	Aluminum Frame - 3' 6" X 6' 8" : 4" Throat	EA	$138.46	$372.04	$0.00	$510.50
103682	Aluminum Frame - 4' X 6' 8" : 4" Throat	EA	$169.69	$396.05	$0.00	$565.74
103683	Aluminum Frame - 5' X 6' 8" : 4" Throat	EA	$169.69	$408.05	$0.00	$577.74
103684	Aluminum Frame - 6' X 6' 8" : 4" Throat	EA	$169.69	$420.06	$0.00	$589.75
103685	Aluminum Frame - 7' X 6' 8" : 4" Throat	EA	$169.69	$444.06	$0.00	$613.75
103686	Aluminum Frame - Up to 2' X 6' 8" : 6" Throat	EA	$138.46	$342.04	$0.00	$480.50
103687	Aluminum Frame - 2' 6" X 6' 8" : 6" Throat	EA	$138.46	$360.04	$0.00	$498.50
103688	Aluminum Frame - 3' X 6' 8" : 6" Throat	EA	$138.46	$378.99	$0.00	$517.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103689	Aluminum Frame - 3' 6" X 6' 8" : 6" Throat	EA	$138.46	$391.63	$0.00	$530.09
103690	Aluminum Frame - 4' X 6' 8" : 6" Throat	EA	$169.69	$416.90	$0.00	$586.59
103691	Aluminum Frame - 5' X 6' 8" : 6" Throat	EA	$169.69	$429.53	$0.00	$599.22
103692	Aluminum Frame - 6' X 6' 8" : 6" Throat	EA	$169.69	$442.16	$0.00	$611.85
103693	Aluminum Frame - 7' X 6' 8" : 6" Throat	EA	$169.69	$467.43	$0.00	$637.12
103694	Aluminum Frame - Up To 2' X 6' 8" : 8" Throat	EA	$138.46	$358.14	$0.00	$496.60
103695	Aluminum Frame - 2' 6" X 6' 8" : 8" Throat	EA	$138.46	$378.05	$0.00	$516.51
103696	Aluminum Frame - 3' X 6' 8" : 8" Throat	EA	$138.46	$397.94	$0.00	$536.40
103697	Aluminum Frame - 3' 6" X 6' 8" : 8" Throat	EA	$138.46	$411.21	$0.00	$549.67
103698	Aluminum Frame - 4' X 6' 8" : 8" Throat	EA	$169.69	$437.73	$0.00	$607.42
103699	Aluminum Frame - 5' X 6' 8" : 8" Throat	EA	$169.69	$451.01	$0.00	$620.70
103700	Aluminum Frame - 6' X 6' 8" : 8" Throat	EA	$169.69	$464.27	$0.00	$633.96
103701	Aluminum Frame - 7' X 6' 8" : 8" Throat	EA	$169.69	$490.79	$0.00	$660.48
103702	Aluminum Frame (Knock Down) - Up To 2' X 6' 8" : 4" Throat	EA	$138.46	$292.45	$0.00	$430.91
103703	Aluminum Frame (Knock Down) - 2' 6" X 6' 8" : 4" Throat	EA	$138.46	$307.83	$0.00	$446.29
103704	Aluminum Frame (Knock Down) - 3' X 6' 8" : 4" Throat	EA	$138.46	$324.03	$0.00	$462.49
103705	Aluminum Frame (Knock Down) - 3' 6" X 6' 8" : 4" Throat	EA	$138.46	$334.85	$0.00	$473.31
103706	Aluminum Frame (Knock Down) - 4' X 6' 8" : 4" Throat	EA	$169.69	$356.45	$0.00	$526.14
103707	Aluminum Frame (Knock Down) - 5' X 6' 8" : 4" Throat	EA	$169.69	$367.25	$0.00	$536.94
103708	Aluminum Frame (Knock Down) - 6' X 6' 8" : 4" Throat	EA	$169.69	$378.05	$0.00	$547.74
103709	Aluminum Frame (Knock Down) - 7' X 6' 8" : 4" Throat	EA	$169.69	$399.65	$0.00	$569.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103710	Aluminum Frame (Knock Down) - Up To 2' X 6' 8" : 6" Throat	EA	$138.46	$307.83	$0.00	$446.29
103711	Aluminum Frame (Knock Down) - 2' 6" X 6' 8" : 6" Throat	EA	$138.46	$324.03	$0.00	$462.49
103712	Aluminum Frame (Knock Down) - 3' X 6' 8" : 6" Throat	EA	$138.46	$341.10	$0.00	$479.56
103713	Aluminum Frame (Knock Down) - 3' 6" X 6' 8" : 6" Throat	EA	$138.46	$352.46	$0.00	$490.92
103714	Aluminum Frame (Knock Down) - 4' X 6' 8" : 6" Throat	EA	$169.69	$375.21	$0.00	$544.90
103715	Aluminum Frame (Knock Down) - 5' X 6' 8" : 6" Throat	EA	$169.69	$386.57	$0.00	$556.26
103716	Aluminum Frame (Knock Down) - 6' X 6' 8" : 6" Throat	EA	$169.69	$397.94	$0.00	$567.63
103717	Aluminum Frame (Knock Down) - 7' X 6' 8" : 6" Throat	EA	$169.69	$420.69	$0.00	$590.38
103718	Aluminum Frame (Knock Down) - Up To 2' X 6' 8" : 8" Throat	EA	$138.46	$322.34	$0.00	$460.80
103719	Aluminum Frame (Knock Down) - 2' 6" X 6' 8" : 8" Throat	EA	$138.46	$340.25	$0.00	$478.71
103720	Aluminum Frame (Knock Down) - 3' X 6' 8" : 8" Throat	EA	$138.46	$358.14	$0.00	$496.60
103721	Aluminum Frame (Knock Down) - 3' 6" X 6' 8" : 8" Throat	EA	$138.46	$370.09	$0.00	$508.55
103722	Aluminum Frame (Knock Down) - 4' X 6' 8" : 8" Throat	EA	$169.69	$393.97	$0.00	$563.66
103723	Aluminum Frame (Knock Down) - 5' X 6 '8" : 8" Throat	EA	$169.69	$405.90	$0.00	$575.59
103724	Aluminum Frame (Knock Down) - 6' X 6' 8" : 8" Throat	EA	$169.69	$417.84	$0.00	$587.53
103725	Aluminum Frame (Knock Down) - 7' X 6' 8" : 8" Throat	EA	$169.69	$441.72	$0.00	$611.41
103726	Aluminum Frame - Up To 2' X 7' : 4" Throat	EA	$138.46	$342.04	$0.00	$480.50
103727	Aluminum Frame - 2' 6" X 7' : 4" Throat	EA	$138.46	$360.04	$0.00	$498.50
103728	Aluminum Frame - 3' X 7' : 4" Throat	EA	$138.46	$378.99	$0.00	$517.45
103729	Aluminum Frame - 3' 6" X 7' : 4" Throat	EA	$138.46	$391.63	$0.00	$530.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103730	Aluminum Frame - 4' X 7' : 4" Throat	EA	$169.69	$416.90	$0.00	$586.59
103731	Aluminum Frame - 5' X 7' : 4" Throat	EA	$169.69	$429.53	$0.00	$599.22
103732	Aluminum Frame - 6' X 7' : 4" Throat	EA	$169.69	$442.16	$0.00	$611.85
103733	Aluminum Frame - 7' X 7' : 4" Throat	EA	$169.69	$467.43	$0.00	$637.12
103734	Aluminum Frame - Up To 2' X 7' : 6" Throat	EA	$138.46	$360.04	$0.00	$498.50
103735	Aluminum Frame - 2' 6" X 7' : 6" Throat	EA	$138.46	$378.99	$0.00	$517.45
103736	Aluminum Frame - 3' X 7' : 6" Throat	EA	$138.46	$398.94	$0.00	$537.40
103737	Aluminum Frame - 3' 6" X 7' : 6" Throat	EA	$138.46	$412.24	$0.00	$550.70
103738	Aluminum Frame - 4' X 7' : 6" Throat	EA	$169.69	$438.84	$0.00	$608.53
103739	Aluminum Frame - 5' X 7' : 6" Throat	EA	$169.69	$452.13	$0.00	$621.82
103740	Aluminum Frame - 6' X 7' : 6" Throat	EA	$169.69	$465.43	$0.00	$635.12
103741	Aluminum Frame - 7' X 7' : 6" Throat	EA	$169.69	$492.02	$0.00	$661.71
103742	Aluminum Frame - Up to 2' X 7' : 8" Throat	EA	$138.46	$377.00	$0.00	$515.46
103743	Aluminum Frame - 2' 6" X 7' : 8" Throat	EA	$138.46	$397.94	$0.00	$536.40
103744	Aluminum Frame - 3' X 7' : 8" Throat	EA	$138.46	$418.88	$0.00	$557.34
103745	Aluminum Frame - 3' 6" X 7' : 8" Throat	EA	$138.46	$432.85	$0.00	$571.31
103746	Aluminum Frame - 4' X 7' : 8" Throat	EA	$169.69	$460.78	$0.00	$630.47
103747	Aluminum Frame - 5' X 7' : 8" Throat	EA	$169.69	$474.74	$0.00	$644.43
103748	Aluminum Frame - 6' X 7' : 8" Throat	EA	$169.69	$488.70	$0.00	$658.39
103749	Aluminum Frame - 7' X 7' : 8" Throat	EA	$169.69	$516.62	$0.00	$686.31
103750	Aluminum Frame (Knock Down) - Up To 2' X 7' : 4" Throat	EA	$138.46	$307.83	$0.00	$446.29
103751	Aluminum Frame (Knock Down) - 2' 6" X 7' : 4" Throat	EA	$138.46	$324.05	$0.00	$462.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103752	Aluminum Frame (Knock Down) - 3' X 7' : 4" Throat	EA	$138.46	$341.10	$0.00	$479.56
103753	Aluminum Frame (Knock Down) - 3' 6" X 7' : 4" Throat	EA	$138.46	$352.46	$0.00	$490.92
103754	Aluminum Frame (Knock Down) - 4' X 7' : 4" Throat	EA	$169.69	$375.21	$0.00	$544.90
103755	Aluminum Frame (Knock Down) - 5' X 7' : 4" Throat	EA	$169.69	$386.57	$0.00	$556.26
103756	Aluminum Frame (Knock Down) - 6' X 7' : 4" Throat	EA	$169.69	$397.94	$0.00	$567.63
103757	Aluminum Frame (Knock Down) - 7' X 7' : 4" Throat	EA	$169.69	$420.69	$0.00	$590.38
103758	Aluminum Frame (Knock Down) - Up to 2' X 7' : 6" Throat	EA	$138.46	$324.03	$0.00	$462.49
103759	Aluminum Frame (Knock Down) - 2' 6" X 7' : 6" Throat	EA	$138.46	$341.10	$0.00	$479.56
103760	Aluminum Frame (Knock Down) - 3' X 7' : 6" Throat	EA	$138.46	$359.04	$0.00	$497.50
103761	Aluminum Frame (Knock Down) - 3' 6" X 7' : 6" Throat	EA	$138.46	$371.01	$0.00	$509.47
103762	Aluminum Frame (Knock Down) - 4' X 7' : 6" Throat	EA	$169.69	$394.94	$0.00	$564.63
103763	Aluminum Frame (Knock Down) - 5' X 7' : 6" Throat	EA	$169.69	$406.91	$0.00	$576.60
103764	Aluminum Frame (Knock Down) - 6' X 7' : 6" Throat	EA	$169.69	$418.88	$0.00	$588.57
103765	Aluminum Frame (Knock Down) - 7' X 7' : 6" Throat	EA	$169.69	$442.83	$0.00	$612.52
103766	Aluminum Frame (Knock Down) - Up to 2' X 7' : 8" Throat	EA	$138.46	$339.30	$0.00	$477.76
103767	Aluminum Frame (Knock Down) - 2 '6" X 7' : 8" Throat	EA	$138.46	$358.14	$0.00	$496.60
103768	Aluminum Frame (Knock Down) - 3' X 7' : 8" Throat	EA	$138.46	$377.00	$0.00	$515.46
103769	Aluminum Frame (Knock Down) - 3' 6" X 7' : 8" Throat	EA	$138.46	$389.57	$0.00	$528.03
103770	Aluminum Frame (Knock Down) - 4' X 7' : 8" Throat	EA	$169.69	$414.70	$0.00	$584.39
103771	Aluminum Frame (Knock Down) - 5' X 7' : 8" Throat	EA	$169.69	$427.27	$0.00	$596.96
103772	Aluminum Frame (Knock Down) - 6' X 7' : 8" Throat	EA	$169.69	$439.83	$0.00	$609.52
103773	Aluminum Frame (Knock Down) - 7' X 7' : 8" Throat	EA	$169.69	$464.96	$0.00	$634.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103774	Aluminum Frame - Up To 2' X 8' : 4" Throat	EA	$138.46	$376.24	$0.00	$514.70
103775	Aluminum Frame - 2' 6" X 8' : 4" Throat	EA	$138.46	$396.05	$0.00	$534.51
103776	Aluminum Frame - 3' X 8' : 4" Throat	EA	$138.46	$416.90	$0.00	$555.36
103777	Aluminum Frame - 3' 6" X 8' : 4" Throat	EA	$138.46	$430.79	$0.00	$569.25
103778	Aluminum Frame - 4' X 8' : 4" Throat	EA	$169.69	$458.58	$0.00	$628.27
103779	Aluminum Frame - 5' X 8' : 4" Throat	EA	$169.69	$472.48	$0.00	$642.17
103780	Aluminum Frame - 6' X 8' : 4" Throat	EA	$169.69	$486.38	$0.00	$656.07
103781	Aluminum Frame - 7' X 8' : 4" Throat	EA	$169.69	$514.16	$0.00	$683.85
103782	Aluminum Frame - Up To 2' X 8' : 6" Throat	EA	$138.46	$396.05	$0.00	$534.51
103783	Aluminum Frame - 2' 6" X 8' : 6" Throat	EA	$138.46	$416.90	$0.00	$555.36
103784	Aluminum Frame - 3' X 8' : 6" Throat	EA	$138.46	$438.84	$0.00	$577.30
103785	Aluminum Frame - 3' 6" X 8' : 6" Throat	EA	$138.46	$453.46	$0.00	$591.92
103786	Aluminum Frame - 4' X 8' : 6" Throat	EA	$169.69	$482.71	$0.00	$652.40
103787	Aluminum Frame - 5' X 8' : 6" Throat	EA	$169.69	$497.34	$0.00	$667.03
103788	Aluminum Frame - 6' X 8' : 6" Throat	EA	$169.69	$511.97	$0.00	$681.66
103789	Aluminum Frame - 7' X 8' : 6" Throat	EA	$169.69	$541.22	$0.00	$710.91
103790	Aluminum Frame - Up To 2' X 8' : 8" Throat	EA	$138.46	$414.70	$0.00	$553.16
103791	Aluminum Frame - 2' 6" X 8' : 8" Throat	EA	$138.46	$437.73	$0.00	$576.19
103792	Aluminum Frame - 3' X 8' : 8" Throat	EA	$138.46	$460.78	$0.00	$599.24
103793	Aluminum Frame - 3' 6" X 8' : 8" Throat	EA	$138.46	$476.14	$0.00	$614.60
103794	Aluminum Frame - 4' X 8' : 8" Throat	EA	$169.69	$506.86	$0.00	$676.55
103795	Aluminum Frame - 5' X 8' : 8" Throat	EA	$169.69	$522.21	$0.00	$691.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103796	Aluminum Frame - 6' X 8' : 8" Throat	EA	$169.69	$537.58	$0.00	$707.27
103797	Aluminum Frame - 7' X 8' : 8" Throat	EA	$169.69	$568.30	$0.00	$737.99
103798	Aluminum Frame (Knock Down) - Up To 2' X 8' : 4" Throat	EA	$138.46	$338.63	$0.00	$477.09
103799	Aluminum Frame (Knock Down) - 2' 6" X 8' : 4" Throat	EA	$138.46	$356.45	$0.00	$494.91
103800	Aluminum Frame (Knock Down) - 3' X 8' : 4" Throat	EA	$138.46	$375.21	$0.00	$513.67
103801	Aluminum Frame (Knock Down) - 3' 6" X 8' : 4" Throat	EA	$138.46	$387.72	$0.00	$526.18
103802	Aluminum Frame (Knock Down) - 4' X 8' : 4" Throat	EA	$169.69	$412.73	$0.00	$582.42
103803	Aluminum Frame (Knock Down) - 5' X 8' : 4" Throat	EA	$169.69	$425.24	$0.00	$594.93
103804	Aluminum Frame (Knock Down) - 6' X 8' : 4" Throat	EA	$169.69	$437.74	$0.00	$607.43
103805	Aluminum Frame (Knock Down) - 7' X 8' : 4" Throat	EA	$169.69	$462.76	$0.00	$632.45
103806	Aluminum Frame (Knock Down) - Up To 2' X 8' : 6" Throat	EA	$138.46	$356.45	$0.00	$494.91
103807	Aluminum Frame (Knock Down) - 2' 6" X 8' : 6" Throat	EA	$138.46	$375.21	$0.00	$513.67
103808	Aluminum Frame (Knock Down) - 3' X 8' : 6" Throat	EA	$138.46	$394.94	$0.00	$533.40
103809	Aluminum Frame (Knock Down) - 3' 6" X 8' : 6" Throat	EA	$138.46	$408.12	$0.00	$546.58
103810	Aluminum Frame (Knock Down) - 4' X 8' : 6" Throat	EA	$169.69	$434.45	$0.00	$604.14
103811	Aluminum Frame (Knock Down) - 5' X 8' : 6" Throat	EA	$169.69	$447.62	$0.00	$617.31
103812	Aluminum Frame (Knock Down) - 6' X 8' : 6" Throat	EA	$169.69	$460.78	$0.00	$630.47
103813	Aluminum Frame (Knock Down) - 7' X 8' : 6" Throat	EA	$169.69	$487.10	$0.00	$656.79
103814	Aluminum Frame (Knock Down) - Up To 2' X 8' : 8" Throat	EA	$138.46	$373.23	$0.00	$511.69
103815	Aluminum Frame (Knock Down) - 2' 6" X 8' : 8" Throat	EA	$138.46	$393.97	$0.00	$532.43
103816	Aluminum Frame (Knock Down) - 3' X 8' : 8" Throat	EA	$138.46	$414.70	$0.00	$553.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103817	Aluminum Frame (Knock Down) - 3' 6" X 8' : 8" Throat	EA	$138.46	$428.53	$0.00	$566.99
103818	Aluminum Frame (Knock Down) - 4' X 8' : 8" Throat	EA	$169.69	$456.17	$0.00	$625.86
103819	Aluminum Frame (Knock Down) - 5' X 8' : 8" Throat	EA	$169.69	$469.99	$0.00	$639.68
103820	Aluminum Frame (Knock Down) - 6' X 8' : 8" Throat	EA	$169.69	$483.82	$0.00	$653.51
103821	Aluminum Frame (Knock Down) - 7' X 8' : 8" Throat	EA	$169.69	$511.47	$0.00	$681.16
103822	[Modifier] Center Mullion	EA	$54.30	$76.83	$0.00	$131.13
103823	[Modifier] Frame Grouting – Single Door	EA	$54.30	$49.65	$0.00	$103.95
103824	[Modifier] Frame Grouting – Double Door	EA	$77.58	$64.53	$0.00	$142.11

08-13-00 Metal Doors

08-13-13 Hollow Metal Doors

Steel doors are based on Level 2, Heavy duty 18 gauge, 1 3/4" thick in sizes indicated, unless noted otherwise. Flat face construction. Includes prep for hinges, lockset and closer. Fire rated up to 45 minutes

103825	Hollow Metal Door Up To 2' x 6'8"	EA	$82.75	$296.07	$0.00	$378.82
103826	Hollow Metal Door Up To 2'6" x 6'8"	EA	$82.75	$328.97	$0.00	$411.72
103827	Hollow Metal Door Up To 3' X 6'8"	EA	$82.75	$365.52	$0.00	$448.27
103828	Hollow Metal Door Up To 3'6" X 6'8"	EA	$82.75	$402.07	$0.00	$484.82
103829	Hollow Metal Door Up To 4' X 6'8"	EA	$93.55	$442.28	$0.00	$535.83
103830	Hollow Metal Door Up To 2' x 7'	EA	$82.75	$311.66	$0.00	$394.41
103831	Hollow Metal Door Up To 2'6" x 7'	EA	$82.75	$346.28	$0.00	$429.03
103832	Hollow Metal Door Up To 3' X 7'	EA	$82.75	$384.75	$0.00	$467.50
103833	Hollow Metal Door Up To 3'6" X 7'	EA	$82.75	$423.24	$0.00	$505.99
103834	Hollow Metal Door Up To 4' X 7'	EA	$93.55	$465.56	$0.00	$559.11
103835	Hollow Metal Door Up To 2' x 8'	EA	$82.75	$342.82	$0.00	$425.57
103836	Hollow Metal Door Up To 2'6" x 8'	EA	$82.75	$380.91	$0.00	$463.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103837	Hollow Metal Door Up To 3' X 8'	EA	$82.75	$423.24	$0.00	$505.99
103838	Hollow Metal Door Up To 3'6" X 8'	EA	$82.75	$465.56	$0.00	$548.31
103839	Hollow Metal Door Up To 4' X 8'	EA	$93.55	$512.11	$0.00	$605.66
103840	Primed Steel Door Up To 2' x 6'8" – Prehung Includes frame and hinges	EA	$82.75	$222.05	$0.00	$304.80
103841	Primed Steel Door Up To 2'6" x 6'8" – Prehung Includes frame and hinges	EA	$82.75	$246.73	$0.00	$329.48
103842	Primed Steel Door Up To 3' X 6'8" – Prehung Includes frame and hinges	EA	$82.75	$274.14	$0.00	$356.89
103843	Primed Steel Door Up To 3'6" X 6'8" – Prehung Includes frame and hinges	EA	$82.75	$301.56	$0.00	$384.31
103844	Primed Steel Door Up To 4' X 6'8" – Prehung Includes frame and hinges	EA	$93.55	$331.71	$0.00	$425.26
103845	Primed Steel Door Up To 2' x 7' – Prehung Includes frame and hinges	EA	$82.75	$233.74	$0.00	$316.49
103846	Primed Steel Door Up To 2'6" x 7' – Prehung Includes frame and hinges	EA	$82.75	$259.71	$0.00	$342.46
103847	Primed Steel Door Up To 3' X 7' – Prehung Includes frame and hinges	EA	$82.75	$288.56	$0.00	$371.31
103848	Primed Steel Door Up To 3'6" X 7' – Prehung Includes frame and hinges	EA	$82.75	$317.43	$0.00	$400.18
103849	Primed Steel Door Up To 4' X 7' – Prehung Includes frame and hinges	EA	$93.55	$349.17	$0.00	$442.72
103850	Primed Steel Door Up To 2' x 8' – Prehung Includes frame and hinges	EA	$82.75	$257.12	$0.00	$339.87
103851	Primed Steel Door Up To 2'6" x 8' – Prehung Includes frame and hinges	EA	$82.75	$285.68	$0.00	$368.43
103852	Primed Steel Door Up To 3' X 8' – Prehung Includes frame and hinges	EA	$82.75	$317.43	$0.00	$400.18
103853	Primed Steel Door Up To 3'6" X 8' – Prehung Includes frame and hinges	EA	$82.75	$349.17	$0.00	$431.92
103854	Primed Steel Door Up To 4' X 8' – Prehung Includes frame and hinges	EA	$93.55	$384.08	$0.00	$477.63
103855	Insulated Steel Door Up To 2' x 6'8"	EA	$82.75	$325.68	$0.00	$408.43
103856	Insulated Steel Door Up To 2'6" x 6'8"	EA	$82.75	$361.86	$0.00	$444.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103857	Insulated Steel Door Up To 3' X 6'8"	EA	$82.75	$402.07	$0.00	$484.82
103858	Insulated Steel Door Up To 3'6" X 6'8"	EA	$82.75	$442.28	$0.00	$525.03
103859	Insulated Steel Door Up To 4' X 6'8"	EA	$93.55	$486.52	$0.00	$580.07
103860	Insulated Steel Door Up To 2' x 7'	EA	$82.75	$342.82	$0.00	$425.57
103861	Insulated Steel Door Up To 2'6" x 7'	EA	$82.75	$380.91	$0.00	$463.66
103862	Insulated Steel Door Up To 3' X 7'	EA	$82.75	$423.24	$0.00	$505.99
103863	Insulated Steel Door Up To 3'6" X 7'	EA	$82.75	$465.56	$0.00	$548.31
103864	Insulated Steel Door Up To 4' X 7'	EA	$93.55	$512.11	$0.00	$605.66
103865	Insulated Steel Door Up To 2' x 8'	EA	$82.75	$377.11	$0.00	$459.86
103866	Insulated Steel Door Up To 2'6" x 8'	EA	$82.75	$419.01	$0.00	$501.76
103867	Insulated Steel Door Up To 3' X 8'	EA	$82.75	$465.56	$0.00	$548.31
103868	Insulated Steel Door Up To 3'6" X 8'	EA	$82.75	$512.11	$0.00	$594.86
103869	Insulated Steel Door Up To 4' X 8'	EA	$93.55	$563.32	$0.00	$656.87
103870	Metal Fire Door Up To 2' x 6'8" 90 Minute Fire Rating	EA	$82.75	$472.24	$0.00	$554.99
103871	Metal Fire Door Up To 2'6" x 6'8" 90 Minute Fire Rating	EA	$82.75	$524.69	$0.00	$607.44
103872	Metal Fire Door Up To 3' X 6'8" 90 Minute Fire Rating	EA	$82.75	$583.00	$0.00	$665.75
103873	Metal Fire Door Up To 3'6" X 6'8" 90 Minute Fire Rating	EA	$82.75	$641.30	$0.00	$724.05
103874	Metal Fire Door Up To 4' X 6'8" 90 Minute Fire Rating	EA	$93.55	$705.44	$0.00	$798.99
103875	Metal Fire Door Up To 2' x 7' 90 Minute Fire Rating	EA	$82.75	$497.10	$0.00	$579.85
103876	Metal Fire Door Up To 2'6" x 7' 90 Minute Fire Rating	EA	$82.75	$552.32	$0.00	$635.07
103877	Metal Fire Door Up To 3' X 7' 90 Minute Fire Rating	EA	$82.75	$613.68	$0.00	$696.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103878	Metal Fire Door Up To 3'6" X 7' 90 Minute Fire Rating	EA	$82.75	$675.06	$0.00	$757.81
103879	Metal Fire Door Up To 4' X 7' 90 Minute Fire Rating	EA	$93.55	$742.57	$0.00	$836.12
103880	Metal Fire Door Up To 2' x 8' 90 Minute Fire Rating	EA	$82.75	$546.81	$0.00	$629.56
103881	Metal Fire Door Up To 2'6" x 8' 90 Minute Fire Rating	EA	$82.75	$607.55	$0.00	$690.30
103882	Metal Fire Door Up To 3' X 8' 90 Minute Fire Rating	EA	$82.75	$675.06	$0.00	$757.81
103883	Metal Fire Door Up To 3'6" X 8' 90 Minute Fire Rating	EA	$82.75	$742.55	$0.00	$825.30
103884	Metal Fire Door Up To 4' X 8' 90 Minute Fire Rating	EA	$93.55	$816.83	$0.00	$910.38
103885	Composite Fire Door Up To 2' x 6'8" 3 Hour Fire Rating	EA	$82.75	$671.78	$0.00	$754.53
103886	Composite Fire Door Up To 2'6" x 6'8" 3 Hour Fire Rating	EA	$82.75	$746.41	$0.00	$829.16
103887	Composite Fire Door Up To 3' X 6'8" 3 Hour Fire Rating	EA	$82.75	$829.35	$0.00	$912.10
103888	Composite Fire Door Up To 3'6" X 6'8" 3 Hour Fire Rating	EA	$82.75	$912.28	$0.00	$995.03
103889	Composite Fire Door Up To 4' X 6'8" 3 Hour Fire Rating	EA	$93.55	$1,003.52	$0.00	$1,097.07
103890	Composite Fire Door Up To 2' x 7' 3 Hour Fire Rating	EA	$82.75	$707.13	$0.00	$789.88
103891	Composite Fire Door Up To 2'6" x 7' 3 Hour Fire Rating	EA	$82.75	$785.69	$0.00	$868.44
103892	Composite Fire Door Up To 3' X 7' 3 Hour Fire Rating	EA	$82.75	$872.99	$0.00	$955.74
103893	Composite Fire Door Up To 3'6" X 7' 3 Hour Fire Rating	EA	$82.75	$960.29	$0.00	$1,043.04
103894	Composite Fire Door Up To 4' X 7' 3 Hour Fire Rating	EA	$93.55	$1,056.32	$0.00	$1,149.87
103895	Composite Fire Door Up To 2' x 8' 3 Hour Fire Rating	EA	$82.75	$777.84	$0.00	$860.59
103896	Composite Fire Door Up To 2'6" x 8' 3 Hour Fire Rating	EA	$82.75	$864.26	$0.00	$947.01
103897	Composite Fire Door Up To 3' X 8' 3 Hour Fire Rating	EA	$82.75	$960.29	$0.00	$1,043.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103898	Composite Fire Door Up To 3'6" X 8' 3 Hour Fire Rating	EA	$82.75	$1,056.31	$0.00	$1,139.06
103899	Composite Fire Door Up To 4' X 8' 3 Hour Fire Rating	EA	$93.55	$1,161.96	$0.00	$1,255.51
103900	[Modifier] 60-Minute Door Rating	EA	$0.00	$67.61	$0.00	$67.61
103901	[Modifier] 90-Minute Door Rating	EA	$0.00	$135.21	$0.00	$135.21
103902	[Modifier] 120-Minute Door Rating	EA	$0.00	$216.34	$0.00	$216.34
103903	[Modifier] Raised Door Panels Includes any number of raised panels	EA	$0.00	$42.57	$0.00	$42.57
103904	[Modifier] Door Louvers – Metal	SF	$0.00	$17.72	$0.00	$17.72
103905	[Modifier] Door Louvers – Wood	SF	$0.00	$22.83	$0.00	$22.83
103906	[Modifier] Door Light Includes factory installation of a standard clear up to 90 minute rated glazing unit into a door slab.	SF	$0.00	$23.64	$0.00	$23.64
103907	[Modifier] Galvanized	EA	$0.00	$49.65	$0.00	$49.65
103908	[Modifier] 16 Gauge Door Face	EA	$0.00	$92.21	$0.00	$92.21

08-13-16 Aluminum Doors

.063 anodized aluminum construction unless noted otherwise. Includes prep for hinges, lockset and closer

103909	Aluminum Food Service Door Up To 3' X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$1,016.56	$0.00	$1,488.77
103910	Aluminum Food Service Door Up To 3'6" X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$1,070.93	$0.00	$1,543.14
103911	Aluminum Food Service Door Up To 4' X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$1,595.76	$0.00	$2,067.97
103912	Aluminum Food Service Door Up To 5' X 7' Double Includes door, frame, double acting hinges, push and impact plates	EA	$724.05	$1,678.50	$0.00	$2,402.55
103913	Aluminum Food Service Door Up To 6' X 7' Double Includes door, frame, double acting hinges, push and impact plates	EA	$724.05	$1,778.97	$0.00	$2,503.02
103914	[Modifier] Door Louvers- Metal	SF	$0.00	$17.72	$0.00	$17.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103915	[Modifier] Door Louvers- Wood	SF	$0.00	$22.83	$0.00	$22.83
103916	[Modifier] Door Light Includes factory installation of a standard clear up to 90 minute rated glazing unit into a door slab.	SF	$0.00	$23.64	$0.00	$23.64

08-13-19 Stainless-Steel Doors

16 gauge stainless steel construction with brush finish unless noted otherwise. Includes prep for hinges, lockset and closer

103917	Stainless Steel Food Service Door Up To 3' X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$1,524.83	$0.00	$1,997.04
103918	Stainless Steel Food Service Door Up To 3'6" X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$1,606.40	$0.00	$2,078.61
103919	Stainless Steel Food Service Door Up To 4' X 7' Includes door, frame, double acting hinges, push and impact plates	EA	$472.21	$2,393.64	$0.00	$2,865.85
103920	Stainless Steel Food Service Door Up To 5' X 7' Double Includes door, frame, double acting hinges, push and impact plates	EA	$724.05	$2,517.76	$0.00	$3,241.81
103921	Stainless Steel Food Service Door Up To 6' X 7' Double Includes door, frame, double acting hinges, push and impact plates	EA	$724.05	$2,668.46	$0.00	$3,392.51
103922	Stainless Steel Door Up To 3' X 7' Includes door, frame, hinges, door closer, latch and lockset in a 626 finish or equal	EA	$472.21	$2,033.12	$0.00	$2,505.33
103923	Stainless Steel Door Up To 3'6" X 7' Includes door, frame, hinges, door closer, latch and lockset in a 626 finish or equal	EA	$472.21	$2,087.49	$0.00	$2,559.70
103924	Stainless Steel Door Up To 4' X 7' Includes door, frame, hinges, door closer, latch and lockset in a 626 finish or equal	EA	$472.21	$2,141.87	$0.00	$2,614.08
103925	Stainless Steel Door Up To 5' X 7' Double Includes door, frame, hinges, door closer, latch and lockset in a 626 finish or equal	EA	$724.05	$3,357.00	$0.00	$4,081.05
103926	Stainless Steel Door Up To 6' X 7' Double Includes door, frame, hinges, door closer, latch and lockset in a 626 finish or equal	EA	$724.05	$3,557.96	$0.00	$4,282.01
103927	[Modifier] Door Louvers – Metal	SF	$0.00	$17.72	$0.00	$17.72
103928	[Modifier] Door Louvers – Wood	SF	$0.00	$22.83	$0.00	$22.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103929	[Modifier] Door Light Includes factory installation of a standard clear up to 90 minute rated glazing unit into a door slab.	SF	$0.00	$23.64	$0.00	$23.64

08-13-73 Sliding Metal Doors

103930	Metal Side Rolling / Bi-Part Doors To 12' Heavy track top and bottom. Hercules or equal	EA	$3,598.19	$14,184.53	$0.00	$17,782.72

08-14-00 Wood Doors

08-14-16 Wood Doors

All doors are flat sawn, Buy America Compliant, with an STC rating of 35. Includes prep for hinges, lockset and closer

103931	Solid Core Wood Door Up To 2' X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$349.85	$0.00	$485.61
103932	Solid Core Wood Door Up To 2'6" X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$370.43	$0.00	$506.19
103933	Solid Core Wood Door Up To 3' X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$380.72	$0.00	$516.48
103934	Solid Core Wood Door Up To 3'6" X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$401.29	$0.00	$537.05
103935	Solid Core Wood Door Up To 4' X 6'8" Hardwood Veneer Stain Grade	EA	$162.10	$463.04	$0.00	$625.14
103936	Solid Core Wood Door Up To 2' X 6'8" Paint grade	EA	$135.76	$279.88	$0.00	$415.64
103937	Solid Core Wood Door Up To 2'6" X 6'8" Paint grade	EA	$135.76	$296.34	$0.00	$432.10
103938	Solid Core Wood Door Up To 3' X 6'8" Paint grade	EA	$135.76	$304.58	$0.00	$440.34
103939	Solid Core Wood Door Up To 3'6" X 6'8" Paint grade	EA	$135.76	$321.04	$0.00	$456.80
103940	Solid Core Wood Door Up To 4' X 6'8" Paint grade	EA	$162.10	$370.43	$0.00	$532.53
103941	Hollow Core Wood Door Up To 2' X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$227.40	$0.00	$363.16
103942	Hollow Core Wood Door Up To 2'6" X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$240.78	$0.00	$376.54
103943	Hollow Core Wood Door Up To 3' X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$247.47	$0.00	$383.23
103944	Hollow Core Wood Door Up To 3'6" X 6'8" Hardwood Veneer Stain Grade	EA	$135.76	$260.84	$0.00	$396.60
103945	Hollow Core Wood Door Up To 4' X 6'8" Hardwood Veneer Stain Grade	EA	$162.10	$300.97	$0.00	$463.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103946	Hollow Core Wood Door Up To 2' X 6'8" Paint grade	EA	$135.76	$181.92	$0.00	$317.68
103947	Hollow Core Wood Door Up To 2'6" X 6'8" Paint grade	EA	$135.76	$192.63	$0.00	$328.39
103948	Hollow Core Wood Door Up To 3' X 6'8" Paint grade	EA	$135.76	$197.98	$0.00	$333.74
103949	Hollow Core Wood Door Up To 3'6" X 6'8" Paint grade	EA	$135.76	$208.67	$0.00	$344.43
103950	Hollow Core Wood Door Up To 4' X 6'8" Paint grade	EA	$162.10	$240.78	$0.00	$402.88
103951	Solid Core Wood Door Up To 2' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$262.39	$0.00	$371.00
103952	Solid Core Wood Door Up To 2'6" X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$277.82	$0.00	$386.43
103953	Solid Core Wood Door Up To 3' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$285.54	$0.00	$394.15
103954	Solid Core Wood Door Up To 3'6" X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$300.97	$0.00	$409.58
103955	Solid Core Wood Door Up To 4' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$347.27	$0.00	$472.10
103956	Solid Core Wood Door Up To 2' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$209.91	$0.00	$318.52
103957	Solid Core Wood Door Up To 2'6" X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$222.26	$0.00	$330.87
103958	Solid Core Wood Door Up To 3' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$228.43	$0.00	$337.04
103959	Solid Core Wood Door Up To 3'6" X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$240.78	$0.00	$349.39
103960	Solid Core Wood Door Up To 4' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$277.82	$0.00	$402.65
103961	Hollow Core Wood Door Up To 2' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$170.55	$0.00	$279.16
103962	Hollow Core Wood Door Up To 2'6" X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$180.58	$0.00	$289.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103963	Hollow Core Wood Door Up To 3' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$185.60	$0.00	$294.21
103964	Hollow Core Wood Door Up To 3'6" X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$195.63	$0.00	$304.24
103965	Hollow Core Wood Door Up To 4' X 6'8" – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$225.73	$0.00	$350.56
103966	Hollow Core Wood Door Up To 2' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$136.44	$0.00	$245.05
103967	Hollow Core Wood Door Up To 2'6" X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$144.46	$0.00	$253.07
103968	Hollow Core Wood Door Up To 3' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$148.49	$0.00	$257.10
103969	Hollow Core Wood Door Up To 3'6" X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$156.51	$0.00	$265.12
103970	Hollow Core Wood Door Up To 4' X 6'8" – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$180.58	$0.00	$305.41
103971	Composite MDF Door Up To 2' X 6'8" – Prehung Includes frame and hinges	EA	$108.61	$127.19	$0.00	$235.80
103972	Composite MDF Door Up To 2'6" X 6'8" – Prehung Includes frame and hinges	EA	$108.61	$134.68	$0.00	$243.29
103973	Composite MDF Door Up To 3' X 6'8" – Prehung Includes frame and hinges	EA	$108.61	$138.42	$0.00	$247.03
103974	Composite MDF Door Up To 3'6" X 6'8" – Prehung Includes frame and hinges	EA	$108.61	$145.89	$0.00	$254.50
103975	Composite MDF Door Up To 4' X 6'8" – Prehung Includes frame and hinges	EA	$124.83	$168.34	$0.00	$293.17
103976	Solid Core Wood Door Up To 2' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$275.51	$0.00	$384.12
103977	Solid Core Wood Door Up To 2'6" X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$291.71	$0.00	$400.32
103978	Solid Core Wood Door Up To 3' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$299.81	$0.00	$408.42
103979	Solid Core Wood Door Up To 3'6" X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$316.01	$0.00	$424.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103980	Solid Core Wood Door Up To 4' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$124.83	$364.64	$0.00	$489.47
103981	Solid Core Wood Door Up To 2' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$220.41	$0.00	$329.02
103982	Solid Core Wood Door Up To 2'6" X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$233.37	$0.00	$341.98
103983	Solid Core Wood Door Up To 3' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$239.85	$0.00	$348.46
103984	Solid Core Wood Door Up To 3'6" X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$252.81	$0.00	$361.42
103985	Solid Core Wood Door Up To 4' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$124.83	$291.71	$0.00	$416.54
103986	Hollow Core Wood Door Up To 2' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$179.08	$0.00	$287.69
103987	Hollow Core Wood Door Up To 2'6" X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$189.62	$0.00	$298.23
103988	Hollow Core Wood Door Up To 3' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$194.88	$0.00	$303.49
103989	Hollow Core Wood Door Up To 3'6" X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$108.61	$205.41	$0.00	$314.02
103990	Hollow Core Wood Door Up To 4' X 6'8" – Bi-Fold Hardwood Veneer Stain Grade. Includes hardware, hinges, and track	EA	$124.83	$237.01	$0.00	$361.84
103991	Hollow Core Wood Door Up To 2' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$143.27	$0.00	$251.88
103992	Hollow Core Wood Door Up To 2'6" X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$151.69	$0.00	$260.30
103993	Hollow Core Wood Door Up To 3' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$155.90	$0.00	$264.51
103994	Hollow Core Wood Door Up To 3'6" X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$108.61	$164.33	$0.00	$272.94
103995	Hollow Core Wood Door Up To 4' X 6'8" – Bi-Fold Paint grade. Includes hardware, hinges, and track	EA	$124.83	$189.62	$0.00	$314.45
103996	Composite MDF Door Up To 2' X 6'8" – Bi-Fold Includes hardware, hinges, and track	EA	$108.61	$133.55	$0.00	$242.16
103997	Composite MDF Door Up To 2'6" X 6'8" – Bi-Fold Includes hardware, hinges, and track	EA	$108.61	$141.40	$0.00	$250.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
103998	Composite MDF Door Up To 3' X 6'8" – Bi-Fold Includes hardware, hinges, and track	EA	$108.61	$145.34	$0.00	$253.95
103999	Composite MDF Door Up To 3'6" X 6'8" – Bi-Fold Includes hardware, hinges, and track	EA	$108.61	$153.19	$0.00	$261.80
104000	Composite MDF Door Up To 4' X 6'8" – Bi-Fold Includes hardware, hinges, and track	EA	$124.83	$176.76	$0.00	$301.59
104001	Solid Core Wood Door Up To 2' X 7' Hardwood Veneer Stain Grade	EA	$135.76	$368.26	$0.00	$504.02
104002	Solid Core Wood Door Up To 2'6" X 7' Hardwood Veneer Stain Grade	EA	$135.76	$389.92	$0.00	$525.68
104003	Solid Core Wood Door Up To 3' X 7' Hardwood Veneer Stain Grade	EA	$135.76	$400.76	$0.00	$536.52
104004	Solid Core Wood Door Up To 3'6" X 7' Hardwood Veneer Stain Grade	EA	$135.76	$422.41	$0.00	$558.17
104005	Solid Core Wood Door Up To 4' X 7' Hardwood Veneer Stain Grade	EA	$162.10	$487.40	$0.00	$649.50
104006	Solid Core Wood Door Up To 2' X 7' Paint grade	EA	$135.76	$294.61	$0.00	$430.37
104007	Solid Core Wood Door Up To 2'6" X 7' Paint grade	EA	$135.76	$311.94	$0.00	$447.70
104008	Solid Core Wood Door Up To 3' X 7' Paint grade	EA	$135.76	$320.61	$0.00	$456.37
104009	Solid Core Wood Door Up To 3'6" X 7' Paint grade	EA	$135.76	$337.93	$0.00	$473.69
104010	Solid Core Wood Door Up To 4' X 7' Paint grade	EA	$162.10	$389.92	$0.00	$552.02
104011	Hollow Core Wood Door Up To 2' X 7' Hardwood Veneer Stain Grade	EA	$135.76	$239.38	$0.00	$375.14
104012	Hollow Core Wood Door Up To 2'6" X 7' Hardwood Veneer Stain Grade	EA	$135.76	$253.44	$0.00	$389.20
104013	Hollow Core Wood Door Up To 3' X 7' Hardwood Veneer Stain Grade	EA	$135.76	$260.49	$0.00	$396.25
104014	Hollow Core Wood Door Up To 3'6" X 7' Hardwood Veneer Stain Grade	EA	$135.76	$274.57	$0.00	$410.33
104015	Hollow Core Wood Door Up To 4' X 7' Hardwood Veneer Stain Grade	EA	$162.10	$316.82	$0.00	$478.92
104016	Hollow Core Wood Door Up To 2' X 7' Paint grade	EA	$135.76	$191.49	$0.00	$327.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104017	Hollow Core Wood Door Up To 2'6" X 7' Paint grade	EA	$135.76	$202.76	$0.00	$338.52
104018	Hollow Core Wood Door Up To 3' X 7' Paint grade	EA	$135.76	$208.39	$0.00	$344.15
104019	Hollow Core Wood Door Up To 3'6" X 7' Paint grade	EA	$135.76	$219.65	$0.00	$355.41
104020	Hollow Core Wood Door Up To 4' X 7' Paint grade	EA	$162.10	$253.45	$0.00	$415.55
104021	Solid Core Wood Door Up To 2' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$276.20	$0.00	$384.81
104022	Solid Core Wood Door Up To 2'6" X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$292.44	$0.00	$401.05
104023	Solid Core Wood Door Up To 3' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$300.57	$0.00	$409.18
104024	Solid Core Wood Door Up To 3'6" X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$316.81	$0.00	$425.42
104025	Solid Core Wood Door Up To 4' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$365.55	$0.00	$490.38
104026	Solid Core Wood Door Up To 2' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$220.96	$0.00	$329.57
104027	Solid Core Wood Door Up To 2'6" X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$233.95	$0.00	$342.56
104028	Solid Core Wood Door Up To 3' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$240.45	$0.00	$349.06
104029	Solid Core Wood Door Up To 3'6" X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$253.44	$0.00	$362.05
104030	Solid Core Wood Door Up To 4' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$292.44	$0.00	$417.27
104031	Hollow Core Wood Door Up To 2' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$179.53	$0.00	$288.14
104032	Hollow Core Wood Door Up To 2'6" X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$190.09	$0.00	$298.70
104033	Hollow Core Wood Door Up To 3' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$195.37	$0.00	$303.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104034	Hollow Core Wood Door Up To 3'6" X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$205.93	$0.00	$314.54
104035	Hollow Core Wood Door Up To 4' X 7' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$237.61	$0.00	$362.44
104036	Hollow Core Wood Door Up To 2' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$143.62	$0.00	$252.23
104037	Hollow Core Wood Door Up To 2'6" X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$152.07	$0.00	$260.68
104038	Hollow Core Wood Door Up To 3' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$156.30	$0.00	$264.91
104039	Hollow Core Wood Door Up To 3'6" X 7' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$164.74	$0.00	$273.35
104040	Hollow Core Wood Door Up To 4' X 7' – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$190.09	$0.00	$314.92
104041	Composite MDF Door Up To 2' X 7' – Prehung Includes frame and hinges	EA	$108.61	$133.88	$0.00	$242.49
104042	Composite MDF Door Up To 2'6" X 7' – Prehung Includes frame and hinges	EA	$108.61	$141.76	$0.00	$250.37
104043	Composite MDF Door Up To 3' X 7' – Prehung Includes frame and hinges	EA	$108.61	$145.71	$0.00	$254.32
104044	Composite MDF Door Up To 3'6" X 7' – Prehung Includes frame and hinges	EA	$108.61	$153.57	$0.00	$262.18
104045	Composite MDF Door Up To 4' X 7' – Prehung Includes frame and hinges	EA	$124.83	$177.21	$0.00	$302.04
104046	Solid Core Wood Door Up To 2' X 8' Hardwood Veneer Stain Grade	EA	$135.76	$405.09	$0.00	$540.85
104047	Solid Core Wood Door Up To 2'6" X 8' Hardwood Veneer Stain Grade	EA	$135.76	$428.92	$0.00	$564.68
104048	Solid Core Wood Door Up To 3' X 8' Hardwood Veneer Stain Grade	EA	$135.76	$440.83	$0.00	$576.59
104049	Solid Core Wood Door Up To 3'6" X 8' Hardwood Veneer Stain Grade	EA	$135.76	$464.66	$0.00	$600.42
104050	Solid Core Wood Door Up To 4' X 8' Hardwood Veneer Stain Grade	EA	$162.10	$536.14	$0.00	$698.24
104051	Solid Core Wood Door Up To 2' X 8' Paint grade	EA	$135.76	$324.07	$0.00	$459.83
104052	Solid Core Wood Door Up To 2'6" X 8' Paint grade	EA	$135.76	$343.12	$0.00	$478.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104053	Solid Core Wood Door Up To 3' X 8' Paint grade	EA	$135.76	$352.67	$0.00	$488.43
104054	Solid Core Wood Door Up To 3'6" X 8' Paint grade	EA	$135.76	$371.72	$0.00	$507.48
104055	Solid Core Wood Door Up To 4' X 8' Paint grade	EA	$162.10	$428.92	$0.00	$591.02
104056	Hollow Core Wood Door Up To 2' X 8' Hardwood Veneer Stain Grade	EA	$135.76	$263.30	$0.00	$399.06
104057	Hollow Core Wood Door Up To 2'6" X 8' Hardwood Veneer Stain Grade	EA	$135.76	$278.80	$0.00	$414.56
104058	Hollow Core Wood Door Up To 3' X 8' Hardwood Veneer Stain Grade	EA	$135.76	$286.54	$0.00	$422.30
104059	Hollow Core Wood Door Up To 3'6" X 8' Hardwood Veneer Stain Grade	EA	$135.76	$302.02	$0.00	$437.78
104060	Hollow Core Wood Door Up To 4' X 8' Hardwood Veneer Stain Grade	EA	$162.10	$348.49	$0.00	$510.59
104061	Hollow Core Wood Door Up To 2' X 8' Paint grade	EA	$135.76	$210.64	$0.00	$346.40
104062	Hollow Core Wood Door Up To 2'6" X 8' Paint grade	EA	$135.76	$223.04	$0.00	$358.80
104063	Hollow Core Wood Door Up To 3' X 8' Paint grade	EA	$135.76	$229.23	$0.00	$364.99
104064	Hollow Core Wood Door Up To 3'6" X 8' Paint grade	EA	$135.76	$241.62	$0.00	$377.38
104065	Hollow Core Wood Door Up To 4' X 8' Paint grade	EA	$162.10	$278.80	$0.00	$440.90
104066	Solid Core Wood Door Up To 2' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$303.82	$0.00	$412.43
104067	Solid Core Wood Door Up To 2'6" X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$321.68	$0.00	$430.29
104068	Solid Core Wood Door Up To 3' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$330.62	$0.00	$439.23
104069	Solid Core Wood Door Up To 3'6" X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$348.49	$0.00	$457.10
104070	Solid Core Wood Door Up To 4' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$402.11	$0.00	$526.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104071	Solid Core Wood Door Up To 2' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$243.06	$0.00	$351.67
104072	Solid Core Wood Door Up To 2'6" X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$257.34	$0.00	$365.95
104073	Solid Core Wood Door Up To 3' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$264.50	$0.00	$373.11
104074	Solid Core Wood Door Up To 3'6" X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$278.80	$0.00	$387.41
104075	Solid Core Wood Door Up To 4' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$321.68	$0.00	$446.51
104076	Hollow Core Wood Door Up To 2' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$197.48	$0.00	$306.09
104077	Hollow Core Wood Door Up To 2'6" X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$209.10	$0.00	$317.71
104078	Hollow Core Wood Door Up To 3' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$214.91	$0.00	$323.52
104079	Hollow Core Wood Door Up To 3'6" X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$108.61	$226.51	$0.00	$335.12
104080	Hollow Core Wood Door Up To 4' X 8' – Prehung Hardwood Veneer Stain Grade. Includes frame and hinges	EA	$124.83	$261.37	$0.00	$386.20
104081	Hollow Core Wood Door Up To 2' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$157.98	$0.00	$266.59
104082	Hollow Core Wood Door Up To 2'6" X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$167.27	$0.00	$275.88
104083	Hollow Core Wood Door Up To 3' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$171.93	$0.00	$280.54
104084	Hollow Core Wood Door Up To 3'6" X 8' – Prehung Paint grade. Includes frame and hinges	EA	$108.61	$181.22	$0.00	$289.83
104085	Hollow Core Wood Door Up To 4' X 8' – Prehung Paint grade. Includes frame and hinges	EA	$124.83	$209.10	$0.00	$333.93
104086	Composite MDF Door Up To 2' X 8' – Prehung Includes frame and hinges	EA	$108.61	$147.28	$0.00	$255.89
104087	Composite MDF Door Up To 2'6" X 8' – Prehung Includes frame and hinges	EA	$108.61	$155.93	$0.00	$264.54
104088	Composite MDF Door Up To 3' X 8' – Prehung Includes frame and hinges	EA	$108.61	$160.27	$0.00	$268.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104089	Composite MDF Door Up To 3'6" X 8' – Prehung Includes frame and hinges	EA	$108.61	$168.93	$0.00	$277.54
104090	Composite MDF Door Up To 4' X 8' – Prehung Includes frame and hinges	EA	$124.83	$194.93	$0.00	$319.76
104091	Torrefied Doors Up To 3'0" x 7'0"	EA	$135.77	$1,713.43	$0.00	$1,849.20
104092	Torrefied Doors Up To 3'0" x 6'8"	EA	$135.77	$1,599.55	$0.00	$1,735.32
104093	Wood French Door Up to 8'0" Wide Includes Door Lites	EA	$543.04	$1,461.28	$0.00	$2,004.32
104094	[Modifier] 60-Min Door Rating)	EA	$0.00	$67.61	$0.00	$67.61
104095	[Modifier] 90-Min Door Rating)	EA	$0.00	$135.21	$0.00	$135.21
104096	[Modifier] Rift, Quarter Sawn, or Book Matched	EA	$0.00	$42.57	$0.00	$42.57
104097	[Modifier] Raised Door Panels Includes any number of raised panels	EA	$0.00	$42.57	$0.00	$42.57
104098	[Modifier] Door Louvers- Metal	SF	$0.00	$17.72	$0.00	$17.72
104099	[Modifier] Door Louvers- Wood	SF	$0.00	$22.83	$0.00	$22.83
104100	[Modifier] Door Light Includes factory installation of a standard clear up to 90 minute rated glazing unit into a door slab.	SF	$0.00	$23.64	$0.00	$23.64
	08-15-00 Plastic Doors					
	08-15-00 Plastic Doors					
104101	Plastic Faced Door (Standard) 2' X 6'8" – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$454.37	$0.00	$590.13
104102	Plastic Faced Door (Standard) 2'6" X 6'8" – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$479.60	$0.00	$615.36
104103	Plastic Faced Door (Standard) 3' X 6'8" – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$504.85	$0.00	$640.61
104104	Plastic Faced Door (Standard) 3'6" X 6'8" – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$553.40	$0.00	$689.16
104105	Plastic Faced Door (Standard) 4' X 6'8" – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$162.10	$638.55	$0.00	$800.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104106	Plastic Faced Door (Premium) 2' X 6'8" – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$644.06	$0.00	$779.82
104107	Plastic Faced Door (Premium) 2'6" X 6'8" – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$679.84	$0.00	$815.60
104108	Plastic Faced Door (Premium) 3' X 6'8" – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$715.63	$0.00	$851.39
104109	Plastic Faced Door (Premium) 3'6" X 6'8" – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$784.45	$0.00	$920.21
104110	Plastic Faced Door (Premium) 4' X 6'8" – Laminate Thickness .059" Acrovyn or equal	EA	$162.10	$905.13	$0.00	$1,067.23
104111	Plastic Faced Door (Standard) 2' X 7' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$477.08	$0.00	$612.84
104112	Plastic Faced Door (Standard) 2'6" X 7' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$503.58	$0.00	$639.34
104113	Plastic Faced Door (Standard) 3' X 7' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$530.09	$0.00	$665.85
104114	Plastic Faced Door (Standard) 3'6" X 7' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$581.07	$0.00	$716.83
104115	Plastic Faced Door (Standard) 4' X 7' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$162.10	$670.47	$0.00	$832.57
104116	Plastic Faced Door (Premium) 2' X 7' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$676.26	$0.00	$812.02
104117	Plastic Faced Door (Premium) 2'6" X 7' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$713.83	$0.00	$849.59
104118	Plastic Faced Door (Premium) 3' X 7' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$751.40	$0.00	$887.16
104119	Plastic Faced Door (Premium) 3'6" X 7' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$823.68	$0.00	$959.44
104120	Plastic Faced Door (Premium) 4' X 7' – Laminate Thickness .059" Acrovyn or equal	EA	$162.10	$950.39	$0.00	$1,112.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104121	Plastic Faced Door (Standard) 2' X 8' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$524.79	$0.00	$660.55
104122	Plastic Faced Door (Standard) 2'6" X 8' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$553.95	$0.00	$689.71
104123	Plastic Faced Door (Standard) 3' X 8' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$583.10	$0.00	$718.86
104124	Plastic Faced Door (Standard) 3'6" X 8' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$135.76	$639.18	$0.00	$774.94
104125	Plastic Faced Door (Standard) 4' X 8' – Laminate Thickness .048" Wilsonart, Formica, Pionite, or equal	EA	$162.10	$737.52	$0.00	$899.62
104126	Plastic Faced Door (Premium) 2' X 8' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$743.89	$0.00	$879.65
104127	Plastic Faced Door (Premium) 2'6" X 8' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$785.22	$0.00	$920.98
104128	Plastic Faced Door (Premium) 3' X 8' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$826.54	$0.00	$962.30
104129	Plastic Faced Door (Premium) 3'6" X 8' – Laminate Thickness .059" Acrovyn or equal	EA	$135.76	$906.05	$0.00	$1,041.81
104130	Plastic Faced Door (Premium) 4' X 8' – Laminate Thickness .059" Acrovyn or equal	EA	$162.10	$1,045.43	$0.00	$1,207.53
104131	[Modifier] 60-Min Door Rating	EA	$0.00	$67.61	$0.00	$67.61
104132	[Modifier] 90-Min Door Rating	EA	$0.00	$135.21	$0.00	$135.21
104133	[Modifier] Raised Door Panels Includes any number of raised panels	EA	$0.00	$42.57	$0.00	$42.57
104134	[Modifier] Door Louvers- Metal	SF	$0.00	$17.72	$0.00	$17.72
104135	[Modifier] Door Louvers- Wood	SF	$0.00	$22.83	$0.00	$22.83
104136	[Modifier] Door Light Includes factory installation of a standard clear up to 90 minute rated glazing unit into a door slab.	SF	$0.00	$23.64	$0.00	$23.64

08-15-16 Solid Plastic Doors

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104137	FRP Door 3' X 6'8" Pebble grain finish, prepped for hardware	EA	$246.50	$1,847.52	$0.00	$2,094.02
104138	FRP Door 3'6" X 6'8" Pebble grain finish, prepped for hardware	EA	$246.50	$1,939.89	$0.00	$2,186.39
104139	FRP Door 3' X 7' Pebble grain finish, prepped for hardware	EA	$246.50	$1,939.89	$0.00	$2,186.39
104140	FRP Door 3'6" X 7' Pebble grain finish, prepped for hardware	EA	$246.50	$2,037.39	$0.00	$2,283.89

08-30-00 Specialty Doors and Frames

08-31-00 Access Doors and Panels

08-31-00 Access Doors and Panels

104141	Access Door Up To 8" X 8" Uninsulated Steel Powder Coated Fire Rated	EA	$54.30	$118.21	$0.00	$172.51
104142	Access Door Up To 12" X 12" Uninsulated Steel Powder Coated Fire Rated	EA	$54.30	$132.98	$0.00	$187.28
104143	Access Door Up To 14" X 14" Uninsulated Steel Powder Coated Fire Rated	EA	$54.30	$147.75	$0.00	$202.05
104144	Access Door Up To 18" X 18" Uninsulated Steel Powder Coated Fire Rated	EA	$54.30	$192.08	$0.00	$246.38
104145	Access Door Up To 24" X 24" Uninsulated Steel Powder Coated Fire Rated	EA	$54.30	$229.03	$0.00	$283.33
104146	Access Door Up To 30" X 30" Uninsulated Steel Powder Coated Fire Rated	EA	$67.88	$339.83	$0.00	$407.71
104147	Access Door Up To 36" X 36" Uninsulated Steel Powder Coated Fire Rated	EA	$67.88	$517.15	$0.00	$585.03
104148	Access Door Up To 48" X 48" Uninsulated Steel Powder Coated Fire Rated	EA	$67.88	$1,108.17	$0.00	$1,176.05
104149	Access Door Up To 8" X 8" Uninsulated Steel Powder Coated Non Rated	EA	$54.30	$47.29	$0.00	$101.59
104150	Access Door Up To 12" X 12" Uninsulated Steel Powder Coated Non Rated	EA	$54.30	$53.20	$0.00	$107.50
104151	Access Door Up To 14" X 14" Uninsulated Steel Powder Coated Non Rated	EA	$54.30	$59.10	$0.00	$113.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104152	Access Door Up To 18" X 18" Uninsulated Steel Powder Coated Non Rated	EA	$54.30	$76.83	$0.00	$131.13
104153	Access Door Up To 24" X 24" Uninsulated Steel Powder Coated Non Rated	EA	$54.30	$91.61	$0.00	$145.91
104154	Access Door Up To 30" X 30" Uninsulated Steel Powder Coated Non Rated	EA	$67.88	$135.93	$0.00	$203.81
104155	Access Door Up To 36" X 36" Uninsulated Steel Powder Coated Non Rated	EA	$67.88	$206.85	$0.00	$274.73
104156	Access Door Up To 48" X 48" Uninsulated Steel Powder Coated Non Rated	EA	$67.88	$443.26	$0.00	$511.14
104157	Access Door Up To 8" X 8" Insulated Steel Powder Coated Fire Rated	EA	$54.30	$159.58	$0.00	$213.88
104158	Access Door Up To 12" X 12" Insulated Steel Powder Coated Fire Rated	EA	$54.30	$179.52	$0.00	$233.82
104159	Access Door Up To 14" X 14" Insulated Steel Powder Coated Fire Rated	EA	$54.30	$199.48	$0.00	$253.78
104160	Access Door Up To 18" X 18" Insulated Steel Powder Coated Fire Rated	EA	$54.30	$259.31	$0.00	$313.61
104161	Access Door Up To 24" X 24" Insulated Steel Powder Coated Fire Rated	EA	$54.30	$309.17	$0.00	$363.47
104162	Access Door Up To 30" X 30" Insulated Steel Powder Coated Fire Rated	EA	$67.88	$458.78	$0.00	$526.66
104163	Access Door Up To 36" X 36" Insulated Steel Powder Coated Fire Rated	EA	$67.88	$698.15	$0.00	$766.03
104164	Access Door Up To 48" X 48" Insulated Steel Powder Coated Fire Rated	EA	$67.88	$1,496.03	$0.00	$1,563.91
104165	Access Door Up To 8" X 8" Insulated Steel Powder Coated Non Rated	EA	$54.30	$63.83	$0.00	$118.13
104166	Access Door Up To 12" X 12" Insulated Steel Powder Coated Non Rated	EA	$54.30	$71.81	$0.00	$126.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104167	Access Door Up To 14" X 14" Insulated Steel Powder Coated Non Rated	EA	$54.30	$79.78	$0.00	$134.08
104168	Access Door Up To 18" X 18" Insulated Steel Powder Coated Non Rated	EA	$54.30	$103.72	$0.00	$158.02
104169	Access Door Up To 24" X 24" Insulated Steel Powder Coated Non Rated	EA	$54.30	$123.67	$0.00	$177.97
104170	Access Door Up To 30" X 30" Insulated Steel Powder Coated Non Rated	EA	$67.88	$183.51	$0.00	$251.39
104171	Access Door Up To 36" X 36" Insulated Steel Powder Coated Non Rated	EA	$67.88	$279.26	$0.00	$347.14
104172	Access Door Up To 48" X 48" Insulated Steel Powder Coated Non Rated	EA	$67.88	$598.41	$0.00	$666.29
104173	Access Door Up To 8" X 8" Uninsulated Steel Paint Grade Fire Rated	EA	$54.30	$106.38	$0.00	$160.68
104174	Access Door Up To 12" X 12" Uninsulated Steel Paint Grade Fire Rated	EA	$54.30	$119.68	$0.00	$173.98
104175	Access Door Up To 14" X 14" Uninsulated Steel Paint Grade Fire Rated	EA	$54.30	$132.98	$0.00	$187.28
104176	Access Door Up To 18" X 18" Uninsulated Steel Paint Grade Fire Rated	EA	$54.30	$172.88	$0.00	$227.18
104177	Access Door Up To 24" X 24" Uninsulated Steel Paint Grade Fire Rated	EA	$54.30	$206.12	$0.00	$260.42
104178	Access Door Up To 30" X 30" Uninsulated Steel Paint Grade Fire Rated	EA	$67.88	$305.86	$0.00	$373.74
104179	Access Door Up To 36" X 36" Uninsulated Steel Paint Grade Fire Rated	EA	$67.88	$465.43	$0.00	$533.31
104180	Access Door Up To 48" X 48" Uninsulated Steel Paint Grade Fire Rated	EA	$67.88	$997.35	$0.00	$1,065.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104181	Access Door Up To 8" X 8" Uninsulated Steel Paint Grade Non Rated	EA	$54.30	$42.56	$0.00	$96.86
104182	Access Door Up To 12" X 12" Uninsulated Steel Paint Grade Non Rated	EA	$54.30	$47.87	$0.00	$102.17
104183	Access Door Up To 14" X 14" Uninsulated Steel Paint Grade Non Rated	EA	$54.30	$53.20	$0.00	$107.50
104184	Access Door Up To 18" X 18" Uninsulated Steel Paint Grade Non Rated	EA	$54.30	$69.15	$0.00	$123.45
104185	Access Door Up To 24" X 24" Uninsulated Steel Paint Grade Non Rated	EA	$54.30	$82.45	$0.00	$136.75
104186	Access Door Up To 30" X 30" Uninsulated Steel Paint Grade Non Rated	EA	$67.88	$122.34	$0.00	$190.22
104187	Access Door Up To 36" X 36" Uninsulated Steel Paint Grade Non Rated	EA	$67.88	$186.18	$0.00	$254.06
104188	Access Door Up To 48" X 48" Uninsulated Steel Paint Grade Non Rated	EA	$67.88	$398.94	$0.00	$466.82
104189	Access Door Up To 8" X 8" Insulated Steel Paint Grade Fire Rated	EA	$54.30	$143.62	$0.00	$197.92
104190	Access Door Up To 12" X 12" Insulated Steel Paint Grade Fire Rated	EA	$54.30	$161.57	$0.00	$215.87
104191	Access Door Up To 14" X 14" Insulated Steel Paint Grade Fire Rated	EA	$54.30	$179.52	$0.00	$233.82
104192	Access Door Up To 18" X 18" Insulated Steel Paint Grade Fire Rated	EA	$54.30	$233.38	$0.00	$287.68
104193	Access Door Up To 24" X 24" Insulated Steel Paint Grade Fire Rated	EA	$54.30	$278.26	$0.00	$332.56
104194	Access Door Up To 30" X 30" Insulated Steel Paint Grade Fire Rated	EA	$67.88	$412.90	$0.00	$480.78
104195	Access Door Up To 36" X 36" Insulated Steel Paint Grade Fire Rated	EA	$67.88	$628.33	$0.00	$696.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104196	Access Door Up To 48" X 48" Insulated Steel Paint Grade Fire Rated	EA	$67.88	$1,346.42	$0.00	$1,414.30
104197	Access Door Up To 8" X 8" Insulated Steel Paint Grade Non Rated	EA	$54.30	$57.45	$0.00	$111.75
104198	Access Door Up To 12" X 12" Insulated Steel Paint Grade Non Rated	EA	$54.30	$64.63	$0.00	$118.93
104199	Access Door Up To 14" X 14" Insulated Steel Paint Grade Non Rated	EA	$54.30	$71.81	$0.00	$126.11
104200	Access Door Up To 18" X 18" Insulated Steel Paint Grade Non Rated	EA	$54.30	$93.35	$0.00	$147.65
104201	Access Door Up To 24" X 24" Insulated Steel Paint Grade Non Rated	EA	$54.30	$111.31	$0.00	$165.61
104202	Access Door Up To 30" X 30" Insulated Steel Paint Grade Non Rated	EA	$67.88	$165.16	$0.00	$233.04
104203	Access Door Up To 36" X 36" Insulated Steel Paint Grade Non Rated	EA	$67.88	$251.33	$0.00	$319.21
104204	Access Door Up To 48" X 48" Insulated Steel Paint Grade Non Rated	EA	$67.88	$538.57	$0.00	$606.45
104205	Access Door Up To 8" X 8" Uninsulated Stainless Steel Non Rated	EA	$54.30	$94.56	$0.00	$148.86
104206	Access Door Up To 12" X 12" Uninsulated Stainless Steel Non Rated	EA	$54.30	$106.38	$0.00	$160.68
104207	Access Door Up To 14" X 14" Uninsulated Stainless Steel Non Rated	EA	$54.30	$118.21	$0.00	$172.51
104208	Access Door Up To 18" X 18" Uninsulated Stainless Steel Non Rated	EA	$54.30	$153.67	$0.00	$207.97
104209	Access Door Up To 24" X 24" Uninsulated Stainless Steel Non Rated	EA	$54.30	$183.22	$0.00	$237.52
104210	Access Door Up To 30" X 30" Uninsulated Stainless Steel Non Rated	EA	$67.88	$271.87	$0.00	$339.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104211	Access Door Up To 36" X 36" Uninsulated Stainless Steel Non Rated	EA	$67.88	$413.72	$0.00	$481.60
104212	Access Door Up To 48" X 48" Uninsulated Stainless Steel Non Rated	EA	$67.88	$886.53	$0.00	$954.41
104213	Access Door Up To 8" X 8" Uninsulated Stainless Steel Fire Rated	EA	$54.30	$236.41	$0.00	$290.71
104214	Access Door Up To 12" X 12" Uninsulated Stainless Steel Fire Rated	EA	$54.30	$265.96	$0.00	$320.26
104215	Access Door Up To 14" X 14" Uninsulated Stainless Steel Fire Rated	EA	$54.30	$295.51	$0.00	$349.81
104216	Access Door Up To 18" X 18" Uninsulated Stainless Steel Fire Rated	EA	$54.30	$384.17	$0.00	$438.47
104217	Access Door Up To 24" X 24" Uninsulated Stainless Steel Fire Rated	EA	$54.30	$458.04	$0.00	$512.34
104218	Access Door Up To 30" X 30" Uninsulated Stainless Steel Fire Rated	EA	$67.88	$679.68	$0.00	$747.56
104219	Access Door Up To 36" X 36" Uninsulated Stainless Steel Fire Rated	EA	$67.88	$1,034.28	$0.00	$1,102.16
104220	Access Door Up To 48" X 48" Uninsulated Stainless Steel Fire Rated	EA	$67.88	$2,216.34	$0.00	$2,284.22
104221	Access Door Up To 8" X 8" Insulated Stainless Steel Non Rated	EA	$54.30	$127.67	$0.00	$181.97
104222	Access Door Up To 12" X 12" Insulated Stainless Steel Non Rated	EA	$54.30	$143.62	$0.00	$197.92
104223	Access Door Up To 14" X 14" Insulated Stainless Steel Non Rated	EA	$54.30	$159.58	$0.00	$213.88
104224	Access Door Up To 18" X 18" Insulated Stainless Steel Non Rated	EA	$54.30	$207.45	$0.00	$261.75
104225	Access Door Up To 24" X 24" Insulated Stainless Steel Non Rated	EA	$54.30	$247.35	$0.00	$301.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104226	Access Door Up To 30" X 30" Insulated Stainless Steel Non Rated	EA	$67.88	$367.03	$0.00	$434.91
104227	Access Door Up To 36" X 36" Insulated Stainless Steel Non Rated	EA	$67.88	$558.52	$0.00	$626.40
104228	Access Door Up To 48" X 48" Insulated Stainless Steel Non Rated	EA	$67.88	$1,196.81	$0.00	$1,264.69
104229	Access Door Up To 8" X 8" Insulated Stainless Steel Fire Rated	EA	$54.30	$319.15	$0.00	$373.45
104230	Access Door Up To 12" X 12" Insulated Stainless Steel Fire Rated	EA	$54.30	$359.04	$0.00	$413.34
104231	Access Door Up To 14" X 14" Insulated Stainless Steel Fire Rated	EA	$54.30	$398.94	$0.00	$453.24
104232	Access Door Up To 18" X 18" Insulated Stainless Steel Fire Rated	EA	$54.30	$518.62	$0.00	$572.92
104233	Access Door Up To 24" X 24" Insulated Stainless Steel Fire Rated	EA	$54.30	$618.36	$0.00	$672.66
104234	Access Door Up To 30" X 30" Insulated Stainless Steel Fire Rated	EA	$67.88	$917.57	$0.00	$985.45
104235	Access Door Up To 36" X 36" Insulated Stainless Steel Fire Rated	EA	$67.88	$1,396.29	$0.00	$1,464.17
104236	Access Door Up To 48" X 48" Insulated Stainless Steel Fire Rated	EA	$67.88	$2,992.05	$0.00	$3,059.93
104237	[Modifier] Access Door - Lockable Includes lockset	EA	$0.00	$413.72	$0.00	$413.72

08-32-00 Sliding Glass Doors

Track mounted solid rail, fully glazed doors. Includes weatherstripping for exterior use or sound at interior use.

08-32-00 Sliding Glass Doors

Track mounted solid rail, fully glazed doors. Includes weatherstripping for exterior use or sound at interior use.

104238	Sliding Glass Door – Exterior Commercial Includes all hardware, tracks, thermal glazing system, fasteners & frame	SF	$24.75	$76.61	$0.00	$101.36
104239	Sliding Glass Door – Interior Commercial Includes all hardware, tracks, non thermal glazing system, fasteners & frame	SF	$22.51	$61.29	$0.00	$83.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104240	Sliding Glass Door – Exterior Residential Includes all hardware, tracks, thermal glazing system, fasteners & frame	SF	$20.63	$53.62	$0.00	$74.25
104241	Sliding Glass Door – Interior Residential Includes all hardware, tracks, non thermal glazing system, fasteners & frame	SF	$18.76	$42.90	$0.00	$61.66
104242	Glass Bi-Fold Door System – NanaWall Or Equal Includes Bi-Fold doors, track, hardware, non thermal glazing system, and frame	SF	$52.67	$147.75	$0.00	$200.42

08-33-00 Coiling Doors and Grilles

Includes all hardware, tracks, fasteners, and frame

08-33-00 Coiling Doors and Grilles

Includes all hardware, tracks, fasteners, and frame

104243	Roll Up Security Grille Powder Coated Steel – Manual	SF	$19.39	$30.50	$0.00	$49.89
104244	Roll Up Security Grille Aluminum – Manual	SF	$19.39	$35.89	$0.00	$55.28
104245	Roll Up Security Grille Stainless Steel – Manual	SF	$19.39	$71.77	$0.00	$91.16
104246	Fire Shutter Powder Coated Steel – 45 Minute Rating Integral automatic door closure	SF	$19.39	$46.10	$0.00	$65.49
104247	Fire Shutter Powder Coated Steel – 90 Minute Rating Integral automatic door closure	SF	$19.39	$53.01	$0.00	$72.40
104248	Fire Shutter Powder Coated Steel – 3 Hour Rating Integral automatic door closure	SF	$19.39	$59.93	$0.00	$79.32
104249	Fire Shutter Aluminum – 45 Minute Rating Integral automatic door closure	SF	$19.39	$54.23	$0.00	$73.62
104250	Fire Shutter Aluminum – 90 Minute Rating Integral automatic door closure	SF	$19.39	$62.36	$0.00	$81.75
104251	Fire Shutter Aluminum – 3 Hour Rating Integral automatic door closure	SF	$19.39	$70.51	$0.00	$89.90
104252	Fire Shutter Stainless Steel – 45 Minute Rating Integral automatic door closure	SF	$19.39	$108.47	$0.00	$127.86
104253	Fire Shutter Stainless Steel – 90 Minute Rating Integral automatic door closure	SF	$19.39	$124.73	$0.00	$144.12
104254	Fire Shutter Stainless Steel – 3 Hour Rating Integral automatic door closure	SF	$19.39	$141.00	$0.00	$160.39
104255	[Modifier] Motorized Operation and Control	EA	$0.00	$803.78	$0.00	$803.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	08-33-23 Overhead Coiling Doors					
104256	Overhead Coiling Door Powder Coated Steel – Manual	SF	$19.39	$39.01	$0.00	$58.40
104257	Overhead Coiling Door Aluminum – Manual	SF	$19.39	$45.88	$0.00	$65.27
104258	Overhead Coiling Door Stainless Steel – Manual	SF	$19.39	$91.78	$0.00	$111.17
104259	Overhead Coiling Door Powder Coated Steel – Manual With Insulated Core	SF	$19.39	$53.20	$0.00	$72.59
104260	Overhead Coiling Door Aluminum – Manual With Insulated Core	SF	$19.39	$60.07	$0.00	$79.46
104261	Overhead Coiling Door Stainless Steel – Manual With Insulated Core	SF	$19.39	$105.96	$0.00	$125.35
104262	Overhead Door - Audio/Visual Alarm and Timer	EA	$242.16	$613.99	$0.00	$856.15
104263	Overhead Door - Optical Safety Edge	EA	$121.08	$644.51	$0.00	$765.59
104264	Overhead Door - Radio Control for Door Operation	EA	$121.08	$56.35	$1.46	$178.89
104265	Overhead Full Curtain Rolling Security Door Door Curtain Slats to be galvanized painted steel, perforated. Electric operators included. Door track, angle guides, operator mounting plates and rolled guides to be galvanized	SF	$17.32	$182.39	$1.46	$201.17
	08-34-00 Special Function Doors					
	08-34-00 Special Function Doors					
104266	Radio Frequency Door Single Up To 4' Wide Includes Door, Frame, and Hardware	EA	$135.76	$3,640.01	$0.00	$3,775.77
104267	Radio Frequency Door Double Up To 8' Wide Includes Door, Frame, and Hardware	EA	$181.01	$6,370.02	$0.00	$6,551.03
104268	Pneumatic Radio Frequency Door Single Up To 4' Wide Includes Door, Frame, and Hardware	EA	$181.01	$6,878.48	$0.00	$7,059.49
104269	Pneumatic Radio Frequency Door Double Up To 8' Wide Includes Door, Frame, and Hardware	EA	$271.52	$12,037.32	$0.00	$12,308.84
104270	Lead Lined Door Single Up To 4' Wide	EA	$135.76	$2,056.98	$0.00	$2,192.74
104271	Lead Lined Door Double Up To 8' Wide	EA	$181.01	$3,599.72	$0.00	$3,780.73
104272	Lead Lined Frame Single Up To 4' Wide	EA	$90.50	$1,260.73	$0.00	$1,351.23
104273	Lead Lined Frame Double Up To 8' Wide	EA	$108.61	$1,891.10	$0.00	$1,999.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104274	Sound Control Door Single Up To 4' Wide – Soundproof Rooms Includes Door, Frame, and Hardware	EA	$181.01	$2,925.56	$0.00	$3,106.57
104275	Sound Control Door Double Up To 8' Wide – Soundproof Rooms Includes Door, Frame, and Hardware	EA	$271.52	$5,119.73	$0.00	$5,391.25
104276	Darkroom Revolving Door Up To 8' Wide Includes Door, Frame, and Hardware	EA	$543.04	$1,773.07	$0.00	$2,316.11
104277	Hydraulic Bi-Fold Overhead Glass and Aluminum Door System Includes all fasteners, angles, brackets and bolts required for a complete installation	SF	$24.43	$324.36	$0.00	$348.79
	08-34-53 Security Doors and Frames					
104278	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,063.00	$0.00	$1,244.01
104279	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,168.48	$0.00	$1,349.49
104280	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,285.33	$0.00	$1,466.34
104281	Security Entrance Storm Door and Frame, Double, Narrow Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,726.87	$0.00	$1,968.22
104282	Security Entrance Storm Door and Frame, Double, Narrow Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,899.56	$0.00	$2,140.91
104283	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,009.86	$0.00	$1,190.87
104284	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,110.06	$0.00	$1,291.07
104285	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,221.06	$0.00	$1,402.07
104286	Security Entrance Storm Door and Frame, Double, Medium Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,640.53	$0.00	$1,881.88
104287	Security Entrance Storm Door and Frame, Double, Medium Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,804.58	$0.00	$2,045.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104288	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$959.37	$0.00	$1,140.38
104289	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,054.56	$0.00	$1,235.57
104290	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$1,160.01	$0.00	$1,341.02
104291	Security Entrance Storm Door and Frame, Double, Wide Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,558.49	$0.00	$1,799.84
104292	Security Entrance Storm Door and Frame, Double, Wide Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$1,714.35	$0.00	$1,955.70
104293	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$472.45	$0.00	$653.46
104294	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$519.32	$0.00	$700.33
104295	Security Entrance Storm Door and Frame, Single, Narrow Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$571.26	$0.00	$752.27
104296	Security Entrance Storm Door and Frame, Double, Narrow Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$767.49	$0.00	$1,008.84
104297	Security Entrance Storm Door and Frame, Double, Narrow Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$844.24	$0.00	$1,085.59
104298	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$448.82	$0.00	$629.83
104299	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$493.35	$0.00	$674.36
104300	Security Entrance Storm Door and Frame, Single, Medium Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$542.70	$0.00	$723.71
104301	Security Entrance Storm Door and Frame, Double, Medium Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$729.12	$0.00	$970.47
104302	Security Entrance Storm Door and Frame, Double, Medium Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$802.03	$0.00	$1,043.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104303	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$426.38	$0.00	$607.39
104304	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$468.69	$0.00	$649.70
104305	Security Entrance Storm Door and Frame, Single, Wide Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$515.56	$0.00	$696.57
104306	Security Entrance Storm Door and Frame, Double, Wide Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$692.67	$0.00	$934.02
104307	Security Entrance Storm Door and Frame, Double, Wide Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$241.35	$761.94	$0.00	$1,003.29
104308	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$531.50	$0.00	$676.31
104309	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$584.24	$0.00	$729.05
104310	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$642.67	$0.00	$787.48
104311	Security Entrance Screen Door and Frame, Double, Narrow Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$863.43	$0.00	$1,044.44
104312	Security Entrance Screen Door and Frame, Double, Narrow Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$949.77	$0.00	$1,130.78
104313	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$504.93	$0.00	$649.74
104314	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$555.02	$0.00	$699.83
104315	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$610.54	$0.00	$755.35
104316	Security Entrance Screen Door and Frame, Double, Medium Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$820.27	$0.00	$1,001.28
104317	Security Entrance Screen Door and Frame, Double, Medium Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$902.29	$0.00	$1,083.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104318	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$479.69	$0.00	$624.50
104319	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'6" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$527.28	$0.00	$672.09
104320	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 4'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$580.00	$0.00	$724.81
104321	Security Entrance Screen Door and Frame, Double, Wide Stile, Up To 5'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$779.25	$0.00	$960.26
104322	Security Entrance Screen Door and Frame, Double, Wide Stile, Up To 6'0" x 7'0" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$857.18	$0.00	$1,038.19
104323	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$236.22	$0.00	$381.03
104324	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$259.66	$0.00	$404.47
104325	Security Entrance Screen Door and Frame, Single, Narrow Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$285.62	$0.00	$430.43
104326	Security Entrance Screen Door and Frame, Double, Narrow Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$383.75	$0.00	$564.76
104327	Security Entrance Screen Door and Frame, Double, Narrow Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$422.13	$0.00	$603.14
104328	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$224.42	$0.00	$369.23
104329	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$246.68	$0.00	$391.49
104330	Security Entrance Screen Door and Frame, Single, Medium Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$271.35	$0.00	$416.16
104331	Security Entrance Screen Door and Frame, Double, Medium Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$364.57	$0.00	$545.58
104332	Security Entrance Screen Door and Frame, Double, Medium Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$401.01	$0.00	$582.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104333	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$213.19	$0.00	$358.00
104334	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 3'6" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$234.34	$0.00	$379.15
104335	Security Entrance Screen Door and Frame, Single, Wide Stile, Up To 4'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$144.81	$257.78	$0.00	$402.59
104336	Security Entrance Screen Door and Frame, Double, Wide Stile, Up To 5'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$346.33	$0.00	$527.34
104337	Security Entrance Screen Door and Frame, Double, Wide Stile, Up To 6'0" x 6'8" w/ Hardware Up to 16 gauge steel construction	EA	$181.01	$380.96	$0.00	$561.97
104338	Security Entrance Door and Frame, Single, 2'-6" x 7' w/ Hardware 14 gauge steel construction, hardware includes hinges, mortise locks, closer, kick plates and seals	EA	$665.21	$4,148.79	$0.00	$4,814.00
104339	Security Door - 16 Gauge, Up To 4'-0" x 7'-2" Includes door and hardware installation (hardware supplied by others)	EA	$2,303.35	$2,400.00	$0.00	$4,703.35
104340	Steel Detention Door and Frame Single Up To 4' Wide – Medium Security Includes Door, Frame, Hardware, and Lockable Access Door	EA	$181.01	$7,092.26	$0.00	$7,273.27
104341	Steel Detention Door and Frame Single Up To 4' Wide – Correction Facility Includes door, frame, hinges, closer, pulls and lockset installation. Lockset is not included	EA	$5,898.26	$12,831.11	$0.00	$18,729.37
104342	Steel Detention Door and Frame Double Up To 8' Wide – Medium Security Includes Door, Frame, Hardware, and Lockable Access Door	EA	$271.52	$12,411.47	$0.00	$12,682.99
	08-34-56 Security Gates					
104343	Chain Link Security Gate – Sliding Up to 9'-0" Tall. Includes all Mesh, hardware, track, frame, and Locking Device. Up to 14 gauge steel webbing	LF	$18.10	$94.56	$0.00	$112.66
104344	Steel Security Gate – Sliding Up to 9'-0" Tall. Includes all Mesh, hardware, track, frame, and Locking Device. Up to 14 gauge steel webbing	LF	$18.10	$212.76	$0.00	$230.86
104345	Wood Security Gate – Sliding Up to 9'-0" Tall. Includes, track, hardware, frame, and Locking Device.	LF	$18.10	$136.99	$0.00	$155.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	08-36-00 Panel Doors					
	08-36-13 Sectional Doors					
104346	Sectional Garage Door – Aluminum Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$35.46	$0.00	$39.08
104347	Sectional Garage Door – Aluminum With Vision Tiles Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$47.29	$0.00	$50.91
104348	Sectional Garage Door – Steel Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$40.78	$0.00	$44.40
104349	Sectional Garage Door – Steel With Vision Tiles Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$54.38	$0.00	$58.00
104350	Sectional Garage Door – Wood Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$51.37	$0.00	$54.99
104351	Sectional Garage Door – Wood With Vision Tiles Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$68.50	$0.00	$72.12
104352	Sectional Garage Door – Glass Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$88.66	$0.00	$92.28
104353	Sectional Garage Door – Glass With Vision Tiles Includes Door, Frame, Track, Pulleys and Hardware	SF	$3.62	$118.21	$0.00	$121.83
104354	[Modifier] Add Insulated Panels	SF	$0.00	$11.74	$0.00	$11.74
104355	[Modifier] Motorized Operation	EA	$271.52	$413.72	$0.00	$685.24

08-40-00 Entrances, Storefronts, and Curtain Walls

08-42-00 Entrances

Extruded or Stamped frames and styles. Manual opening, entry or exit rating, heavy duty Grade 1 or equal. Includes hinges, door closer, push plate, door pull, weather stripping, and lockset in a 626 finish or equal. Includes manufactures standard clear anodized or powder coated finish

08-42-00 Entrances

Extruded or Stamped frames and styles. Manual opening, entry or exit rating, heavy duty Grade 1 or equal. Includes hinges, door closer, push plate, door pull, weather stripping, and lockset in a 626 finish or equal. Includes manufactures standard clear anodized or powder coated finish

104356	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 2'0" x 6'8" w/ Hardware	EA	$398.29	$1,692.28	$0.00	$2,090.57
104357	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$398.29	$2,538.41	$0.00	$2,936.70
104358	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$398.29	$2,961.49	$0.00	$3,359.78
104359	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$398.29	$3,384.55	$0.00	$3,782.84
104360	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$610.71	$3,437.43	$0.00	$4,048.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104361	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$610.71	$4,124.93	$0.00	$4,735.64
104362	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 2'0" x 6'8" w/ Hardware	EA	$398.29	$1,611.69	$0.00	$2,009.98
104363	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$398.29	$2,417.53	$0.00	$2,815.82
104364	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$398.29	$2,820.46	$0.00	$3,218.75
104365	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$398.29	$3,223.39	$0.00	$3,621.68
104366	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$610.71	$3,273.75	$0.00	$3,884.46
104367	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$610.71	$3,928.50	$0.00	$4,539.21
104368	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 2'0" x 6'8" w/ Hardware	EA	$398.29	$1,533.42	$0.00	$1,931.71
104369	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'0" x 6'8" w/ Hardware	EA	$398.29	$2,296.66	$0.00	$2,694.95
104370	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'6" x 6'8" w/ Hardware	EA	$398.29	$2,679.44	$0.00	$3,077.73
104371	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 4'0" x 6'8" w/ Hardware	EA	$398.29	$3,062.21	$0.00	$3,460.50
104372	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 5'0" x 6'8" w/ Hardware	EA	$610.71	$3,110.06	$0.00	$3,720.77
104373	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 6'0" x 6'8" w/ Hardware	EA	$610.71	$3,732.08	$0.00	$4,342.79
104374	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 2'0" x 7'0" w/ Hardware	EA	$398.29	$2,417.53	$0.00	$2,815.82
104375	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$398.29	$3,626.31	$0.00	$4,024.60
104376	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$398.29	$4,230.69	$0.00	$4,628.98
104377	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$398.29	$4,835.08	$0.00	$5,233.37
104378	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$610.71	$4,910.62	$0.00	$5,521.33
104379	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$610.71	$5,892.74	$0.00	$6,503.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104380	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 2'0" x 7'0" w/ Hardware	EA	$398.29	$2,302.41	$0.00	$2,700.70
104381	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$398.29	$3,453.62	$0.00	$3,851.91
104382	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$398.29	$4,029.23	$0.00	$4,427.52
104383	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$398.29	$4,604.83	$0.00	$5,003.12
104384	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$610.71	$4,676.78	$0.00	$5,287.49
104385	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$610.71	$5,612.14	$0.00	$6,222.85
104386	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 2'0" x 7'0" w/ Hardware	EA	$398.29	$2,187.30	$0.00	$2,585.59
104387	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'0" x 7'0" w/ Hardware	EA	$398.29	$3,280.94	$0.00	$3,679.23
104388	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'6" x 7'0" w/ Hardware	EA	$398.29	$3,827.77	$0.00	$4,226.06
104389	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 4'0" x 7'0" w/ Hardware	EA	$398.29	$4,374.59	$0.00	$4,772.88
104390	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 5'0" x 7'0" w/ Hardware	EA	$610.71	$4,442.95	$0.00	$5,053.66
104391	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 6'0" x 7'0" w/ Hardware	EA	$610.71	$5,331.53	$0.00	$5,942.24
104392	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 2'0" x 8'0" w/ Hardware	EA	$398.29	$2,659.29	$0.00	$3,057.58
104393	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'0" x 8'0" w/ Hardware	EA	$398.29	$3,988.93	$0.00	$4,387.22
104394	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 3'6" x 8'0" w/ Hardware	EA	$398.29	$4,653.76	$0.00	$5,052.05
104395	Aluminum Glass Storefront Door and Frame, Single, Narrow Stile, Up To 4'0" x 8'0" w/ Hardware	EA	$398.29	$5,318.58	$0.00	$5,716.87
104396	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 5'0" x 8'0" w/ Hardware	EA	$610.71	$5,401.68	$0.00	$6,012.39
104397	Aluminum Glass Storefront Door and Frame, Double, Narrow Stile, Up To 6'0" x 8'0" w/ Hardware	EA	$610.71	$6,482.02	$0.00	$7,092.73
104398	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 2'0" x 8'0" w/ Hardware	EA	$398.29	$2,532.66	$0.00	$2,930.95
104399	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'0" x 8'0" w/ Hardware	EA	$398.29	$3,798.99	$0.00	$4,197.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104400	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 3'6" x 8'0" w/ Hardware	EA	$398.29	$4,432.15	$0.00	$4,830.44
104401	Aluminum Glass Storefront Door and Frame, Single, Medium Stile, Up To 4'0" x 8'0" w/ Hardware	EA	$398.29	$5,065.31	$0.00	$5,463.60
104402	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 5'0" x 8'0" w/ Hardware	EA	$610.71	$5,144.46	$0.00	$5,755.17
104403	Aluminum Glass Storefront Door and Frame, Double, Medium Stile, Up To 6'0" x 8'0" w/ Hardware	EA	$610.71	$6,173.36	$0.00	$6,784.07
104404	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 2'0" x 8'0" w/ Hardware	EA	$398.29	$2,406.03	$0.00	$2,804.32
104405	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'0" x 8'0" w/ Hardware	EA	$398.29	$3,609.03	$0.00	$4,007.32
104406	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 3'6" x 8'0" w/ Hardware	EA	$398.29	$4,210.55	$0.00	$4,608.84
104407	Aluminum Glass Storefront Door and Frame, Single, Wide Stile, Up To 4'0" x 8'0" w/ Hardware	EA	$398.29	$4,812.05	$0.00	$5,210.34
104408	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 5'0" x 8'0" w/ Hardware	EA	$610.71	$4,887.24	$0.00	$5,497.95
104409	Aluminum Glass Storefront Door and Frame, Double, Wide Stile, Up To 6'0" x 8'0" w/ Hardware	EA	$610.71	$5,864.68	$0.00	$6,475.39
104410	Aluminum Glass Door Side Light	SF	$15.74	$35.46	$0.00	$51.20
104411	Revolving Door Up To 10' Wide Includes door, frame, and hardware	EA	$2,633.68	$41,371.54	$0.00	$44,005.22
104412	Stainless Steel Revolving Door Up To 10' Wide Includes door, frame, and hardware	EA	$2,633.68	$61,466.30	$0.00	$64,099.98
104413	[Modifier] Frameless Door	EA	$0.00	$591.02	$0.00	$591.02
104414	[Modifier] Panic Device Operational portion of all panic devices to cover half the width of specified door, minimum. Chassis may be longer. Medium stile unless otherwise noted. Fire rating of exit devices by UL or testing agency acceptable to AHJ. All devices are Grade 1 unless otherwise noted. Touch or crash bars finished in satin stainless steel with chassis in satin aluminum, or plated brass/bronze as standard with manufacturer. Touch Bar or Crash Bar	EA	$77.58	$295.51	$0.00	$373.09
104415	[Modifier] Concealed Panic Device	EA	$77.58	$1,167.86	$0.00	$1,245.44
104416	[Modifier] Concealed Closer	EA	$77.58	$472.81	$0.00	$550.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104417	[Modifier] Pivot Hinge	EA	$77.58	$295.51	$0.00	$373.09

08-42-29 Automatic Entrances

104418	Exterior Automatic Auto Bipart Sliding Glass Door w/ Hardware Includes microprocessor, drive system, breakaway ability, motion, and safety sensor system. Stanley Duraglide or equal	SF	$25.18	$86.22	$0.00	$111.40

08-42-43 Intensive Care Unit/Critical Care Unit Entrances

104419	ICU / CCU Doors 2 Panels	EA	$1,451.98	$2,956.29	$0.00	$4,408.27
104420	ICU / CCU Doors 3 Panels	EA	$1,967.54	$4,018.95	$0.00	$5,986.49
104421	ICU / CCU Doors 4 Panels	EA	$2,479.63	$5,043.78	$0.00	$7,523.41
104422	[Modifier] Smoke Rating (2 Panel ICU / CCU Door)	EA	$2,427.36	$631.21	$0.00	$3,058.57
104423	[Modifier] Smoke Rating (3 Panel ICU / CCU Door)	EA	$2,427.36	$856.98	$0.00	$3,284.34
104424	[Modifier] Smoke Rating (4 Panel ICU / CCU Door)	EA	$2,427.36	$1,076.84	$0.00	$3,504.20

08-43-00 Storefronts

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

08-43-00 Storefronts

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

104425	Exterior Storefront System – Fully Captured, Up To 1" IGU, Up To 5" Mullion Depth	SF	$21.07	$57.12	$0.00	$78.19
104426	Exterior Storefront System – Fully Captured, Up To 1 -1/8" IGU, Up To 6" Mullion Depth	SF	$21.07	$71.31	$0.00	$92.38
104427	Interior Storefront System – Fully Captured, Up To 1/4" Glazing, Up To 4" Mullion	SF	$18.06	$46.81	$0.00	$64.87
104428	Interior Storefront System – Fully Captured, Up To 1/2" Glazing, Up To 4" Mullion	SF	$18.06	$53.83	$0.00	$71.89
104429	Interior Storefront System – Fully Captured, Up To 1/4" Glazing, Up To 5" Mullion	SF	$18.06	$53.83	$0.00	$71.89
104430	Interior Storefront System – Fully Captured, Up To 1/2" Glazing, Up To 5" Mullion	SF	$18.06	$61.90	$0.00	$79.96
104431	Interior Storefront System – Butt Glazed, Up To 1/2" Glazing, Up To 4" Mullion	SF	$18.06	$64.59	$0.00	$82.65
104432	Interior Storefront System – Butt Glazed, Up To 5/8" Glazing, Up To 4" Mullion	SF	$18.06	$71.06	$0.00	$89.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104433	Interior Storefront System – Butt Glazed, Up To 1/2" Glazing, Up To 5" Mullion	SF	$18.06	$74.29	$0.00	$92.35
104434	Interior Storefront System – Butt Glazed, Up To 5/8" Glazing, Up To 5" Mullion	SF	$18.06	$81.71	$0.00	$99.77
104435	Interior Storefront System – Butt Glazed, Up To 5/8" Glazing, Channel/Shoe Frame	SF	$18.06	$89.89	$0.00	$107.95
104436	Interior View Window Fixed – Fully Captured, Up To 1/2" Glazing	SF	$18.06	$56.28	$0.00	$74.34
104437	Interior View Window Sliding – Fully Captured, Up To 1/2" Glazing	SF	$18.06	$67.53	$0.00	$85.59
104438	Mullion Cap Extension – Up To 6"	LF	$10.53	$35.46	$0.00	$45.99
104439	Mullion Cap Extension – Up To 12"	LF	$10.53	$59.10	$0.00	$69.63
104440	Glazing Tint - Storefront Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$2.53	$6.18	$0.00	$8.71
104441	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104442	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104443	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104444	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104445	[Modifier] Insulated Back Pan Spandrel Panel Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104446	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104447	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104448	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104449	[Modifier] Electronically Tintable Privacy Glass Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$112.29	$0.00	$112.29
104450	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104451	[Modifier] Quantity Premium - Storefronts (101-500 SF) Quantity premium can be used when total square footage in section 08-43-00 Storefront are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.10	$0.00	$0.00	$2.10
104452	[Modifier] Quantity Premium - Storefronts (51-100 SF) Quantity premium can be used when total square footage in section 08-43-00 Storefront are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27
104453	[Modifier] Quantity Premium - Storefronts (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-43-00 Storefront are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53

08-44-00 Curtain Wall and Glazed Assemblies

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

08-44-00 Curtain Wall and Glazed Assemblies

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

104454	Exterior Curtain Wall – Fully Captured, Up To 1" IGU, Up To 5" Mullion Depth	SF	$23.94	$94.20	$0.00	$118.14
104455	Exterior Curtain Wall – Fully Captured, Up To 1-1/8" IGU, Up To 5" Mullion Depth	SF	$23.94	$109.27	$0.00	$133.21
104456	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" IGU, Up To 5" Mullion Depth	SF	$23.94	$103.63	$0.00	$127.57
104457	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 5" Mullion Depth	SF	$23.94	$120.21	$0.00	$144.15
104458	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" IGU, Up To 5" Mullion Depth	SF	$23.94	$113.99	$0.00	$137.93
104459	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 5" Mullion Depth	SF	$23.94	$132.22	$0.00	$156.16
104460	Exterior Curtain Wall – Fully Captured, Up To 1" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$107.05	$0.00	$133.39
104461	Exterior Curtain Wall – Fully Captured, Up To 1-1/8" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$124.18	$0.00	$150.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104462	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$117.76	$0.00	$144.10
104463	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$136.59	$0.00	$162.93
104464	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$129.53	$0.00	$155.87
104465	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 7.5" Mullion Depth	SF	$26.34	$150.25	$0.00	$176.59
104466	Exterior Curtain Wall – Fully Captured, Up To 1" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$123.11	$0.00	$152.38
104467	Exterior Curtain Wall – Fully Captured, Up To 1-1/8" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$142.81	$0.00	$172.08
104468	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$135.42	$0.00	$164.69
104469	Exterior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$157.08	$0.00	$186.35
104470	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$148.96	$0.00	$178.23
104471	Exterior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1-1/8" IGU, Up To 10.5" Mullion Depth	SF	$29.27	$172.79	$0.00	$202.06
104472	Interior Curtain Wall – Fully Captured, Up To 1" Glazing, Up To 5" Mullion Depth	SF	$21.94	$79.87	$0.00	$101.81
104473	Interior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" Glazing, Up To 5" Mullion Depth	SF	$21.94	$87.85	$0.00	$109.79
104474	Interior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" Glazing, Up To 5" Mullion Depth	SF	$21.94	$96.64	$0.00	$118.58
104475	Interior Curtain Wall – Fully Captured, Up To 1" Glazing, Up To 7.5" Mullion Depth	SF	$23.94	$90.77	$0.00	$114.71
104476	Interior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" Glazing, Up To 7.5" Mullion Depth	SF	$23.94	$99.84	$0.00	$123.78
104477	Interior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" Glazing, Up To 7.5" Mullion Depth	SF	$23.94	$109.82	$0.00	$133.76
104478	Interior Curtain Wall – Fully Captured, Up To 1" Glazing, Up To 10.5" Mullion Depth	SF	$26.34	$104.37	$0.00	$130.71
104479	Interior Curtain Wall – Two Side Structural Silicone Glazed, Up To 1" Glazing, Up To 10.5" Mullion Depth	SF	$26.34	$114.81	$0.00	$141.15
104480	Interior Curtain Wall – Four Side Structural Silicone Glazed, Up To 1" Glazing, Up To 10.5" Mullion Depth	SF	$26.34	$126.29	$0.00	$152.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104481	Mullion Cap Extension – Up To 6"	LF	$10.53	$35.46	$0.00	$45.99
104482	Mullion Cap Extension – Up To 12"	LF	$10.53	$59.10	$0.00	$69.63
104483	Glazing Tint - Curtain Wall Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$2.53	$6.18	$0.00	$8.71
104484	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104485	Glazing Tint	SF	$1.92	$6.18	$0.00	$8.10
104486	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104487	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104488	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104489	[Modifier] Insulated Back Pan Spandrel Panel Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104490	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104491	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104492	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19
104493	[Modifier] Electronically Tintable Privacy Glass Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$112.29	$0.00	$112.29
104494	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104495	[Modifier] Quantity Premium - Curtain Wall and Glazed Assemblies (101-500 SF) Quantity premium can be used when total square footage in section 08-44-00 Curtain Wall and Glazed Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.10	$0.00	$0.00	$2.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104496	[Modifier] Quantity Premium - Curtain Wall and Glazed Assemblies (51-100 SF) Quantity premium can be used when total square footage in section 08-44-00 Curtain Wall and Glazed Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27
104497	[Modifier] Quantity Premium - Curtain Wall and Glazed Assemblies (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-44-00 Curtain Wall and Glazed Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53
	08-45-00 Translucent Wall and Roof Assemblies					
	08-45-00 Translucent Wall and Roof Assemblies					
104498	Polycarbonate Cellular Panels, Clear and Framing-Vertical Sunlite or equal. Includes factory formed corners and accessories, hardware, channels, and framing	SF	$21.07	$39.59	$0.00	$60.66
104499	Translucent Panel System, Panels and Framing-Vertical Kalwall or equal. Includes factory formed corners and accessories, hardware, channels, and framing	SF	$21.07	$44.70	$0.00	$65.77
104500	Polycarbonate Cellular Panels, Clear and Framing-Horizontal Sunlite or equal. Includes factory formed corners and accessories, hardware, channels, and framing. Typically used for canopies and walkways	SF	$25.08	$45.53	$0.00	$70.61
104501	Translucent Panel System, Panels and Framing-Horizontal Kalwall or equal. Includes factory formed corners and accessories, hardware, channels, and framing. Typically used for canopies and walkways	SF	$25.08	$51.41	$0.00	$76.49
104502	[Modifier] Curved (Bent) Panels and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$31.93	$0.00	$31.93
104503	[Modifier] Quantity Premium - Translucent Wall and Roof Assemblies (101-500 SF) Quantity premium can be used when total square footage in section 08-45-00 Translucent Wall and Roof Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.10	$0.00	$0.00	$2.10
104504	[Modifier] Quantity Premium - Translucent Wall and Roof Assemblies (51-100 SF) Quantity premium can be used when total square footage in section 08-45-00 Translucent Wall and Roof Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104505	[Modifier] Quantity Premium - Translucent Wall and Roof Assemblies (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-45-00 Translucent Wall and Roof Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53

08-50-00 Windows

08-51-00 Metal Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With PVDF or equal finish, minimum STC rating of 44, and Buy America compliant

08-51-00 Metal Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With PVDF or equal finish, minimum STC rating of 44, and Buy America compliant

104506	Metal or Aluminum Window – Up To 1" IGU Double Hung Includes hardware and locks	SF	$14.87	$67.36	$0.00	$82.23
104507	Metal or Aluminum Window – Up To 1" IGU Casement Includes hardware and locks	SF	$14.87	$71.12	$0.00	$85.99
104508	Metal or Aluminum Window – Up To 1" IGU Awning Includes hardware and locks	SF	$14.87	$74.86	$0.00	$89.73
104509	Metal or Aluminum Window – Up To 1" IGU Horizontal Sliding Includes hardware and locks	SF	$14.87	$71.12	$0.00	$85.99
104510	Metal or Aluminum Window – Replace Insulated Glazing in Existing Frames Includes furnishing and installation of 1" low E glazing; for use with window sizing up to 48" x 48"	SF	$18.77	$32.38	$0.00	$51.15
104511	Metal or Aluminum Window – Up To 1" IGU Fixed	SF	$14.87	$62.57	$0.00	$77.44
104512	Metal or Aluminum Window Screen	SF	$0.87	$1.47	$0.00	$2.34
104513	Glazing Tint - Metal or Aluminum Window Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$3.76	$3.25	$0.00	$7.01
104514	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104515	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104516	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104517	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104518	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104519	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104520	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19
104521	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104522	[Modifier] Historical Windows	SF	$20.32	$118.21	$0.00	$138.53
104523	[Modifier] Quantity Premium - Metal Windows (< Or = To 30 SF) Quantity premium can be used when total square footage in section 08-51-00 Metal Windows are within stated quantities. Can be applied cumulatively to base line items.	SF	$17.56	$0.00	$0.00	$17.56
104524	[Modifier] Aluminum Tubing Window Trim Includes 3/4" square clear anodized aluminum tubing, fabricated to window opening, set in caulking bed	LF	$3.07	$4.99	$0.00	$8.06

08-52-00 Wood Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With specified finish, minimum STC rating of 44, and Buy America compliant

08-52-00 Wood Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With specified finish, minimum STC rating of 44, and Buy America compliant

104525	Wood Window – Up To 1" IGU Double Hung Pine or equal, stained and sealed. Includes hardware and locks	SF	$14.87	$73.49	$0.00	$88.36
104526	Wood Window – Up To 1" IGU Casement Pine or equal, stained and sealed. Includes hardware and locks	SF	$14.87	$77.58	$0.00	$92.45
104527	Wood Window – Up To 1" IGU Awning Pine or equal, stained and sealed. Includes hardware and locks	SF	$14.87	$81.66	$0.00	$96.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104528	Wood Window – Up To 1" IGU Horizontal Sliding Pine or equal, stained and sealed. Includes hardware and locks	SF	$14.87	$77.58	$0.00	$92.45
104529	Wood Window – Up To 1" IGU Fixed Pine or equal, stained and sealed	SF	$14.87	$68.26	$0.00	$83.13
104530	Wood Window – Up To 1" IGU Double Hung (Paint Grade) Pine or equal. Includes hardware and locks	SF	$14.87	$58.79	$0.00	$73.66
104531	Wood Window – Up To 1" IGU Casement (Paint Grade) Pine or equal. Includes hardware and locks	SF	$14.87	$62.06	$0.00	$76.93
104532	Wood Window – Up To 1" IGU Awning (Paint Grade) Pine or equal. Includes hardware and locks	SF	$14.87	$65.33	$0.00	$80.20
104533	Wood Window – Up To 1" IGU Horizontal Sliding (Paint Grade) Pine or equal. Includes hardware and locks	SF	$14.87	$62.06	$0.00	$76.93
104534	Wood Window – Up To 1" IGU Fixed (Paint Grade) Pine or equal	SF	$14.87	$54.61	$0.00	$69.48
104535	Wood Screens	SF	$0.87	$11.42	$0.00	$12.29
104536	Glazing Tint - Wood Window Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$3.76	$3.25	$0.00	$7.01
104537	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104538	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104539	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104540	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104541	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104542	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104543	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104544	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104545	[Modifier] Historical Windows	SF	$20.32	$118.21	$0.00	$138.53
104546	[Modifier] Wood Window Architectural Series Can be used to upgrade a Pine frame to a Hardwood frame	SF	$0.00	$17.72	$0.00	$17.72
104547	[Modifier] Quantity Premium - Wood Windows (< Or = To 30 SF) Quantity premium can be used when total square footage in section 08-52-00 Wood Windows are within stated quantities. Can be applied cumulatively to base line items.	SF	$17.56	$0.00	$0.00	$17.56

08-52-13 Metal Clad Wood Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With PVDF or equal finish, minimum STC rating of 44, and Buy America compliant

104548	Metal Or Aluminum Clad Wood Window – Up To 1" IGU Double Hung Includes hardware and locks	SF	$14.87	$80.84	$0.00	$95.71
104549	Metal Or Aluminum Clad Wood Window – Up To 1" IGU Casement Includes hardware and locks	SF	$14.87	$85.34	$0.00	$100.21
104550	Metal Or Aluminum Clad Wood Window – Up To 1" IGU Awning Includes hardware and locks	SF	$14.87	$89.83	$0.00	$104.70
104551	Metal Or Aluminum Clad Wood Window – Up To 1" IGU Horizontal Sliding Includes hardware and locks	SF	$14.87	$85.34	$0.00	$100.21
104552	Metal Or Aluminum Clad Wood Window – Up To 1" IGU Fixed	SF	$14.87	$75.09	$0.00	$89.96
104553	Metal or Aluminum Window Screen	SF	$0.87	$1.47	$0.00	$2.34
104554	Glazing Tint - Metal or Aluminum Clad Windows Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$3.76	$3.25	$0.00	$7.01
104555	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104556	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104557	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104558	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104559	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104560	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104561	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19
104562	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104563	[Modifier] Historical Windows	SF	$20.32	$118.21	$0.00	$138.53
104564	[Modifier] Quantity Premium - Metal Clad Wood Windows (< Or = To 30 SF) Quantity premium can be used when total square footage in section 08-52-13 Metal Clad Wood Windows are within stated quantities. Can be applied cumulatively to base line items.	SF	$17.56	$0.00	$0.00	$17.56

08-52-16 Plastic Clad Wood Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. With Vinyl cladding or equal finish, minimum STC rating of 44, and Buy America compliant

104565	Vinyl Clad Wood Window – Up To 1" IGU Double Hung Includes hardware and locks	SF	$14.87	$68.72	$0.00	$83.59
104566	Vinyl Clad Wood Window – Up To 1" IGU Casement Includes hardware and locks	SF	$14.87	$72.54	$0.00	$87.41
104567	Vinyl Clad Wood Window – Up To 1" IGU Awning Includes hardware and locks	SF	$14.87	$76.35	$0.00	$91.22
104568	Vinyl Clad Wood Window – Up To 1" IGU Horizontal Sliding Includes hardware and locks	SF	$14.87	$72.54	$0.00	$87.41
104569	Vinyl Clad Wood Window – Up To 1" IGU Fixed	SF	$14.87	$63.83	$0.00	$78.70
104570	Metal or Aluminum Window Screen	SF	$0.87	$1.47	$0.00	$2.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104571	Glazing Tint - Vinyl Clad Wood Windows Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$3.76	$3.25	$0.00	$7.01
104572	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104573	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104574	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104575	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104576	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104577	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104578	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19
104579	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104580	[Modifier] Historical Windows	SF	$20.32	$118.21	$0.00	$138.53
104581	[Modifier] Quantity Premium - Plastic Clad Wood Windows (< Or = To 30 SF) Quantity premium can be used when total square footage in section 08-52-16 Plastic Clad Wood Windows are within stated quantities. Can be applied cumulatively to base line items.	SF	$17.56	$0.00	$0.00	$17.56

08-53-00 Plastic Windows

08-53-13 Vinyl Windows

All systems include tempered glass, low-e coating, frame, flashing, caulking, complete thermal and weather seals, integral grids, for both nailing flange and retrofit styles. In Vinyl or equal finish, minimum STC rating of 44, and Buy America compliant

104582	Vinyl Window – Up To 1" IGU Double Hung Includes hardware and locks	SF	$14.87	$59.89	$0.00	$74.76
104583	Vinyl Window – Up To 1" IGU Casement Includes hardware and locks	SF	$14.87	$63.23	$0.00	$78.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104584	Vinyl Window – Up To 1" IGU Awning Includes hardware and locks	SF	$14.87	$66.55	$0.00	$81.42
104585	Vinyl Window – Up To 1" IGU Horizontal Sliding Includes hardware and locks	SF	$14.87	$63.23	$0.00	$78.10
104586	Vinyl Bay Window – Up To 1" IGU w/White Grids Includes hardware and locks, vinyl w/oak interior trim, includes 3 windows - (2) double hung 20" x 61" (1) fixed window 54" x 61"	SF	$28.40	$135.65	$0.00	$164.05
104587	Vinyl Window – Up To 1" IGU Fixed	SF	$14.87	$55.64	$0.00	$70.51
104588	Metal or Aluminum Window Screen	SF	$0.87	$1.47	$0.00	$2.34
104589	Glazing Tint - Vinyl Windows Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV15), Or equal	SF	$3.76	$3.25	$0.00	$7.01
104590	Glazing Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104591	[Modifier] Glazing Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104592	[Modifier] Glazing Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104593	[Modifier] Glazing Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104594	[Modifier] Glazing Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104595	[Modifier] Glazing Blast Resistant Glass Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21
104596	[Modifier] Glazing Hurricane Resistant Glass Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19
104597	[Modifier] Curved (Bent) Glass and Frame Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$118.21	$0.00	$118.21
104598	[Modifier] Historical Windows	SF	$20.32	$118.21	$0.00	$138.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104599	[Modifier] Quantity Premium - Vinyl Windows (< Or = To 30 SF) Quantity premium can be used when total square footage in section 08-53-13 Vinyl Windows are within stated quantities. Can be applied cumulatively to base line items.	SF	$17.56	$0.00	$0.00	$17.56
	08-56-00 Special Function Windows					
	08-56-19 Pass Windows					
104600	Pass Thru Window – Aluminum and Glass (Non-Rated) Includes door, frame, hardware, and shelf	SF	$35.12	$177.30	$0.00	$212.42
104601	Pass Thru Window – Stainless Steel and Glass (Non -Rated) Includes door, frame, hardware, and shelf	SF	$35.12	$236.41	$0.00	$271.53
104602	Pass Thru Window – Aluminum and Glass (Fire-Rated) Includes door, frame, hardware, and shelf	SF	$35.12	$265.96	$0.00	$301.08
104603	Pass Thru Window – Stainless Steel and Glass (Fire-Rated) Includes door, frame, hardware, and shelf	SF	$35.12	$325.06	$0.00	$360.18
104604	Pass Through Window – Level I Bullet Resistant Includes door, frame, hardware, and shelf	SF	$35.12	$472.81	$0.00	$507.93
104605	Pass Through Window – Level II Bullet Resistant Includes door, frame, hardware, and shelf	SF	$35.12	$531.92	$0.00	$567.04
104606	Pass Through Window – Level III Bullet Resistant Includes door, frame, hardware, and shelf	SF	$35.12	$591.02	$0.00	$626.14
104607	Reception Sliding Transaction Window Includes door, frame, hardware, and shelf	SF	$15.05	$48.07	$0.00	$63.12
	08-56-53 Security Windows					
104608	Psychiatric / Behavioral Health Window - Metal Frame w/ Security Glazing Insulated, Tempered and Laminated. 3/8" Air Gap, 3/16" Clear Tempered, 0.090 Clear PVB. Solarban 60 or equal.	SF	$135.09	$284.06	$1.00	$420.15
104609	Psychiatric / Behavioral Health Window - Metal Frame w/ Security Glazing & Internal Blind Insulated, Tempered and Laminated. WACI Blind, 1/2" Makrolon Panel, 3/8" Air Gap, 3/16" Clear Tempered, 0.090 Clear PVB. Solarban 60 or equal.	SF	$135.09	$365.24	$1.00	$501.33
104610	Exterior Behavioral Health Window With Integral Blinds Pricing Based on 4000i-DT Psychiatric Window, Or equal	SF	$21.07	$221.63	$0.00	$242.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104611	Exterior Behavioral Health Retrofit Window With Integral Blinds Pricing based on 2187-DT Psychiatric Seal System, Or equal. Installs on the interior of the existing exterior window system	SF	$21.07	$132.01	$0.00	$153.08
104612	Security Screen – Maximum Security Steel welded frame, 12 mesh .028" stainless steel woven wire cloth, single point emergency release	SF	$18.06	$74.29	$0.00	$92.35
104613	Security Screen – Medium Security Spring loaded for safety	SF	$1.08	$48.41	$0.00	$49.49
104614	Hinged Stainless Steel Security Screen Located at exterior of window, tamper proof fastener, aluminum or steel frames Safe S Cape Egress Screen, Factory finished in white	SF	$12.18	$91.10	$0.00	$103.28
104615	Hinged Stainless Steel Security Screen Located at interior of window, tamper proof fastener, notch around window cranks, aluminum or steel frames, factory finished in white	SF	$8.06	$65.78	$0.00	$73.84
104616	Wire Glass – Fully Captured, Up To 1/2" Glazing, Up To 5" Mullion	SF	$15.51	$53.20	$0.00	$68.71
104617	Window Security Bars With Interior Quick Release Steel construction. Includes interior foot activation quick release	SF	$18.10	$29.55	$0.00	$47.65
104618	Window Security Bars Steel construction	SF	$12.06	$17.72	$0.00	$29.78

08-60-00 Roof Windows and Skylights

08-62-00 Unit Skylights

All systems include fenestrations, frame, curb, fall protection, flashing, trim, caulking, complete thermal and weather seals. With PVDF or equal finish

08-62-00 Unit Skylights

All systems include fenestrations, frame, curb, fall protection, flashing, trim, caulking, complete thermal and weather seals. With PVDF or equal finish

104619	Fiberglass Sandwich Skylight – Up To 2.75” Thick Kalwall or equal. Factory formed corners and accessories included	SF	$11.71	$37.83	$0.00	$49.54
104620	Fiberglass Sandwich Skylight – Up To 4” Thick Kalwall or equal. Factory formed corners and accessories included	SF	$13.17	$43.74	$0.00	$56.91
104621	Tubular Skylights – Up To 14" Diameter, Polycarbonate Lens, Up To 10' Tunnel Includes solar powered night light	EA	$421.39	$782.51	$0.00	$1,203.90
104622	Tubular Skylights – Up To 14" Diameter, Polycarbonate Lens, Up To 20' Tunnel Includes solar powered night light	EA	$526.73	$1,158.40	$0.00	$1,685.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104623	Tubular Skylights – Up To 14" Diameter, Polycarbonate Lens, Up To 30' Tunnel Includes solar powered night light	EA	$702.32	$1,534.29	$0.00	$2,236.61
104624	Tubular Skylights – Up To 14" Diameter, Glass Lens, Up To 10' Tunnel Includes solar powered night light	EA	$421.39	$939.02	$0.00	$1,360.41
104625	Tubular Skylights – Up To 14" Diameter, Glass Lens, Up To 20' Tunnel Includes solar powered night light	EA	$526.73	$1,390.09	$0.00	$1,916.82
104626	Tubular Skylights – Up To 14" Diameter, Glass Lens, Up To 30' Tunnel Includes solar powered night light	EA	$702.32	$1,841.15	$0.00	$2,543.47
104627	Tubular Skylights – Up To 22" Diameter, Polycarbonate Lens, Up To 10' Tunnel Includes solar powered night light	EA	$421.39	$978.14	$0.00	$1,399.53
104628	Tubular Skylights – Up To 22" Diameter, Polycarbonate Lens, Up To 20' Tunnel Includes solar powered night light	EA	$526.73	$1,448.00	$0.00	$1,974.73
104629	Tubular Skylights – Up To 22" Diameter, Polycarbonate Lens, Up To 30' Tunnel Includes solar powered night light	EA	$702.32	$1,917.86	$0.00	$2,620.18
104630	Tubular Skylights – Up To 22" Diameter, Glass Lens, Up To 10' Tunnel Includes solar powered night light	EA	$421.39	$1,173.78	$0.00	$1,595.17
104631	Tubular Skylights – Up To 22" Diameter, Glass Lens, Up To 20' Tunnel Includes solar powered night light	EA	$526.73	$1,737.60	$0.00	$2,264.33
104632	Tubular Skylights – Up To 22" Diameter, Glass Lens, Up To 30' Tunnel Includes solar powered night light	EA	$702.32	$2,301.44	$0.00	$3,003.76
104633	Aluminum Framed Glass Skylight – Flat	SF	$26.34	$132.98	$0.00	$159.32
104634	Aluminum Framed Glass Skylight – Sloped	SF	$26.34	$152.92	$0.00	$179.26
104635	Aluminum Framed Glass Skylight – Barrel	SF	$26.34	$168.22	$0.00	$194.56
104636	Aluminum Framed Glass Skylight – Double Pitch	SF	$26.34	$152.92	$0.00	$179.26
104637	Aluminum Framed Glass Skylight – Domed	SF	$26.34	$168.22	$0.00	$194.56
104638	Aluminum Framed Polycarbonate Skylight – Flat	SF	$26.34	$106.38	$0.00	$132.72
104639	Aluminum Framed Polycarbonate Skylight – Sloped	SF	$26.34	$122.34	$0.00	$148.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104640	Aluminum Framed Polycarbonate Skylight – Barrel	SF	$26.34	$134.58	$0.00	$160.92
104641	Aluminum Framed Polycarbonate Skylight – Double Pitch	SF	$26.34	$122.34	$0.00	$148.68
104642	Aluminum Framed Polycarbonate Skylight – Domed	SF	$26.34	$134.58	$0.00	$160.92
104643	Aluminum Framed Plastic Skylight – Flat Wasco or equal	SF	$17.56	$47.29	$0.00	$64.85
104644	Aluminum Framed Plastic Skylight – Sloped Wasco or equal	SF	$17.56	$54.38	$0.00	$71.94
104645	Aluminum Framed Plastic Skylight – Barrel Wasco or equal	SF	$17.56	$54.38	$0.00	$71.94
104646	Aluminum Framed Plastic Skylight – Double Pitch Wasco or equal	SF	$17.56	$54.38	$0.00	$71.94
104647	Aluminum Framed Plastic Skylight – Domed Wasco or equal	SF	$17.56	$54.38	$0.00	$71.94
104648	Skylight Tint Applies only to the square footage of the glazing system that required the proposed enhancement. Material - 3M window film (tint level - NV25), Or equal	SF	$3.76	$4.67	$0.00	$8.43
104649	Skylight Anti Graffiti Film Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$3.76	$4.73	$0.00	$8.49
104650	[Modifier] Skylight Vented	SF	$0.00	$11.82	$0.00	$11.82
104651	[Modifier] Skylight Fused Link	SF	$0.00	$17.72	$0.00	$17.72
104652	[Modifier] Skylight Frosted Or Fritted Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104653	[Modifier] Skylight Colored Or Textured Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$11.82	$0.00	$11.82
104654	[Modifier] Skylight Low Iron / Ultra Clear Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$5.91	$0.00	$5.91
104655	[Modifier] Skylight Laminated / Impact Resistant Applies only to the square footage of the glazing system that required the proposed enhancement	SF	$0.00	$8.28	$0.00	$8.28
104656	[Modifier] Skylight Blast Resistant Includes modifications to both glazing and framing systems	SF	$0.00	$118.21	$0.00	$118.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104657	[Modifier] Skylight Hurricane Resistant Includes all modification to the frame	SF	$0.00	$14.19	$0.00	$14.19

08-70-00 Hardware

08-71-00 Door Hardware

All hardware is ANSI/BHMA Grade 1, 626 Satin chrome finish unless otherwise noted.

08-71-00 Door Hardware

All hardware is ANSI/BHMA Grade 1, 626 Satin chrome finish unless otherwise noted.

104658	Hinges – Plain Bearing, Brass, Standard Weight 3 ½ X 3 ½	EA	$11.32	$16.80	$0.00	$28.12
104659	Hinges – Plain Bearing, Brass, Standard Weight 4 X 4	EA	$11.32	$14.26	$0.00	$25.58
104660	Hinges – Plain Bearing, Brass, Standard Weight 4 1/2 X4 1/2	EA	$11.32	$18.53	$0.00	$29.85
104661	Hinges – Plain Bearing, Brass, Standard Weight 5 X 4 1/2	EA	$11.32	$25.25	$0.00	$36.57
104662	Hinges – Plain Bearing, Brass, Standard Weight 5 1/2 X 4 1/2	EA	$11.32	$28.87	$0.00	$40.19
104663	Hinges – Plain Bearing, Brass, Heavy Weight 4 1/2 X 4 1/2	EA	$11.32	$22.34	$0.00	$33.66
104664	Hinges – Plain Bearing, Brass, Heavy Weight 5 1/2 X 4 1/2	EA	$11.32	$24.71	$0.00	$36.03
104665	Hinges – Ball Bearing, Brass, Standard Weight 3 ½ X 3 ½	EA	$11.32	$23.94	$0.00	$35.26
104666	Hinges – Ball Bearing, Brass, Standard Weight 4 ½ X 4 ½	EA	$11.32	$23.94	$0.00	$35.26
104667	Hinges – Ball Bearing, Brass, Standard Weight 5 X 4 ½	EA	$11.32	$30.28	$0.00	$41.60
104668	Hinges – Ball Bearing, Brass, Standard Weight 5 ½ X 5 ½	EA	$11.32	$31.74	$0.00	$43.06
104669	Hinges – Ball Bearing, Brass, Standard Weight 5 X 5	EA	$11.32	$32.30	$0.00	$43.62
104670	Hinges – Ball Bearing, Brass, Standard Weight 6 X 5	EA	$11.32	$34.91	$0.00	$46.23
104671	Hinges – Ball Bearing, Brass, Heavy Weight 4 ½ X 4 ½	EA	$11.32	$38.09	$0.00	$49.41
104672	Hinges – Ball Bearing, Brass, Heavy Weight 5 X 4 ½	EA	$11.32	$38.89	$0.00	$50.21
104673	Hinges – Ball Bearing, Brass, Heavy Weight 6 X 5	EA	$11.32	$38.89	$0.00	$50.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104674	Hinges – Concealed Ball Bearing, Brass, Standard Weight 3 ½ X 3 ½	EA	$11.32	$37.62	$0.00	$48.94
104675	Hinges – Concealed Ball Bearing, Brass, Standard Weight 4 ½ X 4 ½	EA	$11.32	$41.40	$0.00	$52.72
104676	Hinges – Concealed Ball Bearing, Brass, Standard Weight 5 X 4 ½	EA	$11.32	$57.34	$0.00	$68.66
104677	Hinges – Concealed Ball Bearing, Brass, Standard Weight 5 ½ X 5 ½	EA	$11.32	$64.17	$0.00	$75.49
104678	Hinges – Concealed Ball Bearing, Brass, Standard Weight 5 X 5	EA	$11.32	$64.17	$0.00	$75.49
104679	Hinges – Concealed Ball Bearing, Brass, Standard Weight 6 X 5	EA	$11.32	$82.45	$0.00	$93.77
104680	Hinges – Concealed Ball Bearing, Brass, Heavy Weight 4 ½ X 4 ½	EA	$11.32	$49.80	$0.00	$61.12
104681	Hinges – Concealed Ball Bearing, Brass, Heavy Weight 5 X 4 ½	EA	$11.32	$56.50	$0.00	$67.82
104682	Hinges – Concealed Ball Bearing, Brass, Heavy Weight 6 X 5	EA	$11.32	$58.80	$0.00	$70.12
104683	Hinges – Plain Bearing, Steel, Standard Weight 3 ½ X 3 ½	EA	$11.32	$38.83	$0.00	$50.15
104684	Hinges – Plain Bearing, Steel, Standard Weight 4 X 4	EA	$11.32	$42.53	$0.00	$53.85
104685	Hinges – Plain Bearing, Steel, Standard Weight 4 ½ X 4 ½	EA	$11.32	$37.73	$0.00	$49.05
104686	Hinges – Plain Bearing, Steel, Standard Weight 5 X 4 ½	EA	$11.32	$55.56	$0.00	$66.88
104687	Hinges – Plain Bearing, Steel, Standard Weight 5 ½ X 4 ½	EA	$11.32	$55.56	$0.00	$66.88
104688	Hinges – Ball Bearing, Steel, Standard Weight 3 ½ X 3 ½	EA	$11.32	$21.75	$0.00	$33.07
104689	Hinges – Ball Bearing, Steel, Standard Weight 4 ½ X 4 ½	EA	$11.32	$21.75	$0.00	$33.07
104690	Hinges – Ball Bearing, Steel, Standard Weight 5 X 4 ½	EA	$11.32	$29.88	$0.00	$41.20
104691	Hinges – Ball Bearing, Steel, Standard Weight 5 ½ X 5 ½	EA	$11.32	$38.72	$0.00	$50.04
104692	Hinges – Ball Bearing, Steel, Standard Weight 5 X 5	EA	$11.32	$36.98	$0.00	$48.30
104693	Hinges – Ball Bearing, Steel, Standard Weight 6 X 5	EA	$11.32	$42.29	$0.00	$53.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104694	Hinges – Ball Bearing, Steel, Heavy Weight 4 ½ X 4 ½	EA	$11.32	$42.59	$0.00	$53.91
104695	Hinges – Ball Bearing, Steel, Heavy Weight 5 X 4 ½	EA	$11.32	$44.59	$0.00	$55.91
104696	Hinges – Ball Bearing, Steel, Heavy Weight 6 X 5	EA	$11.32	$46.40	$0.00	$57.72
104697	Hinge Filler Plate For infill of existing door frame hinge pockets	EA	$7.49	$2.67	$0.00	$10.16
104698	[Modifier] All Hinges Stainless Steel Finish Or Equal Applicable to hinge items above	EA	$0.00	$8.86	$0.00	$8.86
104699	[Modifier] All Hinges Oiled Bronze Finish Or Equal Applicable to hinge items above	EA	$0.00	$16.55	$0.00	$16.55
104700	[Modifier] All Hinges Bright Chrome Finish Or Equal Applicable to hinge items above	EA	$0.00	$20.69	$0.00	$20.69
104701	[Modifier] All Hinges Half Surface Or Half Mortise Applicable to hinge items above	EA	$0.00	$88.66	$0.00	$88.66
104702	[Modifier] All Hinges Electrified Thru Hinge, All Size, Up To 6 Pr, 22 Ga. Wire Applicable to hinge items above	EA	$0.00	$70.92	$0.00	$70.92
104703	[Modifier] All Hinges Non-Removable Pins Applicable to hinge items above	EA	$0.00	$5.31	$0.00	$5.31
104704	[Modifier] All Hinges Spring Hinge Function Applicable to hinge items above	EA	$0.00	$29.73	$0.00	$29.73
104705	[Modifier] All Hinges Swing Clear Function Applicable to hinge items above	EA	$0.00	$7.68	$0.00	$7.68
104706	[Modifier] All Hinges Extra Heavy Weight = Greater Than 200 Lb Door Weight Applicable to hinge items above	EA	$0.00	$17.72	$0.00	$17.72
104707	Pivots 200 LB Limit Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$2,955.11	$0.00	$3,498.15
104708	Pivots 200 LB Limit – Centerhung Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$3,546.13	$0.00	$4,089.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104709	Pivots 500 LB Limit Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$3,546.13	$0.00	$4,089.17
104710	Pivots 500 LB Limit – Centerhung Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$4,137.15	$0.00	$4,680.19
104711	Pivots 800 LB Limit Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$4,137.15	$0.00	$4,680.19
104712	Pivots 800 LB Limit – Centerhung Pivots are priced in pairs, top and bottom, single acting. Stainless steel base material, UL rated up to 3 hours, brushed satin finish, unless otherwise noted. All pivots are mortised into door and frame unless otherwise noted. Includes closer	PR	$543.04	$4,728.17	$0.00	$5,271.21
104713	[Modifier] Pivots – Any Plated Finish Other Than Satin Stainless Applicable to pivot items above	PR	$0.00	$1,773.07	$0.00	$1,773.07
104714	[Modifier] Pivots – Heavy Duty Pivots Rated Above 800 Lb Limit Applicable to pivot items above	PR	$0.00	$236.41	$0.00	$236.41
104715	[Modifier] Pivots – Intermediate Heavy Duty Pivots Rated Above 800 Lb Limit Applicable to pivot items above	PR	$0.00	$295.51	$0.00	$295.51
104716	Continuous Hinges – Standard, 1 ½’ wide	EA	$33.94	$89.72	$0.00	$123.66
104717	Continuous Hinges – Standard, 2” wide	EA	$33.94	$92.79	$0.00	$126.73
104718	Continuous Hinges – Standard, 2 ½ wide	EA	$33.94	$92.79	$0.00	$126.73
104719	Continuous Hinges – Standard, 3” wide	EA	$33.94	$95.03	$0.00	$128.97
104720	[Modifier] Continuous Hinges – For Finishes Other Than Satin Chrome Applicable to continuous hinge items above	EA	$0.00	$53.20	$0.00	$53.20
104721	[Modifier] Continuous Hinges – Lead Lined Applicable to continuous hinge items above	EA	$0.00	$177.30	$0.00	$177.30
104722	Continuous Hinges – Geared, Full Mortise	EA	$33.94	$128.13	$0.00	$162.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104723	Continuous Hinges – Geared, Half Surface	EA	$33.94	$175.65	$0.00	$209.59
104724	Continuous Hinges – Geared Heavy Duty Up To 550 Lbs.	EA	$33.94	$184.17	$0.00	$218.11
104725	[Modifier] Continuous Hinges, Geared Color Match To Frame Applicable to continuous hinge, geared items above	EA	$0.00	$41.37	$0.00	$41.37
104726	[Modifier] Continuous Hinges, Geared Lead Lined Applicable to continuous hinge, geared items above	EA	$0.00	$278.37	$0.00	$278.37
104727	[Modifier] Continuous Hinges, All Standard / Geared, Electrified Thru Hinge Applicable to continuous hinge, geared items above	EA	$0.00	$118.21	$0.00	$118.21
104728	Tubular – Lockset, Office / Storeroom, Lever / Knob, Grade 2	EA	$49.37	$185.90	$0.00	$235.27
104729	Tubular – Lockset, Privacy Thumb Turn, Lever / Knob, Grade 2	EA	$49.37	$103.43	$0.00	$152.80
104730	Tubular – Latchset, Passage, Lever / Knob, Grade 2	EA	$49.37	$100.95	$0.00	$150.32
104731	Dummy Trim Tubular (One Side), Lever Or Knob, Grade 2	EA	$49.37	$70.92	$0.00	$120.29
104732	Tubular – Lockset, Integrated Deadlatch / Lock, Lever	EA	$49.37	$183.22	$0.00	$232.59
104733	[Modifier] Tubular – Add For Finish Other Than 626 Applicable to tubular items above	EA	$0.00	$47.29	$0.00	$47.29
104734	[Modifier] Tubular – Add For Decorative Lever, Rosette Applicable to tubular items above	EA	$0.00	$59.10	$0.00	$59.10
104735	Cylindrical – Lockset, Entry / Office, Lever, Grade 1	EA	$49.37	$342.79	$0.00	$392.16
104736	Cylindrical – Lockset, Storeroom, Classroom, Lever, Grade 1	EA	$49.37	$325.06	$0.00	$374.43
104737	Cylindrical – Lockset, Privacy Thumb Turn, Lever, Grade 1	EA	$49.37	$130.02	$0.00	$179.39
104738	Cylindrical – Latchset, Passage, Lever, Grade 1	EA	$49.37	$130.02	$0.00	$179.39
104739	Dummy Trim Cylindrical (One Side), Lever Or Knob, Grade 1	EA	$49.37	$177.30	$0.00	$226.67
104740	Cylindrical – Lockset, Entry / Office, Lever, Grade 2	EA	$49.37	$165.49	$0.00	$214.86
104741	Cylindrical – Lockset, Storeroom, Classroom, Lever, Grade 2	EA	$49.37	$165.49	$0.00	$214.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104742	Cylindrical – Lockset, Privacy Thumb Turn, Lever, Grade 2	EA	$49.37	$106.38	$0.00	$155.75
104743	Cylindrical – Latchset, Passage, Lever, Grade 2	EA	$49.37	$104.02	$0.00	$153.39
104744	Dummy Trim Cylindrical (One Side), Lever Or Knob, Grade 2	EA	$49.37	$70.92	$0.00	$120.29
104745	Mortise Lockset – Entry / Office, Lever w/ Rose, Grade 1	EA	$49.37	$614.67	$0.00	$664.04
104746	Mortise Lockset – Storeroom / Classroom, Lever w/ Rose, Grade 1	EA	$49.37	$366.43	$0.00	$415.80
104747	Mortise Lockset – Privacy Deadbolt, Lever w/ Rose, Grade 1	EA	$49.37	$366.43	$0.00	$415.80
104748	Mortise Lockset – Passage, Lever w/ Rose, Grade 1	EA	$49.37	$366.43	$0.00	$415.80
104749	Lockset - Mechanical Push Button, Lever with Key Override	EA	$83.25	$1,020.83	$0.00	$1,104.08
104750	Deadbolts – Tubular, Key Cylinder, Grade2	EA	$49.37	$76.83	$0.00	$126.20
104751	Deadbolts – Cylindrical, Key Core, Grade 2	EA	$49.37	$177.30	$0.00	$226.67
104752	Deadbolts – Cylindrical, Key Core, Grade 1	EA	$49.37	$236.41	$0.00	$285.78
104753	Deadbolts – Mortise, Mortise Cylinder and Key Core, Grade 1	EA	$49.37	$283.69	$0.00	$333.06
104754	Aluminum Door Lock – Deadlock, Key Cylinder and Thumb Turn, Grade 1	EA	$49.37	$88.66	$0.00	$138.03
104755	Aluminum Door Lock – Deadlatch, Single Point, Key and Egress Lever, Grade 1	EA	$49.37	$130.02	$0.00	$179.39
104756	Aluminum Door Lock – Deadlatch, Two Point, Keyed Thumb Turn Or Egress Lever, Grade 1	EA	$49.37	$165.49	$0.00	$214.86
104757	[Modifier] All – Electrified Strike, Medium Duty, Surface Mount Applicable to lockset and latchset items above	EA	$0.00	$88.66	$0.00	$88.66
104758	[Modifier] All – Electrified Strike, Medium Duty, Mortise Applicable to lockset and latchset items above	EA	$0.00	$141.84	$0.00	$141.84
104759	[Modifier] All – Electrified Strike, Heavy Duty, Surface Mount Applicable to lockset and latchset items above	EA	$0.00	$165.49	$0.00	$165.49
104760	[Modifier] All – Electrified Strike, Heavy Duty, Mortise Applicable to lockset and latchset items above	EA	$0.00	$354.62	$0.00	$354.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104761	[Modifier] All – Electrified Latch Release Applicable to lockset and latchset items above	EA	$0.00	$118.21	$0.00	$118.21
104762	Panic Device – Rim Mount, Wire Pull w/ Keyed Escutcheon, Touchbar	EA	$135.76	$1,034.28	$0.00	$1,170.04
104763	Panic Device – Rim Mount, Key Cylinder w/ Lever Escutcheon, Nightlatch	EA	$135.76	$1,300.25	$0.00	$1,436.01
104764	Panic Device – Rim Mount, Key Cylinder w/ Lever Escutcheon, Entry	EA	$135.76	$1,418.45	$0.00	$1,554.21
104765	Panic Device – Rim Mount, Egress Only, No Exterior Trim	EA	$135.76	$1,122.94	$0.00	$1,258.70
104766	Panic Device – Rim Mount, Egress Only, No Exterior Trim, Crash Bar	EA	$135.76	$1,595.76	$0.00	$1,731.52
104767	Panic Device – Rim Mount, Narrow, Egress Only, No Exterior Trim, Touch Bar	EA	$135.76	$1,276.61	$0.00	$1,412.37
104768	Panic Device – Mortise, Wire Pull w/ Keyed Escutcheon, Touchbar	EA	$135.76	$1,477.55	$0.00	$1,613.31
104769	Panic Device – Mortise, Key Cylinder w/ Lever Escutcheon, Nightlatch, Touchbar	EA	$135.76	$1,300.25	$0.00	$1,436.01
104770	Panic Device – Mortise, Key Cylinder w/ Lever Escutcheon, Entry, Touchbar	EA	$135.76	$1,418.45	$0.00	$1,554.21
104771	[Modifier] Panic Device – Surface Vertical Rods With Strikes Applicable to panic device items above	EA	$0.00	$413.72	$0.00	$413.72
104772	[Modifier] Panic Device – Keyed Removable Mullion, Up To 96” With Mortise Cylinder and Key Core Applicable to panic device items above	EA	$0.00	$520.10	$0.00	$520.10
104773	[Modifier] Panic Device – Ul Listed, Fire Rated Device Applicable to panic device items above	EA	$0.00	$709.23	$0.00	$709.23
104774	[Modifier] Panic Device – Keyed Dogging and Mortise Cylinder With Key Core, Excepting Crash Bar Type. Applicable to panic device items above	EA	$0.00	$378.26	$0.00	$378.26
104775	[Modifier] Panic Device – Delayed Egress With Internal Alarm, Mortise Cylinder and Key Core, Excepting Crash Bar Type. Applicable to panic device items above	EA	$0.00	$378.26	$0.00	$378.26
104776	[Modifier] Panic Device – Internal Exit Alarm, Excepting Crash Bar Type. Applicable to panic device items above	EA	$0.00	$336.88	$0.00	$336.88
104777	[Modifier] Panic Device – Security Fasteners, All Types Applicable to panic device items above	EA	$0.00	$76.83	$0.00	$76.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104778	[Modifier] Panic Device – Electrified Latch Release, Rim Or Mortise Mounting Applicable to panic device items above	EA	$0.00	$549.65	$0.00	$549.65
104779	[Modifier] Panic Device – Electrified Latch Retraction w/ Power Supply, For All Types As Available Applicable to panic device items above	EA	$0.00	$987.01	$0.00	$987.01
104780	[Modifier] Panic Device – Windstorm Rated Applicable to panic device items above	EA	$0.00	$732.86	$0.00	$732.86
104781	Closer Full Profile- Surface, Operating Size 2-6, Regular Arm Or Top Jamb Regular	EA	$67.88	$333.34	$0.00	$401.22
104782	Closer Full Profile – Surface, Operating Size 2-6, Parallel Arm	EA	$67.88	$367.61	$0.00	$435.49
104783	Closer Full Profile – Surface, Operating Size 2-6, Track Arm	EA	$67.88	$375.89	$0.00	$443.77
104784	Closer Full Profile – Surface, Operating Size 2-6, Power Assist Electronic Hold Open, Track Arm	EA	$67.88	$3,380.65	$0.00	$3,448.53
104785	Closer Full Profile – Surface, Operating Size 2-6, Delayed Egress	EA	$67.88	$341.61	$0.00	$409.49
104786	Closer Narrow Profile – Surface, Operating Size 2-6, Regular Arm Or Top Jamb Regular	EA	$67.88	$216.31	$0.00	$284.19
104787	Closer Narrow Profile – Surface, Operating Size 2-6, Parallel Arm	EA	$67.88	$226.95	$0.00	$294.83
104788	Closer Narrow Profile – Surface, Operating Size 2-6, Track Arm	EA	$67.88	$347.52	$0.00	$415.40
104789	Closer Narrow Profile – Surface, Operating Size 2-6, Electronic Hold Open, Track Arm	EA	$67.88	$323.88	$0.00	$391.76
104790	Closer Slim Profile – Surface, Operating Size 1-4, Regular Arm Or Top Jamb Regular	EA	$67.88	$208.03	$0.00	$275.91
104791	Closer Slim Profile – Surface, Operating Size 1-4, Parallel Arm	EA	$67.88	$218.68	$0.00	$286.56
104792	Closer Concealed – Top Jamb Or Door, Multi-Sized, Regular Arm	EA	$67.88	$513.00	$0.00	$580.88
104793	Closer Concealed – Top Jamb Or Door, Multi-Sized, Delayed Action	EA	$67.88	$602.84	$0.00	$670.72
104794	Closer Floor Mounted – Center Hung, Sized 3 To 5, Up To 350 Lb. Doors	EA	$67.88	$773.05	$0.00	$840.93
104795	Closer Floor Mounted – Offset Mounted, Sized 3 To 5, Up To 500 Lb Door	EA	$67.88	$1,039.01	$0.00	$1,106.89
104796	Closer Floor Mounted – Offset Mounted, Sized 3 To 7, Up To 660 Lb Door	EA	$67.88	$1,369.99	$0.00	$1,437.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104797	[Modifier] Floor Mounted – Add For Polished and Bronze Finishes Applicable to floor mounted closer items above	EA	$0.00	$449.18	$0.00	$449.18
104798	[Modifier] All Closer – Door Coordinator Up To 8' Length Applicable to closer items above	EA	$0.00	$356.78	$0.00	$356.78
104799	[Modifier] All Closer – Finishes Other Than Aluminum Painted Applicable to closer items above	EA	$0.00	$47.29	$0.00	$47.29
104800	[Modifier] All Closer – Heavy Duty, Hold Open, Stop Arm Applicable to closer items above	EA	$0.00	$171.39	$0.00	$171.39
104801	Flush Bolts Manual – Steel, Extension Rod Type (Metal Doors) Up To 8” Long	EA	$49.37	$40.19	$0.00	$89.56
104802	Flush Bolts Manual – Steel, Corner Wrap Type (Wood Doors) Up To 8” Long	EA	$49.37	$48.47	$0.00	$97.84
104803	[Modifier] Flush Bolts Manual – Brass Or Bronze Satin Finish Applicable to flush bolts manual items above	EA	$0.00	$11.82	$0.00	$11.82
104804	[Modifier] Flush Bolts Manual – Polished Brass Or Chrome Finishes Applicable to flush bolts manual items above	EA	$0.00	$35.46	$0.00	$35.46
104805	[Modifier] Flush Bolts Manual – 12” Or Longer Extension Rods Applicable to flush bolts manual items above	EA	$0.00	$94.56	$0.00	$94.56
104806	Flush Bolts Automatic – Extension Rod Type (Metal Doors) Up To 8” Long	EA	$49.37	$172.57	$0.00	$221.94
104807	Flush Bolts Automatic – Corner Wrap Type (Wood Doors) Up To 8” Long	EA	$49.37	$179.67	$0.00	$229.04
104808	[Modifier] Flush Bolts Automatic – Brass Or Bronze Satin Finish Applicable to flush bolts automatic items above	EA	$0.00	$11.82	$0.00	$11.82
104809	[Modifier] Flush Bolts Automatic – Polished Brass Or Chrome Finishes Applicable to flush bolts automatic items above	EA	$0.00	$35.46	$0.00	$35.46
104810	[Modifier] Flush Bolts Automatic – 12” Or Longer Extension Rods Applicable to flush bolts automatic items above	EA	$0.00	$112.29	$0.00	$112.29
104811	Surface Bolts Manual – ½ Round, Brushed Chrome, 8” Long With Strike	EA	$49.37	$53.20	$0.00	$102.57
104812	Surface Bolts Manual – ½ Round, Brushed Chrome,12" Long With Strike	EA	$49.37	$88.66	$0.00	$138.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104813	[Modifier] Surface Bolts – Decorative Style Applicable to surface bolts items above	EA	$0.00	$41.37	$0.00	$41.37
104814	[Modifier] Surface Bolts – Brass Or Bronze Satin Finishes Applicable to surface bolts items above	EA	$0.00	$23.64	$0.00	$23.64
104815	Protection Plate / Kick Plate – Satin Aluminum, .050" Thick	SF	$7.54	$18.91	$0.00	$26.45
104816	Protection Plate / Kick Plate – Stainless Steel, .050" Thick	SF	$7.54	$21.27	$0.00	$28.81
104817	Protection Plate / Kick Plate – Satin Brass/Bronze, .050" Thick	SF	$7.54	$41.37	$0.00	$48.91
104818	Protection Plate / Kick Plate – High Impact Plastic, Class A .050" Thick	SF	$7.54	$18.91	$0.00	$26.45
104819	[Modifier] Protection Plate / Kick Plate – Countersunk Fasteners Applicable to protection plate items above	SF	$0.00	$2.36	$0.00	$2.36
104820	[Modifier] Protection Plate / Kick Plate – Beveled Edges Applicable to protection plate items above	SF	$0.00	$2.36	$0.00	$2.36
104821	[Modifier] Protection Plate / Kick Plate – Ul Listed Fire Rating Applicable to protection plate items above	SF	$0.00	$4.13	$0.00	$4.13
104822	[Modifier] Protection Plate / Kick Plate – Satin Nickel Over Brass Applicable to protection plate items above	SF	$0.00	$4.73	$0.00	$4.73
104823	[Modifier] Protection Plate / Kick Plate – Bright Chrome, Polished Finishes Applicable to protection plate items above	SF	$0.00	$2.36	$0.00	$2.36
104824	Door Stop – Wall, Brush Chrome, Concave	EA	$33.94	$5.79	$0.00	$39.73
104825	Door Stop – Base Board, Brushed Chrome	EA	$33.94	$7.68	$0.00	$41.62
104826	Door Stop – Floor Dome, Brushed Chrome	EA	$33.94	$7.68	$0.00	$41.62
104827	Door Stop – Floor Gooseneck, Brushed Chrome	EA	$33.94	$18.55	$0.00	$52.49
104828	Door Stop – Floor Gooseneck, Brushed Chrome, Roller Or Hook Catch	EA	$33.94	$59.10	$0.00	$93.04
104829	Door Stop – Hinge Pin, Brushed Chrome	EA	$33.94	$9.22	$0.00	$43.16
104830	Door Stop – Kick Down, Brushed Chrome	EA	$33.94	$12.06	$0.00	$46.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104831	[Modifier] Door Stop – Finishes Other Than Brushed Chrome Applicable to door stop items above	EA	$0.00	$5.91	$0.00	$5.91
104832	[Modifier] Door Stop – Heavy Duty Type Applicable to door stop items above	EA	$0.00	$35.46	$0.00	$35.46
104833	Door Pull – Aluminum, ¾” Dia., 8” Length	PR	$67.88	$87.23	$0.00	$155.11
104834	Door Pull – Aluminum, ¾” Dia., 10” Length	PR	$67.88	$99.24	$0.00	$167.12
104835	Door Pull – Aluminum, ¾” Dia., 12” Length	PR	$67.88	$124.83	$0.00	$192.71
104836	Door Pull – Aluminum, 1” Dia. 8” Length	PR	$67.88	$97.04	$0.00	$164.92
104837	Door Pull – Aluminum, 1” Dia. 10” Length	PR	$67.88	$100.47	$0.00	$168.35
104838	Door Pull – Aluminum, 1” Dia. 12” Length	PR	$67.88	$110.28	$0.00	$178.16
104839	Door Pull – Aluminum, 1” Dia. 14” Length	PR	$67.88	$131.57	$0.00	$199.45
104840	[Modifier] Door Pull – Offset C Shape Applicable to door pull items above	PR	$0.00	$17.72	$0.00	$17.72
104841	[Modifier] Door Pull – Stainless Steel Base Material Applicable to door pull items above	PR	$0.00	$35.46	$0.00	$35.46
104842	[Modifier] Door Pull – Decorative Curved Pull, All Sizes Applicable to door pull items above	PR	$0.00	$53.20	$0.00	$53.20
104843	Push Bar – Aluminum, ¾” Dia., Up To 34 ½” Length	EA	$49.37	$175.18	$0.00	$224.55
104844	Push Bar – Aluminum, 1” Dia., Up To 34 ½” Length	EA	$49.37	$173.17	$0.00	$222.54
104845	Push Bar – Stainless Steel, ¾” Dia., Up To 34 ½” Length	EA	$49.37	$195.98	$0.00	$245.35
104846	Push Bar – Stainless Steel, 1” Dia., Up To 34 ½” Length	EA	$49.37	$200.00	$0.00	$249.37
104847	Push Bar – Bronze, ¾” Dia., Up To 34 ½” Length	EA	$49.37	$220.33	$0.00	$269.70
104848	Push Bar – Bronze, 1” Dia., Up To 34 ½” Length	EA	$49.37	$225.17	$0.00	$274.54
104849	Push Plate – Brass, .050” Thick, 3 X 12	EA	$38.79	$57.45	$0.00	$96.24
104850	Push Plate – Brass, .050” Thick, 4X16	EA	$38.79	$78.60	$0.00	$117.39
104851	Push Plate – Brass, .050” Thick, 6X16	EA	$38.79	$104.37	$0.00	$143.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104852	Push Plate – Stainless Steel, .050” Thick, 3 X 12	EA	$38.79	$45.63	$0.00	$84.42
104853	[Modifier] Push Plates – Polish Or Oxidized Finishes Applicable to push plate items above	EA	$0.00	$35.46	$0.00	$35.46
104854	Weather Stripping – Perimeter Gasket, Silicone Bulb, ¾” Teardrop, Up To 10’ Lengths	EA	$49.37	$54.46	$0.00	$103.83
104855	Weather Stripping – Vinyl Or TPE Ribbed Wings, 2 To 3 Fins, Up To 10' Lengths	EA	$49.37	$58.51	$0.00	$107.88
104856	Weather Stripping – Aluminum Retainer Strip, Up To 1 ½” Wide, With Captured Neoprene Foam, Screw Attached	EA	$49.37	$53.43	$0.00	$102.80
104857	Weather Stripping – Astragal, Stainless Steel Or Aluminum, 1 ½ – 2” Wide, Up To 96" In Length	EA	$49.37	$173.52	$0.00	$222.89
104858	Weather Stripping – Astragal, Stainless Steel Or Aluminum, 2” Wide, Up To 96" In Length	EA	$49.37	$179.08	$0.00	$228.45
104859	Weather Stripping – Astragal, Two Piece, Nylon Brush Or Foam Seal Edge, Surface Mount, Up To 96" In Length	EA	$49.37	$69.39	$0.00	$118.76
104860	Door Sweep – Surface, Aluminum, Brush Or Neoprene Bulb, Up To 48"	EA	$196.48	$91.53	$0.00	$288.01
104861	Door Sweep – Shoe Type, Aluminum, ½ Wrap Mount With Face Fasteners, Nylon Brush Or Half Round Fin Seal / Sweep, Up To 1 1 /2 Gap	EA	$38.79	$27.78	$0.00	$66.57
104862	Door Sweep – Shoe Type, Aluminum, Full Wrap, With Nylon Brush Or Half-Round Seal / Sweep, Up To 1 ½” Gap	EA	$38.79	$23.44	$0.00	$62.23
104863	Door Sweep – Automatic Bottom, Aluminum, With Nylon Brush Or Neoprene Bulb, Up To 48"	EA	$38.79	$110.53	$0.00	$149.32
104864	Threshold – Full Saddle, ¼” High, 3” Wide, 36" Long	EA	$38.79	$41.96	$0.00	$80.75
104865	Threshold – Full Saddle, ¼” High, 4” Wide, 36" Long	EA	$38.79	$44.44	$0.00	$83.23
104866	Threshold – Full Saddle, ¼” High, 5” Wide, 36" Long	EA	$38.79	$55.79	$0.00	$94.58
104867	Threshold – Full Saddle, ¼” High, 6” Wide, 36" Long	EA	$38.79	$81.44	$0.00	$120.23
104868	Threshold – Full Saddle, ¼” High, 3” Wide, 48" Long	EA	$38.79	$50.71	$0.00	$89.50
104869	Threshold – Full Saddle, ¼” High, 4” Wide, 48" Long	EA	$38.79	$59.93	$0.00	$98.72
104870	Threshold – Full Saddle, ¼” High, 5” Wide, 48" Long	EA	$38.79	$71.27	$0.00	$110.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104871	Threshold – Full Saddle, ¼” High, 6” Wide, 48" Long	EA	$38.79	$96.69	$0.00	$135.48
104872	Threshold – Full Saddle, ¼” High, 3” Wide, 72" Long	EA	$38.79	$61.82	$0.00	$100.61
104873	Threshold – Full Saddle, ¼” High, 4” Wide, 72" Long	EA	$38.79	$76.96	$0.00	$115.75
104874	Threshold – Full Saddle, ¼” High, 5” Wide, 72" Long	EA	$38.79	$87.12	$0.00	$125.91
104875	Threshold – Full Saddle, ¼” High, 6” Wide, 72" Long	EA	$38.79	$109.70	$0.00	$148.49
104876	Threshold – Half Saddle, ¼” High, 4” Wide, 36" Long	EA	$38.79	$67.97	$0.00	$106.76
104877	Threshold – Half Saddle, ¼” High, 5” Wide, 36" Long	EA	$38.79	$75.77	$0.00	$114.56
104878	Threshold – Half Saddle, ¼” High, 6” Wide, 36" Long	EA	$38.79	$82.27	$0.00	$121.06
104879	Threshold – Half Saddle, ¼” High, 4” Wide, 48" Long	EA	$38.79	$73.76	$0.00	$112.55
104880	Threshold – Half Saddle, ¼” High, 5” Wide, 48" Long	EA	$38.79	$82.15	$0.00	$120.94
104881	Threshold – Half Saddle, ¼” High, 6” Wide, 48" Long	EA	$38.79	$89.12	$0.00	$127.91
104882	Threshold – Half Saddle, ¼” High, 4” Wide, 72" Long	EA	$38.79	$110.76	$0.00	$149.55
104883	Threshold – Half Saddle, ¼” High, 5” Wide, 72" Long	EA	$38.79	$114.66	$0.00	$153.45
104884	Threshold – Half Saddle, ¼” High, 6” Wide, 72" Long	EA	$38.79	$117.96	$0.00	$156.75
104885	Threshold – Full Saddle, ½” High, 3” Wide, 36" Long	EA	$38.79	$43.38	$0.00	$82.17
104886	Threshold – Full Saddle, ½” High, 4” Wide, 36" Long	EA	$38.79	$47.64	$0.00	$86.43
104887	Threshold – Full Saddle, ½” High, 5” Wide, 36" Long	EA	$38.79	$56.50	$0.00	$95.29
104888	Threshold – Full Saddle, ½” High, 6” Wide, 36" Long	EA	$38.79	$67.37	$0.00	$106.16
104889	Threshold – Full Saddle, ½” High, 3” Wide, 48" Long	EA	$38.79	$50.36	$0.00	$89.15
104890	Threshold – Full Saddle, ½” High, 4” Wide, 48" Long	EA	$38.79	$57.68	$0.00	$96.47
104891	Threshold – Full Saddle, ½” High, 5” Wide, 48" Long	EA	$38.79	$71.40	$0.00	$110.19
104892	Threshold – Full Saddle, ½” High, 6” Wide, 48" Long	EA	$38.79	$75.53	$0.00	$114.32
104893	Threshold – Full Saddle, ½” High, 3” Wide, 72" Long	EA	$38.79	$75.53	$0.00	$114.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104894	Threshold – Full Saddle, ½” High, 4” Wide, 72" Long	EA	$38.79	$79.43	$0.00	$118.22
104895	Threshold – Full Saddle, ½” High, 5” Wide, 72" Long	EA	$38.79	$87.23	$0.00	$126.02
104896	Threshold – Full Saddle, ½” High, 6” Wide, 72" Long	EA	$38.79	$109.70	$0.00	$148.49
104897	Threshold – Half Saddle, ½” High, 4” Wide, 36" Long	EA	$38.79	$53.66	$0.00	$92.45
104898	Threshold – Half Saddle, ½” High, 5” Wide, 36" Long	EA	$38.79	$88.41	$0.00	$127.20
104899	Threshold – Half Saddle, ½” High, 6” Wide, 36" Long	EA	$38.79	$98.00	$0.00	$136.79
104900	Threshold – Half Saddle, ½” High, 4” Wide, 48" Long	EA	$38.79	$68.56	$0.00	$107.35
104901	Threshold – Half Saddle, ½” High, 5” Wide, 48" Long	EA	$38.79	$117.96	$0.00	$156.75
104902	Threshold – Half Saddle, ½” High, 6” Wide, 48" Long	EA	$38.79	$121.16	$0.00	$159.95
104903	Threshold – Half Saddle, ½” High, 4” Wide, 72" Long	EA	$38.79	$83.81	$0.00	$122.60
104904	Threshold – Half Saddle, ½” High, 5” Wide, 72" Long	EA	$38.79	$96.46	$0.00	$135.25
104905	Threshold – Half Saddle, ½” High, 6” Wide, 72" Long	EA	$38.79	$107.69	$0.00	$146.48
104906	[Modifier] Threshold – Extensions Applicable to threshold items above	EA	$0.00	$41.37	$0.00	$41.37
104907	[Modifier] Threshold – Panic Device Latching Profile Applicable to threshold items above	PR	$0.00	$35.46	$0.00	$35.46
104908	Miscellaneous Trims – Door Viewer, One Way, Up To ¾” Lens,120 Degree View	EA	$49.37	$21.27	$0.00	$70.64
104909	Miscellaneous Trims – Door Viewer, One Way, Up To ¾” Lens,150 Degree View	EA	$49.37	$26.00	$0.00	$75.37
104910	Miscellaneous Trims – Door Viewer, One Way, Up To ¾” Lens,190 Degree View	EA	$49.37	$30.73	$0.00	$80.10
104911	Miscellaneous Trims – Door Viewer, One Way, Wide Body, Up To 1-½" Lens,180 Degree View	EA	$49.37	$65.01	$0.00	$114.38
104912	Door Operator - Surface Mounted, Light Duty, Door Weight Up To 200 LBS Includes surface mounted operator and two (2) ADA push plates. Costs are per door leaf, electrical connections to be added from Division 26	EA	$369.78	$2,955.11	$0.00	$3,324.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104913	Door Operator - Surface Mounted, Moderate Duty, Door Weight 201 To 300 LBS Includes surface mounted operator and two (2) ADA push plates. Costs are per door leaf, electrical connections to be added from Division 26	EA	$369.78	$4,137.15	$0.00	$4,506.93
104914	Door Operator - Surface Mounted, Heavy Duty, Door Weight 301 LBS and Up Includes surface mounted operator and two (2) ADA push plates. Costs are per door leaf, electrical connections to be added from Division 26	EA	$369.78	$5,319.20	$0.00	$5,688.98
104915	ADA Push Button - Radio Control Door Operator Includes two (2) surface mounted ADA push buttons and reciever	EA	$246.53	$502.37	$0.00	$748.90
	08-71-53 Security Door Hardware					
104916	Cylinder Lock with Ligature Resistant Trim-Level	EA	$61.77	$648.78	$0.00	$710.55
104917	HD Detention Grade Closer Includes closer and installation	EA	$767.79	$900.00	$0.00	$1,667.79
104918	HD Detention Continuous Hinges Includes continuous hinge and installation	EA	$767.79	$600.00	$0.00	$1,367.79
	08-80-00 Glazing					
	08-81-00 Glass Glazing					
	08-81-26 Interior Glass Glazing					
104919	Clear Annealed Float Glass 1/4" with Polished Edges - Up To 36" x 36" Panels	SF	$9.34	$7.50	$0.00	$16.84
	08-83-00 Mirrors					
	08-83-00 Mirrors					
104920	Mirror – Frameless Includes all mounting hardware	SF	$12.93	$20.69	$0.00	$33.62
104921	Mirror – Hardwood Frame Includes all mounting hardware	SF	$12.93	$28.96	$0.00	$41.89
104922	Mirror – Painted Wood Frame Includes all mounting hardware	SF	$12.93	$23.17	$0.00	$36.10
104923	Mirror – Aluminum Frame Includes all mounting hardware	SF	$12.93	$24.82	$0.00	$37.75
104924	Mirror – Stainless Steel Frame Includes all mounting hardware	SF	$12.93	$28.96	$0.00	$41.89
104925	Mirror – Plastic Frame Includes all mounting hardware	SF	$12.93	$21.87	$0.00	$34.80
104926	Mirror – Recreational Wall Mirror Includes all mounting hardware	SF	$6.46	$14.77	$0.00	$21.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104927	[Modifier] Mirror – Metal Shelf Applicable to mirror items above	LF	$0.00	$28.96	$0.00	$28.96
104928	[Modifier] Mirror – Behavioral Safety Glass Applicable to mirror items above	SF	$0.00	$11.82	$0.00	$11.82
104929	[Modifier] Mirror – Non-Geometrically Shaped Applicable to mirror items above	SF	$0.00	$5.91	$0.00	$5.91
104930	[Modifier] Mirror – Beveled Applicable to mirror items above	SF	$0.00	$4.13	$0.00	$4.13
104931	[Modifier] Mirror – Integral LED Applicable to mirror items above	SF	$0.00	$29.55	$0.00	$29.55
104932	Mirror Sliding Wardrobe Doors – Satin Or Clean Finish Steel construction. Includes all mounting hardware and tracks	SF	$8.22	$5.08	$0.00	$13.30
104933	Mirror Sliding Wardrobe Doors – Gold Finish Steel construction. Includes all mounting hardware and tracks	SF	$8.22	$5.21	$0.00	$13.43
104934	Mirror Sliding Wardrobe Doors – Brush Nickel Or Bronze Finish Steel construction. Includes all mounting hardware and tracks	SF	$8.22	$5.44	$0.00	$13.66
104935	Mirror Sliding Wardrobe Doors – Hardwood Frame Wood construction. Includes all mounting hardware and tracks	SF	$8.22	$15.96	$0.00	$24.18
104936	Mirror Sliding Wardrobe Doors – Painted Wood Frame Wood construction. Includes all mounting hardware and tracks	SF	$8.22	$13.95	$0.00	$22.17
	08-87-00 Glazing Surface Films					
	08-87-23 Safety and Security Films					
104937	Safety and Security Window Film - 3M S800 - Interior Clear 3M S800 - Interior Clear or equal. Clean window, install film and clean afterwards	SF	$5.44	$4.52	$0.00	$9.96
104938	Safety and Security Window Film - 3M Ultra 800 - Interior Clear 3M Ultra 800 - Interior Clear or equal. Clean window, install film and clean afterwards	SF	$5.44	$9.69	$0.00	$15.13
104939	Safety and Security Window Film - 3M S70 - Exterior Clear 3M S70 - Exterior Clear or equal. Clean window, install film and clean afterwards	SF	$7.56	$6.46	$0.00	$14.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104940	Safety and Security Window Film - 3M Ultra Night Vision S25 - Interior Tinted 3M Ultra Night Vision S25 - Interior Tinted or equal. Clean window, install film and clean afterwards	SF	$5.44	$10.34	$0.00	$15.78
104941	Safety and Security Window Film - Madico Safety Shield 1500, Clear - Interior Includes prep for new film, Madico Safety Shield 1500 (15 mil) film or equal, Dow Corning or equal anchoring bead	SF	$12.68	$14.63	$0.00	$27.31
104942	3M Impact Protection Adhesive 3M Impact Protection Adhesive or equal. Trim rubber gasket, lay 3/8 to 1/2" bead, providing clean lines with adhesion to the film and the mullion	LF	$5.44	$3.23	$0.00	$8.67

08-88-00 Special Function Glazing

08-88-13 Fire-Rated Glazing

All systems include low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

104943	Fire Rated Glazing Clear – 45 Min	SF	$23.94	$174.57	$0.00	$198.51
104944	Fire Rated Glazing Clear – 1 Hr.	SF	$23.94	$223.41	$0.00	$247.35
104945	Fire Rated Glazing Clear – 2 Hr.	SF	$23.94	$312.06	$0.00	$336.00
104946	[Modifier] Quantity Premium - Fire-Rated Glazing (51 -100 SF) Quantity premium can be used when total square footage in section 08-88-13 Fire-Rated Glazing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27
104947	[Modifier] Quantity Premium - Fire-Rated Glazing (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-88-13 Fire-Rated Glazing are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53

08-88-53 Security Glazing

All systems include low-e coating, frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish

104948	Exterior Security Glazing – Fully Captured, Up To 1" IGU, Up To 7.5" Mullion Childgard or equal	SF	$17.56	$83.06	$0.00	$100.62
104949	Exterior Security Glazing – Fully Captured, Up To 1-1/8" IGU Glazing, Up To 10.5" Mullion Childgard or equal	SF	$17.56	$94.89	$0.00	$112.45
104950	Interior Security Glazing – Fully Captured, Up To 1/2" Glazing, Up To 5" Mullion Childgard or equal	SF	$15.05	$74.76	$0.00	$89.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104951	Interior Security Glazing – Fully Captured, Up To 5/8" Glazing, Up To 5" Mullion Childgard or equal	SF	$15.05	$86.57	$0.00	$101.62
104952	Interior Security Glazing – Polycarbonate Abrasion Resistant Clear Panel Includes cutting, beveling, drilling holes, sanding and fasteners. Not subject to minimum quantity Modifier	SF	$21.49	$22.72	$0.00	$44.21
104953	[Modifier] Quantity Premium - Security Glazing (51-100 SF) Quantity premium can be used when total square footage in section 08-88-53 Security Glazing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27
104954	[Modifier] Quantity Premium - Security Glazing (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-88-53 Security Glazing are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53

08-88-56 Ballistics-Resistant Glazing

All systems include low spall glazing, frame, frame lining, flashing, caulking, complete thermal and weather seals with PVDF or painted finish

104955	Ballistic Resistant Glass & Frame - Level 1 Includes fixed panel, transom or sidelight panels. Excludes custom/complex installations, elaborate fabrications/unique shapes, additional features/specialized coatings, certifications, and permits.	SF	$62.50	$114.99	$0.00	$177.49
104956	Ballistic Resistant Glass & Frame - Level 2 Includes fixed panel, transom or sidelight panels. Excludes custom/complex installations, elaborate fabrications/unique shapes, additional features/specialized coatings, certifications, and permits.	SF	$62.50	$140.54	$0.00	$203.04
104957	Ballistic Resistant Glass & Frame - Level 3 Includes fixed panel, transom or sidelight panels. Excludes custom/complex installations, elaborate fabrications/unique shapes, additional features/specialized coatings, certifications, and permits.	SF	$62.50	$166.09	$0.00	$228.59
104958	Ballistic Resistant Glass & Frame - Level 4 Includes fixed panel, transom or sidelight panels. Excludes custom/complex installations, elaborate fabrications/unique shapes, additional features/specialized coatings, certifications, and permits.	SF	$68.75	$217.19	$0.00	$285.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104959	Ballistic Resistant Glass & Frame - Level 5 - Exterior, Aluminum Curtainwall/Clerestory System Includes testing and rated to UL 752 Level 5 Standards - 2" TSS-005 L/S IG-NP (Low Spall Insulated, no poly) clear glass, dark bronze anodized aluminum TSS-650 thermal bullet resistant framing system	SF	$87.89	$522.07	$0.00	$609.96
104960	Ballistic Resistant Glass Level 5 - Interior, Bullet Resistant Window/Assembly Includes testing and rated to UL 752 Level 5 standards - 1 1/2" TSS-005 L/S NP (Low Spall, no poly) clear glass, primed painted hollow metal framing system lined with Level 5 armor plate, (1) stainless steel recessed deal tray with Level 5 Bullet Trap, (1) stainless steel countertop and (1) stainless steel PE/Package Passer with lockable paddle latch (18" x 18" x 18")	SF	$134.55	$647.00	$0.00	$781.55
104961	Ballistic Resistant Door Level 5 - Exterior, Aluminum Bullet Resistant Door/Assembly (1) 3/6 x 7/0 x 2 3/8" Full Vision Wide Stile Aluminum Door Includes testing and rated to UL 752 Level 5 Standards - 1 1/2" TSS-005 L/S NP (Low Spall, no poly) clear glass, dark bronze anodized aluminum TSS-650 thermal bullet resistant framing system. Door hardware includes Select SL-11 heavy duty continuous hinge with door threshold and sweeps. Factory prep only: all additional door hardware furnished by others	EA	$1,246.86	$15,421.85	$0.00	$16,668.71
104962	Ballistic Resistant Door Level 5 - Interior, Steel Door/Assembly (1) 3/6 x 7/0 x 1 3/4" Primed Painted Steel Door with 6" x 33" View Window Primed painted knockdown/adjustable hollow metal framing lined with Level 5 Armor Plate, door lite tested and rated to UL 752 Level 5 Standards - 1 1/2" TSS-005 L/S NP (Low Spall, no poly) clear glass. Door hardware includes Select SL-11 heavy duty continuous hinge, factory prep only, all additional door hardware furnished by others	EA	$2,404.34	$12,432.14	$0.00	$14,836.48
104963	Ballistic Resistant Glass & Frame - Level 7 Includes prime painted finish, glazed with bullet resistant, Level 7 clear glass clad polycarbonate, low spall, 1 7/8” thick glazing, caulking as required	SF	$56.80	$806.45	$0.00	$863.25
104964	[Modifier] Ballistic Resistant Glass - Add for Operable Window	SF	$5.15	$8.25	$0.00	$13.40
104965	Speak Thru - Level 3 Bullet Resistant Brushed stainless steel, 6" round	EA	$137.49	$681.84	$0.00	$819.33

08-90-00 Louvers and Vents

08-91-00 Louvers

08-91-19 Louvers

Louvers include bird screens unless otherwise noted

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104966	Wall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$37.23	$0.00	$46.00
104967	Wall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$33.10	$0.00	$41.87
104968	Wall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$28.96	$0.00	$37.73
104969	Wall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$24.82	$0.00	$33.59
104970	Wall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$45.21	$0.00	$54.79
104971	Wall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$40.19	$0.00	$49.77
104972	Wall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$35.17	$0.00	$44.75
104973	Wall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$30.15	$0.00	$39.73
104974	Wall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$53.20	$0.00	$63.73
104975	Wall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$47.29	$0.00	$57.82
104976	Wall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$41.37	$0.00	$51.90
104977	Wall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$35.46	$0.00	$45.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104978	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$31.65	$0.00	$40.42
104979	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$28.13	$0.00	$36.90
104980	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$24.61	$0.00	$33.38
104981	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$21.10	$0.00	$29.87
104982	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$38.44	$0.00	$48.02
104983	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$34.16	$0.00	$43.74
104984	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$29.89	$0.00	$39.47
104985	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$9.58	$25.62	$0.00	$35.20
104986	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$45.21	$0.00	$55.74
104987	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$40.19	$0.00	$50.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104988	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$35.17	$0.00	$45.70
104989	Wall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$10.53	$30.15	$0.00	$40.68
104990	Wall Louvers Metal Or Aluminum – Residential Up To 35% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$14.19	$0.00	$22.96
104991	Wall Louvers Metal Or Aluminum – Residential Up To 45% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$13.01	$0.00	$21.78
104992	Wall Louvers Metal Or Aluminum – Residential Up To 55% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$11.82	$0.00	$20.59
104993	Wall Louvers Metal Or Aluminum – Residential Up To 65% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$10.64	$0.00	$19.41
104994	Wall Louvers Vinyl – Residential Up To 35% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$9.46	$0.00	$18.23
104995	Wall Louvers Vinyl – Residential Up To 45% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$8.28	$0.00	$17.05
104996	Wall Louvers Vinyl – Residential Up To 55% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$7.09	$0.00	$15.86
104997	Wall Louvers Vinyl – Residential Up To 65% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$5.91	$0.00	$14.68
104998	Wall Louvers Wood – Residential Up To 35% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$20.55	$0.00	$29.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
104999	Wall Louvers Wood – Residential Up To 45% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$18.26	$0.00	$27.03
105000	Wall Louvers Wood – Residential Up To 55% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$15.98	$0.00	$24.75
105001	Wall Louvers Wood – Residential Up To 65% Louver Free Area Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$13.70	$0.00	$22.47
105002	Screenwall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$22.34	$0.00	$29.86
105003	Screenwall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$19.86	$0.00	$27.38
105004	Screenwall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$17.37	$0.00	$24.89
105005	Screenwall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$14.90	$0.00	$22.42
105006	Screenwall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$27.12	$0.00	$35.23
105007	Screenwall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$24.11	$0.00	$32.22
105008	Screenwall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$21.10	$0.00	$29.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105009	Screenwall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$18.09	$0.00	$26.20
105010	Screenwall Louvers Metal Or Aluminum – Architectural Up To 35% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$31.91	$0.00	$40.68
105011	Screenwall Louvers Metal Or Aluminum – Architectural Up To 45% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$28.37	$0.00	$37.14
105012	Screenwall Louvers Metal Or Aluminum – Architectural Up To 55% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$24.82	$0.00	$33.59
105013	Screenwall Louvers Metal Or Aluminum – Architectural Up To 65% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$21.27	$0.00	$30.04
105014	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$18.99	$0.00	$26.51
105015	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$16.88	$0.00	$24.40
105016	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$14.77	$0.00	$22.29
105017	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 2" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$7.52	$12.67	$0.00	$20.19
105018	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$23.06	$0.00	$31.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105019	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$20.49	$0.00	$28.60
105020	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$17.93	$0.00	$26.04
105021	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 4" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.11	$15.37	$0.00	$23.48
105022	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 35% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$27.12	$0.00	$35.89
105023	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 45% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$24.11	$0.00	$32.88
105024	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 55% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$21.10	$0.00	$29.87
105025	Screenwall Louvers Metal Or Aluminum – Mechanical Or Industrial Up To 65% Louver Free Area Up To 6" Blade Include frame, flashing, caulking, complete thermal and weather seals. With PVDF or equal finish	SF	$8.77	$18.09	$0.00	$26.86
105026	Sunshade – Aluminum Louver Or Flat Blade Up To 8" Deep Include frame, flashing, caulking, outrigger supports, and mounting brackets. With PVDF or equal finish	SF	$13.17	$53.20	$0.00	$66.37
105027	Sunshade – Aluminum Airfoil Blade Up To 8" Deep Include frame, flashing, caulking, outrigger supports, and mounting brackets. With PVDF or equal finish	SF	$13.17	$65.01	$0.00	$78.18
105028	Sunshade – Aluminum Tube Blade Up To 8" Deep Include frame, flashing, caulking, outrigger supports, and mounting brackets. With PVDF or equal finish	SF	$13.17	$70.92	$0.00	$84.09
105029	[Modifier] Blank Off Panel	SF	$0.00	$4.13	$0.00	$4.13
105030	[Modifier] Motorized Louver	SF	$0.00	$11.82	$0.00	$11.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105031	[Modifier] Hurricane Louver	SF	$0.00	$5.91	$0.00	$5.91
105032	[Modifier] Quantity Premium - Louvers (51-100 SF) Quantity premium can be used when total square footage in section 08-91-19 Fixed Louvers are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.27	$0.00	$0.00	$5.27
105033	[Modifier] Quantity Premium - Louvers (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-91-19 Fixed Louvers are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.53	$0.00	$0.00	$10.53

09-00-00 Finishes

Includes fasteners and clips to substrate, casing, and corner beads. Division Nine quantities are based on greater than 500 square feet unless otherwise noted.

09-00-00 Finishes

Includes fasteners and clips to substrate, casing, and corner beads. Division Nine quantities are based on greater than 500 square feet unless otherwise noted.

09-01-00 Maintenance of Finishes

09-01-20 Maintenance of Plaster and Gypsum Board

105034	Patch Gypsum Wallboard (< 5 SF) Includes new GWB patch with applicable joint reinforcement and fasteners. Match adjacent finish and texture	EA	$135.76	$15.49	$0.00	$151.25
105035	Patch Gypsum Wallboard (5-50 SF) Includes new GWB patch with applicable joint reinforcement and fasteners. Match adjacent finish and texture	SF	$10.86	$2.22	$0.00	$13.08
105036	Patch Gypsum Wallboard (51-100 SF) Includes new GWB patch with applicable joint reinforcement and fasteners. Match adjacent finish and texture	SF	$5.43	$2.22	$0.00	$7.65
105037	Patch Gypsum Wallboard (101-500 SF) Includes new GWB patch with applicable joint reinforcement and fasteners. Match adjacent finish and texture	SF	$2.17	$2.22	$0.00	$4.39
105038	Patch Plaster Wall (< 5 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	EA	$162.91	$15.49	$0.00	$178.40
105039	Patch Plaster Wall (5-50 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	SF	$13.58	$3.32	$0.00	$16.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105040	Patch Plaster Wall (51-100 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	SF	$6.78	$3.32	$0.00	$10.10
105041	Patch Plaster Wall (101-500 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	SF	$2.71	$3.32	$0.00	$6.03
105042	Patch Plaster Wall (501 - 1,000 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	SF	$2.47	$2.86	$0.00	$5.33
105043	Patch Plaster Wall (Over 1,000 SF) Includes up to three coats of plaster. Includes infill for voids to depth of lath or original substrate until flush. Match adjacent finish and texture	SF	$2.37	$2.74	$0.00	$5.11
	09-01-30 Maintenance of Tiling					
105044	Re-Grout Floor / Wall Tile With Non-Epoxy Grout Includes removal of existing grout, cleaning, and re-grouting	SF	$3.97	$1.26	$0.00	$5.23
105045	Re-Grout Floor / Wall Tile With Epoxy Grout Includes removal of existing grout, cleaning, and re-grouting	SF	$7.24	$2.13	$0.00	$9.37
105046	Clean and Seal Quarry Tile Floor SaniMAX Sealer or equal	SF	$4.76	$2.32	$0.00	$7.08
105047	Clean and Seal CT Wall Tile SaniMAX ChromaGLAZE or equal	SF	$6.38	$2.94	$0.00	$9.32
	09-01-60 Maintenance of Flooring					
105048	Strip Existing Wax Floor Finish - Light Buildup	SF	$0.08	$0.07	$0.02	$0.17
105049	Strip Existing Wax Floor Finish - Heavy Buildup	SF	$0.25	$0.12	$0.07	$0.44
105050	Floor Buffing/Polishing - Up to 1,000 SF Buffing and Polishing is for 1 coat of wax applied and finished	SF	$0.13	$0.10	$0.03	$0.26
105051	Floor Buffing/Polishing - Over 1,000 SF Buffing and Polishing is for 1 coat of wax applied and finished	SF	$0.07	$0.10	$0.02	$0.19
	09-05-00 Common Work Results for Finishes					
	09-05-00 Common Work Results for Finishes					
105052	Moisture Control Membrane (New Floor Slabs) – Up To 1.5 LBS / SF Over 24 Hrs. Includes both hydrostatic and non-hydrostatic applications, For use on new slabs prior to placing adhered finish flooring	SF	$1.00	$0.27	$0.00	$1.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105053	Moisture Control Membrane (New Floor Slabs) – Up To 3 LBS / SF Over 24 Hrs. Includes both hydrostatic and non-hydrostatic applications, For use on new slabs prior to placing adhered finish flooring	SF	$1.00	$3.19	$0.00	$4.19
105054	Moisture Control Membrane (New Floor Slabs) – Greater Than 3 LBS / SF Over 24 Hrs. Includes both hydrostatic and non-hydrostatic applications, For use on new slabs prior to placing adhered finish flooring	SF	$1.00	$5.33	$0.00	$6.33
105055	Moisture Control Membrane (Existing Floor Slabs) – Per Coat Topical epoxy	SF	$1.00	$0.59	$0.00	$1.59
105056	Acoustic Underlayment 1/8" Adhered or loose laid resilient closed cell rubber mat	SF	$1.55	$0.63	$0.00	$2.18
105057	Acoustic Underlayment 1/4" Adhered or loose laid resilient closed cell rubber mat	SF	$1.55	$0.74	$0.00	$2.29
105058	Acoustic Underlayment 3/8" Adhered or loose laid resilient closed cell rubber mat	SF	$1.55	$0.85	$0.00	$2.40
105059	Acoustic Underlayment 1/2" Adhered or loose laid resilient closed cell rubber mat	SF	$1.55	$0.96	$0.00	$2.51
105060	Floor Flash Patch Concrete Includes a blend of adhesive removal, flash patching, grinding, leveling, bead blasting, and other necessary preparation to insure a proper substrate for new finishes. Can be used on existing floors	SF	$1.26	$0.57	$0.00	$1.83
105061	[Modifier] Quantity Premium - Common Work Results for Finishes (101-500 SF) Quantity premium can be used when total square footage in section 09-05-00 Common Work Results for Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105062	[Modifier] Quantity Premium - Common Work Results for Finishes (51-100 SF) Quantity premium can be used when total square footage in section 09-05-00 Common Work Results for Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105063	[Modifier] Quantity Premium - Common Work Results for Finishes (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-05-00 Common Work Results for Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-05-61 Common Work Results for Flooring Preparation					
105064	Sandblast Finish Concrete Slab	SF	$2.47	$0.00	$0.00	$2.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105065	Acid Wash Finish - Concrete	SF	$1.21	$0.85	$0.00	$2.06
105066	Power Grind/Sand Concrete Floor For use in cleaning/prep new or exisiting floor for finsh	SF	$0.72	$0.00	$0.38	$1.10
105067	Pressure Wash Concrete Floor	SF	$0.49	$0.00	$0.15	$0.64

09-20-00 Plaster and Gypsum Board

09-21-00 Plaster and Gypsum Board Assemblies

09-21-13 Plaster Assemblies

105068	Cement Plaster On Lath (Per Side) System includes up to three coats and all miscellaneous screeds, aid, termination, expanded metals / wire, building paper, fasteners, flashings, sealants and textures	SF	$5.74	$1.74	$0.00	$7.48
105069	Cement Plaster On Lath (Per Side) – Complex Textures System includes up to three coats and all miscellaneous screeds, aid, termination, expanded metals / wire, building paper, fasteners, flashings, sealants and textures	SF	$6.89	$1.74	$0.00	$8.63
105070	Cement Plaster On Lath (Per Side) – Quick Setting Cement Plaster System includes up to three coats and all miscellaneous screeds, aid, termination, expanded metals / wire, building paper, fasteners, flashings, sealants and textures	SF	$6.89	$1.74	$0.00	$8.63
105071	Cement Plaster On Backer Board (Per Side) Includes cement plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$5.16	$1.66	$0.00	$6.82
105072	Cement Plaster On Backer Board (Per Side) – Complex Textures Includes cement plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$6.20	$1.66	$0.00	$7.86
105073	Cement Plaster On Backer Board (Per Side) – Quick Setting Cement Plaster Includes cement plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$6.20	$1.66	$0.00	$7.86
105074	Gypsum Plaster On Backer Board (Per Side) Includes gypsum plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$4.93	$1.66	$0.00	$6.59
105075	Gypsum Plaster On Backer Board (Per Side) – Complex Textures Includes gypsum plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$5.92	$1.66	$0.00	$7.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105076	Gypsum Plaster On Backer Board (Per Side) – Quick Setting Cement Plaster Includes gypsum plaster up to ½" thick on backer board substrate. Match surrounding texture	SF	$5.92	$1.66	$0.00	$7.58
105077	Plaster Veneer (Per Side) Base and finish coat over solid substrates. Cement or gypsum plaster. Match surrounding texture	SF	$3.37	$0.83	$0.00	$4.20
105078	Plaster Veneer (Per Side) – Complex Textures Base and finish coat over solid substrates. Cement or gypsum plaster. Match surrounding texture	SF	$4.05	$0.83	$0.00	$4.88
105079	Plaster Veneer (Per Side) – Quick Setting Cement Plaster Base and finish coat over solid substrates. Cement or gypsum plaster. Match surrounding texture	SF	$4.05	$0.83	$0.00	$4.88
105080	Venetian Plaster (Per Side) Base and finish coat over solid substrates. Cement or gypsum plaster. No lath. Match surrounding texture	SF	$12.14	$2.77	$0.00	$14.91
105081	Venetian Plaster (Per Side) – Complex Textures Base and finish coat over solid substrates. Cement or gypsum plaster. No lath. Match surrounding texture	SF	$14.57	$2.77	$0.00	$17.34
105082	Venetian Plaster (Per Side) – Quick Setting Cement Plaster Base and finish coat over solid substrates. Cement or gypsum plaster. No lath. Match surrounding texture	SF	$14.57	$2.77	$0.00	$17.34
105083	Synthetic Plaster Soffit On Backer Board Includes lightweight, up to two coat synthetic plaster on a backer board substrate. Match surrounding texture	SF	$6.31	$3.50	$0.00	$9.81
105084	Synthetic Plaster Soffit On Backer Board – Complex Textures Includes lightweight, up to two coat synthetic plaster on a backer board substrate. Match surrounding texture	SF	$7.58	$3.50	$0.00	$11.08
105085	Synthetic Plaster Soffit On Backer Board – Quick Setting Cement Plaster Includes lightweight, up to two coat synthetic plaster on a backer board substrate. Match surrounding texture	SF	$7.58	$3.50	$0.00	$11.08
105086	Plaster Soffit On Backer Board Includes lightweight, up to two coat plaster on a backer board substrate. Match surrounding texture	SF	$11.48	$3.50	$0.00	$14.98
105087	Plaster Soffit On Backer Board – Complex Textures Includes lightweight, up to two coat plaster on a backer board substrate. Match surrounding texture	SF	$13.78	$3.50	$0.00	$17.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105088	Plaster Soffit On Backer Board – Quick Setting Cement Plaster Includes lightweight, up to two coat plaster on a backer board substrate. Match surrounding texture	SF	$13.78	$3.50	$0.00	$17.28
105089	Plaster Ceiling System Includes bearing main and secondary rail support grid, and/or light gauge framing, with lath suitable to application. Control and edge trims included	SF	$11.48	$3.50	$0.00	$14.98
105090	Plaster Ceiling System – Complex Textures Includes bearing main and secondary rail support grid, and/or light gauge framing, with lath suitable to application. Control and edge trims included	SF	$13.78	$3.50	$0.00	$17.28
105091	Plaster Ceiling System – Quick Setting Cement Plaster Includes bearing main and secondary rail support grid, and/or light gauge framing, with lath suitable to application. Control and edge trims included	SF	$13.78	$3.50	$0.00	$17.28
105092	[Modifier] Quantity Premium - Plaster Assemblies (101-500 SF) Quantity premium can be used when total square footage in section 09-21-13 Plaster Assemblies are within stated quantities. Can be applied cumulatively to base line items. Applies to all plaster items.	SF	$2.17	$0.00	$0.00	$2.17
105093	[Modifier] Quantity Premium - Plaster Assemblies (51 -100 SF) Quantity premium can be used when total square footage in section 09-21-13 Plaster Assemblies are within stated quantities. Can be applied cumulatively to base line items. Applies to all plaster items.	SF	$5.43	$0.00	$0.00	$5.43
105094	[Modifier] Quantity Premium - Plaster Assemblies (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-21-13 Plaster Assemblies are within stated quantities. Can be applied cumulatively to base line items. Applies to all plaster items.	SF	$10.86	$0.00	$0.00	$10.86

09-21-16 Gypsum Board Assemblies

All assemblies are assumed Level 4 finish or equal, ready for paint, covering or other specified wall treatments

105095	Partition Type A1 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.32	$4.33	$0.00	$10.65
105096	Partition Type A2 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.95	$4.75	$0.00	$11.70
105097	Partition Type A3 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.35	$4.35	$0.00	$10.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105098	Partition Type A4 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.97	$4.78	$0.00	$11.75
105099	Partition Type A5 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.97	$4.78	$0.00	$11.75
105100	Partition Type A6 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; 3" sab; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.26	$4.96	$0.00	$12.22
105101	Partition Type B1 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.12	$5.56	$0.00	$13.68
105102	Partition Type B2 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.74	$5.99	$0.00	$14.73
105103	Partition Type B3 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.14	$5.60	$0.00	$13.74
105104	Partition Type B4 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.76	$6.01	$0.00	$14.77
105105	Partition Type B5 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.83	$6.06	$0.00	$14.89
105106	Partition Type B6 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.45	$6.49	$0.00	$15.94
105107	Partition Type C1 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.04	$6.88	$0.00	$16.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105108	Partition Type C2 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.66	$7.30	$0.00	$17.96
105109	Partition Type C3 – 20 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.07	$6.90	$0.00	$16.97
105110	Partition Type C4 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.68	$7.33	$0.00	$18.01
105111	Partition Type C5 – 20 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.99	$7.55	$0.00	$18.54
105112	Partition Type C6 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.62	$7.97	$0.00	$19.59
105113	Partition Type D1 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.94	$9.56	$0.00	$23.50
105114	Partition Type D2 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$14.56	$9.98	$0.00	$24.54
105115	Partition Type D3 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.97	$9.59	$0.00	$23.56
105116	Partition Type D4 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$14.59	$10.01	$0.00	$24.60
105117	Partition Type D5 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$15.03	$10.30	$0.00	$25.33
105118	Partition Type D6 – 20 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$15.65	$10.73	$0.00	$26.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105119	Partition Type E1 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$17.97	$12.32	$0.00	$30.29
105120	Partition Type E2 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.58	$12.75	$0.00	$31.33
105121	Partition Type E3 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.00	$12.35	$0.00	$30.35
105122	Partition Type E4 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.62	$12.78	$0.00	$31.40
105123	Partition Type E5 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$19.06	$13.07	$0.00	$32.13
105124	Partition Type E6 – 20 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$19.68	$13.49	$0.00	$33.17
105125	Partition Type F1 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.32	$4.33	$0.00	$10.65
105126	Partition Type F2 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$6.93	$4.75	$0.00	$11.68
105127	Partition Type F3 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.41	$5.07	$0.00	$12.48
105128	Partition Type F4 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.03	$5.50	$0.00	$13.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105129	Partition Type F5 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.46	$5.80	$0.00	$14.26
105130	Partition Type F6 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.07	$6.23	$0.00	$15.30
105131	Partition Type G1 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.75	$5.31	$0.00	$13.06
105132	Partition Type G2 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.36	$5.74	$0.00	$14.10
105133	Partition Type G3 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.83	$6.06	$0.00	$14.89
105134	Partition Type G4 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.45	$6.49	$0.00	$15.94
105135	Partition Type G5 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.88	$6.78	$0.00	$16.66
105136	Partition Type G6 – 20 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.50	$7.19	$0.00	$17.69
105137	Partition Type H1 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.80	$6.03	$0.00	$14.83
105138	Partition Type H2 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.42	$6.45	$0.00	$15.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105139	Partition Type H3 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.60	$6.58	$0.00	$16.18
105140	Partition Type H4 – 20 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.22	$7.01	$0.00	$17.23
105141	Partition Type J1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 7/8" (H) channel; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$2.78	$1.91	$0.00	$4.69
105142	Partition Type J2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$3.22	$2.21	$0.00	$5.43
105143	Partition Type J3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 1/2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$3.56	$2.44	$0.00	$6.00
105144	Partition Type J4 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$4.02	$2.77	$0.00	$6.79
105145	Partition Type K1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 type "x" gwb; 1/2" (R) channel; acoustic sealant at floor and deck; partition to deck	SF	$2.67	$1.83	$0.00	$4.50
105146	Partition Type L1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$2.63	$1.80	$0.00	$4.43
105147	Partition Type L2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$2.78	$1.91	$0.00	$4.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105148	Partition Type L3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$2.94	$2.02	$0.00	$4.96
105149	Partition Type M1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud; 1 1/2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$2.94	$2.02	$0.00	$4.96
105150	Partition Type M2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud; 2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$3.25	$2.23	$0.00	$5.48
105151	Partition Type M3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$3.56	$2.44	$0.00	$6.00
105152	Partition Type N1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; acoustic sealant at floor	SF	$4.34	$2.97	$0.00	$7.31
105153	Partition Type N2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$4.96	$3.40	$0.00	$8.36
105154	Partition Type N3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; acoustic sealant at floor	SF	$4.37	$3.00	$0.00	$7.37
105155	Partition Type N4 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$4.99	$3.43	$0.00	$8.42
105156	Partition Type N5 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; acoustic sealant at floor	SF	$5.12	$3.51	$0.00	$8.63
105157	Partition Type N6 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$5.73	$3.93	$0.00	$9.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105158	Partition Type P1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$3.88	$2.66	$0.00	$6.54
105159	Partition Type P2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.50	$3.08	$0.00	$7.58
105160	Partition Type P3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$3.90	$2.68	$0.00	$6.58
105161	Partition Type P4 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.52	$3.11	$0.00	$7.63
105162	Partition Type P5 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.65	$3.18	$0.00	$7.83
105163	Partition Type P6 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.27	$3.61	$0.00	$8.88
105164	Partition Type R1 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$5.73	$3.93	$0.00	$9.66
105165	Partition Type R2 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$6.35	$4.35	$0.00	$10.70
105166	Partition Type R3 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$5.76	$3.96	$0.00	$9.72
105167	Partition Type R4 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$6.38	$4.38	$0.00	$10.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105168	Partition Type R5 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$6.51	$4.46	$0.00	$10.97
105169	Partition Type R6 – 20 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$7.13	$4.89	$0.00	$12.02
105170	Partition Type S1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$8.49	$5.81	$0.00	$14.30
105171	Partition Type S2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$9.11	$6.24	$0.00	$15.35
105172	Partition Type S3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$9.29	$6.38	$0.00	$15.67
105173	Partition Type S4 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$9.91	$6.80	$0.00	$16.71
105174	Partition Type T1 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$8.80	$6.03	$0.00	$14.83
105175	Partition Type T2 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$9.42	$6.45	$0.00	$15.87
105176	Partition Type T3 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$9.60	$6.58	$0.00	$16.18
105177	Partition Type T4 – 20 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$10.22	$7.01	$0.00	$17.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105178	Partition Type A1 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.27	$4.97	$0.00	$12.24
105179	Partition Type A2 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.98	$5.47	$0.00	$13.45
105180	Partition Type A3 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.30	$5.01	$0.00	$12.31
105181	Partition Type A4 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.02	$5.50	$0.00	$13.52
105182	Partition Type A5 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.02	$5.50	$0.00	$13.52
105183	Partition Type A6 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; 3" sab; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.34	$5.72	$0.00	$14.06
105184	Partition Type B1 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.34	$6.40	$0.00	$15.74
105185	Partition Type B2 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.05	$6.89	$0.00	$16.94
105186	Partition Type B3 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.37	$6.42	$0.00	$15.79
105187	Partition Type B4 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.09	$6.92	$0.00	$17.01
105188	Partition Type B5 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.15	$6.96	$0.00	$17.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105189	Partition Type B6 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.87	$7.45	$0.00	$18.32
105190	Partition Type C1 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.55	$7.91	$0.00	$19.46
105191	Partition Type C2 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.26	$8.40	$0.00	$20.66
105192	Partition Type C3 – 18 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.58	$7.94	$0.00	$19.52
105193	Partition Type C4 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.29	$8.44	$0.00	$20.73
105194	Partition Type C5 – 18 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.65	$8.68	$0.00	$21.33
105195	Partition Type C6 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.36	$9.17	$0.00	$22.53
105196	Partition Type D1 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$16.03	$11.00	$0.00	$27.03
105197	Partition Type D2 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$16.74	$11.48	$0.00	$28.22
105198	Partition Type D3 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$16.07	$11.03	$0.00	$27.10
105199	Partition Type D4 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$16.78	$11.52	$0.00	$28.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105200	Partition Type D5 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$17.28	$11.85	$0.00	$29.13
105201	Partition Type D6 – 18 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.00	$12.34	$0.00	$30.34
105202	Partition Type E1 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$20.67	$14.16	$0.00	$34.83
105203	Partition Type E2 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$21.38	$14.66	$0.00	$36.04
105204	Partition Type E3 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$20.70	$14.20	$0.00	$34.90
105205	Partition Type E4 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$21.41	$14.69	$0.00	$36.10
105206	Partition Type E5 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$21.91	$15.03	$0.00	$36.94
105207	Partition Type E6 – 18 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$22.62	$15.52	$0.00	$38.14
105208	Partition Type F1 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.27	$4.97	$0.00	$12.24
105209	Partition Type F2 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.98	$5.47	$0.00	$13.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105210	Partition Type F3 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.51	$5.84	$0.00	$14.35
105211	Partition Type F4 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.22	$6.33	$0.00	$15.55
105212	Partition Type F5 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.73	$6.67	$0.00	$16.40
105213	Partition Type F6 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.44	$7.17	$0.00	$17.61
105214	Partition Type G1 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.91	$6.11	$0.00	$15.02
105215	Partition Type G2 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.63	$6.59	$0.00	$16.22
105216	Partition Type G3 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.15	$6.96	$0.00	$17.11
105217	Partition Type G4 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.87	$7.45	$0.00	$18.32
105218	Partition Type G5 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.36	$7.79	$0.00	$19.15
105219	Partition Type G6 – 18 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.08	$8.28	$0.00	$20.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105220	Partition Type H1 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.12	$6.94	$0.00	$17.06
105221	Partition Type H2 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.83	$7.42	$0.00	$18.25
105222	Partition Type H3 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.04	$7.57	$0.00	$18.61
105223	Partition Type H4 – 18 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.75	$8.06	$0.00	$19.81
105224	Partition Type J1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 7/8" (H) channel; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$3.21	$2.19	$0.00	$5.40
105225	Partition Type J2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$3.70	$2.54	$0.00	$6.24
105226	Partition Type J3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 1/2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$4.09	$2.82	$0.00	$6.91
105227	Partition Type J4 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$4.63	$3.18	$0.00	$7.81
105228	Partition Type K1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 type "x" gwb; 1/2" (R) channel; acoustic sealant at floor and deck; partition to deck	SF	$3.06	$2.11	$0.00	$5.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105229	Partition Type L1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.02	$2.07	$0.00	$5.09
105230	Partition Type L2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.21	$2.19	$0.00	$5.40
105231	Partition Type L3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.38	$2.32	$0.00	$5.70
105232	Partition Type M1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud; 1 1/2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$3.38	$2.32	$0.00	$5.70
105233	Partition Type M2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud; 2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$3.74	$2.56	$0.00	$6.30
105234	Partition Type M3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$4.09	$2.82	$0.00	$6.91
105235	Partition Type N1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; acoustic sealant at floor	SF	$4.99	$3.43	$0.00	$8.42
105236	Partition Type N2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$5.70	$3.91	$0.00	$9.61
105237	Partition Type N3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; acoustic sealant at floor	SF	$5.03	$3.45	$0.00	$8.48
105238	Partition Type N4 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$5.74	$3.94	$0.00	$9.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105239	Partition Type N5 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; acoustic sealant at floor	SF	$5.88	$4.03	$0.00	$9.91
105240	Partition Type N6 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$6.59	$4.52	$0.00	$11.11
105241	Partition Type P1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.45	$3.06	$0.00	$7.51
105242	Partition Type P2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.16	$3.55	$0.00	$8.71
105243	Partition Type P3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.48	$3.08	$0.00	$7.56
105244	Partition Type P4 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.20	$3.57	$0.00	$8.77
105245	Partition Type P5 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.35	$3.67	$0.00	$9.02
105246	Partition Type P6 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$6.06	$4.16	$0.00	$10.22
105247	Partition Type R1 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$6.59	$4.52	$0.00	$11.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105248	Partition Type R2 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$7.30	$5.01	$0.00	$12.31
105249	Partition Type R3 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$6.62	$4.55	$0.00	$11.17
105250	Partition Type R4 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$7.34	$5.03	$0.00	$12.37
105251	Partition Type R5 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$7.49	$5.13	$0.00	$12.62
105252	Partition Type R6 – 18 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$8.20	$5.62	$0.00	$13.82
105253	Partition Type S1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$9.76	$6.69	$0.00	$16.45
105254	Partition Type S2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$10.48	$7.18	$0.00	$17.66
105255	Partition Type S3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$10.68	$7.33	$0.00	$18.01
105256	Partition Type S4 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$11.40	$7.81	$0.00	$19.21
105257	Partition Type T1 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$10.12	$6.94	$0.00	$17.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105258	Partition Type T2 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$10.83	$7.42	$0.00	$18.25
105259	Partition Type T3 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$11.04	$7.57	$0.00	$18.61
105260	Partition Type T4 – 18 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$11.75	$8.06	$0.00	$19.81
105261	Partition Type A1 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.90	$5.41	$0.00	$13.31
105262	Partition Type A2 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.68	$5.95	$0.00	$14.63
105263	Partition Type A3 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.94	$5.45	$0.00	$13.39
105264	Partition Type A4 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.72	$5.97	$0.00	$14.69
105265	Partition Type A5 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.72	$5.97	$0.00	$14.69
105266	Partition Type A6 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb each side; 6" metal studs; 3" sab; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.06	$6.20	$0.00	$15.26
105267	Partition Type B1 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.15	$6.96	$0.00	$17.11
105268	Partition Type B2 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 3-5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.92	$7.48	$0.00	$18.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105269	Partition Type B3 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.19	$6.98	$0.00	$17.17
105270	Partition Type B4 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.96	$7.52	$0.00	$18.48
105271	Partition Type B5 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.04	$7.57	$0.00	$18.61
105272	Partition Type B6 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 2 layers of 5/8 type "x" gwb other side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.81	$8.11	$0.00	$19.92
105273	Partition Type C1 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.55	$8.59	$0.00	$21.14
105274	Partition Type C2 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.32	$9.13	$0.00	$22.45
105275	Partition Type C3 – 16 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.59	$8.63	$0.00	$21.22
105276	Partition Type C4 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.36	$9.17	$0.00	$22.53
105277	Partition Type C5 – 16 GA Metal Stud Or Equal 2hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.75	$9.42	$0.00	$23.17
105278	Partition Type C6 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$14.52	$9.96	$0.00	$24.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105279	Partition Type D1 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$17.42	$11.95	$0.00	$29.37
105280	Partition Type D2 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.20	$12.48	$0.00	$30.68
105281	Partition Type D3 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$17.47	$11.98	$0.00	$29.45
105282	Partition Type D4 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.24	$12.52	$0.00	$30.76
105283	Partition Type D5 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$18.78	$12.88	$0.00	$31.66
105284	Partition Type D6 – 16 GA Metal Stud Or Equal 3 hr rated; 3 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$19.56	$13.41	$0.00	$32.97
105285	Partition Type E1 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$22.46	$15.41	$0.00	$37.87
105286	Partition Type E2 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$23.24	$15.93	$0.00	$39.17
105287	Partition Type E3 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$22.51	$15.43	$0.00	$37.94
105288	Partition Type E4 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$23.28	$15.97	$0.00	$39.25
105289	Partition Type E5 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$23.82	$16.33	$0.00	$40.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105290	Partition Type E6 – 16 GA Metal Stud Or Equal 4 hr rated; 4 layers 5/8 type "x" gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$24.59	$16.87	$0.00	$41.46
105291	Partition Type F1 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$7.90	$5.41	$0.00	$13.31
105292	Partition Type F2 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$8.67	$5.95	$0.00	$14.62
105293	Partition Type F3 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.26	$6.34	$0.00	$15.60
105294	Partition Type F4 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.03	$6.88	$0.00	$16.91
105295	Partition Type F5 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.57	$7.25	$0.00	$17.82
105296	Partition Type F6 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.35	$7.79	$0.00	$19.14
105297	Partition Type G1 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$9.68	$6.64	$0.00	$16.32
105298	Partition Type G2 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 2 1/2" metal CH studs; 1 1/2" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.45	$7.17	$0.00	$17.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105299	Partition Type G3 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.04	$7.57	$0.00	$18.61
105300	Partition Type G4 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 4" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.81	$8.11	$0.00	$19.92
105301	Partition Type G5 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.35	$8.47	$0.00	$20.82
105302	Partition Type G6 – 16 GA Metal Stud Or Equal 2 hr rated; 2 layers 5/8 type "x" gwb one side; 1" type "x" gypsum liner panel other side; 6" metal CH studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$13.13	$9.00	$0.00	$22.13
105303	Partition Type H1 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$10.99	$7.53	$0.00	$18.52
105304	Partition Type H2 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$11.78	$8.07	$0.00	$19.85
105305	Partition Type H3 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.01	$8.23	$0.00	$20.24
105306	Partition Type H4 – 16 GA Metal Stud Or Equal 1 hr rated; 5/8 type "x" GWB each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor; fire resistive joint system at deck; partition to deck	SF	$12.78	$8.76	$0.00	$21.54
105307	Partition Type J1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 7/8" (H) channel; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$3.48	$2.39	$0.00	$5.87
105308	Partition Type J2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$4.02	$2.75	$0.00	$6.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105309	Partition Type J3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 1/2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$4.45	$3.06	$0.00	$7.51
105310	Partition Type J4 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2" (Z) furring; acoustic sealant at floor; Partition to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, partition can stop a minimum of 6" above finished ceiling	SF	$5.04	$3.45	$0.00	$8.49
105311	Partition Type K1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 type "x" gwb; 1/2" (R) channel; acoustic sealant at floor and deck; partition to deck	SF	$3.34	$2.29	$0.00	$5.63
105312	Partition Type L1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.29	$2.26	$0.00	$5.55
105313	Partition Type L2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.48	$2.39	$0.00	$5.87
105314	Partition Type L3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$3.68	$2.52	$0.00	$6.20
105315	Partition Type M1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 1 5/8" metal stud; 1 1/2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$3.68	$2.52	$0.00	$6.20
105316	Partition Type M2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 2 1/2" metal stud; 2" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$4.07	$2.79	$0.00	$6.86
105317	Partition Type M3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb; 3 5/8" metal stud; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$4.45	$3.06	$0.00	$7.51
105318	Partition Type N1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; acoustic sealant at floor	SF	$5.42	$3.72	$0.00	$9.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105319	Partition Type N2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 3 5/8" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$6.20	$4.25	$0.00	$10.45
105320	Partition Type N3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; acoustic sealant at floor	SF	$5.46	$3.75	$0.00	$9.21
105321	Partition Type N4 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 5 1/4" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$6.23	$4.28	$0.00	$10.51
105322	Partition Type N5 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; acoustic sealant at floor	SF	$6.39	$4.39	$0.00	$10.78
105323	Partition Type N6 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to a minimum of 4" above ceiling; 6" metal studs to deck; 3" acoustical batts to a minimum 4" above ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor	SF	$7.16	$4.91	$0.00	$12.07
105324	Partition Type P1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.84	$3.32	$0.00	$8.16
105325	Partition Type P2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 2 1/2" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.61	$3.85	$0.00	$9.46
105326	Partition Type P3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$4.88	$3.35	$0.00	$8.23
105327	Partition Type P4 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 3 5/8" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.66	$3.89	$0.00	$9.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105328	Partition Type P5 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; acoustic sealant at floor and compressible gasket at ceiling	SF	$5.81	$3.99	$0.00	$9.80
105329	Partition Type P6 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side to underside of ceiling; 4" metal studs to underside of ceiling; 3" acoustical batts to underside of ceiling; 3" acoustical batts above ceiling - 2' each side of partition; acoustic sealant at floor and compressible gasket at ceiling	SF	$6.59	$4.51	$0.00	$11.10
105330	Partition Type R1 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$7.16	$4.91	$0.00	$12.07
105331	Partition Type R2 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$7.94	$5.45	$0.00	$13.39
105332	Partition Type R3 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$7.20	$4.95	$0.00	$12.15
105333	Partition Type R4 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 4" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$7.98	$5.47	$0.00	$13.45
105334	Partition Type R5 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$8.13	$5.57	$0.00	$13.70
105335	Partition Type R6 – 16 GA Metal Stud Or Equal non-rated; 5/8 gwb each side; 6" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$8.91	$6.11	$0.00	$15.02
105336	Partition Type S1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$10.61	$7.27	$0.00	$17.88
105337	Partition Type S2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 2 1/2" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$11.38	$7.80	$0.00	$19.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105338	Partition Type S3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$11.62	$7.97	$0.00	$19.59
105339	Partition Type S4 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows of 3 5/8" metal studs to deck; 3" acoustical batts; acoustic sealant at floor; GWB to deck with acoustic sealant only where a no ceiling condition occurs. Where a ceiling occurs, stop gwb a minimum of 6" above finished ceiling	SF	$12.40	$8.50	$0.00	$20.90
105340	Partition Type T1 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$10.99	$7.53	$0.00	$18.52
105341	Partition Type T2 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 2 1/2" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$11.78	$8.07	$0.00	$19.85
105342	Partition Type T3 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; acoustic sealant at floor and deck; partition to deck	SF	$12.01	$8.23	$0.00	$20.24
105343	Partition Type T4 – 16 GA Metal Stud Or Equal non-rated; 1 layer 5/8 gwb each side; 2 rows 3 5/8" metal studs; 3" acoustical batts; acoustic sealant at floor and deck; partition to deck	SF	$12.78	$8.76	$0.00	$21.54
105344	GWB Ceiling System Gypsum board on suspended load bearing main and secondary rail support grid or light gauge framing. Control and edge joint trims included	SF	$4.86	$6.11	$0.00	$10.97
105345	GWB Soffit System Vertical Includes 3 5/8" metal stud; 1 layer of 5/8" GWB fully finished	SF	$6.41	$3.99	$0.00	$10.40
105346	GWB Soffit System Horizontal Gypsum board on load bearing main and secondary rail support grid, and/or light gauge framing. Control and edge joint trims included	SF	$6.41	$4.32	$0.00	$10.73
105347	GWB Bulkhead/Soffit - 5/8" Includes GWB, beads, casing, taped and finished (level 4)	SF	$3.16	$0.89	$0.00	$4.05
105348	GWB Bulkhead/Soffit - 1/2" Includes GWB, beads, casing, taped and finished (level 4)	SF	$3.16	$0.78	$0.00	$3.94
105349	GWB Taped and Finished – 1/2" Thick Includes single layer of GWB taped and finished. Partition systems already include this item	SF	$0.93	$1.04	$0.00	$1.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105350	GWB Taped and Finished – 1/2" Thick (Water Resistant) Includes single layer of GWB taped and finished. Partition systems already include this item	SF	$0.93	$1.08	$0.00	$2.01
105351	GWB Taped and Finished – 5/8" Thick Includes single layer of GWB taped and finished. Partition systems already include this item	SF	$1.00	$1.19	$0.00	$2.19
105352	GWB Taped and Finished – 5/8" Thick (Water Resistant) Includes single layer of GWB taped and finished. Partition systems already include this item	SF	$1.00	$1.26	$0.00	$2.26
105353	Metal Stud Up To 4", 20 GA, 12" O.C. (> 500 SF) Partition systems already include this item	SF	$3.53	$4.78	$0.00	$8.31
105354	Metal Stud Up To 4", 20 GA, 16" O.C. (> 500 SF) Partition systems already include this item	SF	$2.73	$3.67	$0.00	$6.40
105355	Metal Stud Up To 4", 20 GA, 24" O.C. (> 500 SF) Partition systems already include this item	SF	$2.09	$2.28	$0.00	$4.37
105356	Metal Stud Up To 6", 20 GA, 12" O.C. (> 500 SF) Partition systems already include this item	SF	$3.71	$5.50	$0.00	$9.21
105357	Metal Stud Up To 6", 20 GA, 16" O.C. (> 500 SF) Partition systems already include this item	SF	$2.86	$4.23	$0.00	$7.09
105358	Metal Stud Up To 6", 20 GA, 24" O.C. (> 500 SF) Partition systems already include this item	SF	$2.21	$2.62	$0.00	$4.83
105359	Metal Stud Up To 8", 20 GA, 12" O.C. (> 500 SF) Partition systems already include this item	SF	$4.13	$6.31	$0.00	$10.44
105360	Metal Stud Up To 8", 20 GA, 16" O.C. (> 500 SF) Partition systems already include this item	SF	$3.19	$4.85	$0.00	$8.04
105361	Metal Stud Up To 8", 20 GA, 24" O.C. (> 500 SF) Partition systems already include this item	SF	$2.45	$3.01	$0.00	$5.46
105362	[Modifier] Level Five Finish (Per Side)	SF	$0.54	$0.22	$0.00	$0.76
105363	[Modifier] Textured Finish (Per Side)	SF	$0.54	$0.22	$0.00	$0.76
105364	[Modifier] Add Strait-Flex Tape	SF	$0.15	$0.06	$0.00	$0.21
105365	[Modifier] For Abuse Resistant GWB (Per Side)	SF	$0.40	$0.60	$0.00	$1.00
105366	[Modifier] For High Impact GWB (Per Side)	SF	$0.40	$1.11	$0.00	$1.51
105367	[Modifier] For Cement Board (Per Side)	SF	$0.40	$0.83	$0.00	$1.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105368	[Modifier] Add 3/4" Flat Steel Expanded Metal Security Mesh Clark Dietrich BM75 13 gauge w/ barrier mesh clips or equal	SF	$10.02	$2.99	$0.00	$13.01
105369	[Modifier] Quantity Premium - Gypsum Board Assemblies (101-500 SF) Quantity premium can be used when total square footage in section 09-21-16 Gypsum Board Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105370	[Modifier] Quantity Premium - Gypsum Board Assemblies (51-100 SF) Quantity premium can be used when total square footage in section 09-21-16 Gypsum Board Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105371	[Modifier] Quantity Premium - Gypsum Board Assemblies (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-21-16 Gypsum Board Assemblies are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-22-00 Supports for Plaster and Gypsum Board					
	09-22-16 Non-Structural Metal Framing					
105372	Cantilevered Partial Wall Support - Pony Wall - 16 GA - Up To 48" Tall Partial wall framing connection to floor for unsupported top track. Similar to Clark Dietrich Pony Wall Support. Includes all necessary concrete drilling and inserts	EA	$92.84	$71.65	$0.00	$164.49
105373	Cantilevered Partial Wall Support - Pony Wall - 12 GA - Up To 36" Tall Partial wall framing connection to floor for unsupported top track. Similar to Clark Dietrich Pony Wall Support. Includes all necessary concrete drilling and inserts	EA	$106.63	$95.29	$0.00	$201.92
	09-24-00 Cement Plastering					
	09-24-23 Cement Stucco					
105374	Stucco – 3 Coats With Mesh System includes up to three coats and all miscellaneous screeds, aid, termination, expanded metals / wire, building paper, fasteners, flashings, sealants and textures	SF	$7.82	$2.63	$0.00	$10.45
105375	[Modifier] Quantity Premium - Cement Stucco (101-500 SF) Quantity premium can be used when total square footage in section 09-24-23 Cement Stucco are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105376	[Modifier] Quantity Premium - Cement Stucco (51-100 SF) Quantity premium can be used when total square footage in section 09-24-23 Cement Stucco are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105377	[Modifier] Quantity Premium - Cement Stucco (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-24-23 Cement Stucco are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-24-26 Glass-Fiber-Reinforced Concrete Fabrications					
105378	Glass Fiber Reinforced Concrete (GFRC) Column Covers	SF	$6.74	$29.59	$0.00	$36.33
105379	Glass Fiber Reinforced Concrete (GFRC) Wall Covering	SF	$4.72	$20.71	$0.00	$25.43
105380	Glass Fiber Reinforced Concrete (GFRC) Banding / Cornice up to 4" Built up combinations may be added cumulatively	LF	$9.78	$12.32	$0.00	$22.10
105381	Glass Fiber Reinforced Concrete (GFRC) Banding / Cornice up to 6" Built up combinations may be added cumulatively	LF	$10.86	$16.44	$0.00	$27.30
105382	Glass Fiber Reinforced Concrete (GFRC) Banding / Cornice up to 8" Built up combinations may be added cumulatively	LF	$12.21	$20.55	$0.00	$32.76
105383	Glass Fiber Reinforced Concrete (GFRC) Banding / Cornice up to 12" Built up combinations may be added cumulatively	LF	$16.30	$24.66	$0.00	$40.96
105384	Glass Fiber Reinforced Concrete (GFRC) Sill	LF	$9.78	$13.36	$0.00	$23.14
105385	Glass Fiber Reinforced Concrete (GFRC) Header	LF	$12.21	$21.58	$0.00	$33.79
105386	Glass Fiber Reinforced Concrete (GFRC) Corbel	EA	$243.16	$339.06	$0.00	$582.22
105387	Glass Fiber Reinforced Concrete (GFRC) Column Cap Or Base	EA	$243.16	$410.99	$0.00	$654.15
105388	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (101-500 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Concrete Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105389	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (51-100 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Concrete Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105390	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Concrete Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-27-00 Plaster Fabrications					
	09-27-13 Glass-Fiber-Reinforced Gypsum Fabrications					
105391	Glass Fiber Reinforced Gypsum (GFRG) Column Covers	SF	$4.48	$19.89	$0.00	$24.37
105392	Glass Fiber Reinforced Gypsum (GFRG) Wall Covering	SF	$3.14	$13.92	$0.00	$17.06
105393	Glass Fiber Reinforced Gypsum (GFRG) Banding / Cornice up to 4" Built up combinations may be added cumulatively	LF	$6.52	$8.29	$0.00	$14.81
105394	Glass Fiber Reinforced Gypsum (GFRG) Banding / Cornice up to 6" Built up combinations may be added cumulatively	LF	$7.24	$11.06	$0.00	$18.30
105395	Glass Fiber Reinforced Gypsum (GFRG) Banding / Cornice up to 8" Built up combinations may be added cumulatively	LF	$8.14	$13.81	$0.00	$21.95
105396	Glass Fiber Reinforced Gypsum (GFRG) Banding / Cornice up to 12" Built up combinations may be added cumulatively	LF	$10.86	$16.58	$0.00	$27.44
105397	Glass Fiber Reinforced Gypsum (GFRG) Sill	LF	$6.52	$8.98	$0.00	$15.50
105398	Glass Fiber Reinforced Gypsum (GFRG) Header	LF	$8.14	$14.51	$0.00	$22.65
105399	Glass Fiber Reinforced Gypsum (GFRG) Corbel	EA	$162.10	$227.93	$0.00	$390.03
105400	Glass Fiber Reinforced Gypsum (GFRG) Column Cap Or Base	EA	$162.10	$276.27	$0.00	$438.37
105401	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (101-500 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Gypsum Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105402	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (51-100 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Gypsum Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105403	[Modifier] Quantity Premium - Glass-Fiber-Reinforced Concrete Fabrications (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-27-13 Glass-Fiber-Reinforced Gypsum Fabrications are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-28-00 Backing Boards and Underlayments

09-28-13 Cementitious Backing Boards

105404	1/4" Tile Backer Board - Floors	SF	$1.18	$1.02	$0.00	$2.20
105405	1/2" Tile Backer Board - Floors	SF	$1.18	$1.32	$0.00	$2.50
105406	5/8" Tile Backer Board - Floors	SF	$1.18	$1.73	$0.00	$2.91
105407	[Modifier] Add Tile Backer Board - Walls	SF	$0.24	$0.00	$0.00	$0.24

09-30-00 Tiling

Tile work includes glazed and unglazed tile materials, cement or modified setting, profiling floors to drain, mortars, grouts, sealers, spacers, trim pieces, marble thresholds or equal unless noted otherwise, termination strips, expansion strips, and reveals for a complete flooring installation

09-30-00 Tiling

Tile work includes glazed and unglazed tile materials, cement or modified setting, profiling floors to drain, mortars, grouts, sealers, spacers, trim pieces, marble thresholds or equal unless noted otherwise, termination strips, expansion strips, and reveals for a complete flooring installation

09-30-13 Ceramic Tiling

105408	Ceramic Tile Floor – Class 1 Up To 3/4" Thick Class 2: up To 1/2" thick	SF	$5.78	$12.62	$0.00	$18.40
105409	Ceramic Tile Floor – Class 1 Up To 3/4" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$6.36	$13.25	$0.00	$19.61
105410	Ceramic Tile Floor – Class 2 Up To 1/2" Thick Class 2: up To 1/2" thick	SF	$5.78	$10.51	$0.00	$16.29
105411	Ceramic Tile Floor – Class 2 Up To 1/2" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$6.36	$11.03	$0.00	$17.39
105412	Ceramic Tile Floor – Class 3 Up To 1/4" Thick Class 2: up To 1/2" thick	SF	$5.78	$8.41	$0.00	$14.19
105413	Ceramic Tile Floor – Class 3 Up To 1/4" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$6.36	$8.83	$0.00	$15.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105414	Ceramic Tile Wall – Class 1 Up To 3/4" Thick Class 2: up To 1/2" thick	SF	$6.82	$12.62	$0.00	$19.44
105415	Ceramic Tile Wall – Class 1 Up To 3/4" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$7.50	$13.25	$0.00	$20.75
105416	Ceramic Tile Wall – Class 2 Up To 1/2" Thick Class 2: up To 1/2" thick	SF	$6.82	$10.51	$0.00	$17.33
105417	Ceramic Tile Wall – Class 2 Up To 1/2" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$7.50	$11.03	$0.00	$18.53
105418	Ceramic Tile Wall – Class 3 Up To 1/4" Thick Class 2: up To 1/2" thick	SF	$6.82	$8.41	$0.00	$15.23
105419	Ceramic Tile Wall – Class 3 Up To 1/4" Thick – Large Format > 1'-0" x 2'-0" Class 2: up To 1/2" thick	SF	$7.50	$8.83	$0.00	$16.33
105420	Ceramic Tile Base 4" Tall – Class 1 Up To 3/4" Thick Class 2: up To 1/2" thick	LF	$9.04	$9.37	$0.00	$18.41
105421	Ceramic Tile Base 4" Tall – Class 2 Up To 1/2" Thick Class 2: up To 1/2" thick	LF	$9.04	$7.81	$0.00	$16.85
105422	Ceramic Tile Base 4" Tall – Class 3 Up To 1/4" Thick Class 2: up To 1/2" thick	LF	$9.04	$6.25	$0.00	$15.29
105423	Ceramic Tile Base 6" Tall – Class 1 Up To 3/4" Thick Class 2: up To 1/2" thick	LF	$9.04	$10.31	$0.00	$19.35
105424	Ceramic Tile Base 6" Tall – Class 2 Up To 1/2" Thick Class 2: up To 1/2" thick	LF	$9.04	$8.59	$0.00	$17.63
105425	Ceramic Tile Base 6" Tall – Class 3 Up To 1/4" Thick Class 2: up To 1/2" thick	LF	$9.04	$6.88	$0.00	$15.92
105426	Ceramic Mosaic Tile Floor – Tile Class 1 Off Whites Tile Class 1: Off whites	SF	$6.07	$11.57	$0.00	$17.64
105427	Ceramic Mosaic Tile Floor – Tile Class 1 Off Whites – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$12.14	$0.00	$18.82
105428	Ceramic Mosaic Tile Floor – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	SF	$6.07	$13.87	$0.00	$19.94
105429	Ceramic Mosaic Tile Floor – Tile Class 2 Blacks and Grays – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$14.57	$0.00	$21.25
105430	Ceramic Mosaic Tile Floor – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	SF	$6.07	$15.03	$0.00	$21.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105431	Ceramic Mosaic Tile Floor – Tile Class 3 Primary and Secondary Bright Colors – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$15.79	$0.00	$22.47
105432	Ceramic Mosaic Tile Wall – Tile Class 1 Off Whites Tile Class 1: Off whites	SF	$7.15	$11.57	$0.00	$18.72
105433	Ceramic Mosaic Tile Wall – Tile Class 1 Off Whites – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$12.14	$0.00	$20.01
105434	Ceramic Mosaic Tile Wall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	SF	$7.15	$13.87	$0.00	$21.02
105435	Ceramic Mosaic Tile Wall – Tile Class 2 Blacks and Grays – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$14.57	$0.00	$22.44
105436	Ceramic Mosaic Tile Wall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	SF	$7.15	$15.03	$0.00	$22.18
105437	Ceramic Mosaic Tile Wall – Tile Class 3 Primary and Secondary Bright Colors – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$15.79	$0.00	$23.66
105438	Ceramic Mosaic Tile Base 4" Tall – Tile Class 1 Off Whites Tile Class 1: Off whites	LF	$9.49	$8.59	$0.00	$18.08
105439	Ceramic Mosaic Tile Base 4" Tall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	LF	$9.49	$10.31	$0.00	$19.80
105440	Ceramic Mosaic Tile Base 4" Tall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	LF	$9.49	$11.18	$0.00	$20.67
105441	Ceramic Mosaic Tile Base 6" Tall – Tile Class 1 Off Whites Tile Class 1: Off whites	LF	$9.49	$9.46	$0.00	$18.95
105442	Ceramic Mosaic Tile Base 6" Tall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	LF	$9.49	$11.35	$0.00	$20.84
105443	Ceramic Mosaic Tile Base 6" Tall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	LF	$9.49	$12.30	$0.00	$21.79
105444	Porcelain Tile Floor – Class I Or II Hardness Less than 5 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$5.78	$9.30	$0.00	$15.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105445	Porcelain Tile Floor – Class I Or II Hardness Less than 5 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.95	$9.78	$0.00	$16.73
105446	Porcelain Tile Floor – Class III Hardness of 5 to 7 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$5.78	$11.63	$0.00	$17.41
105447	Porcelain Tile Floor – Class III Hardness of 5 to 7 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.95	$12.21	$0.00	$19.16
105448	Porcelain Tile Floor – Class IV Hardness Greater than 7 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$5.78	$13.96	$0.00	$19.74
105449	Porcelain Tile Floor – Class IV Hardness Greater than 7 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.95	$14.65	$0.00	$21.60
105450	Porcelain Wall Tile – Class I Or II Hardness Less than 5 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.82	$9.30	$0.00	$16.12
105451	Porcelain Wall Tile – Class I Or II Hardness Less than 5 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$8.18	$9.78	$0.00	$17.96
105452	Porcelain Tile Wall – Class III Hardness of 5 to 7 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.82	$11.63	$0.00	$18.45
105453	Porcelain Wall Tile – Class III Hardness of 5 to 7 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$8.18	$12.21	$0.00	$20.39
105454	Porcelain Wall Tile – Class IV Hardness Greater than 7 Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$6.82	$13.96	$0.00	$20.78
105455	Porcelain Wall Tile – Class IV Hardness Greater than 7 – Large Format > 1'-0" x 2'-0" Class III: Porcelain Enamel Institute, Hardness 5-7	SF	$8.18	$14.65	$0.00	$22.83
105456	Porcelain Tile Base 4" Tall – Class I Or II Hardness Less than 5 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$7.19	$0.00	$16.23
105457	Porcelain Tile Base 4" Tall – Class III Hardness of 5 to 7 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$8.98	$0.00	$18.02
105458	Porcelain Tile Base 4" Tall – Class IV Hardness Greater than 7 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$10.79	$0.00	$19.83
105459	Porcelain Tile Base 6" Tall – Class I Or II Hardness Less than 5 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$7.91	$0.00	$16.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105460	Porcelain Tile Base 6" Tall – Class III Hardness of 5 to 7 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$9.89	$0.00	$18.93
105461	Porcelain Tile Base 6" Tall – Class IV Hardness Greater than 7 Class III: Porcelain Enamel Institute, Hardness 5-7	LF	$9.04	$11.86	$0.00	$20.90
105462	Porcelain Mosaic Tile Floor – Tile Class 1 Off Whites Tile Class 1: Off whites	SF	$6.07	$12.79	$0.00	$18.86
105463	Porcelain Mosaic Tile Floor – Tile Class 1 Off Whites – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$13.43	$0.00	$20.11
105464	Porcelain Mosaic Tile Floor – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	SF	$6.07	$15.35	$0.00	$21.42
105465	Porcelain Mosaic Tile Floor – Tile Class 2 Blacks and Grays – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$16.12	$0.00	$22.80
105466	Porcelain Mosaic Tile Floor – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	SF	$6.07	$16.63	$0.00	$22.70
105467	Porcelain Mosaic Tile Floor – Tile Class 3 Primary and Secondary Bright Colors – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$6.68	$17.46	$0.00	$24.14
105468	Porcelain Mosaic Tile Wall – Tile Class 1 Off Whites Tile Class 1: Off whites	SF	$7.15	$12.79	$0.00	$19.94
105469	Porcelain Mosaic Tile Wall – Tile Class 1 Off Whites – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$13.43	$0.00	$21.30
105470	Porcelain Mosaic Tile Wall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	SF	$7.15	$15.35	$0.00	$22.50
105471	Porcelain Mosaic Tile Wall – Tile Class 2 Blacks and Grays – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$16.12	$0.00	$23.99
105472	Porcelain Mosaic Tile Wall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	SF	$7.15	$16.63	$0.00	$23.78
105473	Porcelain Mosaic Tile Wall – Tile Class 3 Primary and Secondary Bright Colors – Large Format > 1'-0" x 2'-0" Tile Class 1: Off whites	SF	$7.87	$17.46	$0.00	$25.33
105474	Porcelain Mosaic Tile Base 4" Tall – Tile Class 1 Off Whites Tile Class 1: Off whites	LF	$9.49	$9.89	$0.00	$19.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105475	Porcelain Mosaic Tile Base 4" Tall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	LF	$9.49	$11.86	$0.00	$21.35
105476	Porcelain Mosaic Tile Base 4" Tall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	LF	$9.49	$12.85	$0.00	$22.34
105477	Porcelain Mosaic Tile Base 6" Tall – Tile Class 1 Off Whites Tile Class 1: Off whites	LF	$9.49	$10.89	$0.00	$20.38
105478	Porcelain Mosaic Tile Base 6" Tall – Tile Class 2 Blacks and Grays Tile Class 1: Off whites	LF	$9.49	$13.06	$0.00	$22.55
105479	Porcelain Mosaic Tile Base 6" Tall – Tile Class 3 Primary and Secondary Bright Colors Tile Class 1: Off whites	LF	$9.49	$14.14	$0.00	$23.63
105480	Grout Sealer Cannot be combined with tile flooring assemblies, since grout sealer is already included in the assembly	SF	$1.04	$0.54	$0.00	$1.58
105481	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105482	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105483	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34
105484	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105485	[Modifier] Quantity Premium - Ceramic Tiling (101-500 SF) Quantity premium can be used when total square footage in section 09-30-13 Ceramic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105486	[Modifier] Quantity Premium - Ceramic Tiling (51-100 SF) Quantity premium can be used when total square footage in section 09-30-13 Ceramic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78
105487	[Modifier] Quantity Premium - Ceramic Tiling (< Or = To 50 SF) Quantity premium can be used when total square footage in section 09-30-13 Ceramic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57

09-30-16 Quarry Tiling

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105488	Quarry Tile Floor	SF	$5.78	$10.51	$0.00	$16.29
105489	Quarry Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$11.03	$0.00	$17.39
105490	Quarry Tile Wall	SF	$6.82	$10.51	$0.00	$17.33
105491	Quarry Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$11.03	$0.00	$18.53
105492	Quarry Tile Base 4" Tall	LF	$9.04	$7.81	$0.00	$16.85
105493	Quarry Tile Base 6" Tall	LF	$9.04	$8.59	$0.00	$17.63
105494	Self-Coving Health Department Approved Tile Base 4" Tall	LF	$9.04	$7.42	$0.00	$16.46
105495	Self-Coving Health Department Approved Tile Base 6" Tall	LF	$9.04	$8.17	$0.00	$17.21
105496	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105497	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105498	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34
105499	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105500	[Modifier] Quantity Premium - Quarry Tiling (101-500 SF) Quantity premium can be used when total square footage in section 09-30-16 Quarry Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105501	[Modifier] Quantity Premium - Quarry Tiling (51-100 SF) Quantity premium can be used when total square footage in section 09-30-16 Quarry Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78
105502	[Modifier] Quantity Premium - Quarry Tiling (< Or = To 50 SF) Quantity premium can be used when total square footage in section 09-30-16 Quarry Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57
	09-30-23 Glass Mosaic Tiling					
105503	Glass Mosaic Tile Floor	SF	$5.78	$17.71	$0.00	$23.49
105504	Glass Mosaic Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$18.59	$0.00	$24.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105505	Glass Mosaic Tile Floor – Metallic Finish	SF	$5.78	$21.25	$0.00	$27.03
105506	Glass Mosaic Tile Floor – Metallic Finish – Large Format > 1'-0" x 2'-0"	SF	$6.36	$22.31	$0.00	$28.67
105507	Glass Mosaic Tile Wall	SF	$6.82	$17.71	$0.00	$24.53
105508	Glass Mosaic Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$18.59	$0.00	$26.09
105509	Glass Mosaic Tile Wall- Metallic Finish	SF	$6.82	$21.25	$0.00	$28.07
105510	Glass Mosaic Tile Wall- Metallic Finish – Large Format > 1'-0" x 2'-0"	SF	$7.50	$22.31	$0.00	$29.81
105511	Glass Mosaic Tile Base 4" Tall	LF	$9.04	$14.77	$0.00	$23.81
105512	Glass Mosaic Tile Base 4" Tall – Metallic Finish	LF	$9.04	$17.74	$0.00	$26.78
105513	Glass Mosaic Tile Base 6" Tall	LF	$9.04	$16.25	$0.00	$25.29
105514	Glass Mosaic Tile Base 6" Tall – Metallic Finish	LF	$9.04	$19.50	$0.00	$28.54
105515	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105516	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105517	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34
105518	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105519	[Modifier] Quantity Premium - Glass Mosaic Tiling (101-500 SF) Quantity premium can be used when total square footage in section 09-30-23 Glass Mosaic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105520	[Modifier] Quantity Premium - Glass Mosaic Tiling (51-100 SF) Quantity premium can be used when total square footage in section 09-30-23 Glass Mosaic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78
105521	[Modifier] Quantity Premium - Glass Mosaic Tiling (< Or = To 50 SF) Quantity premium can be used when total square footage in section 09-30-23 Glass Mosaic Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	09-30-29 Metal Tiling					
105522	Stainless Steel Tile Floor	SF	$5.78	$26.46	$0.00	$32.24
105523	Stainless Steel Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$27.79	$0.00	$34.15
105524	Stainless Steel Tile Wall	SF	$6.82	$26.46	$0.00	$33.28
105525	Stainless Steel Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$27.79	$0.00	$35.29
105526	Stainless Steel Tile Base 4" Tall	LF	$9.04	$22.23	$0.00	$31.27
105527	Stainless Steel Tile Base 6" Tall	LF	$9.04	$24.34	$0.00	$33.38
105528	Aluminum Tile Floor	SF	$5.78	$21.41	$0.00	$27.19
105529	Aluminum Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$22.47	$0.00	$28.83
105530	Aluminum Tile Wall	SF	$6.82	$21.41	$0.00	$28.23
105531	Aluminum Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$22.47	$0.00	$29.97
105532	Aluminum Tile Base 4" Tall	LF	$9.04	$17.98	$0.00	$27.02
105533	Aluminum Tile Base 6" Tall	LF	$9.04	$19.69	$0.00	$28.73
105534	Copper Tile Floor	SF	$5.78	$27.26	$0.00	$33.04
105535	Copper Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$28.61	$0.00	$34.97
105536	Copper Tile Wall	SF	$6.82	$27.26	$0.00	$34.08
105537	Copper Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$28.61	$0.00	$36.11
105538	Copper Tile Base 4" Tall	LF	$9.04	$22.89	$0.00	$31.93
105539	Copper Tile Base 6" Tall	LF	$9.04	$25.07	$0.00	$34.11
105540	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105541	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105542	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105543	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105544	[Modifier] Quantity Premium - Metal Tiling (101-500 SF) Quantity premium can be used when total square footage in section 09-30-29 Metal Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105545	[Modifier] Quantity Premium - Metal Tiling (51-100 SF) Quantity premium can be used when total square footage in section 09-30-29 Metal Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78
105546	[Modifier] Quantity Premium - Metal Tiling (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-30-29 Metal Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57
105547	Granite Tile Floor	SF	$5.78	$24.25	$0.00	$30.03
105548	Granite Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$25.45	$0.00	$31.81
	09-30-33 Stone Tiling					
105549	Granite Tile Wall	SF	$6.82	$24.25	$0.00	$31.07
105550	Granite Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$25.45	$0.00	$32.95
105551	Granite Tile Base 4" Tall	LF	$9.04	$20.36	$0.00	$29.40
105552	Granite Tile Base 6" Tall	LF	$9.04	$22.31	$0.00	$31.35
105553	Marble Tile Floor	SF	$5.78	$21.28	$0.00	$27.06
105554	Marble Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$22.36	$0.00	$28.72
105555	Marble Tile Wall	SF	$6.82	$21.28	$0.00	$28.10
105556	Marble Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$22.36	$0.00	$29.86
105557	Marble Tile Base 4" Tall	LF	$9.04	$17.88	$0.00	$26.92
105558	Marble Tile Base 6" Tall	LF	$9.04	$19.59	$0.00	$28.63
105559	Slate Tile Floor	SF	$5.78	$20.17	$0.00	$25.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105560	Slate Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$6.36	$21.19	$0.00	$27.55
105561	Slate Tile Wall	SF	$6.82	$20.17	$0.00	$26.99
105562	Slate Tile Wall – Large Format > 1'-0" x 2'-0"	SF	$7.50	$21.19	$0.00	$28.69
105563	Slate Tile Base 4" Tall	LF	$9.04	$16.96	$0.00	$26.00
105564	Slate Tile Base 6" Tall	LF	$9.04	$18.57	$0.00	$27.61
105565	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105566	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105567	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34
105568	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105569	[Modifier] Quantity Premium - Stone Tiling (101-500 SF) Quantity premium can be used when total square footage in section 09-30-33 Stone Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105570	[Modifier] Quantity Premium - Stone Tiling (51-100 SF) Quantity premium can be used when total square footage in section 09-30-33 Stone Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78
105571	[Modifier] Quantity Premium - Stone Tiling (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-30-33 Stone Tiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57

09-50-00 Ceilings

09-51-00 Acoustical Ceilings

09-51-23 Acoustical Tile Ceilings

Preformed acoustical tile in standard sizes. Each item includes suspension system, standard 15/16” width grid, field cutting, and fitting in a complete assembly. Includes but not limited to, cut outs for ceiling penetrations (lighting, sprinkler heads, diffusers, smoke detectors). CISCA compliant for seismic zones. Fire Class A unless otherwise indicated.

105572	1 x 1 Acoustical Ceiling Tile (ACT) Mineral Fiber Tongue and Groove – Hidden Spline Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant.	SF	$1.81	$2.88	$0.00	$4.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105573	1 x 1 Acoustical Ceiling Tile (ACT) Mineral Fiber Tongue and Groove – Direct Adhered Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant. .80 NRC or better	SF	$1.67	$2.30	$0.00	$3.97
105574	2 X 2 Acoustical Ceiling Tile (ACT) Mineral Fiber – Square Edge Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant. .80 NRC or better	SF	$1.98	$4.66	$0.00	$6.64
105575	2 X 2 Acoustical Ceiling Tile (ACT) Mineral Fiber – Tegular Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant. .80 NRC or better	SF	$1.98	$5.00	$0.00	$6.98
105576	2 X 4 Acoustical Ceiling Tile (ACT) Mineral Fiber – Square Edge Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant. .80 NRC or better	SF	$1.98	$4.29	$0.00	$6.27
105577	2 X 4 Acoustical Ceiling Tile (ACT) Mineral Fiber – Square Edge, Fissured, Firecode Mineral fiber, water felted, lightly textured, NRC 55, 15/16" grid	SF	$2.67	$5.58	$0.00	$8.25
105578	2 X 4 Acoustical Ceiling Tile (ACT) Mineral Fiber – Tegular Mineral fiber with membrane facing. water felted, lightly textured, humidity and sag resistant. .80 NRC or better	SF	$1.98	$4.62	$0.00	$6.60
105579	2 X 2 Acoustical Ceiling Tile (ACT) Fiberglass – Square Edge Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$1.98	$5.36	$0.00	$7.34
105580	2 X 2 Acoustical Ceiling Tile (ACT) Fiberglass – Tegular Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$1.98	$5.74	$0.00	$7.72
105581	2 X 4 Acoustical Ceiling Tile (ACT) Fiberglass – Square Edge Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$1.98	$4.97	$0.00	$6.95
105582	2 X 4 Acoustical Ceiling Tile (ACT) Fiberglass – Tegular Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$1.98	$5.33	$0.00	$7.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105583	2 X 2 Acoustical Ceiling Tile (ACT) Scrubbable Mineral fiber tile, water felted, with polyester or vinyl face. Scrubbable. Lightly textured or smooth, .55 NRC or better	SF	$1.98	$8.69	$0.00	$10.67
105584	2 X 4 Acoustical Ceiling Tile (ACT) Scrubbable Mineral fiber tile, water felted, with polyester or vinyl face. Scrubbable. Lightly textured or smooth, .55 NRC or better	SF	$1.98	$8.09	$0.00	$10.07
105585	2 X 2 Vinyl Covered Drywall – Washable	SF	$1.98	$8.16	$0.00	$10.14
105586	2 X 4 Vinyl Covered Drywall – Washable	SF	$1.98	$7.56	$0.00	$9.54
105587	2 X 8 Acoustical Ceiling Tile (ACT) Fiberglass Plank – Square Edge Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$2.17	$7.98	$0.00	$10.15
105588	2 X 8 Acoustical Ceiling Tile (ACT) Fiberglass Plank – Tegular Glass fiber tile with membrane facing. water felted, lightly textured, humidity and sag resistant. .65 NRC or better	SF	$2.17	$8.51	$0.00	$10.68
105589	Acoustical Ceiling Tile (ACT) Ceiling Tile Reuse – Install Tile Only	SF	$1.41	$0.52	$0.00	$1.93
105590	Acoustical Ceiling Tile (ACT) Ceiling Grid Reuse – Install Grid Only	SF	$2.13	$0.39	$0.00	$2.52
105591	Acoustical Ceiling Tile (ACT) Ceiling Tile - Furnish and Install New ACT in Existng Grid ACT to be 2 x 2 / 2 x 4 random fissured, white mineral fiber or equal. NRC up to 0.50	SF	$1.43	$1.00	$0.00	$2.43
105592	Remove and Reinstall Acoustical Ceiling Tile (ACT)	SF	$2.06	$0.52	$0.00	$2.58
105593	Remove and Reinstall Acoustical Ceiling Tile (ACT) Grid	SF	$2.76	$0.40	$0.00	$3.16
105594	High Profile Perimeter Edge Trim – 4" Axiom or equal	LF	$4.17	$17.70	$0.00	$21.87
105595	High Profile Perimeter Edge Trim – 6" Axiom or equal	LF	$4.17	$23.60	$0.00	$27.77
105596	[Modifier] For Antimicrobial Coating	SF	$0.00	$1.06	$0.00	$1.06
105597	[Modifier] Concealed Acoustical Ceiling Tile (ACT) Grid	SF	$0.00	$1.34	$0.00	$1.34
105598	[Modifier] Narrow Width Acoustical Ceiling Tile (ACT) Grid – Up To 1/2" Wide	SF	$0.00	$1.17	$0.00	$1.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105599	[Modifier] Reveal / Stepped Acoustical Ceiling Tile (ACT) Grid	SF	$0.00	$1.40	$0.00	$1.40
105600	[Modifier] Acoustical Ceiling Tile (ACT) Grid Colors Other Than White	SF	$0.00	$1.28	$0.00	$1.28
105601	[Modifier] For Seismic Bracing Up To 6' Plenum Space Includes compression struts and splay wires, where required by code	SF	$0.68	$0.28	$0.00	$0.96
105602	[Modifier] For Seismic Bracing Up To 12' Plenum Space Includes compression struts and splay wires, where required by code	SF	$0.90	$0.41	$0.00	$1.31
105603	[Modifier] For Seismic Bracing Greater Than 12' Plenum Space Includes compression struts and splay wires, where required by code	SF	$1.13	$0.63	$0.00	$1.76
105604	[Modifier] Quantity Premium - Acoustical Tile Ceilings (101-500 SF) Quantity premium can be used when total square footage in section 09-51-23 Acoustical Tile Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105605	[Modifier] Quantity Premium - Acoustical Tile Ceilings (51-100 SF) Quantity premium can be used when total square footage in section 09-51-23 Acoustical Tile Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105606	[Modifier] Quantity Premium - Acoustical Tile Ceilings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-51-23 Acoustical Tile Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-54-00 Specialty Ceilings					
	09-54-26 Suspended Wood Ceilings					
105607	2 X 4 ACT – Wood Veneer Perforated wood composite panels with finished face veneers and acoustical backing. No less than .40 NRC	SF	$3.61	$21.13	$0.00	$24.74
105608	2 X 2 ACT – Wood Veneer Perforated wood composite panels with finished face veneers and acoustical backing. No less than .40 NRC	SF	$3.61	$26.40	$0.00	$30.01
105609	Wood Ceiling Panel Custom perforated wood composite panels with finished face veneers and acoustical backing. No less than .40 NRC	SF	$3.61	$35.42	$0.00	$39.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105610	Linear Wood Slat Ceiling Custom perforated wood composite panels with finished face veneers and acoustical backing. No less than .40 NRC	SF	$5.44	$39.96	$0.00	$45.40
105611	[Modifier] Quantity Premium - Suspended Wood Ceilings (101-500 SF) Quantity premium can be used when total square footage in section 09-54-26 Suspended Wood Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105612	[Modifier] Quantity Premium - Suspended Wood Ceilings (51-100 SF) Quantity premium can be used when total square footage in section 09-54-26 Suspended Wood Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105613	[Modifier] Quantity Premium - Suspended Wood Ceilings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-54-26 Suspended Wood Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-54-33 Decorative Panel Ceilings					
105614	Acoustical Metal Ceiling Pre-finished metal profiles with open or closed joints, smooth or perforated face, on concealed suspended grid. Includes all perimeter trims	SF	$4.07	$26.71	$0.00	$30.78
105615	Acoustical Metal Slat Ceiling Pre-finished metal slat profiles with open or closed joints, smooth or perforated face, on concealed suspended grid. Includes all perimeter trims	SF	$6.81	$28.02	$0.00	$34.83
105616	Glass Ceiling Panel	SF	$27.63	$75.43	$0.00	$103.06
105617	"Buzzispace Buzziland Round" Decorative Acoustical Panels 2' and 3' diameters. Includes all fasteners, hangers, clips and trim for a complete installation	SF	$55.73	$469.58	$0.00	$525.31
105618	[Modifier] Quantity Premium - Decorative Panel Ceilings (101-500 SF) Quantity premium can be used when total square footage in section 09-54-33 Decorative Panel Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105619	[Modifier] Quantity Premium - Decorative Panel Ceilings (51-100 SF) Quantity premium can be used when total square footage in section 09-54-33 Decorative Panel Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105620	[Modifier] Quantity Premium - Decorative Panel Ceilings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-54-33 Decorative Panel Ceilings are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-54-46 Fabric-Wrapped Ceiling Panels

105621	Acoustic Baffles, Hung with Aircraft Cable TURF Design, Straight Baffle or equal. Includes baffle, cable to deck, anchors required for a complete installation	SF	$17.05	$80.43	$0.00	$97.48

09-57-53 Security Ceiling Assemblies

105622	Metal Security Ceiling - 2' x 2' Includes 18 ga lay-in panel system, perimeter channel, hanger wire, compression struts and hold down clips; Armstrong SecureLock Panels or equal; perforated and/or non-perforated	SF	$14.66	$48.59	$0.00	$63.25
105623	Metal Security Ceiling - 2' x 8' Includes 18 ga screw-in plank system, perimeter channel, hanger wire, compression struts and hold down clips; Armstrong SecureLock Panels or equal; perforated and/or non-perforated	SF	$13.90	$49.98	$0.00	$63.88

09-60-00 Flooring

Flooring includes all adhesive, spacers, sealers, trim pieces, marble thresholds or equal unless noted otherwise, termination strips, expansion strips, and reveals for a complete flooring installation

09-61-00 Flooring Treatment

09-61-00 Flooring Treatment

105624	Applied Dissipative Floor Finish Traffic bearing, multi-part polymeric static control coating for cured concrete floors. Non-slip. Includes grounding	SF	$1.92	$2.93	$0.00	$4.85
105625	[Modifier] Quantity Premium - Flooring Treatment (101-500 SF) Quantity premium can be used when total square footage in section 09-61-00 Flooring Treatment are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105626	[Modifier] Quantity Premium - Flooring Treatment (51 -100 SF) Quantity premium can be used when total square footage in section 09-61-00 Flooring Treatment are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105627	[Modifier] Quantity Premium - Flooring Treatment (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-61-00 Flooring Treatment are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-62-00 Specialty Flooring					
	09-62-19 Laminate Flooring					
105628	Laminate Flooring Floating laminate flooring, includes underlayment, transitions, and thresholds. Simulated wood veneers laminated to wood fibered substrate in various length planks. Interlocked butt or micro V joints, smooth to lightly embossed textures, satin finish or equal.	SF	$3.48	$6.22	$0.00	$9.70
105629	[Modifier] Quantity Premium - Laminate Flooring (101 -500 SF) Quantity premium can be used when total square footage in section 09-62-19 Laminate Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105630	[Modifier] Quantity Premium - Laminate Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-62-19 Laminate Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105631	[Modifier] Quantity Premium - Laminate Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-62-19 Laminate Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-62-23 Bamboo Flooring					
105632	Bamboo Flooring Floating bamboo flooring, includes underlayment, transitions, and thresholds. Up to 1/2" thick various length planks of engineered strand woven bamboo. Interlocked butt or micro V joints, smooth to lightly embossed textures, satin finish or equal	SF	$3.48	$6.85	$0.00	$10.33
105633	[Modifier] Quantity Premium - Bamboo Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-62-23 Bamboo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105634	[Modifier] Quantity Premium - Bamboo Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-62-23 Bamboo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105635	[Modifier] Quantity Premium - Bamboo Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-62-23 Bamboo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-62-29 Cork Flooring					
105636	Cork Flooring Floating cork flooring, includes underlayment, transitions, and thresholds. Up to 1/2" thick various length planks of high density fiberboard cork flooring. Interlocked butt or micro V joints, smooth to lightly embossed textures, satin finish or equal	SF	$3.48	$6.22	$0.00	$9.70
105637	[Modifier] Quantity Premium - Cork Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-62-29 Cork Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105638	[Modifier] Quantity Premium - Cork Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-62-29 Cork Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105639	[Modifier] Quantity Premium - Cork Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-62-29 Cork Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-62-53 Synthetic Turf Flooring					
105640	Synthetic Turf – Indoor Monofilament, nylon or polypropylene fiber over resilient backing pad for glue down applications. Includes substrate or base preparation. XGrass Field or equal	SF	$3.28	$5.90	$0.00	$9.18
105641	[Modifier] Quantity Premium - Synthetic Turf Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-62-53 Synthetic Turf Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105642	[Modifier] Quantity Premium - Synthetic Turf Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-62-53 Synthetic Turf Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105643	[Modifier] Quantity Premium - Synthetic Turf Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-62-53 Synthetic Turf Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-62-83 Structural Glass Flooring

105644	Structural Glass Flooring	SF	$27.63	$88.66	$0.00	$116.29

09-64-00 Wood Flooring

Includes manufacturer recommended vapor retarder

09-64-23 Wood Parquet Flooring

Fully adhered in standard modular sizes, 9”, 12”, or 18” square. Floor prep, leveling to manufacturer’s requirements, and vapor retarder included

105645	Wood Parquet Flooring – 5/16" Thick (Poplar, Ash, Hickory) Includes applicable staining and or sealing	SF	$4.20	$5.70	$0.00	$9.90
105646	Wood Parquet Flooring – 5/16" Thick (Maple, Oak, Cherry, Birch) Includes applicable staining and or sealing	SF	$4.20	$8.00	$0.00	$12.20
105647	Wood Parquet Flooring – 5/16" Thick (Mahogany, Walnut) Includes applicable staining and or sealing	SF	$4.20	$10.28	$0.00	$14.48
105648	Wood Parquet Flooring – 5/16" Thick (Imported Exotics) Includes applicable staining and or sealing	SF	$4.20	$17.13	$0.00	$21.33
105649	[Modifier] Quantity Premium - Wood Parquet Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-64-23 Wood Parquet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105650	[Modifier] Quantity Premium - Wood Parquet Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-64-23 Wood Parquet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105651	[Modifier] Quantity Premium - Wood Parquet Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-64-23 Wood Parquet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-64-29 Wood Strip and Plank Flooring

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105652	Wood Strip Floor (Poplar, Ash, Hickory) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$4.40	$5.70	$0.00	$10.10
105653	Wood Strip Floor (Maple, Oak, Cherry, Birch) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$4.40	$8.00	$0.00	$12.40
105654	Wood Strip Floor (Mahogany, Walnut) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$4.40	$10.28	$0.00	$14.68
105655	Wood Strip Floor (Imported Exotics) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$4.40	$17.13	$0.00	$21.53
105656	Prefinished Wood Floor (Poplar, Ash, Hickory) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$3.62	$6.85	$0.00	$10.47
105657	Prefinished Wood Floor (Maple, Oak, Cherry, Birch) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$3.62	$9.59	$0.00	$13.21
105658	Prefinished Wood Floor (Mahogany, Walnut) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$3.62	$12.32	$0.00	$15.94
105659	Prefinished Wood Floor (Imported Exotics) Non-laminated natural wood, up to 3/4" thick, T&G plank flooring. Nailed down. Includes compatible stain and or clear coat traffic bearing finish and manufacturers recommended vapor barrier/underlayment	SF	$3.62	$20.55	$0.00	$24.17
105660	Refinish Wood Floor Includes, cleaning, sanding, staining, and sealing, per manufacturers recommendations	SF	$4.11	$1.71	$0.00	$5.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105661	Wood Base – Profiled Edge 4" Tall Includes staining, and sealing	LF	$5.43	$7.12	$0.00	$12.55
105662	Wood Base – Profiled Edge 6" Tall Includes staining, and sealing	LF	$6.39	$7.83	$0.00	$14.22
105663	[Modifier] Quantity Premium - Wood Strip and Plank Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-64-29 Wood Strip and Plank Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105664	[Modifier] Quantity Premium - Wood Strip and Plank Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-64-29 Wood Strip and Plank Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105665	[Modifier] Quantity Premium - Wood Strip and Plank Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-64-29 Wood Strip and Plank Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-64-66 Wood Athletic Flooring					
105666	Wood Athletic Floor Strip flooring over resilient channel designed for sport playing surface. Includes metal transition strips, and court striping. Robbins Bio Channel or equal	SF	$3.36	$12.58	$0.00	$15.94
105667	Wood and Synthetic Athletic Floor Hybrid Includes a combination of wood strip flooring over resilient channel and Urethane flooring designed for sport playing surface. Includes metal transition strips, and court striping. Urethane Flooring is Robbins Classic 110 or equal poured Urethane on 11mm resilient pad over a layer of plywood. Wood flooring is Robbins Bio-Channel or equal	SF	$3.59	$13.48	$0.00	$17.07
105668	[Modifier] Quantity Premium - Wood Athletic Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-64-66 Wood Athletic Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105669	[Modifier] Quantity Premium - Wood Athletic Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-64-66 Wood Athletic Flooring. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105670	[Modifier] Quantity Premium - Wood Athletic Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-64-66 Wood Athletic Flooring. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-65-00 Resilient Flooring

09-65-13 Resilient Base and Accessories

Roppe or equal, includes performed corners

105671	Rubber Stair Treads and Risers 7.5" Riser, 12" Tread	LF	$2.86	$21.28	$0.00	$24.14
105672	Rubber Stair Nosing	LF	$2.61	$5.27	$0.00	$7.88
105673	Resilient Base 4" Tall Coved or straight	LF	$1.09	$0.74	$0.00	$1.83
105674	Resilient Base 6" Tall Coved or straight	LF	$1.09	$0.83	$0.00	$1.92
105675	Rubber Base – Vented 4" Tall Coved or straight, for wood athletic/vented flooring	LF	$1.09	$6.40	$0.00	$7.49
105676	Rubber Base – Vented 6" Tall Coved or straight, for wood athletic/vented flooring	LF	$1.09	$7.11	$0.00	$8.20
105677	Rubber Base 4" Tall Coved or straight	LF	$1.09	$0.87	$0.00	$1.96
105678	Rubber Base 6" Tall Coved or straight	LF	$1.09	$0.98	$0.00	$2.07
105679	Rubber Carpet Transition Roppe #42 or equal. Includes removal of existing transition if necessary	LF	$8.03	$10.42	$0.00	$18.45
105680	Rubber ADA Threshold Ramp – Up To 1.5" Floor Height Differential Item can be used in when the height differential between floor finishes is greater than or equal to 1". Standard transition strips and thresholds are included in the floor finish unit pricing	LF	$4.93	$41.56	$0.00	$46.49

09-65-16 Resilient Sheet Flooring

105681	Sheet Vinyl – Standard Armstrong Duality Premium or equal	SF	$2.61	$3.06	$0.00	$5.67
105682	Sheet Vinyl – Premium Armstrong Rejuvenations or equal	SF	$2.61	$4.40	$0.00	$7.01
105683	Sheet Vinyl – Slip-Resistant Armstrong Safety Zone Sheet or equal	SF	$2.61	$5.00	$0.00	$7.61
105684	Sheet Vinyl – Homogenous Armstrong Medintech or equal	SF	$2.61	$4.32	$0.00	$6.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105685	Sheet Rubber – Standard Mannington ColorFields or equal	SF	$2.61	$4.40	$0.00	$7.01
105686	Sheet Rubber – Premium Nora Noraplan or equal	SF	$2.61	$5.33	$0.00	$7.94
105687	Linoleum Armstrong LinoArt or equal	SF	$2.61	$3.60	$0.00	$6.21
105688	Flash Cove Sheet Vinyl / Rubber Base 4" Tall Includes termination wall metal or equal	LF	$3.48	$2.89	$0.00	$6.37
105689	Flash Cove Sheet Vinyl / Rubber Base 6" Tall Includes termination wall metal or equal	LF	$3.48	$3.21	$0.00	$6.69
105690	[Modifier] Heat Welded Seams	SF	$0.23	$0.00	$0.00	$0.23
105691	[Modifier] Quantity Premium - Resilient Sheet Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-65-16 Resilient Sheet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105692	[Modifier] Quantity Premium - Resilient Sheet Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-65-16 Resilient Sheet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105693	[Modifier] Quantity Premium - Resilient Sheet Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-65-16 Resilient Sheet Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-65-19 Resilient Tile Flooring					
105694	VCT – Standard Composite vinyl, 1/8" thick	SF	$1.86	$2.39	$0.00	$4.25
105695	VCT – Premium Composite vinyl, enhanced wear surface, 1/8" thick	SF	$1.86	$4.00	$0.00	$5.86
105696	VCT – Slip-Resistant Embossed surface	SF	$1.86	$4.25	$0.00	$6.11
105697	VCT – Bio Based Contributes to sustainability certifications	SF	$1.86	$2.97	$0.00	$4.83
105698	VCT – Static Resistant Static conductive. Includes grounding	SF	$1.86	$7.77	$0.00	$9.63
105699	LVT – Luxury Vinyl Tile 100% vinyl, enhanced wear surface, 1/8" thick	SF	$1.86	$6.39	$0.00	$8.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105700	LVP – Luxury Vinyl Plank 100% vinyl, various sizes, 1/8" thick	SF	$1.86	$6.39	$0.00	$8.25
105701	Linoleum Tile	SF	$1.13	$2.60	$0.00	$3.73
105702	Rubber Tile – 1/4"	SF	$1.86	$6.59	$0.00	$8.45
105703	Rubber Tile – 3/8"	SF	$1.86	$7.25	$0.00	$9.11
105704	Rubber Tile – 1/2"	SF	$1.86	$7.98	$0.00	$9.84
105705	Rubber Tile – Skate and Spike Resistant	SF	$1.86	$12.24	$0.00	$14.10
105706	[Modifier] Quantity Premium - Resilient Tile Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-65-19 Resilient Tile Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105707	[Modifier] Quantity Premium - Resilient Tile Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-65-19 Resilient Tile Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105708	[Modifier] Quantity Premium - Resilient Tile Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-65-19 Resilient Tile Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-65-66 Resilient Athletic Flooring					
105709	Synthetic Athletic Floor Multi-layer poured urethane sport court. Includes court striping	SF	$2.04	$7.11	$0.00	$9.15
105710	Vinyl Gym Floor Vinyl bonded to resilient pad, seamless. Multipurpose use. Includes Court striping	SF	$4.52	$7.48	$0.00	$12.00
105711	Urethane Running Track (Indoor) Multi-layer poured urethane on resilient pad. Point elastic for running/jogging. Includes lane striping	SF	$4.05	$7.09	$0.00	$11.14
105712	Rubber Sports Flooring 10mm Rubber composition sheet, 3 mm wear surface over resilient base layer. For impact resistance in weight rooms and training	SF	$4.52	$10.15	$0.00	$14.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105713	[Modifier] Quantity Premium - Resilient Athletic Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-65-66 Resilient Athletic Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105714	[Modifier] Quantity Premium - Resilient Athletic Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-65-66 Resilient Athletic Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105715	[Modifier] Quantity Premium - Resilient Athletic Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-65-66 Resilient Athletic Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-66-00 Terrazzo Flooring					
	09-66-13 Portland Cement Terrazzo Flooring					
105716	Terrazzo – Thick Set One color and one pattern, Includes slip sheet membrane and screed metals	SF	$11.57	$26.89	$0.00	$38.46
105717	Flash Cove Terrazzo Base 4" Tall Includes termination wall metal or equal	LF	$9.04	$20.69	$0.00	$29.73
105718	Flash Cove Terrazzo Base 6" Tall Includes termination wall metal or equal	LF	$9.04	$22.65	$0.00	$31.69
105719	[Modifier] Additional Color Can be applied cumulatively to base line items	SF	$1.86	$0.57	$0.00	$2.43
105720	[Modifier] Additional Pattern Can be applied cumulatively to base line items	SF	$1.86	$0.57	$0.00	$2.43
105721	[Modifier] Quantity Premium - Portland Cement Terrazzo Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-66-13 Portland Cement Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$4.99	$0.00	$0.00	$4.99
105722	[Modifier] Quantity Premium - Portland Cement Terrazzo Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-66-13 Portland Cement Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$14.96	$0.00	$0.00	$14.96
105723	[Modifier] Quantity Premium - Portland Cement Terrazzo Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-66-13 Portland Cement Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$49.89	$0.00	$0.00	$49.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	09-66-16 Terrazzo Floor Tile					
	Tile work includes honed or polished tile materials, cement or modified setting, profiling floors to drain, mortars, grouts, sealers, spacers, trim pieces, thresholds, termination strips, and reveals					
105724	Terrazzo Tile Floor	SF	$7.23	$17.10	$0.00	$24.33
105725	Terrazzo Tile Floor – Large Format > 1'-0" x 2'-0"	SF	$7.96	$17.96	$0.00	$25.92
105726	Terrazzo Tile Base 4" Tall	LF	$9.04	$14.36	$0.00	$23.40
105727	Terrazzo Tile Base 6" Tall	LF	$9.04	$15.74	$0.00	$24.78
105728	Terrazzo Stair Treads Pre-cast unit with integral nosing	LF	$21.57	$51.06	$0.00	$72.63
105729	Terrazzo Stair Risers Pre-cast unit	LF	$15.69	$40.41	$0.00	$56.10
105730	Terrazzo Sills	LF	$13.40	$32.83	$0.00	$46.23
105731	Terrazzo Coping	LF	$13.40	$32.83	$0.00	$46.23
105732	Terrazzo Column Cap Or Base	EA	$260.60	$684.97	$0.00	$945.57
105733	[Modifier] For Full Bed Mortar Sloping floors included	SF	$3.58	$0.43	$0.00	$4.01
105734	[Modifier] For Waterproofing Membrane	SF	$1.92	$2.13	$0.00	$4.05
105735	[Modifier] For Epoxy Grout	SF	$0.61	$0.73	$0.00	$1.34
105736	[Modifier] For Chemical Resistant Grout	SF	$0.61	$0.79	$0.00	$1.40
105737	[Modifier] Quantity Premium - Terrazzo Floor Tile (101-500 SF) Quantity premium can be used when total square footage in section 09-66-16 Terrazzo Floor Tile are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.31	$0.00	$0.00	$2.31
105738	[Modifier] Quantity Premium - Terrazzo Floor Tile (51-100 SF) Quantity premium can be used when total square footage in section 09-66-16 Terrazzo Floor Tile are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.78	$0.00	$0.00	$5.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105739	[Modifier] Quantity Premium - Terrazzo Floor Tile (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-66-16 Terrazzo Floor Tile are within stated quantities. Can be applied cumulatively to base line items.	SF	$11.57	$0.00	$0.00	$11.57
	09-66-23 Resinous Matrix Terrazzo Flooring					
105740	Terrazzo – 3/8" Epoxy One color and one pattern, Includes slip sheet membrane and screed metals	SF	$11.57	$24.62	$0.00	$36.19
105741	Flash Cove Terrazzo Base 4" Tall Includes termination wall metal or equal	LF	$9.04	$20.69	$0.00	$29.73
105742	Flash Cove Terrazzo Base 6" Tall Includes termination wall metal or equal	LF	$9.04	$22.65	$0.00	$31.69
105743	[Modifier] Additional Color Can be applied cumulatively to base line items	SF	$1.86	$0.57	$0.00	$2.43
105744	[Modifier] Additional Pattern Can be applied cumulatively to base line items	SF	$1.86	$0.57	$0.00	$2.43
105745	[Modifier] Quantity Premium - Resinous Matrix Terrazzo Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-66-23 Resinous Matrix Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$4.99	$0.00	$0.00	$4.99
105746	[Modifier] Quantity Premium - Resinous Matrix Terrazzo Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-66-23 Resinous Matrix Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$14.96	$0.00	$0.00	$14.96
105747	[Modifier] Quantity Premium - Resinous Matrix Terrazzo Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-66-23 Resinous Matrix Terrazzo Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$49.89	$0.00	$0.00	$49.89
	09-67-00 Fluid-Applied Flooring					
	09-67-23 Resinous Flooring					
105748	Resinous Epoxy Flooring – 10 to 25 mils Thick Epoxy/Urethane mix, low build. Multi-layer, broadcast decorative chip with seal coat. Squeegee and/or roller applied. Includes primer, body coat, broadcast and topcoat (2 layers)	SF	$6.22	$4.69	$0.00	$10.91
105749	Resinous Epoxy Flooring – 30 to 125 mils Thick Epoxy mortar medium build. Multilayer, colored aggregate mortar with grout and seal coat. Trowel or screed rake applied. Impact resistance. Includes primer, body coat, broadcast and grout/topcoats	SF	$9.35	$7.07	$0.00	$16.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105750	Resinous Epoxy Flooring – 130 to 250 mils Thick Polyurethane mortar, resilient, high build. Multilayer, colored aggregate mortar with grout and seal coat. Trowel or screed rake applied. Includes primer, body coat, broadcast and grout/topcoats	SF	$11.18	$8.44	$0.00	$19.62
105751	Resinous Epoxy Flooring - Operating Rooms/Specialty Floor Areas - Up To 200 mils Thick Urethane floor system, screed rake or trowel application, broadcast is spike rolled into the surface, surface sanded, squeegee apply and back roll grout coat, roller apply topcoats (3 layers)	SF	$17.31	$13.08	$0.00	$30.39
105752	Integral Resin Base 4" Tall – Economy	LF	$7.29	$6.00	$0.00	$13.29
105753	Integral Resin Base 6" Tall – Economy	LF	$7.29	$6.66	$0.00	$13.95
105754	Integral Resin Base 4" Tall – Standard	LF	$7.29	$10.48	$0.00	$17.77
105755	Integral Resin Base 6" Tall – Standard	LF	$7.29	$11.64	$0.00	$18.93
105756	Integral Resin Base 4" Tall – Premium Range	LF	$7.29	$15.77	$0.00	$23.06
105757	Integral Resin Base 6" Tall – Premium Range	LF	$7.29	$17.53	$0.00	$24.82
105758	[Modifier] Quantity Premium - Resinous Epoxy Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-67-23 Resinous Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18
105759	[Modifier] Quantity Premium - Resinous Epoxy Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-67-23 Resinous Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
105760	[Modifier] Quantity Premium - Resinous Epoxy Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-67-23 Resinous Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91

09-68-00 Carpeting

Carpet pricing does not include set up for minimum runs or costs for special colors

09-68-00 Carpeting

Carpet pricing does not include set up for minimum runs or costs for special colors

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105761	Carpet Tile – Economy Range 25 - 35 ounces per SY	SY	$5.03	$30.08	$0.00	$35.11
105762	Carpet Tile – Standard Range 35 - 50 ounces per SY	SY	$5.03	$40.21	$0.00	$45.24
105763	Carpet Tile – Premium Range 50 - 70 ounces per SY	SY	$5.03	$46.85	$0.00	$51.88
105764	Carpet – Economy Range – Up To 3# Density, Resilient Foam Padding Up To 1/2" Thick 25 - 35 ounces per SY, cut or nylon loop pile	SY	$7.44	$33.50	$0.00	$40.94
105765	Carpet – Standard Range – Up To 6# Density, Resilient Foam Padding Up To 1/2" Thick 35 - 50 ounces per SY, cut or nylon loop pile	SY	$7.44	$40.78	$0.00	$48.22
105766	Carpet – Premium Range – Up To 8# Density, Fiber or Foam Padding Up To 1/2" Thick 50 - 70 ounces per SY, cut or nylon loop pile	SY	$7.44	$72.04	$0.00	$79.48
105767	[Modifier] Quantity Premium - Carpeting (13-55 SY) Quantity premium can be used when total square footage in section 09-68-00 Carpeting are within stated quantities. Can be applied cumulatively to base line items.	SY	$16.68	$0.00	$0.00	$16.68
105768	[Modifier] Quantity Premium - Carpeting (7-12 SY) Quantity premium can be used when total square footage in section 09-68-00 Carpeting are within stated quantities. Can be applied cumulatively to base line items.	SY	$41.71	$0.00	$0.00	$41.71
105769	[Modifier] Quantity Premium - Carpeting (< or = to 6 SY) Quantity premium can be used when total square footage in section 09-68-00 Carpeting are within stated quantities. Can be applied cumulatively to base line items.	SY	$83.42	$0.00	$0.00	$83.42

09-69-00 Access Flooring

09-69-00 Access Flooring

105770	Access Flooring – Up To 12" Plenum, 1,500#, Aluminum Raised pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$11.17	$0.00	$13.72
105771	Access Flooring – Up To 24" Plenum, 2,000#, Steel Raised pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$16.75	$0.00	$19.30
105772	Access Flooring – Up To 48" Plenum, 2,500#, Steel Raised pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$22.33	$0.00	$24.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105773	Access Flooring With Cementitious Panel – Up To 12" Plenum, 1,500#, Aluminum Raised rated pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$14.52	$0.00	$17.07
105774	Access Flooring With Cementitious Panel – Up To 24" Plenum, 2,000#, Steel Raised rated pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$21.78	$0.00	$24.33
105775	Access Flooring With Cementitious Panel – Up To 48" Plenum, 2,500#, Steel Raised rated pedestal mounted floor system. Includes all plates, stringers, transitions, and rough-in trims. Finish flooring is added cumulatively	SF	$2.55	$29.04	$0.00	$31.59
105776	[Modifier] Include Manufacturer Underfloor Raceway System	SF	$1.08	$2.00	$0.00	$3.08
105777	[Modifier] Quantity Premium - Access Flooring (101-500 SF) Quantity premium can be used when total square footage in section 09-69-00 Access Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105778	[Modifier] Quantity Premium - Access Flooring (51-100 SF) Quantity premium can be used when total square footage in section 09-69-00 Access Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105779	[Modifier] Quantity Premium - Access Flooring (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-69-00 Access Flooring are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-70-00 Wall Finishes

09-72-00 Wall Coverings

Wall coverings of natural or synthetic materials with backing. Includes wall preparation and adhesives.

09-72-00 Wall Coverings

Wall coverings of natural or synthetic materials with backing. Includes wall preparation and adhesives.

105780	Cork Wall Covering	SF	$3.48	$6.22	$0.00	$9.70
105781	Textile Wall Covering 5-7oz / Lineal Yard. Smooth or textured	SF	$2.17	$3.17	$0.00	$5.34
105782	Light Duty Wall Covering 12-19oz / Lineal Yard. Smooth or textured	SF	$2.17	$0.80	$0.00	$2.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105783	Medium Duty Wall Covering 20-28oz / Lineal Yard. Smooth or textured	SF	$2.17	$1.33	$0.00	$3.50
105784	Heavy Duty Wall Covering 30-36oz / Lineal Yard. Smooth or textured	SF	$2.17	$1.60	$0.00	$3.77
105785	Dry Erase Wall Covering	SF	$2.17	$4.79	$0.00	$6.96
105786	[Modifier] Quantity Premium - Wall Coverings (101-500 SF) Quantity premium can be used when total square footage in section 09-72-00 Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105787	[Modifier] Quantity Premium - Wall Coverings (51-100 SF) Quantity premium can be used when total square footage in section 09-72-00 Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105788	[Modifier] Quantity Premium - Wall Coverings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-72-00 Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-74-00 Flexible Wood Sheets

09-72-00 Wall Coverings

Wall coverings of natural or synthetic materials with backing. Includes wall preparation and adhesives.

105789	Prefinished Gypsum Board - Durasan or Equal Includes trim pieces	SF	$1.37	$4.38	$0.00	$5.75

09-74-13 Wood Wall Coverings

105790	Flexible Wood Wall Covering	SF	$2.93	$14.55	$0.00	$17.48
105791	[Modifier] Quantity Premium - Wood Wall Coverings (101-500 SF) Quantity premium can be used when total square footage in section 09-74-13 Wood Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105792	[Modifier] Quantity Premium - Wood Wall Coverings (51-100 SF) Quantity premium can be used when total square footage in section 09-74-13 Wood Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105793	[Modifier] Quantity Premium - Wood Wall Coverings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-74-13 Wood Wall Coverings are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-77-00 Special Wall Surfacing

09-77-00 Special Wall Surfacing

105794	Fabric Wrapped Wall Panel – Economy Range Up to 1", 3#/CF, NRC = .80	SF	$2.92	$12.37	$0.00	$15.29
105795	Fabric Wrapped Wall Panel – Standard Range Up to 1", 6#/CF, NRC = .85	SF	$2.92	$17.26	$0.00	$20.18
105796	Fabric Wrapped Wall Panel – Premium Range Up to 2", 3#/CF, NRC = 1.15	SF	$2.92	$28.78	$0.00	$31.70
105797	[Modifier] Quantity Premium - Special Wall Surfacing (101-500 SF) Quantity premium can be used when total square footage in section 09-77-00 Special Wall Surfacing are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105798	[Modifier] Quantity Premium - Special Wall Surfacing (51-100 SF) Quantity premium can be used when total square footage in section 09-77-00 Special Wall Surfacing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105799	[Modifier] Quantity Premium - Special Wall Surfacing (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-77-00 Special Wall Surfacing are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-78-00 Interior Wall Paneling

Includes all fasteners, hangers, supports, frames, trim pieces, termination strips, grout, mortar, sealant, and cleaning for a fully installed system

09-78-00 Interior Wall Paneling

Includes all fasteners, hangers, supports, frames, trim pieces, termination strips, grout, mortar, sealant, and cleaning for a fully installed system

105800	Aluminum Wall Panel Up to .2" thickness 1" depth, reveal edge, on honeycomb backer. Panels sizing up to 5' x 12'. Attached with flushmount angle or equal. Includes all filler pieces	SF	$3.61	$16.75	$0.00	$20.36
105801	Stainless Steel Wall Panel Up to 24 gauge 1" depth, reveal edge, on honeycomb backer. Panels sizing up to 5' x 12'. Attached with flushmount angle or equal. Includes all filler pieces	SF	$3.61	$27.93	$0.00	$31.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105802	Manufactured Adhered Stone Eldorado limestone or equal	SF	$25.78	$34.96	$0.00	$60.74
105803	Synthetic Adhered Stone Veneerstone or equal	SF	$18.06	$24.47	$0.00	$42.53
105804	Stone Sill	SF	$12.62	$44.46	$0.00	$57.08
105805	Stone Trim	SF	$12.62	$44.46	$0.00	$57.08
105806	Stone Column Cap Or Base	SF	$899.52	$1,667.24	$0.00	$2,566.76
105807	Granite / Marble Wall Panel	SF	$22.82	$47.08	$0.00	$69.90
105808	Granite / Marble Column Cover	SF	$26.99	$50.02	$0.00	$77.01
105809	Granite / Marble Sill	LF	$12.62	$44.46	$0.00	$57.08
105810	Granite / Marble Trim	LF	$12.62	$44.46	$0.00	$57.08
105811	Granite / Marble Column Cap Or Base	EA	$899.52	$1,667.24	$0.00	$2,566.76
105812	Phenolic Wall Panel	SF	$3.61	$11.18	$0.00	$14.79
105813	Resinous Wall Panel Custom resinous panels with integral colors and/or patterns. Smooth or textured finish. 3Form or equal	SF	$4.50	$63.85	$0.00	$68.35
105814	Glass Wall Panel Custom glass panels with integral colors and/or patterns. Smooth or textured finish	SF	$4.50	$76.83	$0.00	$81.33
105815	[Modifier] Quantity Premium - Interior Wall Paneling (101-500 SF) Quantity premium can be used when total square footage in section 09-78-00 Interior Wall Paneling are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105816	[Modifier] Quantity Premium - Interior Wall Paneling (51-100 SF) Quantity premium can be used when total square footage in section 09-78-00 Interior Wall Paneling are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105817	[Modifier] Quantity Premium - Interior Wall Paneling (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-78-00 Interior Wall Paneling are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-80-00 Acoustic Treatment

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	09-81-00 Acoustic Insulation					
	09-81-00 Acoustic Insulation					
105818	2-1/2" Sound Attenuation Batt Thickness provided to achieve overall STC rating as determined by the project documents	SF	$0.91	$0.46	$0.00	$1.37
105819	3-1/2" Sound Attenuation Batt Thickness provided to achieve overall STC rating as determined by the project documents	SF	$0.91	$0.57	$0.00	$1.48
105820	5-1/2" Sound Attenuation Batt Thickness provided to achieve overall STC rating as determined by the project documents	SF	$0.91	$0.87	$0.00	$1.78
105821	[Modifier] Quantity Premium - Acoustic Insulation (101-500 SF) Quantity premium can be used when total square footage in section 09-81-00 Acoustic Insulation are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17
105822	[Modifier] Quantity Premium - Acoustic Insulation (51 -100 SF) Quantity premium can be used when total square footage in section 09-81-00 Acoustic Insulation are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105823	[Modifier] Quantity Premium - Acoustic Insulation (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-81-00 Acoustic Insulation are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86
	09-83-00 Acoustic Finishes					
	Natural or synthetic Fabrics stretched and wrapped around a lightweight acoustical core material in modular sizes. Panel edges match face material. Products provided to achieve overall NRC rating as determined by the project documents					
	09-83-00 Acoustic Finishes					
	Natural or synthetic Fabrics stretched and wrapped around a lightweight acoustical core material in modular sizes. Panel edges match face material. Products provided to achieve overall NRC rating as determined by the project documents					
105824	Spray Textured Acoustic Finish (1" Thick) Lightweight gypsum coating, textured with additives to provide sound deadening properties	SF	$1.74	$3.07	$0.00	$4.81
105825	Spray Textured Acoustic Finish (1/2" Thick) Lightweight gypsum coating, textured with additives to provide sound deadening properties	SF	$0.87	$1.54	$0.00	$2.41
105826	Acoustic Plaster Ceiling System Includes bearing main and secondary rail support grid, and/or light gauge framing, with lath suitable to application. Control and edge trims included. Textured finish system engineered for sound absorption qualities. NRC rated to .80 or better	SF	$11.48	$3.88	$0.00	$15.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105827	Acoustic Plaster, Direct Applied Textured acrylic plaster for sound reduction	SF	$5.18	$1.39	$0.00	$6.57
105828	Acoustic Plaster On Backer Board (Per Side) Includes acoustical plaster on backer board substrate. Textured finish system engineered for sound absorption qualities. NRC rated to .80 or better	SF	$5.18	$3.32	$0.00	$8.50
105829	Acoustical Wall Panel (Absorptive) – Economy Natural or synthetic fabric faced panel, 1-3 lbs density mineral fiber up to 1” thick	SF	$5.18	$16.69	$0.00	$21.87
105830	Acoustical Wall Panel (Absorptive) – Standard Natural or synthetic fabric faced panel, 4-6 lbs density mineral fiber or board, up to 2” thick	SF	$5.18	$20.15	$0.00	$25.33
105831	Acoustical Wall Panel (Absorptive) – Premium Natural or synthetic fabric faced panel, 8-10 mineral density board, up to ¾ inch thick	SF	$5.18	$23.03	$0.00	$28.21
105832	Acoustical Wall Panel (Absorptive) – Economy With Perforated Plastic Sheet Natural or synthetic fabric faced panel, 1-3 lbs density mineral fiber up to 1” thick	SF	$5.18	$20.03	$0.00	$25.21
105833	Acoustical Wall Panel (Absorptive) – Standard With Perforated Plastic Sheet Natural or synthetic fabric faced panel, 4-6 lbs density mineral fiber or board, up to 2” thick	SF	$5.18	$24.17	$0.00	$29.35
105834	Acoustical Wall Panel (Absorptive) – Premium With Perforated Plastic Sheet Natural or synthetic fabric faced panel, 8-10 mineral density board, up to ¾ inch thick	SF	$5.18	$27.62	$0.00	$32.80
105835	Acoustical Wall Panel (Reflective) – Economy Natural or synthetic fabric faced panel, perforated Plastic core or hardboard core. Up to 1/4" Core	SF	$5.18	$16.69	$0.00	$21.87
105836	Acoustical Wall Panel (Reflective) – Standard Prime Painted pre-molded plastic, geometric acoustical reflectors, up to 8" deep	SF	$5.18	$28.78	$0.00	$33.96
105837	Acoustical Wall Panel (Reflective) – Premium Fabric faced pre-molded plastic cores, geometric shapes, up to 12" Deep	SF	$5.18	$40.29	$0.00	$45.47
105838	Fabric Faced Ceiling Hung Baffle Natural or synthetic fabric faced panel, 8-10 mineral density board	SF	$5.18	$27.62	$0.00	$32.80
105839	[Modifier] Quantity Premium - Acoustic Finishes (101 -500 SF) Quantity premium can be used when total square footage in section 09-83-00 Acoustic Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.17	$0.00	$0.00	$2.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105840	[Modifier] Quantity Premium - Acoustic Finishes (51-100 SF) Quantity premium can be used when total square footage in section 09-83-00 Acoustic Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
105841	[Modifier] Quantity Premium - Acoustic Finishes (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-83-00 Acoustic Finishes are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

09-90-00 Painting and Coating

09-90-00 Painting and Coating

09-90-91 Surface Preparation

105842	Pressure Wash Existing Surface for Paint (Wood or Metal)	SF	$0.31	$0.05	$0.15	$0.51
105843	Metal Surface Cleaning - Scrape by Hand	SF	$1.06	$0.00	$0.14	$1.20
105844	Surface Preparation Sandblast Structural Steel	SFCA	$2.99	$0.00	$0.00	$2.99
105845	Metal Surface Cleaning - Power Tool	SF	$0.63	$0.00	$0.17	$0.80
105846	Existing Drywall Surface Preparation - Drywall Compound Skim Coat	SF	$0.68	$0.20	$0.00	$0.88
105847	Surface Preparation - Sandblast Water Tower/Tank - Exterior Includes media (as specified), media blaster with compressor and vacuum equipment	SFCA	$2.63	$0.45	$0.80	$3.88
105848	Surface Preparation - Sandblast Water Tower/Tank - Interior Includes media (as specified), media blaster with compressor and vacuum equipment	SFCA	$5.50	$0.95	$1.69	$8.14

09-91-00 Painting

All painting costs are complete systems with one primer coat and two finish coats unless noted otherwise. Includes surface preparation to comply with manufacturer's requirements, and application of primer (over unpainted) or barrier coats (over previously painted surfaces). Follow project documents as well as manufacturers requirements for number of required coats and DFT thicknesses. Includes all protection, including but not limited to plastic sheeting, tarps, tape, etc. Excludes stripping existing paint.

09-91-13 Exterior Painting

105849	Paint Siding – Steel Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$1.07	$0.41	$0.00	$1.48
105850	Paint Galvanized Sheet Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$1.07	$0.41	$0.00	$1.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105851	Paint Siding – Stucco (High Solids Acrylic Latex Paint) Includes One Coat Primer and Two Coats Paint	SF	$1.16	$0.41	$0.00	$1.57
105852	Paint Fiber Cement Siding Includes One Coat Primer and Two Coats Paint	SF	$1.16	$0.41	$0.00	$1.57
105853	Paint Wood Lap Siding Includes One Coat Primer and Two Coats Paint	SF	$1.16	$0.41	$0.00	$1.57
105854	Paint Wood Shingle Siding Includes One Coat Primer and Two Coats Paint	SF	$1.16	$0.41	$0.00	$1.57
105855	Paint Exterior Soffit Includes One Coat Primer and Two Coats Paint	SF	$1.35	$0.41	$0.00	$1.76
105856	Paint Exterior Trim Includes One Coat Primer and Two Coats Paint	LF	$2.69	$0.52	$0.00	$3.21
105857	Paint Exterior Concrete Masonry Unit (CMU Block) Wall Includes One Coat Primer and Two Coats Paint	SF	$1.52	$0.62	$0.00	$2.14
105858	Paint Exterior Door Wood – Single Door Includes One Coat Primer and Two Coats Paint	EA	$120.18	$20.74	$0.00	$140.92
105859	Paint Exterior Door Metal – Single Door Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	EA	$120.18	$20.74	$0.00	$140.92
105860	Paint Exterior Door Composite – Single Door Includes One Coat Primer and Two Coats Paint	EA	$120.18	$20.74	$0.00	$140.92
105861	Powder Coating Finish - Perforated Metal Screen Door	EA	$12.83	$10.61	$0.00	$23.44
105862	Paint Exterior Door Wood – Double Door Includes One Coat Primer and Two Coats Paint	EA	$240.34	$41.48	$0.00	$281.82
105863	Paint Exterior Door Metal – Double Door Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	EA	$240.34	$41.48	$0.00	$281.82
105864	Paint Exterior Door Composite – Double Door Includes One Coat Primer and Two Coats Paint	EA	$240.34	$41.48	$0.00	$281.82
105865	Paint Exterior Door Frame – Single Wood Includes One Coat Primer and Two Coats Paint	EA	$106.87	$14.52	$0.00	$121.39
105866	Paint Exterior Door Frame – Single Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	EA	$106.87	$14.52	$0.00	$121.39
105867	Paint Exterior Door Frame – Double Wood Includes One Coat Primer and Two Coats Paint	EA	$178.11	$26.14	$0.00	$204.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105868	Paint Exterior Door Frame – Double Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	EA	$178.11	$26.14	$0.00	$204.25
105869	Paint Exterior Roll Up Doors – Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$1.07	$0.41	$0.00	$1.48
105870	Paint Exterior Roll Up Doors – Wood Includes One Coat Primer and Two Coats Paint	SF	$1.07	$0.41	$0.00	$1.48
105871	Paint Exterior Gate – Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$1.29	$0.50	$0.00	$1.79
105872	Paint Exterior Gate – Wood Includes One Coat Primer and Two Coats Paint	SF	$1.29	$0.50	$0.00	$1.79
105873	Paint Exterior Hatch- Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$1.29	$0.50	$0.00	$1.79
105874	Paint Exterior Hatch – Wood Includes One Coat Primer and Two Coats Paint	SF	$1.29	$0.50	$0.00	$1.79
105875	Paint Window – Wood (Acrylic Enamel Paint) Includes One Coat Primer / Barrier Coat and Two Coats Paint	SF	$19.10	$3.63	$0.00	$22.73
105876	Paint Window – Metal Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Paint	SF	$19.10	$3.63	$0.00	$22.73
105877	Paint Wood Fencing Includes One Coat Primer and Two Coats Paint	SF	$1.16	$0.41	$0.00	$1.57
105878	Paint Wrought Iron Fencing Includes One Coat Primer and Two Coats Paint	SF	$1.83	$0.41	$0.00	$2.24
105879	Paint Bollard (High Build Impact Resistant Epoxy Paint) Includes One Coat Primer and Two Coats Paint	EA	$95.51	$20.74	$0.00	$116.25
105880	Paint Ladder – LF Of Ladder Includes One Coat Primer and Two Coats Paint	LF	$45.84	$2.07	$0.00	$47.91
105881	Paint Ladder With Cage – LF Of Ladder Includes One Coat Primer and Two Coats Paint	LF	$64.18	$2.90	$0.00	$67.08
105882	Single Coat Paint Siding - Steel Excludes Primer	SF	$0.36	$0.13	$0.00	$0.49
105883	Single Coat Paint Galvanized Sheet Metal Excludes Primer	SF	$0.36	$0.13	$0.00	$0.49
105884	Single Coat Paint Siding - Stucco (High Solids Acrylic Latex Paint) Excludes Primer	SF	$0.39	$0.13	$0.00	$0.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105885	Single Coat Paint Fiber Cement Siding Excludes Primer	SF	$0.39	$0.13	$0.00	$0.52
105886	Single Coat Paint Wood Lap Siding Excludes Primer	SF	$0.39	$0.13	$0.00	$0.52
105887	Single Coat Paint Wood Shingle Siding Excludes Primer	SF	$0.39	$0.13	$0.00	$0.52
105888	Single Coat Paint Exterior Soffit Excludes Primer	SF	$0.45	$0.13	$0.00	$0.58
105889	Single Coat Paint Exterior Trim Excludes Primer	LF	$0.90	$0.17	$0.00	$1.07
105890	Single Coat Paint Exterior Concrete Masonry Unit (CMU Block) Wall Excludes Primer	SF	$0.51	$0.21	$0.00	$0.72
105891	Single Coat Paint Exterior Door Wood – Single Door Excludes Primer	EA	$40.05	$6.91	$0.00	$46.96
105892	Single Coat Paint Exterior Door Metal – Single Door Excludes Primer	EA	$40.05	$6.91	$0.00	$46.96
105893	Single Coat Paint Exterior Door Composite – Single Door Excludes Primer	EA	$40.05	$6.91	$0.00	$46.96
105894	Single Coat Paint Exterior Door Wood – Double Door Excludes Primer	EA	$80.11	$13.82	$0.00	$93.93
105895	Single Coat Paint Exterior Door Metal – Double Door Excludes Primer	EA	$80.11	$13.82	$0.00	$93.93
105896	Single Coat Paint Exterior Door Composite – Double Door Excludes Primer	EA	$80.11	$13.82	$0.00	$93.93
105897	Single Coat Paint Exterior Door Frame – Single Wood Excludes Primer	EA	$35.63	$4.84	$0.00	$40.47
105898	Single Coat Paint Exterior Door Frame – Single Metal Excludes Primer	EA	$35.63	$4.84	$0.00	$40.47
105899	Single Coat Paint Exterior Door Frame – Double Wood Excludes Primer	EA	$59.37	$8.72	$0.00	$68.09
105900	Single Coat Paint Exterior Door Frame – Double Metal Excludes Primer	EA	$59.37	$8.72	$0.00	$68.09
105901	Single Coat Paint Exterior Roll Up Doors – Metal Excludes Primer	SF	$0.36	$0.13	$0.00	$0.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105902	Single Coat Paint Exterior Roll Up Doors – Wood Excludes Primer	SF	$0.36	$0.13	$0.00	$0.49
105903	Single Coat Paint Exterior Gate – Metal Excludes Primer	SF	$0.43	$0.17	$0.00	$0.60
105904	Single Coat Paint Exterior Gate – Wood Excludes Primer	SF	$0.43	$0.17	$0.00	$0.60
105905	Single Coat Paint Exterior Hatch- Metal Excludes Primer	SF	$0.43	$0.17	$0.00	$0.60
105906	Single Coat Paint Exterior Hatch – Wood Excludes Primer	SF	$0.43	$0.17	$0.00	$0.60
105907	Single Coat Paint Window – Wood (Acrylic Enamel Paint) Excludes Primer	SF	$6.37	$1.21	$0.00	$7.58
105908	Single Coat Paint Window – Metal Excludes Primer	SF	$6.37	$1.21	$0.00	$7.58
105909	Single Coat Paint Wood Fencing Excludes Primer	SF	$0.39	$0.13	$0.00	$0.52
105910	Single Coat Paint Wrought Iron Fencing Excludes Primer	SF	$0.61	$0.13	$0.00	$0.74
105911	Single Coat Paint Bollard Excludes Primer	EA	$31.83	$6.91	$0.00	$38.74
105912	Single Coat Paint Ladder – LF Of Ladder Excludes Primer	LF	$15.28	$0.69	$0.00	$15.97
105913	Single Coat Paint Ladder With Cage – LF Of Ladder Excludes Primer	LF	$21.39	$0.96	$0.00	$22.35
105914	[Modifier] Quantity Premium - Exterior Painting (101-500 SF) Quantity premium can be used when total square footage in section 09-91-13 Exterior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18
105915	[Modifier] Quantity Premium - Exterior Painting (51-100 SF) Quantity premium can be used when total square footage in section 09-91-13 Exterior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
105916	[Modifier] Quantity Premium - Exterior Painting (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-91-13 Exterior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91

09-91-23 Interior Painting

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105917	Paint Interior Floor - Concrete Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$0.71	$0.16	$0.00	$0.87
105918	Paint Interior Floor - Concrete (Urethane) Includes One Coat Primer and Two Coats Urethane Paint	SF	$5.24	$5.85	$0.00	$11.09
105919	Paint Interior Ceiling - GWB, Drywall, or Plaster Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.25	$0.35	$0.00	$1.60
105920	Paint Interior Soffit - GWB, Drywall, or Plaster Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.52	$0.35	$0.00	$1.87
105921	Paint Interior Structural Steel - Exposed Ceiling Includes One Barrier Coat (Over Factory Shop Primer) and Two Coats Dry Fall Acrylic Paint	SF	$2.28	$0.54	$0.00	$2.82
105922	Paint Interior Column - Concrete Masonry Unit (CMU Block) or Concrete Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.79	$0.54	$0.00	$2.33
105923	Paint Interior Column - GWB, Drywall, or Plaster Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.16	$0.35	$0.00	$1.51
105924	Paint Interior Wall - Concrete Masonry Unit (CMU Block) or Concrete Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.52	$0.54	$0.00	$2.06
105925	Paint Interior Wall - GWB, Drywall, or Plaster Includes One Coat Primer and Two Coats Acrylic Latex Paint	SF	$1.00	$0.35	$0.00	$1.35
105926	Paint Interior Trim - Wood or Composite Includes One Coat Primer and Two Coats Acrylic Latex Paint	LF	$2.69	$0.45	$0.00	$3.14
105927	Paint Interior Wood or Composite Door - Single Includes One Coat Primer and Two Coats Acrylic Latex Paint	EA	$120.18	$17.88	$0.00	$138.06
105928	Paint Interior Wood or Composite Door - Double Includes One Coat Primer and Two Coats Acrylic Latex Paint	EA	$240.34	$35.75	$0.00	$276.09
105929	Paint Interior Wood or Composite Door Frame - Single Includes One Coat Primer and Two Coats Acrylic Latex Paint	EA	$106.87	$12.52	$0.00	$119.39
105930	Paint Interior Wood or Composite Door Frame - Double Includes One Coat Primer and Two Coats Acrylic Latex Paint	EA	$178.11	$22.53	$0.00	$200.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105931	Paint Interior Metal Door - Single Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Urethane Enamel Paint	EA	$120.18	$21.27	$0.00	$141.45
105932	Paint Interior Metal Door - Double Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Urethane Enamel Paint	EA	$240.34	$42.56	$0.00	$282.90
105933	Paint Interior Metal Door Frame - Single Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Urethane Enamel Paint	EA	$106.87	$14.90	$0.00	$121.77
105934	Paint Interior Metal Door Frame - Double Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Urethane Enamel Paint	EA	$178.11	$26.81	$0.00	$204.92
105935	Paint Interior Metal Door - Roll Up Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Urethane Enamel Paint	SF	$1.07	$0.43	$0.00	$1.50
105936	Paint Interior Locker (Electrostatically Applied Enamel Paint) Includes One Coat Primer and Two Coats Urethane Enamel Paint	EA	$134.24	$26.82	$0.00	$161.06
105937	Single Coat Paint Interior Ceiling - GWB, Drywall, or Plaster Acrylic Latex Paint. Excludes Primer	SF	$0.41	$0.12	$0.00	$0.53
105938	Single Coat Paint Interior Soffit - GWB, Drywall, or Plaster Acrylic Latex Paint. Excludes Primer	SF	$0.51	$0.12	$0.00	$0.63
105939	Single Coat Paint Interior Structural Steel - Exposed Ceiling Dry Fall Acrylic Paint. Excludes Primer	SF	$0.76	$0.18	$0.00	$0.94
105940	Single Coat Paint Interior Column - Concrete Masonry Unit (CMU Block) or Concrete Acrylic Latex Paint. Excludes Primer	SF	$0.60	$0.18	$0.00	$0.78
105941	Single Coat Paint Interior Column - GWB, Drywall, or Plaster Acrylic Latex Paint. Excludes Primer	SF	$0.39	$0.12	$0.00	$0.51
105942	Single Coat Paint Interior Wall - Concrete Masonry Unit (CMU Block) or Concrete Acrylic Latex Paint. Excludes Primer	SF	$0.51	$0.18	$0.00	$0.69
105943	Single Coat Paint Interior Wall - GWB, Drywall, or Plaster Acrylic Latex Paint. Excludes Primer	SF	$0.33	$0.12	$0.00	$0.45
105944	Single Coat Paint Interior Trim - Wood or Composite Acrylic Latex Paint. Excludes Primer	LF	$0.90	$0.15	$0.00	$1.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105945	Single Coat Paint Interior Wood or Composite Door - Single Acrylic Latex Paint. Excludes Primer	EA	$40.05	$5.96	$0.00	$46.01
105946	Single Coat Paint Interior Wood or Composite Door - Double Acrylic Latex Paint. Excludes Primer	EA	$80.11	$11.92	$0.00	$92.03
105947	Single Coat Paint Interior Wood or Composite Door Frame - Single Acrylic Latex Paint. Excludes Primer	EA	$35.63	$4.17	$0.00	$39.80
105948	Single Coat Paint Interior Wood or Composite Door Frame - Double Acrylic Latex Paint. Excludes Primer	EA	$59.37	$7.51	$0.00	$66.88
105949	Single Coat Paint Interior Metal Door - Single Urethane Enamel Paint. Excludes Primer	EA	$40.05	$7.08	$0.00	$47.13
105950	Single Coat Paint Interior Metal Door - Double Urethane Enamel Paint. Excludes Primer	EA	$80.11	$14.19	$0.00	$94.30
105951	Single Coat Paint Interior Metal Door Frame - Single Urethane Enamel Paint. Excludes Primer	EA	$35.63	$4.97	$0.00	$40.60
105952	Single Coat Paint Interior Metal Door Frame - Double Urethane Enamel Paint. Excludes Primer	EA	$59.37	$8.94	$0.00	$68.31
105953	Single Coat Paint Interior Metal Door - Roll Up Urethane Enamel Paint. Excludes Primer	SF	$0.36	$0.15	$0.00	$0.51
105954	Single Coat Paint Interior Lockers - Electrostatically Applied Enamel Paint Urethane Enamel Paint. Excludes Primer	EA	$44.75	$8.94	$0.00	$53.69
105955	Dry Erase Wall Paint	SF	$0.83	$4.47	$0.00	$5.30
105956	Paint Ductwork, Piping, or Conduit - One Coat Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and One Coat Acrylic Paint	SF	$1.26	$0.29	$0.00	$1.55
105957	Paint Ductwork, Piping, or Conduit - Two Coats Includes One Coat Metal Primer w/ Corrosion Inhibiting Properties and Two Coats Acrylic Paint	SF	$1.83	$0.44	$0.00	$2.27
105958	[Modifier] Scuff Resistant Primer Water based hi build epoxy. 1-1.5mm	SF	$0.00	$1.06	$0.00	$1.06
105959	[Modifier] Quantity Premium - Interior Painting (101-500 SF) Quantity premium can be used when total square footage in section 09-91-23 Interior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105960	[Modifier] Quantity Premium - Interior Painting (51-100 SF) Quantity premium can be used when total square footage in section 09-91-23 Interior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
105961	[Modifier] Quantity Premium - Interior Painting (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-91-23 Interior Painting are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91

09-93-00 Staining and Transparent Finishing

All staining costs are complete systems. Includes surface preparation to comply with manufacturer's requirements, removal of all deleterious materials, and application of stain and sealer. Follow project documents as well as manufacturers requirements for number of required coats and thicknesses. Includes all protection, including but not limited to plastic sheeting, tarps, tape, etc.

09-93-13 Staining and Finishing

105962	Stain and Seal Wood Sills Water or oil based stain with two urethane clear coats.	SFCA	$1.28	$0.38	$0.00	$1.66
105963	Stain and Seal Wood Door – Single Water or oil based stain with two urethane clear coats.	EA	$85.84	$12.78	$0.00	$98.62
105964	Stain and Seal Wood Door – Double Water or oil based stain with two urethane clear coats.	EA	$171.67	$25.54	$0.00	$197.21
105965	Stain and Seal Wood Frame – Single Water or oil based stain with two urethane clear coats.	EA	$76.34	$8.94	$0.00	$85.28
105966	Stain and Seal Wood Frame – Double Water or oil based stain with two urethane clear coats.	EA	$127.22	$16.09	$0.00	$143.31
105967	Stain and Seal Wall Panel Water or oil based stain with two urethane clear coats.	SF	$1.28	$0.38	$0.00	$1.66
105968	Stain and Seal Casework Water or oil based stain with two urethane clear coats.	SF	$2.55	$0.77	$0.00	$3.32
105969	Stain and Seal Wood Lap Siding Water or oil based stain with two urethane clear coats.	SF	$0.71	$0.38	$0.00	$1.09
105970	Stain and Seal Wood Shingle Siding Water or oil based stain with two urethane clear coats.	SF	$0.77	$0.38	$0.00	$1.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105971	Stain and Seal Wood Fencing Water or oil based stain with two urethane clear coats.	SF	$0.71	$0.38	$0.00	$1.09
105972	Stain Window Water or oil based stain with two urethane clear coats.	SF	$13.64	$2.23	$0.00	$15.87
105973	[Modifier] Quantity Premium - Staining and Transparent Finishing (101-500 SF) Quantity premium can be used when total square footage in section 09-93-00 Staining and Transparent Finishing are within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18
105974	[Modifier] Quantity Premium - Staining and Transparent Finishing (51-100 SF) Quantity premium can be used when total square footage in section 09-93-00 Staining and Transparent Finishing are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
105975	[Modifier] Quantity Premium - Staining and Transparent Finishing (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-93-00 Staining and Transparent Finishing are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91

09-96-00 High-Performance Coatings

All painting costs are complete systems. Includes surface preparation to comply with manufacturer's requirements, removal of all deleterious materials, and application of primer (over unpainted) or barrier coats (over previously painted surfaces). Follow project documents as well as manufacturers requirements for number of required coats and DFT thicknesses. Includes all protection, including but not limited to plastic sheeting, tarps, tape, etc. Includes primer and high solids aliphatic or urethane epoxies with intermediate and top coat. 3-5mils finished thickness. Includes barrier coat for incompatible shop primers. Includes primers for high humidity environments

09-96-23 Graffiti-Resistant Coatings

105976	Anti-Graffiti Coating Permanent (Interior) – Spray On Permanent	SF	$1.45	$1.21	$0.00	$2.66
105977	Anti-Graffiti Coating Permanent (Interior) – Roll On Permanent	SF	$1.83	$1.21	$0.00	$3.04
105978	Anti-Graffiti Coating Permanent (Exterior) – Spray On Permanent	SF	$1.26	$1.04	$0.00	$2.30
105979	Anti-Graffiti Coating Permanent (Exterior) – Roll On Permanent	SF	$1.59	$1.04	$0.00	$2.63
105980	Anti-Graffiti Coating Sacrificial (Interior) – Spray On Sacrificial	SF	$1.04	$0.49	$0.00	$1.53
105981	Anti-Graffiti Coating Sacrificial (Interior) – Roll On Sacrificial	SF	$1.30	$0.49	$0.00	$1.79
105982	Anti-Graffiti Coating Sacrificial (Exterior) – Spray On Sacrificial	SF	$0.90	$0.41	$0.00	$1.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105983	Anti-Graffiti Coating Sacrificial (Exterior) – Roll On Sacrificial	SF	$1.13	$0.41	$0.00	$1.54
105984	[Modifier] Quantity Premium - Anti-Graffiti Coatings (101-500 SF) Quantity premium can be used when total square footage in section 09-96-23 Anti-Graffiti Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18
105985	[Modifier] Quantity Premium - Anti-Graffiti Coatings (51-100 SF) Quantity premium can be used when total square footage in section 09-96-23 Anti-Graffiti Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
105986	[Modifier] Quantity Premium - Anti-Graffiti Coatings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-96-23 Anti-Graffiti Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91
	09-96-56 Epoxy Coatings					
105987	Epoxy Paint Metal Pan Stair (Per Riser) Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	RI	$66.78	$21.45	$0.00	$88.23
105988	Epoxy Paint Ceiling	SF	$1.44	$0.89	$0.00	$2.33
105989	Epoxy Paint Floor – Concrete	SF	$1.07	$0.59	$0.00	$1.66
105990	Epoxy Paint Structural Steel - High Humidity/High Build Chlorine resistant formulations	SF	$4.43	$1.79	$0.00	$6.22
105991	Epoxy Paint Wall - Concrete Masonry Unit (CMU Block) or Concrete	SF	$1.79	$0.99	$0.00	$2.78
105992	Epoxy Paint Wall - GWB, Drywall, or Plaster	SF	$1.25	$0.82	$0.00	$2.07
105993	Epoxy Paint Railing - Single Line or Wall Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$9.17	$0.35	$0.00	$9.52
105994	Epoxy Paint Railing - Two Line Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$18.34	$0.72	$0.00	$19.06
105995	Epoxy Paint Railing - Three Line Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$27.51	$1.07	$0.00	$28.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
105996	Epoxy Paint Railing - Four Line Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$36.67	$1.43	$0.00	$38.10
105997	Epoxy Paint Railing - Five Line Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$45.84	$1.79	$0.00	$47.63
105998	Epoxy Paint Handrail w/ Mesh Panels Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$45.84	$1.79	$0.00	$47.63
105999	Epoxy Paint Handrail w/ Vertical Pickets Includes One Coat Primer and Two Coats High Build Impact Resistant Epoxy Paint	LF	$45.84	$1.79	$0.00	$47.63
106000	Single Coat Epoxy Paint Metal Pan Stair (Per Riser) High Build Impact Resistant Epoxy Paint, Excludes Primer	RI	$22.26	$7.16	$0.00	$29.42
106001	Single Coat Epoxy Paint Railing - Single Line or Wall High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$3.06	$0.12	$0.00	$3.18
106002	Single Coat Epoxy Paint Railing - Two Line High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$6.12	$0.24	$0.00	$6.36
106003	Single Coat Epoxy Paint Railing - Three Line High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$9.17	$0.35	$0.00	$9.52
106004	Single Coat Epoxy Paint Railing - Four Line High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$12.22	$0.48	$0.00	$12.70
106005	Single Coat Epoxy Paint Railing - Five Line High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$15.28	$0.60	$0.00	$15.88
106006	Single Coat Epoxy Paint Handrail w/ Mesh Panels High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$15.28	$0.60	$0.00	$15.88
106007	Single Coat Epoxy Paint Handrail w/ Vertical Pickets High Build Impact Resistant Epoxy Paint, Excludes Primer	LF	$15.28	$0.60	$0.00	$15.88
106008	[Modifier] Quantity Premium - Epoxy Coatings (101-500 SF) Quantity premium can be used when total square footage in section 09-96-56 Epoxy Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$2.18	$0.00	$0.00	$2.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106009	[Modifier] Quantity Premium - Epoxy Coatings (51-100 SF) Quantity premium can be used when total square footage in section 09-96-56 Epoxy Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$5.46	$0.00	$0.00	$5.46
106010	[Modifier] Quantity Premium - Epoxy Coatings (< or = to 50 SF) Quantity premium can be used when total square footage in section 09-96-56 Epoxy Coatings is within stated quantities. Can be applied cumulatively to base line items.	SF	$10.91	$0.00	$0.00	$10.91

09-97-00 Special Coatings

09-97-13 Steel Coatings

106011	Paint Water Tower/Tank Exterior 3 coat application, zinc-epoxy-polyurethane	SFCA	$2.68	$4.27	$1.69	$8.64
106012	Paint Water Tower/Tank Interior 3 coat application, zinc-epoxy-epoxy	SFCA	$1.40	$3.11	$0.80	$5.31

10-00-00 Specialties

10-10-00 Information Specialties

10-11-00 Visual Display Units

Includes all mounting hardware, adhesives, and wall backing, for a secure connection to structure

10-11-13 Chalkboards

Chalkboards are black porcelain, unless noted otherwise. Includes all mounting hardware and accessory tray

106013	Chalkboard With Aluminum Frame	SF	$3.62	$11.75	$0.00	$15.37
106014	Chalkboard With Wood Frame	SF	$3.62	$13.99	$0.00	$17.61
106015	[Modifier] Manual Sliding Panels Includes any number of panels	SF	$0.00	$5.60	$0.00	$5.60
106016	[Modifier] Motorized Sliding Panels Includes any number of panels	SF	$0.00	$16.79	$0.00	$16.79
106017	[Modifier] Magnetic	SF	$0.00	$3.91	$0.00	$3.91

10-11-16 Markerboards

Markerboards are white Melamine, unless noted otherwise. Includes all mounting hardware and accessory tray

106018	Markerboard With Aluminum Frame	SF	$3.62	$13.41	$0.00	$17.03
106019	Markerboard With Wood Frame	SF	$3.62	$15.97	$0.00	$19.59
106020	Markerboard Glass	SF	$3.62	$30.73	$0.00	$34.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106021	Interactive Marker Board – SMART Board 6000 Or Equal Modifiers are not applicable to this item	SF	$14.48	$342.49	$0.00	$356.97
106022	Interactive Marker Board – SMART Board 7000 Or Equal Modifiers are not applicable to this item	SF	$14.48	$428.11	$0.00	$442.59
106023	[Modifier] Manual Sliding Panels Includes any number of panels	SF	$0.00	$5.33	$0.00	$5.33
106024	[Modifier] Motorized Sliding Panels Includes any number of panels	SF	$0.00	$15.97	$0.00	$15.97
106025	[Modifier] Magnetic	SF	$0.00	$4.00	$0.00	$4.00
	10-11-23 Tackboards					
106026	Tackboard With Aluminum Frame Includes mounting hardware and accessory tray	SF	$3.62	$9.22	$0.00	$12.84
106027	Tackboard Wood Frame Includes mounting hardware and accessory tray	SF	$3.62	$11.51	$0.00	$15.13
106028	Tackable Surface – WALLTALKERS Or Equal Includes all adhesives, hardware, and trim pieces. Modifiers are not applicable to this line item	SF	$3.62	$10.36	$0.00	$13.98
106029	[Modifier] Manual Sliding Panels	SF	$0.00	$5.75	$0.00	$5.75
106030	[Modifier] Motorized Sliding Panels	SF	$0.00	$17.26	$0.00	$17.26
106031	Metal Wire Mesh Display Wall Panels w/ Steel Angle Frame Similar or equal to - McNichols Wire Mesh Square, Hardware & Industrial Cloth 1676, galvanized steel, hot dipped, welded, trimmed, 2" x 2" mesh (square), 16 gauge with 2" x 2" x 1/8" steel frame	SF	$46.91	$39.70	$0.93	$87.54

10-12-00 Display Cases

Includes all mounting hardware, adhesives, and wall backing, for a secure connection to structure

10-12-00 Display Cases

Includes all mounting hardware, adhesives, and wall backing, for a secure connection to structure

106032	Display Case Glass Unit Up To 4'-0" Height By 3'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$224.86	$1,182.04	$0.00	$1,406.90
106033	Display Case Glass Unit Up To 5'-0" Height By 3'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$270.17	$1,418.45	$0.00	$1,688.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106034	Display Case Glass Unit Up To 6'-0" Height By 3'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$314.80	$1,654.87	$0.00	$1,969.67
106035	Display Case Glass Unit Up To 4'-0" Height By 4'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$270.17	$1,418.45	$0.00	$1,688.62
106036	Display Case Glass Unit Up To 4'-0" Height By 5'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$314.80	$1,654.87	$0.00	$1,969.67
106037	Display Case Glass Unit Up To 4'-0" Height By 6'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$359.87	$1,891.27	$0.00	$2,251.14
106038	Display Case Glass Unit Up To 5'-0" Height By 4'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$314.80	$1,654.87	$0.00	$1,969.67
106039	Display Case Glass Unit Up To 6'-0" Height By 4'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$359.87	$1,891.27	$0.00	$2,251.14
106040	Display Case Glass Unit Up To 5'-0" Height By 5'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$359.87	$1,891.27	$0.00	$2,251.14
106041	Display Case Glass Unit Up To 6'-0" Height By 6'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$449.54	$2,364.09	$0.00	$2,813.63
106042	Display Case Glass Unit Up To 5'-0" Height By 6'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$404.65	$2,127.68	$0.00	$2,532.33
106043	Display Case Glass Unit Up To 6'-0" Height By 5'-0" Wide Includes metal and wood frame, seismic safety hardware	EA	$404.65	$2,127.68	$0.00	$2,532.33
106044	Display Wall Shelving Up To 6" Deep – Aluminum Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$6.78	$22.33	$0.00	$29.11
106045	Display Wall Shelving Up To 1'-0" Deep – Aluminum Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.24	$27.93	$0.00	$35.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106046	Display Wall Shelving Up To 1'-6" Deep – Aluminum Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.76	$33.51	$0.00	$41.27
106047	Display Wall Shelving Up To 6" Deep – Wood Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$6.78	$26.26	$0.00	$33.04
106048	Display Wall Shelving Up To 1'-0" Deep – Wood Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.24	$32.83	$0.00	$40.07
106049	Display Wall Shelving Up To 1'-6" Deep – Wood Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.76	$39.39	$0.00	$47.15
106050	Display Wall Shelving Up To 6" Deep – Plastic Laminate Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$6.78	$17.14	$0.00	$23.92
106051	Display Wall Shelving Up To 1'-0" Deep – Plastic Laminate Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.24	$21.42	$0.00	$28.66
106052	Display Wall Shelving Up To 1'-6" Deep – Plastic Laminate Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.76	$25.71	$0.00	$33.47
106053	Display Wall Shelving Up To 6" Deep – Stainless Steel Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$6.78	$31.51	$0.00	$38.29
106054	Display Wall Shelving Up To 1'-0" Deep – Stainless Steel Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.24	$39.39	$0.00	$46.63
106055	Display Wall Shelving Up To 1'-6" Deep – Stainless Steel Or Equal Includes all intermediate supports, mounting brackets, and mounting hardware	LF	$7.76	$47.26	$0.00	$55.02

10-13-00 Directories

Includes all mounting hardware and adhesives, and wall backing, for a secure connection to structure

10-13-00 Directories

Includes all mounting hardware and adhesives, and wall backing, for a secure connection to structure

106056	Directory Up To 16 SF Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$181.01	$1,141.62	$0.00	$1,322.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106057	Directory 17 SF To 22 SF Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$181.01	$1,598.27	$0.00	$1,779.28
106058	Directory 23 SF To 28 SF Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$217.21	$2,054.92	$0.00	$2,272.13
106059	Directory 29 SF To 34 SF Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$217.21	$2,511.57	$0.00	$2,728.78
106060	Directory 35 SF To 40 SF Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$271.52	$2,968.22	$0.00	$3,239.74
106061	[Modifier] Directory Illuminated Aluminum frame, hinged tempered glass front, for changeable message strips. Surface mounted.	EA	$0.00	$575.58	$0.00	$575.58

10-14-00 Signage

Includes all mounting hardware, adhesives, and wall backing, for a secure connection to structure

10-14-16 Plaques

For Interior and Exterior use. Includes all mounting hardware and adhesives

106062	Plaque Cast Metal Up To .5 SF (Wall Mounted Or Part Of Monumental Sign) Includes all metal makes of signage	EA	$108.61	$837.66	$0.00	$946.27
106063	Plaque Cast Metal .5 SF To 1.5 SF (Wall Mounted Or Part Of Monumental Sign) Includes all metal makes of signage. Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$108.61	$1,061.03	$0.00	$1,169.64
106064	Plaque Cast Metal 1.5 SF To 3.5 SF (Wall Mounted Or Part Of Monumental Sign) Includes all metal makes of signage. Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$135.76	$1,284.41	$0.00	$1,420.17
106065	Plaque Cast Metal 3.5 To 5 SF (Wall Mounted Or Part Of Monumental Sign) Includes all metal makes of signage. Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$135.76	$1,507.79	$0.00	$1,643.55
106066	Plaque Cast Metal Greater Than 5 SF (Wall Mounted Or Part Of Monumental Sign) Includes all metal makes of signage. Provide posts for up to 8'-0" of clearance from bottom of sign.	SF	$27.15	$301.56	$0.00	$328.71
106067	Plaque Cast Metal Up To .5 SF (Post Mounted) Includes all metal makes of signage. Provide posts up to provide 8'-0" of clearance from bottom of sign.	EA	$135.76	$921.43	$0.00	$1,057.19
106068	Plaque Cast Metal .5 SF To 1.5 SF (Post Mounted) Includes all metal makes of signage. Provide posts up to provide 8'-0" of clearance from bottom of sign.	EA	$135.76	$1,167.14	$0.00	$1,302.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106069	Plaque Cast Metal 1.5 SF To 3.5 SF (Post Mounted) Includes all metal makes of signage. Provide posts up to provide 8'-0" of clearance from bottom of sign.	EA	$181.01	$1,412.86	$0.00	$1,593.87
106070	Plaque Cast Metal 3.5 To 5 SF (Post Mounted) Includes all metal makes of signage. Provide posts up to provide 8'-0" of clearance from bottom of sign.	EA	$181.01	$1,658.57	$0.00	$1,839.58
106071	Plaque Cast Metal Greater Than 5 SF (Post Mounted) Includes all metal makes of signage. Provide posts up to provide 8'-0" of clearance from bottom of sign.	SF	$36.20	$331.71	$0.00	$367.91
106072	Plaque Plastic, Acrylic, PVC Up To .5 SF (Wall Mounted Or Part Of Monumental Sign)	EA	$90.50	$79.82	$0.00	$170.32
106073	Plaque Plastic, Acrylic, PVC .5 SF To 1.5 SF (Wall Mounted Or Part Of Monumental Sign)	EA	$90.50	$101.10	$0.00	$191.60
106074	Plaque Plastic, Acrylic, PVC 1.5 SF To 3.5 SF (Wall Mounted Or Part Of Monumental Sign)	EA	$108.61	$122.39	$0.00	$231.00
106075	Plaque Plastic, Acrylic, PVC 3.5 To 5 SF (Wall Mounted Or Part Of Monumental Sign)	EA	$108.61	$143.67	$0.00	$252.28
106076	Plaque Plastic, Acrylic, PVC Greater Than 5 SF (Wall Mounted Or Part Of Monumental Sign)	SF	$21.72	$28.73	$0.00	$50.45
106077	Plaque Plastic, Acrylic, PVC Up To .5 SF (Post Mounted) Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$108.61	$87.80	$0.00	$196.41
106078	Plaque Plastic, Acrylic, PVC .5 SF To 1.5 SF (Post Mounted) Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$108.61	$111.21	$0.00	$219.82
106079	Plaque Plastic, Acrylic, PVC 1.5 SF To 3.5 SF (Post Mounted) Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$135.76	$134.63	$0.00	$270.39
106080	Plaque Plastic, Acrylic, PVC 3.5 To 5 SF (Post Mounted) Provide posts for up to 8'-0" of clearance from bottom of sign.	EA	$135.76	$158.04	$0.00	$293.80
106081	Plaque Plastic, Acrylic, PVC Greater Than 5 SF (Post Mounted) Provide posts for up to 8'-0" of clearance from bottom of sign.	SF	$27.15	$31.61	$0.00	$58.76

10-14-19 Dimensional Letter Signage

For Interior and Exterior use. Includes all mounting hardware and adhesives

106082	Per Character Plastic, Acrylic, PVC Up To 1'-0" In Height	EA	$33.94	$30.87	$0.00	$64.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106083	Per Character Plastic, Acrylic, PVC Up To 1'-6" In Height	EA	$33.94	$57.46	$0.00	$91.40
106084	Per Character Plastic, Acrylic, PVC Up To 2'-0" In Height	EA	$38.79	$92.58	$0.00	$131.37
106085	Per Character Plastic, Acrylic, PVC Up To 2'-6" In Height	EA	$38.79	$149.00	$0.00	$187.79
106086	Per Character Plastic, Acrylic, PVC Up To 3'-0" In Height	EA	$38.79	$214.97	$0.00	$253.76
106087	Per Character Plastic, Acrylic, PVC Up To 3'-6" In Height	EA	$45.25	$309.70	$0.00	$354.95
106088	Per Character Plastic, Acrylic, PVC Up To 4'-0" In Height	EA	$45.25	$403.34	$0.00	$448.59
106089	Per Character Metal Up To 1'-0" In Height Includes all metal makes of signage	EA	$33.94	$111.68	$0.00	$145.62
106090	Per Character Metal Up To 1'-6" In Height Includes all metal makes of signage	EA	$33.94	$195.45	$0.00	$229.39
106091	Per Character Metal Up To 2'-0" In Height Includes all metal makes of signage	EA	$38.79	$279.22	$0.00	$318.01
106092	Per Character Metal Up To 2'-6" In Height Includes all metal makes of signage	EA	$38.79	$335.07	$0.00	$373.86
106093	Per Character Metal Up To 3'-0" In Height Includes all metal makes of signage	EA	$38.79	$446.75	$0.00	$485.54
106094	Per Character Metal Up To 3'-6" In Height Includes all metal makes of signage	EA	$45.25	$558.44	$0.00	$603.69
106095	Per Character Metal Up To 4'-0" In Height Includes all metal makes of signage	EA	$45.25	$670.13	$0.00	$715.38
106096	Per Character Plastic, Acrylic, PVC Up To 1'-0" In Height (Residential)	EA	$30.16	$15.43	$0.00	$45.59
106097	Per Character Plastic, Acrylic, PVC Up To 1'-6" In Height (Residential)	EA	$30.16	$28.73	$0.00	$58.89
106098	Per Character Plastic, Acrylic, PVC Up To 2'-0" In Height (Residential)	EA	$33.94	$46.30	$0.00	$80.24
106099	Per Character Metal Up To 1'-0" In Height (Residential) Includes all metal makes of signage	EA	$30.16	$55.84	$0.00	$86.00
106100	Per Character Metal Up To 1'-6" In Height (Residential) Includes all metal makes of signage	EA	$30.16	$97.73	$0.00	$127.89
106101	Per Character Metal Up To 2'-0" In Height (Residential) Includes all metal makes of signage	EA	$33.94	$139.61	$0.00	$173.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	10-14-23 Panel Signage					
	Includes all mounting hardware and adhesives					
106102	Interior Wayfinding Signage – Wall Mounted (Less Than 0.5 SF) Plastic, Acrylic, or PVC	EA	$60.34	$67.85	$0.00	$128.19
106103	Interior Wayfinding Signage – Wall Mounted (0.5 SF to 1.49 SF) Plastic, Acrylic, or PVC	EA	$60.34	$85.94	$0.00	$146.28
106104	Interior Wayfinding Signage – Wall Mounted (1.5 SF to 3.49 SF) Plastic, Acrylic, or PVC	EA	$67.88	$104.03	$0.00	$171.91
106105	Interior Wayfinding Signage – Wall Mounted (3.5 SF to 4.99 SF) Plastic, Acrylic, or PVC	EA	$67.88	$122.12	$0.00	$190.00
106106	Interior Wayfinding Signage – Wall Mounted (5.0 SF and Up) Plastic, Acrylic, or PVC	SF	$13.58	$24.43	$0.00	$38.01
106107	Exterior Wayfinding Signage – Wall Mounted (Less Than 0.5 SF) Plastic, Acrylic, or PVC	EA	$67.88	$79.82	$0.00	$147.70
106108	Exterior Wayfinding Signage – Wall Mounted (0.5 SF to 1.49 SF) Plastic, Acrylic, or PVC	EA	$67.88	$101.10	$0.00	$168.98
106109	Exterior Wayfinding Signage – Wall Mounted (1.5 SF to 3.49 SF) Plastic, Acrylic, or PVC	EA	$77.58	$122.39	$0.00	$199.97
106110	Exterior Wayfinding Signage – Wall Mounted (3.5 SF to 4.99 SF) Plastic, Acrylic, or PVC	EA	$77.58	$143.67	$0.00	$221.25
106111	Exterior Wayfinding Signage – Wall Mounted (5.0 SF and Up) Plastic, Acrylic, or PVC	SF	$15.51	$28.73	$0.00	$44.24
106112	Exterior Wayfinding Signage – Post Mounted (Less Than 0.5 SF) Plastic, Acrylic, or PVC. Posts Provide 8'-0" of Clearance from Bottom of Sign.	EA	$77.58	$87.80	$0.00	$165.38
106113	Exterior Wayfinding Signage – Post Mounted (0.5 SF to 1.49 SF) Plastic, Acrylic, or PVC. Posts Provide 8'-0" of Clearance from Bottom of Sign.	EA	$77.58	$111.21	$0.00	$188.79
106114	Exterior Wayfinding Signage – Post Mounted (1.5 SF to 3.49 SF) Plastic, Acrylic, or PVC. Posts Provide 8'-0" of Clearance from Bottom of Sign.	EA	$90.50	$134.63	$0.00	$225.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106115	Exterior Wayfinding Signage – Post Mounted (3.5 SF to 4.99 SF) Plastic, Acrylic, or PVC. Posts Provide 8'-0" of Clearance from Bottom of Sign.	EA	$90.50	$158.04	$0.00	$248.54
106116	Exterior Wayfinding Signage – Post Mounted (5.0 SF and Up) Plastic, Acrylic, or PVC. Posts Provide 8'-0" of Clearance from Bottom of Sign.	SF	$18.10	$31.61	$0.00	$49.71
106117	Code Required Signage – Wall Mounted (Less Than 0.5 SF) Plastic, Acrylic, or PVC. For Interior or Exterior use	EA	$33.94	$57.67	$0.00	$91.61
106118	Code Required Signage – Wall Mounted (0.5 SF to 1.49 SF) Plastic, Acrylic, or PVC. For Interior or Exterior use	EA	$33.94	$73.04	$0.00	$106.98
106119	Code Required Signage – Wall Mounted (1.5 SF to 3.49 SF) Plastic, Acrylic, or PVC. For Interior or Exterior use	EA	$36.20	$88.43	$0.00	$124.63
106120	Code Required Signage – Wall Mounted (3.5 SF to 4.99 SF) Plastic, Acrylic, or PVC. For Interior or Exterior use	EA	$36.20	$103.81	$0.00	$140.01
106121	Code Required Signage – Wall Mounted (5.0 SF and Up) Plastic, Acrylic, or PVC. For Interior or Exterior use	SF	$7.24	$20.76	$0.00	$28.00
106122	Door or Room Signage – Plastic, Acrylic, PVC For Interior or Exterior use	EA	$33.94	$47.89	$0.00	$81.83
106123	Door or Room Signage – Aluminum For Interior or Exterior use	EA	$33.94	$61.43	$0.00	$95.37
106124	Door or Room Signage – Stainless Steel For Interior or Exterior use	EA	$33.94	$78.19	$0.00	$112.13
106125	Door or Room Signage – Stick on Vinyl For Interior or Exterior use	EA	$33.94	$10.64	$0.00	$44.58
	10-14-43 Photoluminescent Signage					
106126	Exit Sign – Up To 1 SF Metal Frame and Thermoplastic Or Metal Face – 1 Side Exposed. Flush Mounted To Wall	EA	$33.94	$101.10	$0.00	$135.04
106127	Exit Sign – Up To 1 SF Metal Frame and Thermoplastic Or Metal Face – 2 Side Exposed. Includes Hanging Bracket. Wall Or Ceiling Mounted	EA	$54.30	$143.67	$0.00	$197.97
106128	Exiting Glow In The Dark Tape	LF	$2.25	$5.33	$0.00	$7.58

10-20-00 Interior Specialties

10-21-00 Compartments and Cubicles

10-21-13 Toilet Compartments

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	Pricing is per stall. Includes all Hardware. Pricing includes both floor or ceiling mounting and all fasteners, mounting brackets security screws and fasteners.					
106129	Toilet Partition – Painted Enamel Steel Standard Stall Standard panel height up to 60", floor mounted, overhead brace	EA	$212.62	$1,290.12	$0.00	$1,502.74
106130	Toilet Partition – Painted Enamel Steel ADA Stall Standard panel height up to 60", floor mounted, overhead brace	EA	$212.62	$1,496.21	$0.00	$1,708.83
106131	Toilet Partition – Plastic Laminate Standard Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$1,514.50	$0.00	$1,727.12
106132	Toilet Partition – Plastic Laminate ADA Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$1,710.24	$0.00	$1,922.86
106133	Toilet Partition – Solid Reinforced Plastic / Composite Standard Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$1,851.00	$0.00	$2,063.62
106134	Toilet Partition – Solid Reinforced Plastic / Composite ADA Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$2,089.02	$0.00	$2,301.64
106135	Toilet Partition – Phenolic Standard Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$1,963.24	$0.00	$2,175.86
106136	Toilet Partition – Phenolic ADA Stall Standard panel height up to 60", floor mounted, overhead braced	EA	$212.62	$2,215.28	$0.00	$2,427.90
106137	Toilet Partition – Stainless Steel Standard Stall Standard panel height up to 60", floor mounted, overhead brace	EA	$212.62	$2,411.97	$0.00	$2,624.59
106138	Toilet Partition – Stainless Steel ADA Stall Standard panel height up to 60", floor mounted, overhead brace	EA	$212.62	$2,720.31	$0.00	$2,932.93
106139	Toilet Partition – Reinstallation of Existing Toilet Partition Also includes installation of owner furnished toilet partitions	EA	$149.24	$0.00	$0.00	$149.24
106140	[Modifier] Toilet Partition – Privacy Hardware and 84" High Privacy Panels	EA	$49.61	$425.70	$0.00	$475.31
106141	[Modifier] Toilet Partition – Add Floor To Ceiling Mounted Partitions	EA	$70.87	$145.78	$0.00	$216.65
106142	Urinal Screen – Painted Enamel Steel Up to 24" x 48", wall hung	EA	$70.87	$317.14	$0.00	$388.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106143	Urinal Screen – Plastic Laminate Up to 24" x 48", wall hung	EA	$70.87	$418.62	$0.00	$489.49
106144	Urinal Screen – Solid Reinforced Plastic / Composite Up to 24" x 48", wall hung	EA	$70.87	$558.16	$0.00	$629.03
106145	Urinal Screen – Phenolic Up to 24" x 48", wall hung	EA	$70.87	$558.16	$0.00	$629.03
106146	Urinal Screen – Stainless Steel Up to 24" x 48", wall hung	EA	$70.87	$697.69	$0.00	$768.56
106147	Urinal Screen – Reinstallation of Existing Urinal Screen Also includes installation of owner furnished urinal screens	EA	$84.96	$0.00	$0.00	$84.96

10-21-23 Cubicle Curtains and Track

Includes all hanging hardware, carriers, splices, in ceiling supports and hooks

106148	I.V. Track	LF	$5.23	$16.20	$0.00	$21.43
106149	Curtain Track	LF	$4.47	$16.75	$0.00	$21.22
106150	Cubicle Curtain	SF	$0.34	$4.46	$0.00	$4.80
106151	Laser Curtain Track	LF	$5.23	$16.20	$0.00	$21.43
106152	Laser Safety Curtain Based on Kentek Laser Safety Curtain Barrier or equal. Laser rated at 250 W/cm2 for 100 seconds or equal	SF	$2.29	$32.35	$0.00	$34.64

10-22-00 Partitions

10-22-13 Wire Mesh Partitions

106153	Wire Mesh Partition Pre-finished 10 ga wire mesh assembled panels with 14 gauge frame. Includes all assembly hardware and floor or wall mounting. Includes swing mesh door and cylindrical lock when in cage configuration.	SF	$1.51	$9.35	$0.00	$10.86

10-22-19 Demountable Partitions

Demountable Partitions have an STC rating of up to 55. Pricing is for a complete system and includes all doors, frames, tracks, hardware and mounting systems

106154	Solid Demountable Partitions – Wood Doors and Aluminum Frames DIRTT or equal	SF	$9.05	$37.97	$0.00	$47.02
106155	Solid Demountable Partitions – Glass Doors and Aluminum Frames DIRTT or equal	SF	$9.05	$41.60	$0.00	$50.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106156	Partially Glazed Demountable Partitions – Wood Doors, Aluminum Frames, With Up To 3/8" Tempered Safety Glazing DIRTT or equal	SF	$9.05	$51.37	$0.00	$60.42
106157	Partially Glazed Demountable Partitions – Glass Doors, Aluminum Frames, With Up To 3/8" Tempered Safety Glazing DIRTT or equal	SF	$9.05	$57.33	$0.00	$66.38
106158	Fully Glazed Demountable Partition – Wood Doors, Aluminum Frames, With Up To 3/8" Tempered Safety Glazing DIRTT or equal	SF	$9.05	$62.79	$0.00	$71.84
106159	Fully Glazed Demountable Partition – Glass Doors, Aluminum Frames, With Up To 3/8" Tempered Safety Glazing DIRTT or equal	SF	$9.05	$70.92	$0.00	$79.97

10-22-33 Operable Partitions

Includes overhead hanging hardware and tracks. Does not include storage pockets, structural support and bulkhead framing

106160	Manual – Operable Partition – Single Panel Up to STC 45. Modernfold or equal	SF	$15.51	$32.23	$0.00	$47.74
106161	Manual – Operable Partition – Paired Panel Up to STC 45. Modernfold or equal	SF	$15.51	$37.73	$0.00	$53.24
106162	Motorized – Operable Partition Horizontal Opening – Economy Up to STC 50. Modernfold or equal	SF	$18.10	$52.01	$0.00	$70.11
106163	Motorized – Operable Partition Horizontal Opening – Standard Up to STC 55. Modernfold or equal	SF	$18.10	$65.01	$0.00	$83.11
106164	Motorized – Operable Partition Horizontal Opening – Premium Up to STC 60 with premium finishes. Modernfold or equal	SF	$18.10	$104.02	$0.00	$122.12
106165	Motorized – Operable Partition Vertical Opening – Economy Up to STC 50. Skyfold or equal	SF	$21.72	$313.25	$0.00	$334.97
106166	Motorized – Operable Partition Vertical Opening – Standard Up to STC 55. Skyfold or equal	SF	$21.72	$342.79	$0.00	$364.51
106167	Motorized – Operable Partition Vertical Opening – Premium Up to STC 60 with premium finishes. Skyfold or equal	SF	$21.72	$407.80	$0.00	$429.52
106168	Motorized – Fire Rated Operable Partition Won-Door or equal	SF	$18.10	$147.75	$0.00	$165.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106169	[Modifier] – Glass Panels in Folding Partitions Applies only to the square footage of glazing	SF	$0.00	$59.10	$0.00	$59.10
106170	[Modifier] – Add For Operable Partition Motor Includes motor drive unit, key switch assembly. Does not include electrical connections	EA	$1,572.64	$2,990.00	$0.00	$4,562.64
106171	[Modifier] – Labor Add For Operable Partitions Over 15' High	SF	$4.02	$0.00	$0.00	$4.02

10-25-00 Service Walls

10-25-13 Patient Bed Service Walls

All Premanufactured - combination of thermoplastic, metal and wood materials. Includes all fasteners and attaching to supports. Includes hooking up to provided Plumbing-Medical Gas and Electrical services.

106172	Patient Room Headwall – Rail System Single Tier / Rail headwall. Length up to 8'. Vertical Height up to 18". Both Horizontal and Vertical applications. Provisions for 4 to 8 Gas Outlets, 3 to 5 Electrical Outlets, 4 to 6 data ports, 1 telephone, 2-4 Vacuum. Amico Majestic series or equal	EA	$362.02	$2,792.20	$0.00	$3,154.22
106173	Patient Room Headwall – Panel Type-Mid Sized Panel System. Length up to 8'. Vertical Height up to 8'. Provisions for 4 to 8 Gas Outlets, 6 to 10 Electrical Outlets, 4 to 6 data ports, 1 telephone, 2-4 Vacuum, 37 PIN Connector, 2 Monitor Channels & 2-4 Horizontal Channel. Amico Serenity Series or equal	EA	$543.04	$9,703.76	$0.00	$10,246.80
106174	Patient Room Headwall – Panel Type-Large Sized Panel System. Length up to 18'. Vertical Height up to 9'. Provisions for 10 to 16 Gas Outlets, 11 to 30 Electrical Outlets, 10 to 12 data ports, 1 telephone, 6 -8 Vacuum, 2-37 PIN Connector, 2 Monitor Channels & 8-12 Horizontal Channel. 2 Dialysis Cut-Outs. Amico Serenity Series or equal	EA	$724.05	$13,699.44	$0.00	$14,423.49
106175	Patient Room Headwall – Neo-Natal Typical NICU use.	EA	$724.05	$14,841.06	$0.00	$15,565.11
106176	Patient Room Headwall – Full Wall System with integral Millwork Grade 2 Thermofoil finish or equal, with up to one integral cabinet and solid surface desk. DIRTT or equal	SF	$42.16	$302.53	$0.00	$344.69
106177	Patient Room Footwall – Full Wall System with integral Millwork Grade 2 Thermofoil finish or equal, with up to one integral cabinet and solid surface desk. DIRTT or equal	SF	$19.27	$142.71	$0.00	$161.98
106178	[Modifier] Radial, Telescoping Equipment Boom Arm to Headwall	EA	$449.90	$2,854.04	$0.00	$3,303.94

10-26-00 Wall and Door Protection

10-26-13 Corner Guards

Includes all mounting hardware, fasteners and adhesives

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106179	Corner Guard – Full Height PVC / Plastic Surface mounted	EA	$54.30	$63.85	$0.00	$118.15
106180	Corner Guard – Half Height PVC / Plastic Surface mounted	EA	$45.25	$51.09	$0.00	$96.34
106181	Corner Guard – Full Height Acrovyn Or Equal Surface mounted	EA	$54.30	$79.82	$0.00	$134.12
106182	Corner Guard – Half Height Acrovyn Or Equal Surface mounted	EA	$45.25	$63.85	$0.00	$109.10
106183	Corner Guard – Full Height Stainless Steel Surface mounted	EA	$54.30	$100.52	$0.00	$154.82
106184	Corner Guard – Half Height Stainless Steel Surface mounted	EA	$45.25	$80.42	$0.00	$125.67
106185	[Modifier] Recessed Corner Guard	EA	$27.15	$0.00	$0.00	$27.15
106186	[Modifier] Fire Rated Corner Guard	EA	$0.00	$53.21	$0.00	$53.21

10-26-16 Bumper Guards

Includes all mounting hardware, fasteners and adhesives

106187	Handrail – Wood and Stainless Steel Acrovyn series number HRWS-6C or equal	LF	$6.78	$51.37	$0.00	$58.15
106188	Handrail – Wood Acrovyn series number HRW-10C or equal	LF	$6.78	$62.79	$0.00	$69.57
106189	Handrail – Rigid Plastic Acrovyn series number HRB-10CN or equal	LF	$6.78	$26.61	$0.00	$33.39
106190	Crash Rail – Wood and Stainless Steel Acrovyn series number CRWS-1 or equal	LF	$6.78	$51.37	$0.00	$58.15
106191	Crash Rail – Wood Acrovyn series FRW-451 or equal	LF	$6.78	$45.66	$0.00	$52.44
106192	Crash Rail – Rigid Plastic Up To 6" High Acrovyn series SCR-48N or equal	LF	$6.78	$10.80	$0.00	$17.58
106193	Crash Rail – Rigid Plastic Up To 4" High Acrovyn series SCR-40N or equal	LF	$6.78	$7.61	$0.00	$14.39
106194	Crash Rail – Rigid Plastic Up To 1-1/8" High Acrovyn series FR-125N or equal	LF	$6.78	$4.52	$0.00	$11.30
106195	[Modifier] Quantity Premium - Bumper Guards (< 30 LF) Quantity premium can be used when total square footage in section 10-26-16 Bumper Guards are within stated quantities. Can be applied cumulatively to base line items.	LF	$18.10	$0.00	$0.00	$18.10

10-26-23 Protective Wall Covering

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106196	Impact Resistant Wall Panel Up To .040 Thick Acrovyn or equal	SF	$2.88	$3.05	$0.00	$5.93
106197	Fiber Reinforced Laminate Panels Up To .075 Thick	SF	$2.88	$8.78	$0.00	$11.66
106198	Solid Surface Wall Panel Up To .5" Thick	SF	$5.76	$19.69	$0.00	$25.45
106199	[Modifier] Quantity Premium - Protective Wall Covering (51-100 SF) Quantity premium can be used when total square footage in section 10-26-23 Protective Wall Covering are within stated quantities. Can be applied cumulatively to base line items.	SF	$5.43	$0.00	$0.00	$5.43
106200	[Modifier] Quantity Premium - Protective Wall Covering (< Or = To 50 SF) Quantity premium can be used when total square footage in section 08-91-19 Fixed Louvers are within stated quantities. Can be applied cumulatively to base line items.	SF	$10.86	$0.00	$0.00	$10.86

10-26-41 Ballistics Resistant Panels

106201	Ballistic Resistant Fiberglass Wall Panel - Level 2 5/16" thick, .357 mag, 3 shot test	SF	$2.52	$20.27	$0.00	$22.79
106202	Ballistic Resistant Fiberglass Wall Panel - Level 3 7/16" thick, .44 mag, 3 shot test	SF	$2.52	$24.31	$0.00	$26.83
106203	Ballistic Resistant Fiberglass Wall Panel - Level 4 1-3/8" thick, .30 cal, 1 shot test	SF	$2.52	$70.91	$0.00	$73.43
106204	Ballistic Resistant Fiberglass Wall Panel - Level 5 1-7/16" thick, 7.62 mm, 1 shot test	SF	$2.52	$76.97	$0.00	$79.49
106205	Ballistic Resistant Fiberglass Wall Panel - Level 6 1-3/8" thick, 9 mm, 5 shot test	SF	$2.52	$125.13	$0.00	$127.65
106206	Ballistic Resistant Fiberglass Wall Panel - Level 7 1-1/8' thick, 5.56 mm, 5 shot test	SF	$2.52	$136.65	$0.00	$139.17

10-28-00 Toilet, Bath, and Laundry Accessories

10-28-13 Toilet Accessories

Bobrick stainless steel commercial grade or equal, unless noted otherwise. Includes all mounting hardware and wall backing as required.

106207	Toilet Paper (TP) Dispenser - Single Roll Similar or equal to Bobrick B-6857, surface mounted, stainless steel finish	EA	$35.44	$68.95	$0.00	$104.39
106208	Toilet Paper (TP) Dispenser - Multi Roll Similar or equal to Bobick B-2892, surface mounted, stainless steel, satin finish	EA	$35.44	$238.06	$0.00	$273.50
106209	Toilet Paper (TP) Dispenser - Multi Roll Similar or equal to Bobick B-2888, surface mounted, stainless steel, satin finish	EA	$35.44	$86.62	$0.00	$122.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106210	Paper Towel (PT) Dispenser - Surface Mounted Similar or equal to Bobrick B-272, surface mounted, stainless steel, satin finish	EA	$35.44	$67.69	$0.00	$103.13
106211	Paper Towel (PT) Dispenser / Disposal - Surface Mounted Similar or equal to Bobrick B-43949, surface mounted, stainless steel, satin finish	EA	$70.87	$1,305.99	$0.00	$1,376.86
106212	Paper Towel (PT) Dispenser / Disposal - Recessed Similar or equal to Bobrick B-36903, recessed, stainless steel, satin finish	EA	$70.87	$334.25	$0.00	$405.12
106213	Push Bar Roll Towel Dispenser Similar or equal to Palmer Fixture TD0216, plastic body	EA	$35.44	$64.97	$0.00	$100.41
106214	Toilet Seat Cover Dispenser Similar or equal to Bobrick B-221, surface mounted, stainless steel, satin finish	EA	$35.44	$45.05	$0.00	$80.49
106215	Baby Changing Station - Stainless Steel Similar or equal to Koala Kare KB-310-SSWM, surface mounted, satin stainless steel exterior, plastic bed	EA	$141.75	$1,997.67	$0.00	$2,139.42
106216	Baby Changing Station - Plastic Similar or equal to Koala Kare KB-300-01, surface mounted, gray plastic	EA	$141.75	$351.94	$0.00	$493.69
106217	Adult Changing Station Similar or equal to Koala Kare KB3000-AHL. Vertical lift 12" to 41", 500 lb capacity, stainless steel frame, plastic bed surface. Does not include electrical connections	EA	$1,133.99	$13,386.40	$0.00	$14,520.39
106218	Soap Dispenser Similar or equal to Bobrick B-848615, heavy duty, surface mounted, stainless steel, satin finish	EA	$17.72	$124.07	$0.00	$141.79
106219	Soap Dispenser - Economy Similar or equal to Bobrick B-2111, capacity 40 oz, surface mounted, stainless steel, satin finish	EA	$17.72	$42.45	$0.00	$60.17
106220	Soap Dispenser - Deck-Mounted Hand Washing Foam Soap Dispenser Polished Chrome Finish, Sensor Activated, Battery Powered	EA	$76.99	$739.59	$0.00	$816.58
106221	Surface Mount Combination Toilet Dispenser Unit Similar or equal to Bobrick B-35715, surface mounted, double-roll toilet tissue dispenser, sanitary napkin waste receptacle and seat cover dispenser	EA	$141.75	$600.38	$0.00	$742.13
106222	Recessed Mount Combination Toilet Dispenser Unit Similar or equal to Bobrick B-35745, recessed, double-roll toilet tissue dispenser, sanitary napkin waste receptacle and seat cover dispenser	EA	$141.75	$513.00	$0.00	$654.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106223	Grab Bar - 18" Similar or equal to Bobrick-B-6806 x 18, smooth satin finish	EA	$35.44	$33.82	$0.00	$69.26
106224	Grab Bar - 24" Similar or equal to Bobrick-B-6806 x 24, smooth satin finish	EA	$35.44	$45.96	$0.00	$81.40
106225	Grab Bar - 36" Similar or equal to Bobrick-B-6806 x 36, smooth satin finish	EA	$35.44	$49.05	$0.00	$84.49
106226	Grab Bar - 42" Similar or equal to Bobrick-B-6806 x 42, smooth satin finish	EA	$35.44	$52.39	$0.00	$87.83
106227	[Modifier] Add Grab Bar Peened Finish	EA	$0.00	$10.00	$0.00	$10.00
106228	Feminine Napkin Dispenser Similar or equal to Bobrick B-2706C, surface mounted, stainless steel, satin finish	EA	$70.87	$772.31	$0.00	$843.18
106229	Feminine Napkin Disposal Similar or equal to Bobrick B-254, surface mounted, stainless steel, satin finish	EA	$35.44	$146.69	$0.00	$182.13
106230	Feminine Napkin Disposal - Economy Similar or equal to Bobrick B-270, surface mounted, stainless steel, satin finish	EA	$35.44	$44.46	$0.00	$79.90
106231	Sharps Disposal Similar or equal to Bobrick B-35016, surface mounted, stainless steel, satin finish	EA	$31.83	$347.32	$0.00	$379.15
106232	Diaper Pail Similar or equal to Diaper Genie Complete	EA	$15.92	$104.47	$0.00	$120.39
106233	Janitor Shelf Includes shelf with mop and broom holder, 34" long	EA	$35.44	$343.16	$0.00	$378.60
106234	Coat / Robe Hook	EA	$18.10	$31.93	$0.00	$50.03
106235	Towel Bar (Single)	EA	$17.72	$42.68	$0.00	$60.40
106236	Towel Ring	EA	$17.72	$24.23	$0.00	$41.95
106237	Towel Rack	EA	$35.44	$134.03	$0.00	$169.47
106238	Electric Hand Dryer Dyson Airblade V or equal. Up to 12 seconds hand drying time	EA	$141.75	$952.79	$0.00	$1,094.54
106239	Electric Hand Dryer Xleratoreco XL-BW-ECO or equal. Up to 15 seconds hand drying time	EA	$141.75	$532.09	$0.00	$673.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106240	Toilet Paper Holder – Residential	EA	$17.72	$26.72	$0.00	$44.44
106241	Towel Bar – Residential Single	EA	$17.72	$26.61	$0.00	$44.33
106242	Towel Bar – Residential Double	EA	$17.72	$53.21	$0.00	$70.93
106243	Towel Ring – Residential	EA	$17.72	$26.61	$0.00	$44.33
106244	Coat / Robe Hook – Residential	EA	$17.72	$13.06	$0.00	$30.78
106245	Medicine Cabinet – Residential Up To 24" Wide Frameless Glass	EA	$70.87	$206.62	$0.00	$277.49
106246	Medicine Cabinet – Residential Up To 24" Plastic Laminate Framed Glass	EA	$70.87	$85.13	$0.00	$156.00
106247	Medicine Cabinet – Residential Up To 24" Wood Framed Glass	EA	$70.87	$142.71	$0.00	$213.58
106248	Medicine Cabinet – Residential Up To 24" Plastic Laminate With integral shelf or equal	EA	$70.87	$95.78	$0.00	$166.65
106249	Medicine Cabinet – Residential Up To 24" Wood With integral shelf or equal	EA	$70.87	$171.25	$0.00	$242.12
106250	Toilet Accessories – Reinstallation of Existing Toilet Accessories Also includes installation of owner furnished toilet accessories	EA	$33.94	$0.00	$0.00	$33.94
106251	Anti Ligature Toilet Paper Holder - Exposed Mount Single roll	EA	$35.44	$81.73	$0.00	$117.17
106252	Anti Ligature Toilet Paper Holder - Concealed Mount Single roll	EA	$35.44	$85.17	$0.00	$120.61
106253	Anti Ligature Toilet Paper Holder - Recessed Single roll, exposed mount	EA	$35.44	$144.32	$0.00	$179.76
106254	Anti Ligature Shower Rod Breakaway Bracket	EA	$33.94	$39.70	$0.00	$73.64
106255	Anti Ligature Paper Towel Dispenser Surface mounted, stainless steel	EA	$33.94	$390.56	$0.00	$424.50
106256	Anti Ligature Manual Soap Dispenser Surface mounted, stainless steel	EA	$35.44	$370.48	$0.00	$405.92
106257	Anti Ligature Flexible Fin Shower Doorset - Up To 48" Wide Includes shatter proof polycarbonate door, single leaf with flexible fin, hollow metal frame with backing plate. Similar or equal to Kingsway Group Ligature Resistant Shower Door	EA	$382.44	$2,011.61	$0.00	$2,394.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106258	Anti Ligature Shower Seat	EA	$70.87	$1,165.83	$0.00	$1,236.70
106259	Anti Ligature Grab Bar with Closure Plate - 18" Concealed mounting, stainless steel with satin finish	EA	$35.44	$154.11	$0.00	$189.55
106260	Anti Ligature Grab Bar - 18" Aluminum, Powder Coated Similar or equal to Kingsway Group KG270	EA	$35.44	$480.01	$0.00	$515.45
106261	Anti Ligature Grab Bar with Closure Plate - 24" Concealed mounting, stainless steel with satin finish	EA	$35.44	$165.30	$0.00	$200.74
106262	Anti Ligature Grab Bar - 24" Aluminum, Powder Coated Similar or equal to Kingsway Group KG272	EA	$35.44	$518.00	$0.00	$553.44
106263	Anti Ligature Grab Bar with Closure Plate - 36" Concealed mounting, stainless steel with satin finish	EA	$35.44	$197.23	$0.00	$232.67
106264	Anti Ligature Grab Bar - 36" Aluminum, Powder Coated Similar or equal to Kingsway Group KG274	EA	$35.44	$614.00	$0.00	$649.44
106265	Anti Ligature Grab Bar with Closure Plate - 42" Concealed mounting, stainless steel with satin finish	EA	$35.44	$214.92	$0.00	$250.36
106266	Anti Ligature Grab Bar - 42" Aluminum, Powder Coated Similar or equal to Kingsway Group KG276	EA	$35.44	$676.00	$0.00	$711.44
106267	Anti Ligature Coat Hook - Exposed Mounting Single hook	EA	$17.72	$77.56	$0.00	$95.28
106268	Anti Ligature Coat Hook - Concealed Mounting Single hook	EA	$17.72	$98.17	$0.00	$115.89
	10-28-16 Bath Accessories					
106269	ADA Threshold To Shower Collapsible. Up To 6'0' Wide	EA	$155.16	$345.88	$0.00	$501.04
106270	Folding Shower Seat	EA	$70.87	$300.02	$0.00	$370.89
106271	Shower Rod - Adjustable Length Adjustable tension, 44" - 72"	EA	$17.72	$24.87	$0.00	$42.59
106272	Shower Rod - Fixed Length Fixed length - 5'	EA	$17.72	$44.51	$0.00	$62.23
106273	Shower Rod - ADA	EA	$35.44	$49.64	$0.00	$85.08
106274	Shower Curtain	EA	$15.51	$18.52	$0.00	$34.03

10-30-00 Fireplaces and Stoves

10-31-00 Manufactured Fireplaces

10-31-00 Manufactured Fireplaces

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106275	Gas Fireplace Inserts – Economy Up to 3'-6" wide by 2'-0" Tall. Includes glass doors, blower, and gas line hookup	EA	$1,475.25	$2,747.53	$0.00	$4,222.78
106276	Gas Fireplace Inserts – Standard Up to 5'-6" wide by 3'-0" Tall. Includes glass doors, blower, and gas line hookup	EA	$2,066.24	$3,846.53	$0.00	$5,912.77
106277	Gas Fireplace Inserts – Premium Up to 5'-6" wide by 3'-0" Tall and viewable from both sides. Includes glass doors, blower, and gas line hookup	EA	$3,099.48	$5,769.80	$0.00	$8,869.28
106278	[Modifier] Fireplace Glass Cooling Package Automated system for keeping glass safe to the touch	EA	$0.00	$949.35	$0.00	$949.35

10-40-00 Safety Specialties

10-41-00 Emergency Access and Information Cabinets

10-41-16 Emergency Key Cabinets

106279	KNOX Box – 3200 or Equal Surface or Recessed Mounted - Includes Tamper Switch	EA	$122.22	$759.47	$0.00	$881.69
106280	KNOX Box – 4200 or Equal Surface or Recessed Mounted - Includes Tamper Switch	EA	$122.22	$1,116.88	$0.00	$1,239.10

10-44-00 Fire Protection Specialties

10-44-16 Fire Extinguishers

106281	Fire Extinguisher - 5 Lb Dry Chemical Class ABC Fire Extinguisher	EA	$17.72	$108.36	$0.00	$126.08
106282	Fire Extinguisher - 10 Lb Dry Chemical Class ABC Fire Extinguisher	EA	$17.72	$147.88	$0.00	$165.60
106283	Fire Extinguisher - 20 Lb Dry Chemical Class ABC Fire Extinguisher	EA	$17.72	$304.70	$0.00	$322.42

10-50-00 Storage Specialties

10-51-00 Lockers

10-51-13 Metal Lockers

Includes all hardware, mounting brackets and secure connection to structure

106284	Metal Lockers – 1 Tier Up To 12"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$251.30	$0.00	$287.50
106285	Metal Lockers – 2 Tier Up To 12"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$273.63	$0.00	$309.83
106286	Metal Lockers – 3 Tier Up To 12"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$295.97	$0.00	$332.17
106287	Metal Lockers – 4 Tier Up To 12"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$318.31	$0.00	$354.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106288	Metal Lockers – 1 Tier Up To 15"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$263.86	$0.00	$300.06
106289	Metal Lockers – 2 Tier Up To 15"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$287.32	$0.00	$323.52
106290	Metal Lockers – 3 Tier Up To 15"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$310.77	$0.00	$346.97
106291	Metal Lockers – 4 Tier Up To 15"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$334.23	$0.00	$370.43
106292	Metal Lockers – 1 Tier Up To 18"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$276.43	$0.00	$312.63
106293	Metal Lockers – 2 Tier Up To 18"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$301.00	$0.00	$337.20
106294	Metal Lockers – 3 Tier Up To 18"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$325.57	$0.00	$361.77
106295	Metal Lockers – 4 Tier Up To 18"x18"x72" Fully welded enamel steel, vented	EA	$36.20	$350.15	$0.00	$386.35
106296	[Modifier] Metal Locker – Locking Mechanism (Key Or Combination) Either Key or Combination	EA	$0.00	$50.26	$0.00	$50.26
106297	[Modifier] Metal Locker – Locking Mechanism (Battery Operated Digital Lock) Battery Operated Digital Lock	EA	$0.00	$134.03	$0.00	$134.03
106298	[Modifier] Metal Locker - Sloping Top	EA	$0.00	$50.26	$0.00	$50.26
106299	[Modifier] Metal Locker - Electrostatic Paint Locker and New Hardware	EA	$27.29	$106.42	$0.00	$133.71

10-51-16 Wood Lockers

Includes all hardware, mounting brackets and secure connection to structure

106300	Wood Lockers – 1 Tier Up To 16"x18"x72" Fully finished oak construction	EA	$36.20	$426.70	$0.00	$462.90
106301	Wood Lockers – 2 Tier Up To 16"x18"x72" Fully finished oak construction	EA	$36.20	$464.62	$0.00	$500.82
106302	Wood Lockers – 3 Tier Up To 16"x18"x72" Fully finished oak construction	EA	$36.20	$502.56	$0.00	$538.76
106303	Wood Lockers – 4 Tier Up To 16"x18"x72" Fully finished oak construction	EA	$36.20	$540.48	$0.00	$576.68
106304	Wood Lockers – 1 Tier Up To 18"x18"x72" Fully finished oak construction	EA	$45.25	$448.03	$0.00	$493.28
106305	Wood Lockers – 2 Tier Up To 18"x18"x72" Fully finished oak construction	EA	$45.25	$487.86	$0.00	$533.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106306	Wood Lockers – 3 Tier Up To 18"x18"x72" Fully finished oak construction	EA	$45.25	$527.68	$0.00	$572.93
106307	Wood Lockers – 4 Tier Up To 18"x18"x72" Fully finished oak construction	EA	$45.25	$567.51	$0.00	$612.76
106308	Wood Lockers – 1 Tier Up To 21"x21"x72" Fully finished oak construction	EA	$67.88	$543.15	$0.00	$611.03
106309	Wood Lockers – 2 Tier Up To 21"x21"x72" Fully finished oak construction	EA	$67.88	$591.43	$0.00	$659.31
106310	Wood Lockers – 3 Tier Up To 21"x21"x72" Fully finished oak construction	EA	$67.88	$639.72	$0.00	$707.60
106311	Wood Lockers – 4 Tier Up To 21"x21"x72" Fully finished oak construction	EA	$67.88	$687.99	$0.00	$755.87
106312	Wood Lockers – 1 Tier Up To 24"x24"x72" Fully finished oak construction	EA	$67.88	$597.47	$0.00	$665.35
106313	Wood Lockers – 2 Tier Up To 24"x24"x72" Fully finished oak construction	EA	$67.88	$650.58	$0.00	$718.46
106314	Wood Lockers – 3 Tier Up To 24"x24"x72" Fully finished oak construction	EA	$67.88	$703.69	$0.00	$771.57
106315	Wood Lockers – 4 Tier Up To 24"x24"x72" Fully finished oak construction	EA	$67.88	$756.79	$0.00	$824.67
106316	[Modifier] Wood Locker – Locking Mechanism (Key Or Combination) Either Key or Combination	EA	$0.00	$50.26	$0.00	$50.26
106317	[Modifier] Wood Locker – Locking Mechanism (Battery Operated Digital Lock) Battery Operated Digital Lock	EA	$0.00	$134.03	$0.00	$134.03
106318	[Modifier] Wood Locker - Sloping Top Fully finished oak construction	EA	$0.00	$125.58	$0.00	$125.58

10-51-23 Plastic-Laminate-Clad Lockers

Includes all hardware, mounting brackets and secure connection to structure

106319	Plastic Laminate Clad Lockers – 1 Tier Up To 12"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$275.37	$0.00	$311.57
106320	Plastic Laminate Clad Lockers – 2 Tier Up To 12"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$299.85	$0.00	$336.05
106321	Plastic Laminate Clad Lockers – 3 Tier Up To 12"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$324.33	$0.00	$360.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106322	Plastic Laminate Clad Lockers – 4 Tier Up To 12"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$348.80	$0.00	$385.00
106323	Plastic Laminate Clad Lockers – 1 Tier Up To 15"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$289.13	$0.00	$325.33
106324	Plastic Laminate Clad Lockers – 2 Tier Up To 15"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$314.84	$0.00	$351.04
106325	Plastic Laminate Clad Lockers – 3 Tier Up To 15"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$340.54	$0.00	$376.74
106326	Plastic Laminate Clad Lockers – 4 Tier Up To 15"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$366.25	$0.00	$402.45
106327	Plastic Laminate Clad Lockers – 1 Tier Up To 18"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$302.91	$0.00	$339.11
106328	Plastic Laminate Clad Lockers – 2 Tier Up To 18"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$329.84	$0.00	$366.04
106329	Plastic Laminate Clad Lockers – 3 Tier Up To 18"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$356.76	$0.00	$392.96
106330	Plastic Laminate Clad Lockers – 4 Tier Up To 18"x18"x72" Particleboard construction with high pressure laminate cladding	EA	$36.20	$383.68	$0.00	$419.88
106331	[Modifier] Plastic Laminate Clad Locker – Locking Mechanism (Key or Combination) Either Key or Combination	EA	$0.00	$50.26	$0.00	$50.26
106332	[Modifier] Plastic Laminate Clad Locker – Locking Mechanism (Battery Operated Digital Lock) Battery Operated Digital Lock	EA	$0.00	$134.03	$0.00	$134.03
106333	[Modifier] Plastic Laminate Clad Locker - Sloping Top Particleboard construction with high pressure laminate cladding	EA	$0.00	$55.07	$0.00	$55.07

10-51-26 Plastic Lockers

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	Includes all hardware, mounting brackets and secure connection to structure					
106334	Plastic Lockers – 1 Tier Up To 12"x18"x72" High grade ABS plastic construction	EA	$36.20	$289.13	$0.00	$325.33
106335	Plastic Lockers – 2 Tier Up To 12"x18"x72" High grade ABS plastic construction	EA	$36.20	$314.84	$0.00	$351.04
106336	Plastic Lockers – 3 Tier Up To 12"x18"x72" High grade ABS plastic construction	EA	$36.20	$340.54	$0.00	$376.74
106337	Plastic Lockers – 4 Tier Up To 12"x18"x72" High grade ABS plastic construction	EA	$36.20	$366.25	$0.00	$402.45
106338	Plastic Lockers – 1 Tier Up To 15"x18"x72" High grade ABS plastic construction	EA	$36.20	$303.60	$0.00	$339.80
106339	Plastic Lockers – 2 Tier Up To 15"x18"x72" High grade ABS plastic construction	EA	$36.20	$330.58	$0.00	$366.78
106340	Plastic Lockers – 3 Tier Up To 15"x18"x72" High grade ABS plastic construction	EA	$36.20	$357.57	$0.00	$393.77
106341	Plastic Lockers – 4 Tier Up To 15"x18"x72" High grade ABS plastic construction	EA	$36.20	$384.56	$0.00	$420.76
106342	Plastic Lockers – 1 Tier Up To 18"x18"x72" High grade ABS plastic construction	EA	$36.20	$318.05	$0.00	$354.25
106343	Plastic Lockers – 2 Tier Up To 18"x18"x72" High grade ABS plastic construction	EA	$36.20	$346.33	$0.00	$382.53
106344	Plastic Lockers – 3 Tier Up To 18"x18"x72" High grade ABS plastic construction	EA	$36.20	$374.60	$0.00	$410.80
106345	Plastic Lockers – 4 Tier Up To 18"x18"x72" High grade ABS plastic construction	EA	$36.20	$402.87	$0.00	$439.07
106346	[Modifier] Plastic Lockers – Locking Mechanism (Key Or Combination) Either Key or Combination	EA	$0.00	$50.26	$0.00	$50.26
106347	[Modifier] Plastic Lockers – Locking Mechanism (Battery Operated Digital Lock) Battery Operated Digital Lock	EA	$0.00	$134.03	$0.00	$134.03
106348	[Modifier] Plastic Lockers - Sloping Top High grade phenolic construction	EA	$0.00	$57.83	$0.00	$57.83
	10-51-29 Phenolic Lockers					
	Includes all hardware, mounting brackets and secure connection to structure					
106349	Phenolic Lockers – 1 Tier Up To 12"x18"x72" High grade phenolic construction	EA	$36.20	$521.90	$0.00	$558.10
106350	Phenolic Lockers – 2 Tier Up To 12"x18"x72" High grade phenolic construction	EA	$36.20	$568.29	$0.00	$604.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106351	Phenolic Lockers – 3 Tier Up To 12"x18"x72" High grade phenolic construction	EA	$36.20	$614.68	$0.00	$650.88
106352	Phenolic Lockers – 4 Tier Up To 12"x18"x72" High grade phenolic construction	EA	$36.20	$661.08	$0.00	$697.28
106353	Phenolic Lockers – 1 Tier Up To 15"x18"x72" High grade phenolic construction	EA	$36.20	$547.99	$0.00	$584.19
106354	Phenolic Lockers – 2 Tier Up To 15"x18"x72" High grade phenolic construction	EA	$36.20	$596.70	$0.00	$632.90
106355	Phenolic Lockers – 3 Tier Up To 15"x18"x72" High grade phenolic construction	EA	$36.20	$645.41	$0.00	$681.61
106356	Phenolic Lockers – 4 Tier Up To 15"x18"x72" High grade phenolic construction	EA	$36.20	$694.12	$0.00	$730.32
106357	Phenolic Lockers – 1 Tier Up To 18"x18"x72" High grade phenolic construction	EA	$36.20	$574.09	$0.00	$610.29
106358	Phenolic Lockers – 2 Tier Up To 18"x18"x72" High grade phenolic construction	EA	$36.20	$625.12	$0.00	$661.32
106359	Phenolic Lockers – 3 Tier Up To 18"x18"x72" High grade phenolic construction	EA	$36.20	$676.14	$0.00	$712.34
106360	Phenolic Lockers – 4 Tier Up To 18"x18"x72" High grade phenolic construction	EA	$36.20	$727.18	$0.00	$763.38
106361	[Modifier] Phenolic Locker – Locking Mechanism (Key Or Combination) Either Key or Combination	EA	$0.00	$47.89	$0.00	$47.89
106362	[Modifier] Phenolic Locker – Locking Mechanism (Battery Operated Digital Lock) Battery Operated Digital Lock	EA	$0.00	$127.71	$0.00	$127.71
106363	[Modifier] Phenolic Lockers - Sloping Top High grade phenolic construction	EA	$0.00	$104.38	$0.00	$104.38

10-55-00 Postal Specialties

Includes all hardware, mounting brackets and secure connection to structure

10-55-00 Postal Specialties

Includes all hardware, mounting brackets and secure connection to structure

106364	Pigeon Hole Mailbox Letter Sized	HOLE	$21.72	$27.93	$0.00	$49.65
106365	USPS Mailbox Systems Hinged Door with keyed parcel locker	HOLE	$27.15	$62.19	$0.00	$89.34
106366	Wall Mounted Postal Box – Residential- Single Unit Metal -All types, with standard finishes, includes locking mechanisms	EA	$33.94	$228.81	$0.00	$262.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106367	Post and Postal Box Free Standing- Residential Metal -All types, with standard finishes, includes locking mechanisms. Post both metal and wood. Includes post hole and all hardware, mounting brackets and secure connection to post.	EA	$135.76	$266.06	$0.00	$401.82

10-56-00 Storage Assemblies

10-56-13 Metal And Wood Storage Shelving

Includes all hardware, mounting brackets and secure connection to structure

106368	Metal Wire Storage Shelving Up To 24" Deep x 72" High – Standard Epoxy powder coating	LF	$15.51	$55.84	$0.00	$71.35
106369	Metal Wire Storage Shelving Up To 24" Deep x 72" High – Kitchen / Health Care Grade Anti-microbial epoxy powder coating	LF	$15.51	$78.19	$0.00	$93.70
106370	Metal Wire Storage Shelving Up To 24" Deep x 72" High – Kitchen / Health Care Grade Stainless Steel	LF	$15.51	$167.53	$0.00	$183.04
106371	Metal Wire Wall Storage Shelving Up To 24" Deep With Standards – Standard Epoxy powder coating	LF	$13.58	$25.12	$0.00	$38.70
106372	Metal Wire Wall Storage Shelving Up To 24" Deep With Standards – Kitchen / Health Care Grade Anti-microbial epoxy powder coating	LF	$13.58	$35.18	$0.00	$48.76
106373	Metal Wire Wall Storage Shelving Up To 24" Deep With Standards – Kitchen / Health Care Grade Stainless Steel	LF	$13.58	$75.40	$0.00	$88.98
106374	Metal Closet Rod and Shelf – Epoxy Powder Coating	LF	$15.51	$33.51	$0.00	$49.02
106375	Metal Closet Rod and Shelf – Stainless Steel	LF	$15.51	$61.43	$0.00	$76.94
106376	Wood Storage Shelving Up To 24" Deep X 72" High – Fully Finished Softwood Construction	LF	$15.51	$65.64	$0.00	$81.15
106377	Wood Wall Storage Shelving Up To 24" Deep With Standards – Fully Finished Softwood Construction	LF	$13.58	$29.54	$0.00	$43.12
106378	Wood Storage Shelving Up To 24" Deep X 72" High – Fully Finished Hardwood Construction	LF	$15.51	$82.05	$0.00	$97.56
106379	Wood Wall Storage Shelving Up To 24" Deep With Standards – Fully Finished Hardwood Construction	LF	$13.58	$36.92	$0.00	$50.50
106380	Wood Closet Rod and Shelf – Fully Finished Softwood Construction	LF	$15.51	$39.39	$0.00	$54.90
106381	Wood Closet Rod and Shelf – Fully Finished Hardwood Construction	LF	$15.51	$49.24	$0.00	$64.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106382	[Modifier] Quantity Premium - Metal And Wood Storage Shelving (< Or = To 20 LF) Quantity premium can be used when total linear footage in section 10-56-13 Metal And Wood Storage Shelving are within stated quantities. Can be applied cumulatively to base line items.	LF	$27.15	$0.00	$0.00	$27.15
	10-56-26 Mobile Storage Shelving					
106383	High Density File Storage System (Single Faced) Manual Assist Each single faced shelving unit is 9" deep and 7 shelves high. Metal shelves with wood end panels and manual assist turning handles on both ends	LF	$49.37	$290.66	$0.00	$340.03
106384	High Density File Storage System (Double Faced) Manual Assist Each double faced shelving unit is 1.5' deep and 7 shelves high. Metal shelves with wood end panels and manual assist turning handles on both ends	LF	$38.79	$528.49	$0.00	$567.28
106385	High Density File Storage System (Double Faced) Manual Assist Double faced shelving unit 32" deep, 6 adjustable shelves (not including top and bottom shelves), 101" high	LF	$150.86	$761.59	$7.00	$919.45
106386	High Density File Storage System (Single Faced) Automatic Assist Each single faced shelving unit is 9" deep and 7 shelves high. Metal shelves with wood end panels and automatic controls on both ends	LF	$49.37	$348.78	$0.00	$398.15
106387	High Density File Storage System (Double Faced) Automatic Assist Each double faced shelving unit is 1.5' deep and 7 shelves high. Metal shelves with wood end panels and automatic controls on both ends	LF	$38.79	$634.17	$0.00	$672.96
	10-70-00 Exterior Specialties					
	10-71-00 Exterior Protection					
	10-71-13 Exterior Sun Control Devices					
106388	Shade Sail Synthetic Textile With 10- year warranty, and approved fire rating.	SF	$1.36	$3.22	$0.00	$4.58
	10-73-00 Protective Covers					
	10-73-43 Transportation Stop Shelters					
106389	Transportation Stop Shelter - Standing Seam Aluminum Hip Roof and Anodized Finish - 5'x13'	EA	$2,059.79	$18,285.00	$0.00	$20,344.79
106390	Transportation Stop Shelter - Standing Seam Aluminum Hip Roof and Anodized Finish - 6'x20'	EA	$2,746.38	$24,928.55	$0.00	$27,674.93
106391	Transportation Stop Shelter - Standing Seam Aluminum Hip Roof and Anodized Finish - 7'x21'	EA	$2,746.38	$33,949.15	$0.00	$36,695.53
	10-74-00 Manufactured Exterior Specialties					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	10-74-49 Modular Landing and Ramp Systems					
106392	Modular Aluminum ADA Ramp – Up To 30' Long Up to 48" wide. Includes all supports, landings, platforms and railings.	LF	$55.11	$586.36	$0.00	$641.47
106393	Modular Aluminum ADA Ramp – > 30' Long Up to 48" wide. Includes all supports, landings, platforms and railings.	LF	$55.11	$698.05	$0.00	$753.16
	10-75-00 Flagpoles					
	10-75-00 Flagpoles					
106394	Ground Set Flagpole - Up To 25' Includes, ropes and pullies, tapered, aluminum, keying, non-fowling, cleats, finial ball & foundation. Meets wind requirements up to 120 MPH	EA	$345.95	$5,361.03	$0.00	$5,706.98
106395	Ground Set Flagpole - 25' To 35' Includes, ropes and pullies, tapered, aluminum, keying, non-fowling, cleats, finial ball & foundation. Meets wind requirements up to 120 MPH	EA	$406.49	$7,203.88	$0.00	$7,610.37
	10-80-00 Other Specialties					
	10-81-00 Pest Control Devices					
	10-81-13 Bird Control Devices					
106396	Bird Netting Black 3/4" bird netting - includes netting, straining wire, bird net ferrules, turnbuckles, brackets and labor for a complete installation	SF	$0.36	$0.57	$0.12	$1.05
	11-00-00 Equipment					
	11-00-00 Equipment					
	11-15-00 Security Control Equipment					
	11-15-00 Security Control Equipment					
106397	Walk Through Book Detectors (Single)	EA	$975.58	$5,584.40	$0.00	$6,559.98
	11-10-00 Vehicle and Pedestrian Equipment					
	11-11-00 Vehicle Service Equipment					
	11-11-00 Vehicle Service Equipment					
106398	Hydraulic Vehicle Lift-Double Post – Up To 8,000 Pound Capacity (4 Tons)	EA	$2,322.82	$11,448.02	$0.00	$13,770.84
106399	Hydraulic Vehicle Lift-Double Post – Up To 10,000 Pound Capacity (5 Tons)	EA	$2,567.33	$14,519.44	$0.00	$17,086.77
106400	Hydraulic Vehicle Lift-Double Post – Up To 12,000 Pound Capacity (6 Tons)	EA	$2,709.95	$18,986.95	$0.00	$21,696.90
106401	Hydraulic Vehicle Lift-Double Post – Up To 14,000 Pound Capacity (7 Tons)	EA	$3,048.70	$24,571.35	$0.00	$27,620.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106402	Hydraulic Truck Lift- Four Post – Up To 24,000 Pound Capacity (12 Tons)	EA	$3,251.95	$30,714.19	$0.00	$33,966.14
106403	Hydraulic Truck Lift – Four Post – Up To 32,000 Pound Capacity (16 Tons)	EA	$3,752.24	$61,428.37	$0.00	$65,180.61
106404	Hydraulic Truck Lift- Four Post – Up To 42,000 Pound Capacity (21 Tons)	EA	$4,064.93	$107,499.66	$0.00	$111,564.59
106405	Hydraulic Truck Lift- Four Post – Up To 52,000 Pound Capacity (26 Tons)	EA	$4,434.47	$134,374.01	$0.00	$138,808.48
106406	Hydraulic Truck Lift- Four Post – Up To 62,000 Pound Capacity (31 Tons)	EA	$4,877.92	$154,530.35	$0.00	$159,408.27
	11-12-00 Parking Control Equipment					
	11-12-00 Parking Control Equipment					
106407	Parking Security Spike Strips - In Ground Includes furnish and installation of spike strip (3' long), galvanized, painted red, excavation and concrete perimeter curbing	EA	$1,168.61	$2,753.27	$493.81	$4,415.69
106408	Hydraulic Wedge Vehicle Barrier (Width x Vertical Height)	SF	$1,625.97	$7,818.15	$0.00	$9,444.12
106409	Electric Wedge Vehicle Barrier (Width x Vertical Height) 4-Post, RSSI Barriers RSS-2000 or Equal	SF	$592.71	$4,930.00	$130.72	$5,653.43
106410	Ticket Booth Up to 60 SF. Heated & Cooled Electric	EA	$4,877.92	$27,921.99	$0.00	$32,799.91
	11-12-33 Parking Gates					
106411	Drop Arm Lift Gate - Up To 30' Wide, Manually Operated Includes manual barrier gate and bolt down cradle; does not include concrete foundations. Similar in construction to UpSwung MB832	EA	$2,496.60	$7,622.41	$0.00	$10,119.01
	11-13-00 Loading Dock Equipment					
	11-13-19 Stationary Loading Dock Equipment					
106412	Hydraulic Loading Dock Leveler - 30,000 LB Capacity Includes 20" custom lip, idock alert technology with controls. Similar or equal to Heavy Duty VH Series Hydraulic Loading Dock Levelers by Poweramp	EA	$4,484.13	$13,064.50	$695.00	$18,243.63
106413	Dock Levelers Edge Of Dock (Each Bay) – Up To 20,000 LB Capacity	EA	$487.80	$3,909.08	$0.00	$4,396.88
106414	Dock Levelers Edge Of Dock (Each Bay) – Up To 25,000 LB Capacity	EA	$487.80	$4,467.51	$0.00	$4,955.31
106415	Dock Levelers Pit Mount (Each Bay) – Up To 25,000 LB Capacity	EA	$975.58	$6,142.83	$0.00	$7,118.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106416	Dock Levelers Pit Mount (Each Bay) – Up To 50,000 LB Capacity	EA	$975.58	$9,493.47	$0.00	$10,469.05
106417	Loading Dock Scissors Lift – Up To 5,000 LB Capacity	EA	$975.58	$9,493.47	$0.00	$10,469.05
106418	Loading Dock Scissors Lift – Up To 15,000 LB Capacity	EA	$975.58	$14,519.44	$0.00	$15,495.02
106419	Dock Bumper (Each Bay) Up to a 15'-0" wide opening.	EA	$139.37	$245.71	$0.00	$385.08
106420	Dock Seals (Each Bay) Up To 10' x 10' Opening Up to 12" deep	EA	$243.89	$1,596.37	$0.00	$1,840.26
106421	Dock Seals (Each Bay) Up To 15' x 10' Opening Up to 12" deep	EA	$243.89	$2,128.48	$0.00	$2,372.37
	11-14-00 Pedestrian Control Equipment					
	11-14-13 Pedestrian Gates					
106422	Pedestrian Turnstile – Manual One Way – Tripod Arm Galvanized Steel Up to 48" Diameter and 50" in height.	EA	$1,086.07	$3,909.08	$0.00	$4,995.15
106423	Pedestrian Turnstile – Manual One Way – Tripod Arm Stainless Steel Up to 48" Diameter and 50" in height.	EA	$1,086.07	$6,701.28	$0.00	$7,787.35
106424	Pedestrian Turnstile – Bi-Directional Motorized Swinging Barrier – Hands Free – Glass Panel Sliding Gate – Optical Controller Alvarado SU5000 or equal	EA	$4,056.25	$40,710.26	$0.00	$44,766.51
106425	Pedestrian Turnstile – Full Height Up To 7'-0"-Galvanized Steel Up to 6' diameter revolving gate	EA	$1,086.07	$6,142.83	$0.00	$7,228.90
106426	Pedestrian Turnstile – Full Height Up To 7'-0"-Stainless Steel Up to 6' diameter revolving gate	EA	$1,086.07	$11,168.79	$0.00	$12,254.86
106427	Pedestrian Turnstile – Full Height Up To 7'-0"-Stainless Steel-With Automatic Controller Up to 6' diameter revolving gate	EA	$1,086.07	$17,870.08	$0.00	$18,956.15
106428	[Modifier] Pedestrian Turnstile - Floor Saver Mounting Plates Alvarado SU5000-BP/BP-A-E or equal - Prevents the need for any floor demo/wire ran directly into base plates	EA	$881.38	$11,391.45	$0.00	$12,272.83
106429	[Modifier] Pedestrian Turnstile - Card Reader Barcode Reader for Electronic Turnstile. Pricing is provided as a complete package installed by the manufacturer. Includes Converter.	EA	$0.00	$2,968.28	$0.00	$2,968.28
106430	Optical Turnstiles Standard	EA	$5,721.66	$90,513.53	$0.00	$96,235.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106431	Optical Turnstiles High Glass	EA	$6,079.27	$97,065.93	$0.00	$103,145.20
	11-14-43 Pedestrian Detection Equipment					
106432	Eco Counter - Nature Multi Evo Counters - Counts Pedestrians and Bikes Includes post directly placed in 20" depth hole; materials include: battery pack, multi-box, adapters, nature post, cables	EA	$191.00	$6,851.08	$100.00	$7,142.08
106433	Eco Counter - Pyro Evo Counter with Recycled Post - Counts Pedestrians/Hikers in Natural Areas	EA	$191.00	$4,611.10	$100.00	$4,902.10
106434	Eco Counter - Pyro Nano Eco x3 Package Includes 2 year Eco-Vision License	EA	$0.00	$4,219.79	$0.00	$4,219.79
	11-15-00 Security Control Equipment					
	11-15-00 Security Control Equipment					
106435	Guard Booth - Prefabricated Up to 60 sf. Electric heating and cooling, wood framed construction	SF	$76.00	$645.94	$0.00	$721.94
106436	Guard Booth - Prefabricated 60 SF or greater. Electric heating and cooling	SF	$81.29	$744.58	$0.00	$825.87
106437	Guard Booth – Bullet Resistant Up to 60 sf. Electric heating and cooling	SF	$81.29	$1,470.55	$0.00	$1,551.84
106438	Projectile Recovery Trap Bench Mount – Low Volume Testing Up To 4,100 FPE	EA	$121.95	$2,792.20	$0.00	$2,914.15
106439	Projectile Recovery Trap Floor Mount – Moderate To High Volume Testing Up To 8,100 FPE	EA	$487.80	$7,259.72	$0.00	$7,747.52
106440	Projectile Recovery Trap Floor Mount – Moderate To High Volume Testing Up To 13,000 FPE	EA	$487.80	$11,168.79	$0.00	$11,656.59
106441	Projectile Recovery Trap Floor Mount – High Volume 24" Box Trap Up To 8,100 FPE With fluid circulation	EA	$650.39	$22,337.59	$0.00	$22,987.98
106442	Projectile Recovery Trap Floor Mount – High Volume 36" Box Trap Up To 8,100 FPE With fluid circulation	EA	$650.39	$29,597.31	$0.00	$30,247.70
106443	Projectile Recovery Trap Floor Mount – High Volume 48" Box Trap Up To 8,100 FPE With fluid circulation	EA	$650.39	$37,973.91	$0.00	$38,624.30
106444	Bullet Trap, Target Trolley, and Baffle System	EA	$9,755.83	$51,376.46	$0.00	$61,132.29
106445	Evidence Drying Cabinet – Up To 36" Wide Tamper-resistant Polypropylene, Metal, and Glass construction, ductless, with multi-stage filtration. Includes both moveable and fixed cabinets.	EA	$487.80	$7,594.78	$0.00	$8,082.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106446	Evidence Drying Cabinet – Up To 60" Wide Tamper-resistant Polypropylene, Metal, and Glass construction, ductless, with multi-stage filtration. Includes both moveable and fixed cabinets.	EA	$650.39	$13,961.00	$0.00	$14,611.39
106447	Evidence Lockers – 1 Tier Up To 16"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$34.84	$3,026.52	$0.00	$3,061.36
106448	Evidence Lockers – 2 Tier Up To 16"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$34.84	$3,295.54	$0.00	$3,330.38
106449	Evidence Lockers – 3 Tier Up To 16"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$34.84	$3,564.56	$0.00	$3,599.40
106450	Evidence Lockers – 4 Tier Up To 16"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$34.84	$3,833.58	$0.00	$3,868.42
106451	Evidence Lockers – 1 Tier Up To 18"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$44.34	$3,177.85	$0.00	$3,222.19
106452	Evidence Lockers – 2 Tier Up To 18"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$44.34	$3,460.31	$0.00	$3,504.65
106453	Evidence Lockers – 3 Tier Up To 18"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$44.34	$3,742.79	$0.00	$3,787.13
106454	Evidence Lockers – 4 Tier Up To 18"x18"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$44.34	$4,025.26	$0.00	$4,069.60
106455	Evidence Lockers – 1 Tier Up To 21"x21"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$3,852.54	$0.00	$3,922.23
106456	Evidence Lockers – 2 Tier Up To 21"x21"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,194.98	$0.00	$4,264.67
106457	Evidence Lockers – 3 Tier Up To 21"x21"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,537.42	$0.00	$4,607.11
106458	Evidence Lockers – 4 Tier Up To 21"x21"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,879.88	$0.00	$4,949.57
106459	Evidence Lockers – 1 Tier Up To 24"x24"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,237.78	$0.00	$4,307.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106460	Evidence Lockers – 2 Tier Up To 24"x24"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,614.46	$0.00	$4,684.15
106461	Evidence Lockers – 3 Tier Up To 24"x24"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$4,991.17	$0.00	$5,060.86
106462	Evidence Lockers – 4 Tier Up To 24"x24"x82" Heavy duty steel construction with tamper proof keyless locking system	EA	$69.69	$5,367.85	$0.00	$5,437.54
106463	Gun Safe – 1 Hour Fire Rating Up To 22" Wide x 20" Deep x 59" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$1,675.32	$0.00	$1,837.92
106464	Gun Safe – 1 Hour Fire Rating Up To 32" Wide x 22" Deep x 59" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$2,122.07	$0.00	$2,284.67
106465	Gun Safe – 1 Hour Fire Rating Up To 39" Wide x 24" Deep x 59" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$3,015.57	$0.00	$3,178.17
106466	Gun Safe – 1 Hour Fire Rating Up To 22" Wide x 20" Deep x 72" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$1,926.62	$0.00	$2,089.22
106467	Gun Safe – 1 Hour Fire Rating Up To 32" Wide x 22" Deep x 72" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$2,440.38	$0.00	$2,602.98
106468	Gun Safe – 1 Hour Fire Rating Up To 39" Wide x 24" Deep x 72" High Steel construction with tamper resistant electronic keypad locking system	EA	$162.60	$3,467.91	$0.00	$3,630.51
106469	Gun Lockers – Up To 42" Wide x 15" Deep x 45" Tall Heavy duty vented steel construction with tamper proof keyless locking system	EA	$162.60	$2,345.44	$0.00	$2,508.04
106470	Gun Lockers – Up To 42" Wide x 15" Deep x 72" Tall Heavy duty vented steel construction with tamper proof keyless locking system	EA	$162.60	$2,903.89	$0.00	$3,066.49
106471	Gun Lockers – Up To 42" Wide x 15" Deep x 84" Tall Heavy duty vented steel construction with tamper proof keyless locking system	EA	$162.60	$3,350.64	$0.00	$3,513.24
106472	X-Ray Scanner Conveyor belt scanner	EA	$2,438.95	$31,337.56	$0.00	$33,776.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106473	Walk Through Metal Detectors (Single) Garrett CS5000 or equal. 30" to 42" Wide, 70 to 90" in Height, 20" to 32" in depth. Programmable & adjustable.	EA	$975.58	$5,584.40	$0.00	$6,559.98

11-20-00 Commercial Equipment

11-21-00 Retail and Service Equipment

11-21-73 Commercial Laundry and Dry Cleaning Equipment

106474	20 LB. Electric and Gas Dry Cleaner	EA	$4,130.33	$33,394.70	$0.00	$37,525.03
106475	25 LB. Electric and Gas Dry Cleaner	EA	$5,039.17	$42,664.80	$0.00	$47,703.97
106476	30 LB. Electric and Gas Dry Cleaner	EA	$5,662.12	$44,898.56	$0.00	$50,560.68
106477	60 LB. Electric and Gas Dry Cleaner	EA	$9,162.13	$70,921.86	$0.00	$80,083.99
106478	20 LB. Combination Washer / Extractor	EA	$303.01	$4,400.50	$0.00	$4,703.51
106479	30 LB. Combination Washer / Extractor	EA	$568.11	$8,482.70	$0.00	$9,050.81
106480	50 LB. Combination Washer / Extractor	EA	$668.32	$10,498.67	$0.00	$11,166.99
106481	75 LB. Combination Washer / Extractor	EA	$668.32	$21,862.92	$0.00	$22,531.24
106482	125 LB. Combination Washer / Extractor	EA	$668.32	$27,670.69	$0.00	$28,339.01
106483	50 LB. Capacity Washing Machine	EA	$668.32	$10,610.36	$0.00	$11,278.68
106484	50 LB. Capacity Dryer	EA	$668.32	$4,188.30	$0.00	$4,856.62

11-22-00 Banking Equipment

11-22-16 Teller and Service Equipment

106485	Transaction Drawer - Thru Wall, Small Approximate size -12"w x 16"d x 4"h, extends up to 11", stainless steel construction, manual operation, removable deal tray, Level 3 bullet resistance	EA	$141.75	$1,719.77	$0.00	$1,861.52
106486	Transaction Drawer - Thru Wall, Medium Approximate size - 12"w x 24"d x 4"h, extends up to 17", stainless steel construction, manual operation, removable deal tray, Level 3 bullet resistance	EA	$141.75	$2,302.90	$0.00	$2,444.65
106487	Transaction Drawer - Thru Wall, Large Approximate size - 18"w x 25"d x 5"h, multi drawer, double hinged lid, stainless steel construction, manual operation, removable deal tray, Level 3 bullet resistance	EA	$212.62	$2,361.97	$0.00	$2,574.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106488	Transaction Drawer - Thru Wall, Large Approximate size - 18"w x 25"d x 9"h, multi drawer, stainless steel construction, manual operation, removable deal tray, Level 3 bullet resistance	EA	$212.62	$2,600.88	$0.00	$2,813.50
106489	[Modifier] Rework Existing Partition (GWB)/Millwork and Worksurface for New Transaction Drawer To include cutting and reframing opening in GWB partition and counter surface	EA	$986.08	$167.53	$0.00	$1,153.61
106490	[Modifier] Rework Existing Partition Concrete Masonry Unit (CMU Block)/Millwork and Worksurface for New Transaction Drawer To include cutting and reframing opening in CMU partition and counter surface	EA	$1,545.12	$279.22	$0.00	$1,824.34

11-30-00 Residential Equipment

11-30-00 Residential Equipment

11-30-13 Residential Appliances

Includes all major makes and models in manufactures standard line of finishes. All hookups are included. Due to the competitive nature of residential appliance pricing, if an item is not shown, the contractor is to select the line item nearest in cost to the proposed

106491	Residential Cooktop – Up To 30" Electric, 4 Burner, Dial Controls	EA	$121.95	$670.13	$0.00	$792.08
106492	Residential Cooktop – Up To 30" Electric, 4 Burner, Digital Controls	EA	$121.95	$893.50	$0.00	$1,015.45
106493	Residential Cooktop – Up To 30" Electric, 4 Burner, Downdraft	EA	$121.95	$1,898.69	$0.00	$2,020.64
106494	Residential Cooktop – Up To 30" Gas, 4 Burner, Dial Controls	EA	$121.95	$770.65	$0.00	$892.60
106495	Residential Cooktop – Up To 30" Gas, 4 Burner, Digital Controls	EA	$121.95	$1,027.53	$0.00	$1,149.48
106496	Residential Cooktop – Up To 30" Gas, 4 Burner, Downdraft	EA	$121.95	$2,183.50	$0.00	$2,305.45
106497	Residential Range – Gas, Up To 30"	EA	$121.95	$949.35	$0.00	$1,071.30
106498	Residential Range – Gas, Over 30" Up To 36"	EA	$121.95	$2,010.39	$0.00	$2,132.34
106499	Residential Range – Electric, Up To 24"	EA	$121.95	$837.66	$0.00	$959.61
106500	Residential Range – Electric, Over 24" Up To 30"	EA	$121.95	$893.50	$0.00	$1,015.45
106501	Residential Range Hood – Up To 30" and 350 CFM – Ducted Under Cabinet Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$121.95	$223.38	$0.00	$345.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106502	Residential Range Hood – Up To 30" and 600 CFM – Ducted Under Cabinet Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$121.95	$390.91	$0.00	$512.86
106503	Residential Range Hood – Up To 30" and 900 CFM – Ducted Under Cabinet Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$121.95	$502.59	$0.00	$624.54
106504	Residential Range Hood – Up To 48" and 800 CFM – Ducted Wall / Island Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$162.60	$725.98	$0.00	$888.58
106505	Residential Range Hood – Up To 48" and 950 CFM – Ducted Wall / Island Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$162.60	$1,186.68	$0.00	$1,349.28
106506	Residential Range Hood – Up To 48" and 1,200 CFM – Ducted Wall / Island Mount Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$162.60	$1,493.82	$0.00	$1,656.42
106507	Residential Range Hood – Up To 30" and 350 CFM – Ductless Under Cabinet Mount	EA	$97.55	$201.04	$0.00	$298.59
106508	Residential Range Hood – Up To 30" and 600 CFM – Ductless Under Cabinet Mount	EA	$97.55	$351.82	$0.00	$449.37
106509	Residential Range Hood – Up To 30" and 900 CFM – Ductless Under Cabinet Mount	EA	$97.55	$452.33	$0.00	$549.88
106510	Residential Range Hood – Up To 48" and 800 CFM – Ductless Wall / Island Mount	EA	$121.95	$664.54	$0.00	$786.49
106511	Residential Range Hood – Up To 48" and 950 CFM – Ductless Wall / Island Mount	EA	$121.95	$1,079.18	$0.00	$1,201.13
106512	Residential Range Hood – Up To 48" and 1,200 CFM – Ductless Wall / Island Mount	EA	$121.95	$1,355.61	$0.00	$1,477.56
106513	Residential Dishwasher – 24" Wide, Top Control, Up To 51 Decibels Includes drain hookup	EA	$162.60	$670.13	$0.00	$832.73
106514	Residential Dishwasher – 24" Wide, Top Control, Up To 47 Decibels Includes drain hookup	EA	$162.60	$949.35	$0.00	$1,111.95
106515	Residential Dishwasher – 24" Wide, Top Control, Up To 43 Decibels Includes drain hookup	EA	$162.60	$1,116.88	$0.00	$1,279.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106516	Residential Dishwasher – 24" Wide, Front Control, Up To 51 Decibels Includes drain hookup	EA	$162.60	$670.13	$0.00	$832.73
106517	Residential Dishwasher – 24" Wide, Front Control, Up To 47 Decibels Includes drain hookup	EA	$162.60	$725.98	$0.00	$888.58
106518	Residential Dishwasher – 24" Wide, Front Control, Up To 43 Decibels Includes drain hookup	EA	$162.60	$949.35	$0.00	$1,111.95
106519	Residential Dishwasher – 18" Wide, Top Control, Up To 51 Decibels Includes drain hookup	EA	$162.60	$781.82	$0.00	$944.42
106520	Residential Dishwasher – 18" Wide, Top Control, Up To 47 Decibels Includes drain hookup	EA	$162.60	$949.35	$0.00	$1,111.95
106521	Residential Dishwasher – 18" Wide, Top Control, Up To 43 Decibels Includes drain hookup	EA	$162.60	$1,116.88	$0.00	$1,279.48
106522	Residential Dishwasher – 18" Wide, Front Control, Up To 51 Decibels Includes drain hookup	EA	$162.60	$725.98	$0.00	$888.58
106523	Residential Dishwasher – 18" Wide, Front Control, Up To 47 Decibels Includes drain hookup	EA	$162.60	$893.50	$0.00	$1,056.10
106524	Residential Dishwasher – 18" Wide, Front Control, Up To 41 Decibels Includes drain hookup	EA	$162.60	$1,005.19	$0.00	$1,167.79
106525	Residential Clothes Washer – Front Load, Up To 2.5 Cubic Feet Includes drain hookup	EA	$97.55	$807.23	$0.00	$904.78
106526	Residential Clothes Washer – Front Load, Over 2.5 Cubic Feet Up To 4.5 Cubic Feet Includes drain hookup	EA	$97.55	$942.52	$0.00	$1,040.07
106527	Residential Clothes Washer – Front Load, Over 4.5 Cubic Feet Up To 6 Cubic Feet Includes drain hookup	EA	$97.55	$1,675.32	$0.00	$1,772.87
106528	Residential Clothes Washer – Top Load, Up To 2.5 Cubic Feet Includes drain hookup	EA	$97.55	$702.78	$0.00	$800.33
106529	Residential Clothes Washer – Top Load, Over 2.5 Cubic Feet Up To 4.5 Cubic Feet Includes drain hookup	EA	$97.55	$756.01	$0.00	$853.56
106530	Residential Clothes Washer – Top Load, Over 4.5 Cubic Feet Up To 6 Cubic Feet Includes drain hookup	EA	$97.55	$1,340.25	$0.00	$1,437.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106531	Residential Clothes Dryer – Gas, Up To 6 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$837.66	$0.00	$935.21
106532	Residential Clothes Dryer – Gas, Over 6 Cubic Feet Up To 7.5 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$949.35	$0.00	$1,046.90
106533	Residential Clothes Dryer – Gas, Over 7.5 Cubic Feet Up To 9 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$1,116.88	$0.00	$1,214.43
106534	Residential Clothes Dryer – Electric, Up To 6 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$558.44	$0.00	$655.99
106535	Residential Clothes Dryer – Electric, Over 6 Cubic Feet Up To 7.5 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$893.50	$0.00	$991.05
106536	Residential Clothes Dryer – Electric, Over 7.5 Cubic Feet Up To 9 Cubic Feet Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$1,005.19	$0.00	$1,102.74
106537	Microwave – Counter, Up To 1.6 Cubic Feet	EA	$23.23	$279.22	$0.00	$302.45
106538	Microwave – Counter, Over 1.6 Cubic Feet Up To 2.2 Cubic Feet	EA	$23.23	$418.82	$0.00	$442.05
106539	Microwave – Built-In, Up To 1.6 Cubic Feet	EA	$97.55	$756.84	$0.00	$854.39
106540	Microwave – Built-In, Over 1.6 Cubic Feet Up To 2.2 Cubic Feet	EA	$97.55	$1,081.20	$0.00	$1,178.75
106541	Microwave – Over The Range, Up To 1.6 Cubic Feet	EA	$69.69	$279.22	$0.00	$348.91
106542	Microwave – Over The Range, Over 1.6 Cubic Feet Up To 2.2 Cubic Feet	EA	$69.69	$418.82	$0.00	$488.51
106543	Residential Refrigerator – White, Upper Door with Bottom Freezer – Up to 25 Cubic Feet Up to 36” wide, standard depth, upper refrigerator door, lower bottom freezer door	EA	$97.55	$2,101.39	$0.00	$2,198.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106544	Residential Refrigerator – Stainless Steel, Upper Door with Bottom Freezer – Up to 25 Cubic Feet Up to 36” wide, standard depth, upper refrigerator door, lower bottom freezer door	EA	$97.55	$2,400.21	$0.00	$2,497.76
106545	Residential Refrigerator – White, Bottom Door with Upper Freezer – Up to 25 Cubic Feet Up to 36” wide, standard depth, bottom refrigerator door, upper freezer door	EA	$97.55	$2,101.39	$0.00	$2,198.94
106546	Residential Refrigerator – Stainless Steel, Bottom Door with Upper Freezer – Up to 25 Cubic Feet Up to 36” wide, standard depth, bottom refrigerator door, upper freezer door	EA	$97.55	$2,400.21	$0.00	$2,497.76
106547	Residential Refrigerator – White Side by Side – Up to 25 Cubic Feet Up to 36” wide, standard depth	EA	$97.55	$2,006.88	$0.00	$2,104.43
106548	Residential Refrigerator – Stainless Steel Side by Side – Up to 25 Cubic Feet Up to 36” wide, standard depth	EA	$97.55	$2,098.03	$0.00	$2,195.58
106549	Residential Refrigerator – Stainless Steel French Door Refrigerator – Up to 29 Cubic Feet Smudge-Proof stainless steel finish, 36” wide, standard depth, internal water with ice maker	EA	$97.55	$2,802.88	$0.00	$2,900.43
106550	[Modifier] Residential Refrigerator – Ice Maker	EA	$0.00	$83.77	$0.00	$83.77
106551	[Modifier] Residential Refrigerator – Water Dispenser	EA	$0.00	$139.61	$0.00	$139.61
106552	Undercounter Refrigerator – Single Door With Top Freezer, Up To 3 Cubic Feet	EA	$60.97	$279.22	$0.00	$340.19
106553	Undercounter Refrigerator – Single Door With Top Freezer, Up To 5 Cubic Feet	EA	$60.97	$686.88	$0.00	$747.85
106554	Residential Cooktop Gas Or Electric – Installation Only	EA	$121.95	$0.00	$0.00	$121.95
106555	Residential Range Gas Or Electric – Installation Only	EA	$121.95	$0.00	$0.00	$121.95
106556	Residential Range Hood – Ducted Under Cabinet Mount – Installation Only Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$121.95	$0.00	$0.00	$121.95
106557	Residential Range Hood – Ducted Wall / Island Mount – Installation Only Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$162.60	$0.00	$0.00	$162.60
106558	Residential Range Hood – Ductless Under Cabinet Mount – Installation Only	EA	$97.55	$0.00	$0.00	$97.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106559	Residential Range Hood – Ductless Wall / Island Mount – Installation Only	EA	$121.95	$0.00	$0.00	$121.95
106560	Residential Dishwasher – Installation Only Includes drain hookup	EA	$162.60	$0.00	$0.00	$162.60
106561	Residential Clothes Washer – Installation Only Includes drain hookup	EA	$97.55	$0.00	$0.00	$97.55
106562	Residential Clothes Dryer Gas Or Electric – Installation Only Includes up to 8" diameter through wall venting with up to 10' of duct. For additional ducting refer to the HVAC section	EA	$97.55	$0.00	$0.00	$97.55
106563	Microwave – Counter – Installation Only	EA	$23.23	$0.00	$0.00	$23.23
106564	Microwave – Built-In – Installation Only	EA	$97.55	$0.00	$0.00	$97.55
106565	Microwave – Over The Range – Installation Only	EA	$69.69	$0.00	$0.00	$69.69
106566	Residential Refrigerator – Installation Only	EA	$97.55	$0.00	$0.00	$97.55
106567	Undercounter Refrigerator – Installation Only	EA	$60.97	$0.00	$0.00	$60.97

11-40-00 Foodservice Equipment

11-41-00 Foodservice Storage Equipment

11-41-23 Walk-In Coolers

Units include all refrigeration equipment, lighting, up to 4" Urethane filled Aluminum walls and ceilings (or equal), cooler door with all hardware, screed plastic, supports, blocking, and fasteners, for a complete cooler/freezer system. For different shaped units choose the line item which corresponds with the Square Footage of your unit

106568	Walk In Coolers / Freezers – Up To 6' X 6' X 8' With Insulated Floor	EA	$1,838.69	$8,845.69	$0.00	$10,684.38
106569	Walk In Coolers / Freezers – Up To 6' X 6' X 8' Without Insulated Floor	EA	$1,598.87	$7,518.83	$0.00	$9,117.70
106570	Walk In Coolers / Freezers – Up To 6' X 6' X 10' With Insulated Floor	EA	$2,298.37	$10,614.82	$0.00	$12,913.19
106571	Walk In Coolers / Freezers – Up To 6' X 6' X 10' Without Insulated Floor	EA	$1,998.57	$9,022.60	$0.00	$11,021.17
106572	Walk In Coolers / Freezers – Up To 6' X 6' X 12' With Insulated Floor	EA	$2,872.95	$12,737.78	$0.00	$15,610.73
106573	Walk In Coolers / Freezers – Up To 6' X 6' X 12' Without Insulated Floor	EA	$2,498.23	$10,827.12	$0.00	$13,325.35
106574	Walk In Coolers / Freezers – Up To 8' X 8' X 8' With Insulated Floor	EA	$2,971.62	$14,296.05	$0.00	$17,267.67
106575	Walk In Coolers / Freezers – Up To 8' X 8' X 8' Without Insulated Floor	EA	$2,584.02	$12,151.65	$0.00	$14,735.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106576	Walk In Coolers / Freezers – Up To 8' X 8' X 10' With Insulated Floor	EA	$3,714.52	$17,155.27	$0.00	$20,869.79
106577	Walk In Coolers / Freezers – Up To 8' X 8' X 10' Without Insulated Floor	EA	$3,230.03	$14,581.98	$0.00	$17,812.01
106578	Walk In Coolers / Freezers – Up To 8' X 8' X 12' With Insulated Floor	EA	$4,643.16	$20,586.33	$0.00	$25,229.49
106579	Walk In Coolers / Freezers – Up To 8' X 8' X 12' Without Insulated Floor	EA	$4,037.54	$17,498.38	$0.00	$21,535.92
106580	Walk In Coolers / Freezers – Up To 10' X 10' X 8' With Insulated Floor	EA	$4,178.85	$20,103.83	$0.00	$24,282.68
106581	Walk In Coolers / Freezers – Up To 10' X 10' X 8' Without Insulated Floor	EA	$3,633.78	$17,088.26	$0.00	$20,722.04
106582	Walk In Coolers / Freezers – Up To 10' X 10' X 10' With Insulated Floor	EA	$5,223.55	$24,124.60	$0.00	$29,348.15
106583	Walk In Coolers / Freezers – Up To 10' X 10' X 10' Without Insulated Floor	EA	$4,542.22	$20,505.91	$0.00	$25,048.13
106584	Walk In Coolers / Freezers – Up To 10' X 10' X 12' With Insulated Floor	EA	$6,529.44	$28,949.52	$0.00	$35,478.96
106585	Walk In Coolers / Freezers – Up To 10' X 10' X 12' Without Insulated Floor	EA	$5,677.78	$24,607.09	$0.00	$30,284.87
106586	Walk In Coolers / Freezers – Up To 12' X 12' X 8' With Insulated Floor	EA	$5,348.93	$25,732.91	$0.00	$31,081.84
106587	Walk In Coolers / Freezers – Up To 12' X 12' X 8' Without Insulated Floor	EA	$4,651.23	$21,872.97	$0.00	$26,524.20
106588	Walk In Coolers / Freezers – Up To 12' X 12' X 10' With Insulated Floor	EA	$6,686.16	$30,879.49	$0.00	$37,565.65
106589	Walk In Coolers / Freezers – Up To 12' X 12' X 10' Without Insulated Floor	EA	$5,814.04	$26,247.57	$0.00	$32,061.61
106590	Walk In Coolers / Freezers – Up To 12' X 12' X 12' With Insulated Floor	EA	$8,357.69	$37,055.38	$0.00	$45,413.07
106591	Walk In Coolers / Freezers – Up To 12' X 12' X 12' Without Insulated Floor	EA	$7,267.56	$31,497.08	$0.00	$38,764.64
106592	Walk In Coolers / Freezers – Up To 14' X 14' X 8' With Insulated Floor	EA	$6,370.42	$30,647.17	$0.00	$37,017.59
106593	Walk In Coolers / Freezers – Up To 14' X 14' X 8' Without Insulated Floor	EA	$5,539.49	$26,050.10	$0.00	$31,589.59
106594	Walk In Coolers / Freezers – Up To 14' X 14' X 10' With Insulated Floor	EA	$7,963.03	$36,776.61	$0.00	$44,739.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106595	Walk In Coolers / Freezers – Up To 14' X 14' X 10' Without Insulated Floor	EA	$6,924.37	$31,260.12	$0.00	$38,184.49
106596	Walk In Coolers / Freezers – Up To 14' X 14' X 12' With Insulated Floor	EA	$9,953.78	$44,131.93	$0.00	$54,085.71
106597	Walk In Coolers / Freezers – Up To 14' X 14' X 12' Without Insulated Floor	EA	$8,655.45	$37,512.14	$0.00	$46,167.59
106598	Walk In Coolers / Freezers – Up To 16' X 16' X 8' With Insulated Floor	EA	$7,131.90	$34,310.53	$0.00	$41,442.43
106599	Walk In Coolers / Freezers – Up To 16' X 16' X 8' Without Insulated Floor	EA	$6,201.65	$29,163.97	$0.00	$35,365.62
106600	Walk In Coolers / Freezers – Up To 16' X 16' X 10' With Insulated Floor	EA	$8,914.87	$41,172.65	$0.00	$50,087.52
106601	Walk In Coolers / Freezers – Up To 16' X 16' X 10' Without Insulated Floor	EA	$7,752.05	$34,996.75	$0.00	$42,748.80
106602	Walk In Coolers / Freezers – Up To 16' X 16' X 12' With Insulated Floor	EA	$11,143.58	$49,407.18	$0.00	$60,550.76
106603	Walk In Coolers / Freezers – Up To 16' X 16' X 12' Without Insulated Floor	EA	$9,690.05	$41,996.10	$0.00	$51,686.15
106604	Walk In Coolers / Freezers – Up To 18' X 18' X 8' With Insulated Floor	EA	$7,521.92	$36,186.90	$0.00	$43,708.82
106605	Walk In Coolers / Freezers – Up To 18' X 18' X 8' Without Insulated Floor	EA	$6,540.80	$30,758.87	$0.00	$37,299.67
106606	Walk In Coolers / Freezers – Up To 18' X 18' X 10' With Insulated Floor	EA	$9,402.40	$43,424.28	$0.00	$52,826.68
106607	Walk In Coolers / Freezers – Up To 18' X 18' X 10' Without Insulated Floor	EA	$8,176.01	$36,910.64	$0.00	$45,086.65
106608	Walk In Coolers / Freezers – Up To 18' X 18' X 12' With Insulated Floor	EA	$11,753.01	$52,109.13	$0.00	$63,862.14
106609	Walk In Coolers / Freezers – Up To 18' X 18' X 12' Without Insulated Floor	EA	$10,220.00	$44,292.77	$0.00	$54,512.77
106610	Walk In Coolers / Freezers – Up To 20' X 20' X 8' With Insulated Floor	EA	$8,171.97	$39,314.16	$0.00	$47,486.13
106611	Walk In Coolers / Freezers – Up To 20' X 20' X 8' Without Insulated Floor	EA	$7,106.06	$33,417.03	$0.00	$40,523.09
106612	Walk In Coolers / Freezers – Up To 20' X 20' X 10' With Insulated Floor	EA	$10,214.97	$47,176.99	$0.00	$57,391.96
106613	Walk In Coolers / Freezers – Up To 20' X 20' X 10' Without Insulated Floor	EA	$8,882.58	$40,100.44	$0.00	$48,983.02
106614	Walk In Coolers / Freezers – Up To 20' X 20' X 12' With Insulated Floor	EA	$12,768.71	$56,612.40	$0.00	$69,381.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106615	Walk In Coolers / Freezers – Up To 20' X 20' X 12' Without Insulated Floor	EA	$11,103.20	$48,120.54	$0.00	$59,223.74
106616	Walk In Coolers / Freezers – Greater Than 20' x 20' x 8' With Insulated Floor	SF	$16.32	$80.30	$0.00	$96.62
106617	Walk In Coolers / Freezers – Greater Than 20' x 20' x 8' Without Insulated Floor	SF	$14.19	$68.25	$0.00	$82.44
106618	Walk In Coolers / Freezers – Greater Than 20' x 20' x 10' With Insulated Floor	SF	$19.57	$96.36	$0.00	$115.93
106619	Walk In Coolers / Freezers – Greater Than 20' x 20' x 10' Without Insulated Floor	SF	$17.02	$81.90	$0.00	$98.92
106620	Walk In Coolers / Freezers – Greater Than 20' x 20' x 12' With Insulated Floor	SF	$23.49	$115.63	$0.00	$139.12
106621	Walk In Coolers / Freezers – Greater Than 20' x 20' x 12' Without Insulated Floor	SF	$20.44	$98.29	$0.00	$118.73
106622	Walk In Coolers / Freezers – 1" Urethane Filled Aluminum Panels Or Equal	SF	$4.65	$17.31	$0.00	$21.96
106623	Walk In Coolers / Freezers – 2" Urethane Filled Aluminum Panels Or Equal	SF	$5.34	$18.99	$0.00	$24.33
106624	Walk In Coolers / Freezers – 3" Urethane Filled Aluminum Panels Or Equal	SF	$6.04	$20.66	$0.00	$26.70
106625	Walk In Coolers / Freezers – 4" Urethane Filled Aluminum Panels Or Equal	SF	$6.73	$22.33	$0.00	$29.06
106626	[Modifier] Walk In Cooler / Freezer Upgrade to Stainless Steel Finish	SF	$0.00	$18.83	$0.00	$18.83
	11-46-00 Food Dispensing Equipment					
	11-46-83 Ice Machines					
106627	Ice Machine – Floor Mounted – Makes Up To 150 LB Per Day Capacity	EA	$232.28	$2,233.76	$0.00	$2,466.04
106628	Ice Machine – Floor Mounted – Makes Between 150 LB 350 LB Per Day Capacity	EA	$372.36	$3,909.08	$0.00	$4,281.44
106629	Ice Machine – Floor Mounted – Makes Between 350 LB 550 LB Per Day Capacity	EA	$508.12	$5,584.40	$0.00	$6,092.52
106630	Ice Machine – Floor Mounted – Makes Between 550 LB 750 LB Per Day Capacity	EA	$650.39	$7,259.72	$0.00	$7,910.11
106631	Ice Machine – Floor Mounted – Makes Between 750 LB 950 LB Per Day Capacity	EA	$786.76	$8,935.04	$0.00	$9,721.80
106632	Ice Machine – Floor Mounted – Makes Between 950 LB 1150 LB Per Day Capacity	EA	$920.36	$10,610.36	$0.00	$11,530.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106633	Ice Machine – Floor Mounted – Makes Between 1150 LB 1350 LB Per Day Capacity	EA	$1,060.42	$12,285.68	$0.00	$13,346.10
106634	Ice Machine – Floor Mounted – Makes Greater Than 1350 LB Per Day Capacity	EA	$1,219.48	$13,961.00	$0.00	$15,180.48
	11-48-00 Foodservice Cleaning and Disposal Equipment					
	11-48-13 Commercial Dishwashers					
106635	Commercial Dishwasher – Up To 30 Racks / HR	EA	$232.28	$5,025.96	$0.00	$5,258.24
106636	Commercial Dishwasher – 30 Racks / HR To 40 Racks / HR	EA	$372.36	$8,376.60	$0.00	$8,748.96
106637	Commercial Dishwasher – 40 Racks / HR To 50 Racks /HR	EA	$508.12	$11,727.23	$0.00	$12,235.35
106638	Commercial Dishwasher – 50 Racks / HR To 60 Racks / HR	EA	$650.39	$15,077.87	$0.00	$15,728.26
106639	Commercial Dishwasher – 60 Racks / HR To 70 Racks / HR	EA	$786.76	$18,428.51	$0.00	$19,215.27
106640	[Modifier] Ventless Commercial Dishwasher	EA	$0.00	$5,584.40	$0.00	$5,584.40
106641	[Modifier] Conveyor Commercial Dishwasher	EA	$0.00	$8,376.60	$0.00	$8,376.60
106642	In Sink Garbage Disposal – Up To 1/2 HP	EA	$121.95	$156.36	$0.00	$278.31
106643	In Sink Garbage Disposal – Up To 3/4 HP	EA	$121.95	$223.38	$0.00	$345.33
106644	In Sink Garbage Disposal – Up To 1 HP	EA	$121.95	$446.75	$0.00	$568.70
106645	In Sink Garbage Disposal – Up To 2 HP	EA	$121.95	$1,675.32	$0.00	$1,797.27
106646	In Sink Garbage Disposal – Up To 3 HP	EA	$121.95	$2,792.20	$0.00	$2,914.15
	11-50-00 Educational and Scientific Equipment					
	11-51-00 Library Equipment					
	11-51-23 Library Stack Systems					
106647	Wood Single Faced Library Shelving – 42" Tall, 3 Shelves (2 Adjustable) Oak Veneer or equal over Plywood core with up to 12" shelf depth	LF	$28.58	$244.86	$0.00	$273.44
106648	Wood Single Faced Library Shelving – 48" Tall, 3 Shelves (2 Adjustable) Oak Veneer or equal over Plywood core with up to 12" shelf depth	LF	$28.58	$265.02	$0.00	$293.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106649	Wood Single Faced Library Shelving – 60" Tall, 5 Shelves (4 Adjustable) Oak Veneer or equal over Plywood core with up to 12" shelf depth	LF	$33.94	$331.51	$0.00	$365.45
106650	Wood Single Faced Library Shelving – 72" Tall, 5 Shelves (4 Adjustable) Oak Veneer or equal over Plywood core with up to 12" shelf depth	LF	$33.94	$345.83	$0.00	$379.77
106651	Wood Single Faced Library Shelving – 82" Tall, 6 Shelves (5 Adjustable) Oak Veneer or equal over Plywood core with up to 12" shelf depth	LF	$33.94	$365.80	$0.00	$399.74
106652	Wood Double Faced Library Shelving – 42" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Oak Veneer or equal over Plywood core with up to 12" shelf depth each side	LF	$33.94	$390.41	$0.00	$424.35
106653	Wood Double Faced Library Shelving – 48" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Oak Veneer or equal over Plywood core with up to 12" shelf depth each side	LF	$33.94	$423.25	$0.00	$457.19
106654	Wood Double Faced Library Shelving – 60" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Oak Veneer or equal over Plywood core with up to 12" shelf depth each side	LF	$41.77	$531.50	$0.00	$573.27
106655	Wood Double Faced Library Shelving – 72" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Oak Veneer or equal over Plywood core with up to 12" shelf depth each side	LF	$41.77	$556.91	$0.00	$598.68
106656	Wood Double Faced Library Shelving – 82" Tall, 6 Shelves Each Side (5 Adjustable Each Side) Oak Veneer or equal over Plywood core with up to 12" shelf depth each side	LF	$41.77	$606.31	$0.00	$648.08
106657	Plastic Laminate Single Faced Library Shelving – 42" Tall, 3 Shelves (2 Adjustable) Plastic Laminate over Plywood core with up to 12" shelf depth	LF	$28.58	$182.61	$0.00	$211.19
106658	Plastic Laminate Single Faced Library Shelving – 48" Tall, 3 Shelves (2 Adjustable) Plastic Laminate over Plywood core with up to 12" shelf depth	LF	$28.58	$197.65	$0.00	$226.23
106659	Plastic Laminate Single Faced Library Shelving – 60" Tall, 5 Shelves (4 Adjustable) Plastic Laminate over Plywood core with up to 12" shelf depth	LF	$33.94	$247.23	$0.00	$281.17
106660	Plastic Laminate Single Faced Library Shelving – 72" Tall, 5 Shelves (4 Adjustable) Plastic Laminate over Plywood core with up to 12" shelf depth	LF	$33.94	$257.90	$0.00	$291.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106661	Plastic Laminate Single Faced Library Shelving – 82" Tall, 6 Shelves (5 Adjustable) Plastic Laminate over Plywood core with up to 12" shelf depth	LF	$33.94	$272.80	$0.00	$306.74
106662	Plastic Laminate Double Faced Library Shelving – 42" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Plastic Laminate over Plywood core with up to 12" shelf depth each side	LF	$33.94	$291.16	$0.00	$325.10
106663	Plastic Laminate Double Faced Library Shelving – 48" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Plastic Laminate over Plywood core with up to 12" shelf depth each side	LF	$33.94	$315.65	$0.00	$349.59
106664	Plastic Laminate Double Faced Library Shelving – 60" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Plastic Laminate over Plywood core with up to 12" shelf depth each side	LF	$41.77	$396.38	$0.00	$438.15
106665	Plastic Laminate Double Faced Library Shelving – 72" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Plastic Laminate over Plywood core with up to 12" shelf depth each side	LF	$41.77	$415.34	$0.00	$457.11
106666	Plastic Laminate Double Faced Library Shelving – 82" Tall, 6 Shelves Each Side (5 Adjustable Each Side) Plastic Laminate over Plywood core with up to 12" shelf depth each side	LF	$41.77	$452.16	$0.00	$493.93
106667	Metal Single Faced Library Shelving – 42" Tall, 3 Shelves (2 Adjustable) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth	LF	$28.58	$179.67	$0.00	$208.25
106668	Metal Single Faced Library Shelving – 48" Tall, 3 Shelves (2 Adjustable) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth	LF	$28.58	$194.47	$0.00	$223.05
106669	Metal Single Faced Library Shelving – 60" Tall, 5 Shelves (4 Adjustable) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth	LF	$33.94	$243.24	$0.00	$277.18
106670	Metal Single Faced Library Shelving – 72" Tall, 5 Shelves (4 Adjustable) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth	LF	$33.94	$253.75	$0.00	$287.69
106671	Metal Single Faced Library Shelving – 82" Tall, 6 Shelves (5 Adjustable) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth	LF	$33.94	$268.40	$0.00	$302.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106672	Metal Double Faced Library Shelving – 42" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth each side	LF	$33.94	$286.46	$0.00	$320.40
106673	Metal Double Faced Library Shelving – 48" Tall, 3 Shelves Each Side (2 Adjustable Each Side) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth each side	LF	$33.94	$310.55	$0.00	$344.49
106674	Metal Double Faced Library Shelving – 60" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth each side	LF	$41.77	$389.98	$0.00	$431.75
106675	Metal Double Faced Library Shelving – 72" Tall, 5 Shelves Each Side (4 Adjustable Each Side) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth each side	LF	$41.77	$408.63	$0.00	$450.40
106676	Metal Double Faced Library Shelving – 82" Tall, 6 Shelves Each Side (5 Adjustable Each Side) Up to 16 gauge fully welded steel frame with powder coated finish or equal, with up to 12" shelf depth each side	LF	$41.77	$444.87	$0.00	$486.64
106677	Wood – Book Return Bin and Chute With Spring Loaded Security Door – Up To 20 Cubic Feet	EA	$135.76	$1,141.62	$0.00	$1,277.38
106678	Wood – Book Return Bin and Chute With Spring Loaded Security Door – Greater Than 20 Cubic Feet	EA	$181.01	$1,484.11	$0.00	$1,665.12
106679	Polycarbonate – Book Return Bin and Chute With Spring Loaded Security Door – Up To 20 Cubic Feet	EA	$135.76	$744.97	$0.00	$880.73
106680	Polycarbonate – Book Return Bin and Chute With Spring Loaded Security Door – Greater Than 20 Cubic Feet	EA	$181.01	$968.46	$0.00	$1,149.47
106681	Metal – Book Return Bin and Chute With Spring Loaded Security Door – Up To 20 Cubic Feet	EA	$135.76	$1,005.19	$0.00	$1,140.95
106682	Metal – Book Return Bin and Chute With Spring Loaded Security Door – Greater Than 20 Cubic Feet	EA	$181.01	$1,306.74	$0.00	$1,487.75
	11-52-00 Audio-Visual Equipment					
	11-52-13 Projection Screens					
106683	Projection Screen Manual – Video Format Includes all hardware & hanging brackets	SF	$4.06	$21.28	$0.00	$25.34
106684	Projection Screen Manual – HD Format Includes all hardware & hanging brackets	SF	$4.06	$26.61	$0.00	$30.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106685	Projection Screen Manual – Widescreen Format Includes all hardware & hanging brackets	SF	$4.06	$21.28	$0.00	$25.34
106686	Projection Screen Automatic – Video Format Includes controllers and all hardware & hanging brackets	SF	$4.88	$34.06	$0.00	$38.94
106687	Projection Screen Automatic – HD Format Includes controllers and all hardware & hanging brackets	SF	$4.88	$42.57	$0.00	$47.45
106688	Projection Screen Automatic – Widescreen Format Includes controllers and all hardware & hanging brackets	SF	$4.88	$34.06	$0.00	$38.94
	11-53-00 Laboratory Equipment					
	11-53-13 Laboratory Fume Hoods					
106689	4' Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$1,086.07	$11,402.22	$0.00	$12,488.29
106690	5' Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$1,357.60	$12,263.34	$0.00	$13,620.94
106691	6' Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$1,810.12	$13,364.58	$0.00	$15,174.70
106692	8' Fume Hoods With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$1,810.12	$16,405.84	$0.00	$18,215.96
106693	4' Walk-In Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$2,172.15	$15,386.13	$0.00	$17,558.28
106694	6' Walk-In Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$3,394.00	$20,532.71	$0.00	$23,926.71
106695	8' Walk-In Fume Hood With Cup Sink, CW, CA, N2, G and Shroud Enclosure To Ceiling Mott Manufacturing or equal	EA	$4,525.32	$26,388.51	$0.00	$30,913.83
106696	Laboratory Snorkel Fume Extraction Arm – Up To 7' Arm Length Nederman or equal	EA	$310.30	$1,954.54	$0.00	$2,264.84
106697	Laboratory Snorkel Fume Extraction Arm – Up To 10' Arm Length Nederman or equal	EA	$310.30	$2,122.07	$0.00	$2,432.37
106698	Laboratory Snorkel Fume Extraction Arm – Up To 14' Arm Length Nederman or equal	EA	$310.30	$2,568.82	$0.00	$2,879.12
	11-53-16 Laboratory Incubators					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106699	Laboratory Incubator – Up To 2.5 Cubic Foot Capacity – Coated Steel Thermo Fisher Scientific or equal	EA	$543.04	$4,914.26	$0.00	$5,457.30
106700	Laboratory Incubator – Up To 3.7 Cubic Foot Capacity – Coated Steel Thermo Fisher Scientific or equal	EA	$543.04	$5,584.40	$0.00	$6,127.44
106701	Laboratory Incubator – Up To 6.3 Cubic Foot Capacity – Coated Steel Thermo Fisher Scientific or equal	EA	$543.04	$6,031.15	$0.00	$6,574.19
106702	Laboratory Incubator – Up To 13.5 Cubic Foot Capacity – Coated Steel Thermo Fisher Scientific or equal	EA	$724.05	$11,168.79	$0.00	$11,892.84
106703	Laboratory Incubator – Up To 25 Cubic Foot Capacity – Coated Steel Thermo Fisher Scientific or equal	EA	$724.05	$14,296.05	$0.00	$15,020.10
106704	Laboratory Incubator – Up To 2.5 Cubic Foot Capacity – Stainless Steel Thermo Fisher Scientific or equal	EA	$543.04	$5,209.13	$0.00	$5,752.17
106705	Laboratory Incubator – Up To 3.7 Cubic Foot Capacity – Stainless Steel Thermo Fisher Scientific or equal	EA	$543.04	$5,919.46	$0.00	$6,462.50
106706	Laboratory Incubator – Up To 6.3 Cubic Foot Capacity – Stainless Steel Thermo Fisher Scientific or equal	EA	$543.04	$6,393.02	$0.00	$6,936.06
106707	Laboratory Incubator – Up To 13.5 Cubic Foot Capacity – Stainless Steel Thermo Fisher Scientific or equal	EA	$724.05	$11,838.93	$0.00	$12,562.98
106708	Laboratory Incubator – Up To 25 Cubic Foot Capacity – Stainless Steel Thermo Fisher Scientific or equal	EA	$724.05	$15,153.83	$0.00	$15,877.88
	11-53-17 Laboratory Equipment Washers					
106709	Cage and Rack Washer (Standard) – Up To 46" Door and 8' Chamber LYNX Product Group or equal - Stainless Steel	EA	$16,641.60	$185,960.45	$0.00	$202,602.05
106710	Cage and Rack Washer (Large) – Up To 46" Door and 16' Chamber LYNX Product Group or equal - Stainless Steel	EA	$22,488.69	$251,297.91	$0.00	$273,786.60
106711	Tunnel Washer – 30" Belt, 25' Long (Standard) LYNX Product Group or equal - Stainless Steel	EA	$20,132.80	$245,713.51	$0.00	$265,846.31
106712	Tunnel Washer – 30" Belt, 25' Long (Premium) LYNX Product Group or equal - Stainless Steel	EA	$21,417.82	$274,752.38	$0.00	$296,170.20
106713	Tunnel Washer – 36" Belt, 25' Long (Standard) LYNX Product Group or equal - Stainless Steel	EA	$21,139.29	$252,973.23	$0.00	$274,112.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106714	Tunnel Washer – 36" Belt, 25' Long (Premium) LYNX Product Group or equal - Stainless Steel	EA	$22,488.69	$282,012.10	$0.00	$304,500.79
106715	Tunnel Washer – 42" Belt, 25' Long (Standard) LYNX Product Group or equal - Stainless Steel	EA	$23,488.21	$260,232.95	$0.00	$283,721.16
106716	Tunnel Washer – 42" Belt, 25' Long (Premium) LYNX Product Group or equal - Stainless Steel	EA	$24,987.37	$289,271.82	$0.00	$314,259.19
106717	Laboratory Glass Washer – Undercounter Labconco or equal	EA	$638.87	$16,194.76	$0.00	$16,833.63
106718	Laboratory Glass Washer – Freestanding Up To 40" Hight Labconco or equal	EA	$905.06	$20,662.27	$0.00	$21,567.33
106719	Laboratory Glass Washer – Freestanding Stacked Up To 72" Hight SP Scientific or equal	EA	$905.06	$22,337.59	$0.00	$23,242.65
106720	Water Polishing Station Labconco or equal	EA	$271.52	$10,051.91	$0.00	$10,323.43
106721	Water Purification Station Labconco or equal	EA	$271.52	$9,493.47	$0.00	$9,764.99
	11-53-19 Laboratory Sterilizers					
106722	Autoclave – Benchtop – Up To 1.1 Gallon Capacity Thermo Fisher Scientific or equal	EA	$271.52	$8,711.66	$0.00	$8,983.18
106723	Autoclave – Freestanding – Up To 13.2 Gallon Capacity Kinematica or equal	EA	$724.05	$26,805.12	$0.00	$27,529.17
106724	Autoclave – Freestanding – Up To 22 Gallon Capacity Kinematica or equal	EA	$724.05	$34,623.27	$0.00	$35,347.32
106725	Sterilizer – Benchtop – Up To 6 Gallon Capacity Heidolph or equal	EA	$310.30	$13,179.18	$0.00	$13,489.48
106726	Sterilizer – Benchtop – Up To 17 Gallon Capacity Heidolph or equal	EA	$271.52	$22,002.52	$0.00	$22,274.04
106727	Sterilizer – Benchtop – Up To 22 Gallon Capacity Heidolph or equal	EA	$362.02	$40,207.67	$0.00	$40,569.69
106728	Sterilizer – Freestanding – Up To 16" X 16" X 26" Chamber Size Steris AMSCO or equal	EA	$1,357.60	$99,453.47	$0.00	$100,811.07
106729	Sterilizer – Freestanding – Up To 20" X 20" X 38" Chamber Size Steris AMSCO or equal	EA	$1,357.60	$117,004.08	$0.00	$118,361.68
106730	Sterilizer – Freestanding – Up To 37" X 85" X 85" Chamber Size Steris AMSCO or equal	EA	$4,525.32	$298,393.74	$0.00	$302,919.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	11-53-23 Laboratory Refrigerators					
106731	Scientific Refrigerator – Benchtop – Up To 2 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$271.52	$3,238.96	$0.00	$3,510.48
106732	Scientific Refrigerator – Undercounter – Up To 6 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$310.30	$4,020.76	$0.00	$4,331.06
106733	Scientific Refrigerator – Freestanding – Up To 46 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$13,514.25	$0.00	$14,238.30
106734	Scientific Refrigerator – Freestanding – Up To 80 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$18,986.95	$0.00	$19,711.00
	11-53-26 Laboratory Freezers					
106735	Scientific Freezer – Benchtop – Up To 1 Cubic Foot Capacity Labconco or equal	EA	$271.52	$7,483.09	$0.00	$7,754.61
106736	Scientific Freezer – Undercounter – Up To 5 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$310.30	$8,376.60	$0.00	$8,686.90
106737	Scientific Freezer – Freestanding (General Purpose) – Up To 20 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$11,392.18	$0.00	$12,116.23
106738	Scientific Freezer – Freestanding (General Purpose) – Up To 35 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$14,809.83	$0.00	$15,533.88
106739	Scientific Freezer – Freestanding (Ultra-Low Temperature) – Up To 20 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$25,464.85	$0.00	$26,188.90
106740	Scientific Freezer – Freestanding (Ultra-Low Temperature) – Up To 35 Cubic Foot Capacity Thermo Fisher Scientific or equal	EA	$724.05	$32,947.95	$0.00	$33,672.00
	11-53-29 Laboratory Controlled-Environment Cabinets					
	Units include all refrigeration, dehumidification, heating equipment, and controls. All lighting, up to 4" Urethane filled Aluminum walls and ceilings (or equal), doors with all hardware, screed plastic, supports, blocking, and fasteners, for a complete Controlled Environment Room system.					
106741	Scientific Warm Room – Up To 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$583.57	$0.00	$696.02
106742	Scientific Warm Room – Greater Than 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$490.20	$0.00	$602.65
106743	Scientific Warm Room – Up To 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$706.42	$0.00	$818.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106744	Scientific Warm Room – Greater Than 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$613.06	$0.00	$725.51
106745	Scientific Cold Room – Up To 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$614.28	$0.00	$726.73
106746	Scientific Cold Room – Greater Than 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$516.00	$0.00	$628.45
106747	Scientific Cold Room – Up To 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$737.14	$0.00	$849.59
106748	Scientific Cold Room – Greater Than 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$638.85	$0.00	$751.30
106749	Scientific Dry Room – Up To 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$706.42	$0.00	$818.87
106750	Scientific Dry Room – Greater Than 100 SF – With Integral Condensing Unit BioCold or equal	SF	$112.45	$593.40	$0.00	$705.85
106751	Scientific Dry Room – Up To 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$829.29	$0.00	$941.74
106752	Scientific Dry Room – Greater Than 100 SF – With Remote Condensing Unit BioCold or equal	SF	$112.45	$716.26	$0.00	$828.71
	11-53-43 Service Fittings and Accessories					
106753	Pegboard Drying Rack – Up To 72 Peg Capacity	EA	$67.88	$335.07	$0.00	$402.95
106754	Gas Cylinder Restraint Racks – 1 Cylinder Capacity	EA	$67.88	$469.08	$0.00	$536.96
106755	Gas Cylinder Restraint Racks – 2 Cylinder Capacity	EA	$67.88	$692.47	$0.00	$760.35
106756	Gas Cylinder Restraint Racks – 3 Cylinder Capacity	EA	$77.58	$815.33	$0.00	$892.91
106757	Gas Cylinder Restraint Racks – 4 Cylinder Capacity	EA	$77.58	$1,038.70	$0.00	$1,116.28
106758	Gas Cylinder Exhaust Cabinet – 1 Cylinder Capacity	EA	$90.50	$1,479.87	$0.00	$1,570.37
106759	Gas Cylinder Exhaust Cabinet – 2 Cylinder Capacity	EA	$90.50	$2,183.50	$0.00	$2,274.00
106760	Gas Cylinder Exhaust Cabinet – 3 Cylinder Capacity	EA	$108.61	$2,568.82	$0.00	$2,677.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106761	Gas Cylinder Exhaust Cabinet – 4 Cylinder Capacity	EA	$108.61	$3,272.45	$0.00	$3,381.06
106762	Sharps Receptacle	EA	$33.94	$53.21	$0.00	$87.15
106763	PPE Cabinet – Up To 2' X 2'	EA	$33.94	$418.82	$0.00	$452.76
106764	Overhead Service Carrier – Up To 24" Wide and Hangs Below Ceiling For Power, Data, and Plumbing connections	LF	$108.61	$560.68	$0.00	$669.29
106765	Ceiling Service Panel – Up To 8" Wide and Fits In Ceiling Grid For Power, Data, and Plumbing connections	LF	$22.63	$195.45	$0.00	$218.08
106766	Ceiling Service Panel – Up To 2' X 2' and Fits In Ceiling Grid For Power, Data, and Plumbing connections	EA	$135.76	$502.59	$0.00	$638.35
106767	Service Chase Umbilical – Metal Up To 3' Wide X 1' Deep X 12' Tall Factory pre-plumbed and pre-wired	LF	$543.04	$1,803.77	$0.00	$2,346.81
106768	Service Chase Umbilical – Wood Up To 3' Wide X 1' Deep X 12' Tall Factory pre-plumbed and pre-wired	LF	$543.04	$1,940.76	$0.00	$2,483.80
106769	Service Chase Umbilical – Stainless Steel Up To 3' Wide X 1' Deep X 12' Tall Factory pre-plumbed and pre-wired	LF	$543.04	$3,417.65	$0.00	$3,960.69
106770	Service Chase Umbilical – Plastic Laminate Up To 3' Wide X 1' Deep X 12' Tall Factory pre-plumbed and pre-wired	LF	$543.04	$1,518.96	$0.00	$2,062.00
106771	Downdraft Necropsy Table – Up To 2' Wide X 4' Long TBJ Incorporated or equal	EA	$362.02	$10,051.91	$0.00	$10,413.93
106772	Animal Bedding Disposal Station Geneva Scientific or equal	EA	$1,086.07	$8,935.04	$0.00	$10,021.11
106773	Animal Bedding Dispenser Geneva Scientific or equal	EA	$1,086.07	$43,558.31	$0.00	$44,644.38
106774	Vivarium – Automated Animal Watering System Edstrom Industries or equal	EA	$27,151.86	$161,947.54	$0.00	$189,099.40
106775	Vivarium – Monitoring and Control Software Edstrom Industries or equal	EA	$4,525.32	$50,259.58	$0.00	$54,784.90
106776	Atmosphere Glove Box – Up To 6' Wide Labconco or equal	EA	$1,357.60	$33,283.02	$0.00	$34,640.62
106777	Atmosphere Glove Box – Up To 9' Wide Labconco or equal	EA	$1,810.12	$67,012.78	$0.00	$68,822.90
106778	Filtered Glove Box – Up To 9' Wide Labconco or equal	EA	$1,810.12	$64,779.01	$0.00	$66,589.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106779	Combination Glove Box – Up To 6' Wide With Fiberglass Liner Labconco or equal	EA	$1,357.60	$43,781.68	$0.00	$45,139.28
106780	Combination Glove Box – Up To 6' Wide With Stainless Steel Liner Labconco or equal	EA	$1,357.60	$50,036.21	$0.00	$51,393.81
	11-53-53 Biological Safety Cabinets					
106781	4' Bio-Safety Cabinet – Class II Type A2 Labconco or equal	EA	$1,086.07	$10,940.95	$0.00	$12,027.02
106782	6' Bio-Safety Cabinet – Class II Type A2 Labconco or equal	EA	$1,357.60	$14,112.89	$0.00	$15,470.49
106783	8' Bio-Safety Cabinet – Class II Type A2 Labconco or equal	EA	$1,810.12	$16,935.47	$0.00	$18,745.59
106784	4' Bio-Safety Cabinet – Class II Type B2 Labconco or equal	EA	$1,086.07	$12,035.05	$0.00	$13,121.12
106785	6' Bio-Safety Cabinet – Class II Type B2 Labconco or equal	EA	$1,810.12	$15,524.18	$0.00	$17,334.30
106786	8' Bio-Safety Cabinet – Class II Type B2 Labconco or equal	EA	$1,810.12	$18,629.01	$0.00	$20,439.13
106787	4' Laminar Flow Hood Air Clean Systems, Vertical Flow hood or equal	EA	$1,086.07	$7,429.49	$0.00	$8,515.56
106788	6' Laminar Flow Hood Germfree, Horizontal Flow hood or equal	EA	$1,357.60	$9,006.52	$0.00	$10,364.12
106789	8' Laminar Flow Hood Germfree, Horizontal Flow hood or equal	EA	$1,810.12	$10,807.82	$0.00	$12,617.94
	11-55-00 Planetarium Equipment					
	11-55-13 Planetarium Projectors					
106790	Planetarium Projector and Console	LS	$33,594.44	$269,707.72	$0.00	$303,302.16
106791	Planetarium Special Effects Lighting	LS	$19,379.85	$18,836.73	$0.00	$38,216.58
106792	30' Diameter Planetarium Screen	LS	$7,999.20	$63,854.40	$0.00	$71,853.60
106793	Planetarium General Room Lighting, Console, Sound and Play Back System	LS	$12,921.62	$56,396.02	$0.00	$69,317.64
	11-60-00 Entertainment and Recreation Equipment					
	11-61-00 Broadcast, Theater, and Stage Equipment					
	11-61-33 Rigging Systems and Controls					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106794	Stage Rigging Includes all steel fabrication, connections, shop priming and painting, miscellaneous metal attached to substrate structural system.	LB	$3.25	$11.17	$0.00	$14.42
106795	Stage Rigging and Equipment Controls Includes all wiring, cabling, conduit and hook-ups. Includes all steel fabrication, connections, shop priming and painting, miscellaneous metal attached to substrate structural system.	SF	$32.52	$446.75	$0.00	$479.27
106796	Stage Curtains and Track Includes track and metals to hang track from rigging system or directly to structure.	SF	$3.25	$17.87	$0.00	$21.12
106797	Stage Curtains and Track – Fire Rated Curtain Includes track and metals to hang track from rigging system or directly to structure.	SF	$3.90	$40.20	$0.00	$44.10
106798	Photo Light / Camera Track	EA	$487.80	$3,350.64	$0.00	$3,838.44
	11-66-00 Athletic Equipment					
	11-66-23 Gymnasium Equipment					
106799	Gym Wall Padding – Up To 2" Thick, 14 Ounce Vinyl Includes backerboard attached to substrate and pre-fabricated corners.	SF	$1.96	$8.14	$0.00	$10.10
106800	Gym Wall Padding – Up To 2" Thick, 18 Ounce Vinyl Includes backerboard attached to substrate and pre-fabricated corners.	SF	$1.96	$9.04	$0.00	$11.00
106801	Gym Wall Padding – Up To 3" Thick, 14 Ounce Vinyl Includes backerboard attached to substrate and pre-fabricated corners.	SF	$1.96	$10.18	$0.00	$12.14
106802	Gym Wall Padding – Up To 3" Thick, 18 Ounce Vinyl Includes backerboard attached to substrate and pre-fabricated corners.	SF	$1.96	$11.31	$0.00	$13.27
106803	Basketball Backstop – Manual Includes hanging backstop from structure above	EA	$1,951.17	$4,914.26	$0.00	$6,865.43
106804	Basketball Backstop – Electric Includes hanging backstop from structure above	EA	$1,951.17	$6,142.83	$0.00	$8,094.00
106805	Ceiling Mounted Batting / Pitching Cage Includes motor, cables, nylon netting	EA	$1,951.17	$10,015.15	$0.00	$11,966.32
106806	Volleyball Set With Posts and Floor Sockets	EA	$975.58	$3,909.08	$0.00	$4,884.66
106807	Badminton Set With Posts and Floor Sockets	EA	$975.58	$3,350.64	$0.00	$4,326.22
106808	Tennis Net With Posts and Floor Sockets	EA	$975.58	$2,792.20	$0.00	$3,767.78
106809	Tennis / Volleyball / Badminton Judges Stand – Fixed With Floor Sockets	EA	$243.89	$1,116.88	$0.00	$1,360.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106810	Tennis / Volleyball / Badminton Judges Stand – Portable	EA	$162.60	$558.44	$0.00	$721.04
106811	Ballet Bar – Hardwood Wall Mounted	LF	$8.13	$29.96	$0.00	$38.09
	11-66-43 Interior Scoreboards					
	Includes all mounting brackets and hardware for a complete scoreboard installation					
106812	Scoreboard – Up To 8' X 3' – Multi-Sport Nevco or equal. Includes controls	EA	$975.58	$4,566.48	$0.00	$5,542.06
106813	Scoreboard – Up To 10' X 3' – Multi-Sport Daktronics or equal. Includes controls	EA	$1,393.68	$12,603.48	$0.00	$13,997.16
106814	Scoreboard – Up To 14' X 4' – Multi-Sport Daktronics or equal. Includes controls	EA	$2,869.36	$27,398.88	$0.00	$30,268.24
106815	Scoreboard – Up To 18' X 6' – Multi-Sport Daktronics or equal. Includes controls	EA	$3,048.70	$42,239.93	$0.00	$45,288.63
106816	Scoreboard – Up To 18' X 8' – Multi-Sport Daktronics or equal. Includes controls	EA	$3,251.95	$52,514.52	$0.00	$55,766.47
106817	Scoreboard – Up To 32' X 8' – Multi-Sport Daktronics or equal. Includes controls	EA	$6,968.46	$125,578.20	$0.00	$132,546.66
106818	Scoreboard – Portable Three Sided, Up To 2.5' x 2' Each Side – Multi-Sport Daktronics or equal. Includes controls	EA	$812.98	$6,849.72	$0.00	$7,662.70
106819	Shot Clock – Single Sided Daktronics or equal. Includes controls	EA	$325.20	$1,141.62	$0.00	$1,466.82
106820	Shot Clock – Double Sided Daktronics or equal. Includes controls	EA	$325.20	$1,541.18	$0.00	$1,866.38
106821	Shot Clock – Three Sided Daktronics or equal. Includes controls	EA	$375.22	$1,940.76	$0.00	$2,315.98
106822	Videoboard – LED Video Display Wall Daktronics or equal. Includes controls	SF	$52.06	$1,209.74	$0.00	$1,261.80
106823	[Modifier] Scoreboard / Video Wall / Shot Clock Protective Cage	SF	$8.87	$27.93	$0.00	$36.80
	11-66-53 Gymnasium Dividers					
106824	Gym Divider Curtain- Manual Mesh Curtain with Vinyl base. Horizontal Pull. Includes all tracks and supports to substructure	SF	$1.47	$4.25	$0.00	$5.72
106825	Gym Divider Curtain- Roll-Up Mesh Curtain with Vinyl Boarder. Roll-Up Includes all tracks, pulleys, cables and supports to substructure	SF	$1.55	$5.67	$0.00	$7.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106826	Gym Curtain – Motorized Roll Up Mesh Curtain with Vinyl base. Roll-Up Includes all tracks, pulleys, cables, motor, controls and supports to substructure	SF	$1.81	$7.08	$0.00	$8.89
106827	Protective Athletic Netting – Manual Performance Sports Systems Walk-Draw Gymnasium Curtain or equal	SF	$1.47	$2.93	$0.00	$4.40
106828	Protective Athletic Netting – Automatic Performance Sports Systems Fold-Up Gymnasium Curtain or equal	SF	$1.81	$5.27	$0.00	$7.08

11-67-00 Recreational Equipment

11-67-33 Climbing Walls

106829	Climbing Wall SF = Climbing surface area	SF	$37.58	$55.84	$0.00	$93.42

11-68-00 Play Field Equipment and Structures

11-68-17 Playground - Structured Platforms and Stairs

Includes all posts, hardware, brackets, structure, and direct bury post installation. For items where direct bury cannot be used refer to post foundations for playground equipment at the end of this section

106830	Elevated Playground Structure With Posts, Railings, and Barriers PlayBooster or equal. Can be used for the communicating walks which connect obstacles, ladders, stairs, slides, etc. to form a complete playground structure	SF	$13.94	$67.01	$0.00	$80.95
106831	Roof Playground Structure, With Posts, Railings, and Barriers PlayBooster or equal	SF	$27.88	$134.03	$0.00	$161.91
106832	Balcony Playground Structure With Railings and Barriers PlayBooster 111240 or equal	SF	$17.35	$83.77	$0.00	$101.12
106833	Stairs With Posts, Railings, and Barriers (Per Riser) PlayBooster 152908 or equal	RI	$128.03	$616.52	$0.00	$744.55
106834	Post Foundation For Playground Equipment – Up To 1' Wide X 4' Deep Includes excavation, hauling, formwork, reinforcing, and concrete	EA	$162.60	$85.62	$0.00	$248.22

11-68-18 Playground - Ladders and Slides

Includes all posts, hardware, brackets, structure, and direct bury post installation. For items where direct bury cannot be used refer to post foundations for playground equipment at the end of this section

106835	Rollerslide – Up To 40" Deck Height PlayBooster 123333 or equal	EA	$1,625.97	$7,496.24	$0.00	$9,122.21
106836	Rollerslide – Up To 56" Deck Height PlayBooster 123333 or equal	EA	$1,625.97	$7,871.06	$0.00	$9,497.03
106837	Winding Slide – Up To 48" Deck Height PlayBooster 124863 or equal	EA	$667.30	$2,600.74	$0.00	$3,268.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106838	Winding Slide – Up To 96" Deck Height PlayBooster 124863 or equal	EA	$667.30	$2,894.47	$0.00	$3,561.77
106839	Tunnel Slide – Up To 48" Deck Height PlayBooster 126368 or equal	EA	$667.30	$3,120.88	$0.00	$3,788.18
106840	Tunnel Slide – Up To 96" Deck Height PlayBooster 126368 or equal	EA	$667.30	$3,473.36	$0.00	$4,140.66
106841	Spiral Slide – Up To 56" Deck Height PlayBooster 122033 or equal	EA	$1,283.66	$5,886.84	$0.00	$7,170.50
106842	Spiral Slide – Up To 72" Deck Height PlayBooster 122033 or equal	EA	$1,283.66	$6,181.18	$0.00	$7,464.84
106843	Straight Slide – Up To 56" Deck Height Eclipse 201040 or equal	EA	$667.30	$2,470.71	$0.00	$3,138.01
106844	Straight Slide – Up To 72" Deck Height Eclipse 201040 or equal	EA	$667.30	$2,749.75	$0.00	$3,417.05
106845	Double Slide – Up To 56" Deck Height PlayShaper 132155 or equal	EA	$667.30	$2,043.87	$0.00	$2,711.17
106846	Double Slide – Up To 72" Deck Height PlayShaper 132155 or equal	EA	$667.30	$2,146.06	$0.00	$2,813.36
106847	Ladder – Permalene Up To 24" Deck Height PlayBooster 116247 or equal	EA	$325.20	$856.71	$0.00	$1,181.91
106848	Ladder – Permalene Up To 72" Deck Height PlayBooster 116247 or equal	EA	$325.20	$1,713.43	$0.00	$2,038.63
106849	Chain Ladder – Plastic Planks With Steel Chain and Handholds – Up To 48" Deck Height PlayBooster 169318 or equal	EA	$382.58	$1,560.56	$0.00	$1,943.14
106850	Chain Ladder – Plastic Planks With Steel Chain and Handholds – Up To 72" Deck Height PlayBooster 169318 or equal	EA	$382.58	$1,716.62	$0.00	$2,099.20

11-68-19 Playground - Obstacles

Includes all posts, hardware, brackets, structure, and direct bury post installation. For items where direct bury cannot be used refer to post foundations for playground equipment at the end of this section

106851	Firepole With Handholds – Up To 72" Deck Height PlayBooster 169317 or equal	EA	$487.80	$1,566.99	$0.00	$2,054.79
106852	Curved Climber With Cables and Handholds – Up To 72" Deck Height PlayBooster 202625 or equal	EA	$1,219.48	$5,811.96	$0.00	$7,031.44
106853	Net Tunnel Climber With Cables and Handholds PlayBooster 203845 or equal	EA	$1,354.98	$6,434.91	$0.00	$7,789.89
106854	Bridge Climber With Cables and Handholds PlayBooster 200609 or equal	EA	$1,806.64	$8,579.87	$0.00	$10,386.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106855	Curved Crawling Tunnel – Up To 8' Span PlayBooster 117088 or equal	EA	$1,189.73	$5,415.65	$0.00	$6,605.38
106856	Block Climber – Up To 40" Deck Height With Railings and Handholds PlayBooster 135547 or equal	EA	$650.39	$2,478.35	$0.00	$3,128.74
106857	Curved Plastic Rung Climber With Handholds – Up To 48" Deck Height PlayBooster 132023 or equal	EA	$650.39	$2,417.16	$0.00	$3,067.55
106858	High Wire Bridge With Cables, Handholds, and One Rock Formation Landing PlayBooster 207852 or equal	EA	$1,573.52	$7,590.87	$0.00	$9,164.39
106859	Arch Bridge With Railings – Up To 11' Span PlayBooster 143677 or equal	EA	$956.46	$4,636.72	$0.00	$5,593.18
106860	Rubber Belt Bridge With Railings – Up To 8' Span PlayBooster 120310 or equal	EA	$843.93	$3,310.58	$0.00	$4,154.51
106861	Log Stepper With Handholds – Four Steps PlayBooster 169320 or equal	EA	$1,393.68	$6,474.30	$0.00	$7,867.98
106862	Walking Ramp With Railings – Up To 10' Span PlayBooster 152443 or equal	EA	$882.88	$3,628.46	$0.00	$4,511.34
106863	Wheelchair Accessible ADA Walking Ramp With Railings – Up To 10' Span PlayBooster 156232 or equal	EA	$920.36	$4,392.69	$0.00	$5,313.05

11-68-20 Playground - Stand Alone Items

Includes all posts, hardware, brackets, structure, and direct bury post installation. For items where direct bury cannot be used refer to post foundations for playground equipment at the end of this section

106864	Ring Climber With Cables and Handholds PlayBooster 184605 or equal	EA	$650.39	$1,725.58	$0.00	$2,375.97
106865	Tree Climber With Aluminum Posts and Roof PlayBooster 169322 or equal	EA	$4,434.47	$19,643.21	$0.00	$24,077.68
106866	Pod Climber – Up To 30" Tall PlayBooster 158997 or equal	EA	$195.12	$301.56	$0.00	$496.68
106867	Knot Bridge With Handholds and Grab Bars PlayBooster 193171 or equal	EA	$1,393.68	$6,462.07	$0.00	$7,855.75
106868	Tight Rope Bridge Handholds and Grab Bars PlayBooster 193173 or equal	EA	$975.58	$2,037.75	$0.00	$3,013.33
106869	Steering Wheel PlayBooster or equal	EA	$60.97	$214.18	$0.00	$275.15
106870	Tic-Tack-Toe Panel PlayBooster 115231 or equal	EA	$325.20	$1,444.17	$0.00	$1,769.37
106871	Bell Ringing Panel PlayBooster 164149 or equal	EA	$325.20	$911.79	$0.00	$1,236.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106872	Maze Panel PlayBooster 127440 or equal	EA	$325.20	$477.31	$0.00	$802.51
106873	Drum Panel PlayBooster 164147 or equal	EA	$325.20	$838.36	$0.00	$1,163.56
106874	Balance Board PlayBooster 193176 or equal	EA	$551.80	$2,160.14	$0.00	$2,711.94
106875	Play Seat PlayBooster 120818 or equal	EA	$97.55	$379.94	$0.00	$477.49
106876	Ring Pull-Ups PlayBooster 130873 or equal	EA	$325.20	$648.65	$0.00	$973.85
106877	Talk Tube With Up To 40' Tubing Kit PlayBooster 111363 or equal	EA	$325.20	$629.36	$0.00	$954.56
106878	Play Tower – With Platforms, Ladders, Roof, Railings, Barriers, and Slides PlayBooster 185296 or equal	EA	$6,097.40	$28,655.22	$0.00	$34,752.62
106879	Roller Table PlayBooster 176457 or equal	EA	$2,567.33	$12,266.13	$0.00	$14,833.46
106880	Spring Rider PlayBooster 164074 or equal	EA	$325.20	$1,340.25	$0.00	$1,665.45
106881	Play Spinner – Overhead PlayBooster 185927 or equal	EA	$1,219.48	$3,474.33	$0.00	$4,693.81
106882	Play Spinner – On-Grade PlayBooster 173591 or equal	EA	$1,625.97	$8,528.49	$0.00	$10,154.46
106883	Seesaw – Two Person PlayBooster 186490 or equal	EA	$1,219.48	$6,639.13	$0.00	$7,858.61
106884	Seesaw – Four Person PlayBooster 186490 or equal	EA	$1,625.97	$11,065.20	$0.00	$12,691.17
106885	Zip Line Two Way – Up To 40' Long PlayBooster 194663 or equal	EA	$2,567.33	$12,413.83	$0.00	$14,981.16
106886	Swing Frame – Up To 10' Beam Height – Per Swing PlayBooster 221292 or equal	EA	$487.80	$1,340.25	$0.00	$1,828.05
106887	Swing Frame Toddler – Per Swing PlayBooster 177336 or equal	EA	$390.23	$606.89	$0.00	$997.12
106888	Swing – Belt Seat With Chains – Per Swing PlayBooster 174018 or equal	EA	$28.05	$128.56	$0.00	$156.61
106889	Swing – Bucket Seat With Harness and Chains – Per Swing PlayBooster 177351 or equal	EA	$184.24	$844.58	$0.00	$1,028.82
106890	Swing – Toddler Seat With Harness and Chains – Per Swing PlayBooster 176038 or equal	EA	$66.73	$306.51	$0.00	$373.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106891	Swing – Tire Swing With Frame – Per Swing PlayBooster 120891 or equal	EA	$871.06	$3,983.72	$0.00	$4,854.78
106892	Post Foundation For Playground Equipment – Up To 1' Wide X 4' Deep Includes excavation, hauling, formwork, reinforcing, and concrete	EA	$162.60	$85.62	$0.00	$248.22
	11-68-21 Playground - Shade Structures					
106893	Playground Shade Structure – PTFE Or Equal Includes all posts and framing	SF	$27.86	$47.89	$0.00	$75.75
106894	Playground Shade Structure – PVC Or Equal Includes all posts and framing	SF	$26.00	$44.70	$0.00	$70.70
106895	Playground Shade Structure – HDPE Or Equal Includes all posts and framing	SF	$22.29	$38.31	$0.00	$60.60
106896	[Modifier] Quantity Premium - Playground - Shade Structures (101-500 SF) Quantity premium can be used when total square footage in section 11-68-21 Playground - Shade Structures are within stated quantities. Can be applied cumulatively to base line items.	SF	$1.96	$0.00	$0.00	$1.96
106897	[Modifier] Quantity Premium - Playground - Shade Structures (51-100 SF) Quantity premium can be used when total square footage in section 11-68-21 Playground - Shade Structures are within stated quantities. Can be applied cumulatively to base line items.	SF	$4.88	$0.00	$0.00	$4.88
106898	[Modifier] Quantity Premium - Playground - Shade Structures (< Or = To 50 SF) Quantity premium can be used when total square footage in section 11-68-21 Playground - Shade Structures are within stated quantities. Can be applied cumulatively to base line items.	SF	$9.75	$0.00	$0.00	$9.75
	11-68-33 Athletic Field Equipment					
106899	Baseball Backstops Includes Foundations	EA	$3,251.95	$20,103.83	$0.00	$23,355.78
106900	Baseball Bases – Set Of Three Includes ground anchors	EA	$139.37	$319.27	$0.00	$458.64
106901	Baseball Home Plate	EA	$48.78	$127.71	$0.00	$176.49
106902	Baseball Pitchers Rubber	EA	$48.78	$111.75	$0.00	$160.53
106903	Softball Backstops Includes Foundations	EA	$3,048.70	$17,870.08	$0.00	$20,918.78
106904	Softball Bases – Set Of Three Includes ground anchors	EA	$139.37	$319.27	$0.00	$458.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106905	Softball Home Plate	EA	$48.78	$127.71	$0.00	$176.49
106906	Softball Pitchers Rubber	EA	$48.78	$111.75	$0.00	$160.53
106907	Baseball / Softball Foul Pole Includes Foundations	EA	$975.58	$3,462.33	$0.00	$4,437.91
106908	Discus / Hammer / Shot Put Cage (Fixed) Includes Foundations	EA	$4,101.15	$23,454.47	$0.00	$27,555.62
106909	Discus / Hammer / Shot Put Cage (Portable)	EA	$2,563.22	$22,337.59	$0.00	$24,900.81
106910	Discus / Hammer / Shot Put Throwing Platform	EA	$243.89	$4,690.89	$0.00	$4,934.78
106911	Discus /Hammer / Shot Put Toe Board	EA	$162.60	$837.66	$0.00	$1,000.26
106912	Pole Vault Box	EA	$195.12	$1,116.88	$0.00	$1,312.00
106913	Steeplechase Water Pit Includes excavation, hauling, concrete, reinforcement, formwork, and prefabricated pit system	EA	$4,064.93	$18,986.95	$0.00	$23,051.88
106914	Steeplechase Water Jump Barrier (Fixed)	EA	$487.80	$10,051.91	$0.00	$10,539.71
106915	Soccer Goal With Net	EA	$487.80	$2,233.76	$0.00	$2,721.56
106916	Football Goal Posts – H-Shape Includes Foundations	EA	$975.58	$3,629.85	$0.00	$4,605.43
106917	Football Goal Posts – Y-Shape Includes Foundations	EA	$975.58	$4,467.51	$0.00	$5,443.09
106918	Protective Athletic Netting Exterior – Manual Includes posts, netting, crank, and flags	SF	$1.39	$3.19	$0.00	$4.58
106919	Protective Athletic Netting Exterior – Automatic Includes posts, netting, pullies, controls, and flags	SF	$1.62	$5.33	$0.00	$6.95
106920	Multi-Sport Team Benches – Aluminum (Fixed)	LF	$24.39	$50.26	$0.00	$74.65
106921	Multi-Sport Team Benches – Aluminum (Portable)	LF	$16.26	$57.80	$0.00	$74.06
	11-68-43 Exterior Scoreboards					
106922	Scoreboard – Up To 8' X 3' – Multi-Sport – Exterior Nevco or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$1,904.22	$6,278.91	$0.00	$8,183.13
106923	Scoreboard – Up To 10' X 3' – Multi-Sport – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$2,321.57	$14,315.91	$0.00	$16,637.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106924	Scoreboard – Up To 14' X 4' – Multi-Sport – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$3,797.99	$29,111.30	$0.00	$32,909.29
106925	Scoreboard – Up To 18' X 6' – Multi-Sport – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$3,977.33	$45,093.99	$0.00	$49,071.32
106926	Scoreboard – Up To 18' X 8' – Multi-Sport – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$4,180.58	$55,368.56	$0.00	$59,549.14
106927	Scoreboard – Up To 32' X 8' – Multi-Sport – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	EA	$7,897.08	$128,432.26	$0.00	$136,329.34
106928	Videoboard – LED Video Display Wall – Exterior Daktronics or equal. Includes controls, up to 25' steel mounting poles with foundations	SF	$60.97	$1,237.19	$0.00	$1,298.16

11-70-00 Healthcare Equipment

11-72-00 Examination and Treatment Equipment

11-72-13 Examination Equipment

All hanging Medical Equipment includes attaching to structural support. Includes connecting outlets to medical gas and electrical services

106929	Medical Gas Column – Fixed Amico or equal	EA	$1,393.68	$6,477.90	$0.00	$7,871.58
106930	Medical Gas Column – Manual Retractable Amico or equal	EA	$1,625.97	$8,711.66	$0.00	$10,337.63
106931	Medical Gas Column – Motorized Retractable Amico or equal	EA	$1,951.17	$13,961.00	$0.00	$15,912.17
106932	Floor Mounted Gas Pedestal – Up To 12" Amico or equal	EA	$243.89	$3,339.47	$0.00	$3,583.36
106933	Floor Mounted Gas Pedestal – Up To 12" – Custom Amico or equal	EA	$243.89	$5,908.30	$0.00	$6,152.19
106934	Floor Mounted Gas Pedestal – Up To 18" Amico or equal	EA	$243.89	$3,724.79	$0.00	$3,968.68
106935	Floor Mounted Gas Pedestal – Up To 18" – Custom Amico or equal	EA	$243.89	$6,550.50	$0.00	$6,794.39
106936	Radial Arm Boom – Manual Skytron or equal	EA	$1,393.68	$13,402.55	$0.00	$14,796.23
106937	Radial Arm Boom – Automatic Skytron or equal	EA	$1,625.97	$22,337.59	$0.00	$23,963.56
106938	Film Illuminator – Single Bank	EA	$121.95	$399.56	$0.00	$521.51
106939	Film Illuminator – Two Bank	EA	$121.95	$656.43	$0.00	$778.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106940	Film Illuminator – Three Bank	EA	$139.37	$1,084.54	$0.00	$1,223.91
106941	Film Illuminator – Four Bank	EA	$139.37	$1,369.95	$0.00	$1,509.32
106942	Procedure Table – Medical Office	EA	$750.44	$8,376.60	$0.00	$9,127.04
106943	Procedure Table – Surgical	EA	$886.89	$13,402.55	$0.00	$14,289.44
106944	Dental Chair	EA	$750.44	$8,935.04	$0.00	$9,685.48
106945	Bariatric / Patient Lift System – Up To 600 LB Capacity Includes an up to 600 lb capacity motor, up to 40' of track with two 45 degree curves and one 90 degree curve secured to structure above. Above ceiling structural support is not included	EA	$2,800.50	$9,200.85	$0.00	$12,001.35

11-73-00 Patient Care Equipment

11-73-13 Psychiatric Seclusion Room Padding

106946	Wall Padding – Behavioral Health	SF	$8.58	$25.12	$0.00	$33.70
106947	Wall Padding – Detention Facility Detention Surface Padding System, manufactured by Padded Surfaces by B&E Inc. or equal	SF	$27.86	$89.29	$0.00	$117.15

11-80-00 Facility Maintenance and Operation Equipment

11-81-00 Facility Maintenance Equipment

11-81-23 Facade Access Equipment

106948	Davit Window Washing – Swing Arm Up To 4,000 LB Capacity With Hand Winch Swing Arm Davit - Includes attachment to structure	EA	$650.39	$11,168.79	$0.00	$11,819.18
106949	Davit Window Washing – Swing Arm Up To 4,000 LB Capacity With Electric Winch Swing Arm Davit - Includes attachment to structure	EA	$650.39	$14,519.44	$0.00	$15,169.83
106950	Davit Window Washing – Sleeve Includes attachment to structure	EA	$243.89	$558.44	$0.00	$802.33

11-81-29 Facility Fall Protection

106951	Safety Cable / Perimeter Fall Protection For use on buildings with multiple floors. Includes cable system and toe boards	LF	$14.51	$13.96	$0.00	$28.47
106952	Fall Protection Tie Backs Permanent installation, attached to structure below. Not for use on sloped, shingled roofing	EA	$338.80	$530.52	$0.00	$869.32

11-90-00 Other Equipment

11-95-00 Arts and Crafts Equipment

11-95-00 Arts and Crafts Equipment

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106953	Darkroom Equipment Includes; enlarger, lenses, three plastic tray, three sets of tongs, darkroom timer and drying racks	EA	$1,024.60	$4,566.48	$0.00	$5,591.08
106954	Darkroom Casework – Base Cabinet Includes multiple drawers for exposure storage	LF	$54.30	$330.02	$0.00	$384.32
106955	Darkroom Casework – Wall Cabinet	LF	$36.20	$213.12	$0.00	$249.32
106956	Darkroom Casework – Chemsurf Top	SF	$18.10	$55.87	$0.00	$73.97
106957	Darkroom Casework – Shelving Unit on Standards – Up To Three Shelves	LF	$29.08	$132.01	$0.00	$161.09

12-00-00 Furnishings

12-00-00 Furnishings

12-01-00 Operation and Maintenance of Furnishings

12-01-50 Operation and Maintenance of Furniture

106958	Reupholstering Furniture – Vinyl Or Equal Up To 1/16" Thick SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$10.67	$3.51	$0.00	$14.18
106959	Reupholstering Furniture – Vinyl Or Equal Up To 1/8" Thick SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$10.67	$4.57	$0.00	$15.24
106960	Reupholstering Furniture – Economy Fabric Or Equal – Up To 50,000 Double Rubs SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$16.17	$5.33	$0.00	$21.50
106961	Reupholstering Furniture – Standard Fabric Or Equal – Up To 75,000 Double Rubs SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$16.17	$6.66	$0.00	$22.83
106962	Reupholstering Furniture – Premium Fabric Or Equal – Up To 100,000 Double Rubs SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$16.17	$7.98	$0.00	$24.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106963	Reupholstering Furniture – Bonded Leather Or Equal SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$24.25	$8.51	$0.00	$32.76
106964	Reupholstering Furniture – Genuine Leather Or Equal SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$24.25	$10.22	$0.00	$34.47
106965	Reupholstering Furniture – Suede Leather Or Equal SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$24.25	$12.26	$0.00	$36.51
106966	Reupholstering Furniture – Top Grain Leather Or Equal SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$24.25	$14.71	$0.00	$38.96
106967	Reupholstering Furniture – Full Grain Leather Or Equal SF = Exposed Face Area of furniture. Includes removal of fabric covering and padding down to the frame. Replace all fabric, padding, cords, seams and zippers.	SF	$24.25	$17.65	$0.00	$41.90

12-20-00 Window Treatments

12-21-00 Window Blinds

12-21-13 Horizontal Louver Blinds

Includes all hardware and fasteners for mounting to substrate

106968	Window Blind-Horizontal – 1" Slats Vinyl Or Equal	SF	$1.96	$3.46	$0.00	$5.42
106969	Window Blind-Horizontal – 2" Slats Vinyl Or Equal	SF	$1.96	$6.06	$0.00	$8.02
106970	Window Blind-Horizontal – 3" Slats Vinyl Or Equal	SF	$1.96	$9.08	$0.00	$11.04
106971	Window Blind-Horizontal – 4" Slats Vinyl Or Equal	SF	$1.96	$11.80	$0.00	$13.76
106972	Window Blind-Horizontal – 1" Slats Aluminum Or Equal	SF	$1.96	$3.63	$0.00	$5.59
106973	Window Blind-Horizontal – 2" Slats Aluminum Or Equal	SF	$1.96	$6.36	$0.00	$8.32
106974	Window Blind-Horizontal – 3" Slats Aluminum Or Equal	SF	$1.96	$9.53	$0.00	$11.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106975	Window Blind-Horizontal – 4" Slats Aluminum Or Equal	SF	$1.96	$12.40	$0.00	$14.36
106976	Window Blind-Horizontal – 1" Slats Wood Or Equal	SF	$1.96	$4.72	$0.00	$6.68
106977	Window Blind-Horizontal – 2" Slats Wood Or Equal	SF	$1.96	$8.26	$0.00	$10.22
106978	Window Blind-Horizontal – 3" Slats Wood Or Equal	SF	$1.96	$12.40	$0.00	$14.36
106979	Window Blind-Horizontal – 4" Slats Wood Or Equal	SF	$1.96	$16.10	$0.00	$18.06

12-21-16 Vertical Louver Blinds

Includes all hardware and fasteners for mounting to substrate

106980	Window Blind-Vertical – 3" Slats Vinyl Or Equal	SF	$2.04	$11.80	$0.00	$13.84
106981	Window Blind-Vertical – 4" Slats Vinyl Or Equal	SF	$2.04	$15.35	$0.00	$17.39
106982	Window Blind-Vertical – 3" Slats Aluminum Or Equal	SF	$2.04	$12.40	$0.00	$14.44
106983	Window Blind-Vertical – 4" Slats Aluminum Or Equal	SF	$2.04	$16.12	$0.00	$18.16
106984	Window Blind-Vertical – 3" Slats Wood Or Equal	SF	$2.04	$16.12	$0.00	$18.16
106985	Window Blind-Vertical – 4" Slats Wood Or Equal	SF	$2.04	$20.94	$0.00	$22.98

12-24-00 Window Shades

12-24-13 Roller Window Shades

Includes all hardware and fasteners for mounting to substrate

106986	Roller Shade (Room Darkening) – Up To 8 Oz/CY – Manual	SF	$2.17	$5.85	$0.00	$8.02
106987	Roller Shade (Room Darkening) – Heavier Than 8 Oz/CY – Manual	SF	$2.17	$8.19	$0.00	$10.36
106988	Roller Shade (Room Darkening) – Up To 8 Oz/CY – Motorized	SF	$2.17	$11.70	$0.00	$13.87
106989	Roller Shade (Room Darkening) – Heavier Than 8 Oz/CY – Motorized	SF	$2.17	$16.38	$0.00	$18.55
106990	Roller Shade (Blackout) – Up To 8 Oz/CY – Manual	SF	$2.17	$8.78	$0.00	$10.95
106991	Roller Shade (Blackout) – Heavier Than 8 Oz/CY – Manual	SF	$2.17	$12.29	$0.00	$14.46
106992	Roller Shade (Blackout) – Up To 8 Oz/CY – Motorized	SF	$2.17	$17.57	$0.00	$19.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
106993	Roller Shade (Blackout) – Heavier Than 8 Oz/CY – Motorized	SF	$2.17	$24.59	$0.00	$26.76

12-24-16 Pleated Window Shades

Includes all hardware and fasteners for mounting to substrate

106994	Single Cell Shade (Room Darkening) – Manual	SF	$2.17	$4.68	$0.00	$6.85
106995	Double Cell Shades (Room Darkening) – Manual	SF	$2.17	$6.56	$0.00	$8.73
106996	Single Cell Shade (Room Darkening) – Motorized	SF	$2.17	$9.36	$0.00	$11.53
106997	Double Cell Shades (Room Darkening) – Motorized	SF	$2.17	$13.12	$0.00	$15.29
106998	Single Cell Shade (Blackout) – Manual	SF	$2.17	$6.08	$0.00	$8.25
106999	Double Cell Shades (Blackout) – Manual	SF	$2.17	$8.52	$0.00	$10.69
107000	Single Cell Shade (Blackout) – Motorized	SF	$2.17	$12.18	$0.00	$14.35
107001	Double Cell Shades (Blackout) – Motorized	SF	$2.17	$17.04	$0.00	$19.21

12-30-00 Casework

12-32-00 Manufactured Casework

12-32-12 Manufactured Metal Casework

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels

107002	Manufactured Metal Wall Cabinets – Up To 30" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$107.22	$0.00	$143.42
107003	Manufactured Metal Wall Cabinets – Up To 36" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$128.67	$0.00	$164.87
107004	Manufactured Metal Wall Cabinets – Up To 42" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$150.11	$0.00	$186.31
107005	Manufactured Metal Wall Cabinets – Up To 48" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$171.55	$0.00	$207.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107006	Manufactured Metal Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$128.67	$0.00	$164.87
107007	Manufactured Metal Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$154.40	$0.00	$190.60
107008	Manufactured Metal Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$180.13	$0.00	$216.33
107009	Manufactured Metal Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$205.86	$0.00	$242.06
107010	Manufactured Metal Shelving Cubbies – Up To 48" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$88.46	$0.00	$124.66
107011	Manufactured Metal Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$106.15	$0.00	$142.35
107012	Manufactured Metal Base Cabinets – Up To 36" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$192.99	$0.00	$247.29
107013	Manufactured Metal Base Cabinets (Premium) – Up To 36" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$231.60	$0.00	$285.90
107014	Manufactured Metal Full Height Cabinets – Up To 96" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$361.87	$0.00	$416.17
107015	Manufactured Metal Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$434.24	$0.00	$488.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107016	Manufactured Metal Display Cabinets – Up To 72" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$321.66	$0.00	$375.96
107017	Manufactured Metal Display Cabinets (Premium) – Up To 72" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$386.00	$0.00	$440.30
107018	Manufactured Metal Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$321.66	$0.00	$502.67
107019	Manufactured Metal Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$386.00	$0.00	$567.01
107020	Manufactured Stainless Steel Wall Cabinets – Up To 30" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$297.83	$0.00	$334.03
107021	Manufactured Stainless Steel Wall Cabinets – Up To 36" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$357.40	$0.00	$393.60
107022	Manufactured Stainless Steel Wall Cabinets – Up To 42" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$416.97	$0.00	$453.17
107023	Manufactured Stainless Steel Wall Cabinets – Up To 48" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$476.53	$0.00	$512.73
107024	Manufactured Stainless Steel Shelving Cubbies – Up To 48" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$245.71	$0.00	$281.91
107025	Manufactured Stainless Steel Base Cabinets – Up To 36" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$536.10	$0.00	$590.40
107026	Manufactured Stainless Steel Full Height Cabinets – Up To 96" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$1,005.19	$0.00	$1,059.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107027	Manufactured Stainless Steel Display Cabinets – Up To 72" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$893.50	$0.00	$947.80
107028	Manufactured Stainless Steel Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$893.50	$0.00	$1,074.51
107029	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 12-32-12 Manufactured Metal Casework are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-32-13 Manufactured Wood Faced Casework

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels. Includes painting or staining and sealing

107030	Manufactured Wood Wall Cabinets – Up To 30" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$121.77	$0.00	$157.97
107031	Manufactured Wood Wall Cabinets – Up To 36" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$146.12	$0.00	$182.32
107032	Manufactured Wood Wall Cabinets – Up To 42" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$170.49	$0.00	$206.69
107033	Manufactured Wood Wall Cabinets – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$194.83	$0.00	$231.03
107034	Manufactured Wood Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$146.12	$0.00	$182.32
107035	Manufactured Wood Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$175.35	$0.00	$211.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107036	Manufactured Wood Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$204.57	$0.00	$240.77
107037	Manufactured Wood Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$233.80	$0.00	$270.00
107038	Manufactured Wood Shelving Cubbies – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, shelving, trim pieces And related hardware	LF	$36.20	$100.46	$0.00	$136.66
107039	Manufactured Wood Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$120.56	$0.00	$156.76
107040	Manufactured Wood Base Cabinets – Up To 36" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$219.19	$0.00	$273.49
107041	Manufactured Wood Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$263.02	$0.00	$317.32
107042	Manufactured Wood Full Height Cabinets – Up To 96" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$410.99	$0.00	$465.29
107043	Manufactured Wood Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$493.18	$0.00	$547.48
107044	Manufactured Wood Display Cabinets – Up To 72" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$365.32	$0.00	$419.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107045	Manufactured Wood Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$438.38	$0.00	$492.68
107046	Manufactured Wood Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$365.32	$0.00	$546.33
107047	Manufactured Wood Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	EA	$181.01	$438.38	$0.00	$619.39
107048	Manufactured Wood Fixed AudiTorium / Classroom Tables With Legs All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$41.77	$178.38	$0.00	$220.15
107049	Manufactured Wood Fixed AudiTorium / Classroom Tables With Legs (Premium) All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$41.77	$209.86	$0.00	$251.63
107050	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 12-32-13 Manufactured Wood Casework are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-32-16 Manufactured Plastic-Laminate-Clad Casework

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels

107051	Manufactured Plastic Laminate Wall Cabinets – Up To 30" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$90.82	$0.00	$127.02
107052	Manufactured Plastic Laminate Wall Cabinets – Up To 36" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$108.98	$0.00	$145.18
107053	Manufactured Plastic Laminate Wall Cabinets – Up To 42" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$127.14	$0.00	$163.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107054	Manufactured Plastic Laminate Wall Cabinets – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$145.30	$0.00	$181.50
107055	Manufactured Plastic Laminate Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$108.98	$0.00	$145.18
107056	Manufactured Plastic Laminate Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$130.77	$0.00	$166.97
107057	Manufactured Plastic Laminate Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$152.57	$0.00	$188.77
107058	Manufactured Plastic Laminate Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$174.37	$0.00	$210.57
107059	Manufactured Plastic Laminate Shelving Cubbies – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, shelving, trim pieces And related hardware	LF	$36.20	$74.92	$0.00	$111.12
107060	Manufactured Plastic Laminate Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$89.90	$0.00	$126.10
107061	Manufactured Plastic Laminate Base Cabinets – Up To 36" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$163.47	$0.00	$217.77
107062	Manufactured Plastic Laminate Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$196.16	$0.00	$250.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107063	Manufactured Plastic Laminate Full Height Cabinets – Up To 96" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$306.51	$0.00	$360.81
107064	Manufactured Plastic Laminate Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$367.80	$0.00	$422.10
107065	Manufactured Plastic Laminate Display Cabinets – Up To 72" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$272.45	$0.00	$326.75
107066	Manufactured Plastic Laminate Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$326.94	$0.00	$381.24
107067	Manufactured Plastic Laminate Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$272.45	$0.00	$453.46
107068	Manufactured Plastic Laminate Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	EA	$181.01	$326.94	$0.00	$507.95
107069	Manufactured Plastic Laminate Fixed AudiTorium / Classroom Tables With Legs All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$41.77	$133.03	$0.00	$174.80
107070	Manufactured Plastic Laminate Fixed AudiTorium / Classroom Tables With Legs (Premium) All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$41.77	$156.51	$0.00	$198.28
107071	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 12-32-16 Manufactured Plastic Casework are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-35-00 Specialty Casework

12-35-31 Residential Casework - Metal

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels					
107072	Residential Metal Wall Cabinets – Up To 30" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$91.13	$0.00	$127.33
107073	Residential Metal Wall Cabinets – Up To 36" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$109.37	$0.00	$145.57
107074	Residential Metal Wall Cabinets – Up To 42" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$127.59	$0.00	$163.79
107075	Residential Metal Wall Cabinets – Up To 48" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$145.82	$0.00	$182.02
107076	Residential Metal Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$109.37	$0.00	$145.57
107077	Residential Metal Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$131.24	$0.00	$167.44
107078	Residential Metal Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$153.11	$0.00	$189.31
107079	Residential Metal Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$174.99	$0.00	$211.19
107080	Residential Metal Shelving Cubbies – Up To 48" Tall and 16" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$75.19	$0.00	$111.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107081	Residential Metal Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$90.23	$0.00	$126.43
107082	Residential Metal Base Cabinets – Up To 36" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$164.05	$0.00	$218.35
107083	Residential Metal Base Cabinets (Premium) – Up To 36" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$196.86	$0.00	$251.16
107084	Residential Metal Full Height Cabinets – Up To 96" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$307.59	$0.00	$361.89
107085	Residential Metal Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$369.10	$0.00	$423.40
107086	Residential Metal Display Cabinets – Up To 72" Tall and 28" Deep Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$273.41	$0.00	$327.71
107087	Residential Metal Display Cabinets (Premium) – Up To 72" Tall and 28" Deep Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$328.09	$0.00	$382.39
107088	Residential Metal Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide Up To 18 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$273.41	$0.00	$454.42
107089	Residential Metal Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide Up To 16 gauge metal construction. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$328.09	$0.00	$509.10
107090	Residential Stainless Steel Wall Cabinets – Up To 30" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$253.15	$0.00	$289.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107091	Residential Stainless Steel Wall Cabinets – Up To 36" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$303.79	$0.00	$339.99
107092	Residential Stainless Steel Wall Cabinets – Up To 42" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$354.42	$0.00	$390.62
107093	Residential Stainless Steel Wall Cabinets – Up To 48" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$405.05	$0.00	$441.25
107094	Residential Stainless Steel Shelving Cubbies – Up To 48" Tall and 16" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$208.85	$0.00	$245.05
107095	Residential Stainless Steel Base Cabinets – Up To 36" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$455.69	$0.00	$509.99
107096	Residential Stainless Steel Full Height Cabinets – Up To 96" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$854.41	$0.00	$908.71
107097	Residential Stainless Steel Display Cabinets – Up To 72" Tall and 28" Deep Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$759.47	$0.00	$813.77
107098	Residential Stainless Steel Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$759.47	$0.00	$940.48
107099	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 12-35-31 Residential Casework - Metal are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-35-32 Residential Casework - Wood

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels. Includes painting or staining and sealing

107100	Residential Wood Wall Cabinets – Up To 30" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$103.51	$0.00	$139.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107101	Residential Wood Wall Cabinets – Up To 36" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$124.20	$0.00	$160.40
107102	Residential Wood Wall Cabinets – Up To 42" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$144.91	$0.00	$181.11
107103	Residential Wood Wall Cabinets – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$165.61	$0.00	$201.81
107104	Residential Wood Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$124.20	$0.00	$160.40
107105	Residential Wood Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$149.05	$0.00	$185.25
107106	Residential Wood Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$173.89	$0.00	$210.09
107107	Residential Wood Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$198.73	$0.00	$234.93
107108	Residential Wood Shelving Cubbies – Up To 48" Tall and 16" Deep All hardwood veneer with plywood core. Includes all draws, shelving, trim pieces And related hardware	LF	$36.20	$85.39	$0.00	$121.59
107109	Residential Wood Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$102.47	$0.00	$138.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107110	Residential Wood Base Cabinets – Up To 36" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$186.31	$0.00	$240.61
107111	Residential Wood Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$223.58	$0.00	$277.88
107112	Residential Wood Full Height Cabinets – Up To 96" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$349.34	$0.00	$403.64
107113	Residential Wood Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$419.20	$0.00	$473.50
107114	Residential Wood Display Cabinets – Up To 72" Tall and 28" Deep All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$310.52	$0.00	$364.82
107115	Residential Wood Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$372.62	$0.00	$426.92
107116	Residential Wood Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide All hardwood veneer with plywood core. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$310.52	$0.00	$491.53
107117	Residential Wood Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide All premium stain grade hardwood construction with enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	EA	$181.01	$372.62	$0.00	$553.63
107118	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when Total quantity in section 12-35-32 Residential Casework - Wood are within stated quantity. Can be applied cumulatively To base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-35-33 Residential Casework - Plastic-Laminate-Clad

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107119	Residential Plastic Laminate Wall Cabinets – Up To 30" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$77.19	$0.00	$113.39
107120	Residential Plastic Laminate Wall Cabinets – Up To 36" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$92.63	$0.00	$128.83
107121	Residential Plastic Laminate Wall Cabinets – Up To 42" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$108.08	$0.00	$144.28
107122	Residential Plastic Laminate Wall Cabinets – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$36.20	$123.51	$0.00	$159.71
107123	Residential Plastic Laminate Wall Cabinets (Premium) – Up To 30" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$92.63	$0.00	$128.83
107124	Residential Plastic Laminate Wall Cabinets (Premium) – Up To 36" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$111.16	$0.00	$147.36
107125	Residential Plastic Laminate Wall Cabinets (Premium) – Up To 42" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$129.69	$0.00	$165.89
107126	Residential Plastic Laminate Wall Cabinets (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$148.21	$0.00	$184.41
107127	Residential Plastic Laminate Shelving Cubbies – Up To 48" Tall and 16" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, shelving, trim pieces And related hardware	LF	$36.20	$63.68	$0.00	$99.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107128	Residential Plastic Laminate Shelving Cubbies (Premium) – Up To 48" Tall and 16" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$36.20	$76.42	$0.00	$112.62
107129	Residential Plastic Laminate Base Cabinets – Up To 36" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$138.94	$0.00	$193.24
107130	Residential Plastic Laminate Base Cabinets (Premium) – Up To 36" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$166.73	$0.00	$221.03
107131	Residential Plastic Laminate Full Height Cabinets – Up To 96" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$260.52	$0.00	$314.82
107132	Residential Plastic Laminate Full Height Cabinets (Premium) – Up To 96" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$312.62	$0.00	$366.92
107133	Residential Plastic Laminate Display Cabinets – Up To 72" Tall and 28" Deep All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	LF	$54.30	$231.57	$0.00	$285.87
107134	Residential Plastic Laminate Display Cabinets (Premium) – Up To 72" Tall and 28" Deep All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	LF	$54.30	$277.90	$0.00	$332.20
107135	Residential Plastic Laminate Wardrobe Cabinet – Up To 72" Tall, 28" Deep, and 72' Wide All plastic laminate veneer with MDF Core And melamine interior. Includes all draws, doors, glass, shelving, trim pieces And related hardware	EA	$181.01	$231.57	$0.00	$412.58
107136	Residential Plastic Laminate Wardrobe Cabinet (Premium) – Up To 72" Tall, 28" Deep, and 72' Wide All premium grade plastic laminate with plywood core And enhanced joinery. Includes all draws, doors, glass, shelving, trim pieces And related brass hardware or equal	EA	$181.01	$277.90	$0.00	$458.91

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107137	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when total quantity in section 12-35-33 Residential Casework - Plastic Laminate Clad are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-35-53 Laboratory Casework

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels. Casework is all SEFA-8 Compliant or equal

107138	Metal Open Wall Shelving Lab – Up To 2 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$111.68	$0.00	$138.83
107139	Metal Open Wall Shelving Lab – Up To 3 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$122.85	$0.00	$150.00
107140	Metal Open Wall Shelving Lab – Up To 4 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$134.03	$0.00	$161.18
107141	Metal Wall Cabinet Lab – Up To 24" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$137.66	$0.00	$173.86
107142	Metal Wall Cabinet Lab – Up To 32" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$161.94	$0.00	$198.14
107143	Metal Wall Cabinet Lab – Up To 24" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$158.30	$0.00	$194.50
107144	Metal Wall Cabinet Lab – Up To 32" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$186.24	$0.00	$222.44
107145	Metal Base Cabinet Lab – Up To 36" Tall and 28" Deep Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$295.97	$0.00	$350.27
107146	Metal Base Cabinet Lab – Up To 36" Tall and 28" Deep (With Casters) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$312.72	$0.00	$367.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107147	Metal Lab Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,122.07	$0.00	$2,393.59
107148	Metal Lab Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,713.62	$0.00	$3,985.14
107149	Metal Lab Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,440.38	$0.00	$2,711.90
107150	Metal Lab Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,270.67	$0.00	$4,542.19
107151	Stainless Steel Open Wall Shelving Lab – Up To 2 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$211.62	$0.00	$238.77
107152	Stainless Steel Open Wall Shelving Lab – Up To 3 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$232.78	$0.00	$259.93
107153	Stainless Steel Open Wall Shelving Lab – Up To 4 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$253.94	$0.00	$281.09
107154	Stainless Steel Wall Cabinet Lab – Up To 24" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$260.82	$0.00	$297.02
107155	Stainless Steel Wall Cabinet Lab – Up To 32" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$306.85	$0.00	$343.05
107156	Stainless Steel Wall Cabinet Lab – Up To 24" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$299.95	$0.00	$336.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107157	Stainless Steel Wall Cabinet Lab – Up To 32" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$352.88	$0.00	$389.08
107158	Stainless Steel Base Cabinet Lab – Up To 36" Tall and 28" Deep Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$560.79	$0.00	$615.09
107159	Stainless Steel Base Cabinet Lab – Up To 36" Tall and 28" Deep (With Casters) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$592.53	$0.00	$646.83
107160	Stainless Steel Lab Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,020.76	$0.00	$4,292.28
107161	Stainless Steel Lab Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$7,036.34	$0.00	$7,307.86
107162	Stainless Steel Lab Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,623.89	$0.00	$4,895.41
107163	Stainless Steel Lab Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$8,091.80	$0.00	$8,363.32
107164	Wood Open Wall Shelving Lab – Up To 2 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$120.17	$0.00	$147.32
107165	Wood Open Wall Shelving Lab – Up To 3 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$132.19	$0.00	$159.34
107166	Wood Open Wall Shelving Lab – Up To 4 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$144.21	$0.00	$171.36
107167	Wood Wall Cabinet Lab – Up To 24" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$148.11	$0.00	$184.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107168	Wood Wall Cabinet Lab – Up To 32" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$174.24	$0.00	$210.44
107169	Wood Wall Cabinet Lab – Up To 24" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$170.33	$0.00	$206.53
107170	Wood Wall Cabinet Lab – Up To 32" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$200.38	$0.00	$236.58
107171	Wood Base Cabinet Lab – Up To 36" Tall and 28" Deep Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$318.45	$0.00	$372.75
107172	Wood Base Cabinet Lab – Up To 36" Tall and 28" Deep (With Casters) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$336.48	$0.00	$390.78
107173	Wood Lab Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,283.24	$0.00	$2,554.76
107174	Wood Lab Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,995.67	$0.00	$4,267.19
107175	Wood Lab Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,625.73	$0.00	$2,897.25
107176	Wood Lab Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,595.02	$0.00	$4,866.54
107177	Plastic Laminate Open Wall Shelving Lab – Up To 2 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$89.62	$0.00	$116.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107178	Plastic Laminate Open Wall Shelving Lab – Up To 3 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$98.58	$0.00	$125.73
107179	Plastic Laminate Open Wall Shelving Lab – Up To 4 Shelves Includes a chemical resistant finish. Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$107.54	$0.00	$134.69
107180	Plastic Laminate Wall Cabinet Lab – Up To 24" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$110.45	$0.00	$146.65
107181	Plastic Laminate Wall Cabinet Lab – Up To 32" Tall (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$129.95	$0.00	$166.15
107182	Plastic Laminate Wall Cabinet Lab – Up To 24" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$127.03	$0.00	$163.23
107183	Plastic Laminate Wall Cabinet Lab – Up To 32" Tall (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$149.44	$0.00	$185.64
107184	Plastic Laminate Base Cabinet Lab – Up To 36" Tall and 28" Deep Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$237.50	$0.00	$291.80
107185	Plastic Laminate Base Cabinet Lab – Up To 36" Tall and 28" Deep (With Casters) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$250.93	$0.00	$305.23
107186	Plastic Laminate Lab Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$1,702.78	$0.00	$1,974.30
107187	Plastic Laminate Lab Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,979.87	$0.00	$3,251.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107188	Plastic Laminate Lab Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$1,958.20	$0.00	$2,229.72
107189	Plastic Laminate Lab Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,426.85	$0.00	$3,698.37
107190	Mobile Lab Casework With Epoxy Resin Top, Two Upper Shelves and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$36.20	$698.27	$0.00	$734.47
107191	Mobile Lab Casework With Chemical Resistant Laminate Top, Two Upper Shelves and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$36.20	$692.68	$0.00	$728.88
107192	Mobile Lab Casework With Epoxy Resin Top, Upper Wall Cabinet and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$36.20	$852.46	$0.00	$888.66
107193	Mobile Lab Casework With Chemical Resistant Laminate Top, Upper Wall Cabinet and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$36.20	$846.88	$0.00	$883.08
107194	Mobile Lab Tables With Epoxy Resin Top and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$30.16	$584.80	$0.00	$614.96
107195	Mobile Lab Tables With Chemical Resistant Laminate Top and Base Cabinet Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$30.16	$579.22	$0.00	$609.38
107196	Mobile Lab Tables With Epoxy Resin Top Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$30.16	$562.46	$0.00	$592.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107197	Mobile Lab Tables With Chemical Resistant Laminate Top Mott Manufacturing or equal. Includes a chemical resistant finish. Includes all trim pieces and related hardware. Includes integral wiring and quick disconnect fittings for lab services	LF	$30.16	$556.88	$0.00	$587.04
107198	Mobile Lab Casework With Epoxy Resin Top, Two Upper Shelves and Base Cabinet - Installation Only Installation only	LF	$36.20	$0.00	$0.00	$36.20
107199	Mobile Lab Casework With Chemical Resistant Laminate Top, Two Upper Shelves and Base Cabinet - Installation Only Installation only	LF	$36.20	$0.00	$0.00	$36.20
107200	Mobile Lab Casework With Epoxy Resin Top, Upper Wall Cabinet and Base Cabinet - Installation Only Installation only	LF	$36.20	$0.00	$0.00	$36.20
107201	Mobile Lab Casework With Chemical Resistant Laminate Top, Upper Wall Cabinet and Base Cabinet - Installation Only Installation only	LF	$36.20	$0.00	$0.00	$36.20
107202	Mobile Lab Tables With Epoxy Resin Top and Base Cabinet - Installation Only Installation only	LF	$30.16	$0.00	$0.00	$30.16
107203	Mobile Lab Tables With Chemical Resistant Laminate Top and Base Cabinet - Installation Only Installation only	LF	$30.16	$0.00	$0.00	$30.16
107204	Mobile Lab Tables With Epoxy Resin Top - Installation Only Installation only	LF	$30.16	$0.00	$0.00	$30.16
107205	Mobile Lab Tables With Chemical Resistant Laminate Top - Installation Only Installation only	LF	$30.16	$0.00	$0.00	$30.16
107206	Reagent Shelving- Single Loaded – Up To 3 Shelves Includes all framing to floor, posts and shelving for both fixed or adjustable	LF	$27.15	$111.68	$0.00	$138.83
107207	Reagent Shelving- Double Loaded – Up To 3 Shelves Includes all framing to floor, posts and shelving for both fixed or adjustable	LF	$27.15	$167.53	$0.00	$194.68
107208	Under Wall Cabinet – Fluorescent Fixture	LF	$7.24	$22.83	$0.00	$30.07
107209	Flammable Storage Cabinet – Up to 75 Gallon Capacity	EA	$155.16	$1,787.01	$0.00	$1,942.17
107210	Acid Storage Cabinet – Up to 75 Gallon Capacity	EA	$155.16	$1,537.94	$0.00	$1,693.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107211	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when total quantity in section 12-35-53 Laboratory Casework are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-35-70 Healthcare Casework

Includes a fully finished cabinet system with all trim pieces, hardware, drawers, and end panels

107212	Metal Open Wall Shelving Healthcare – Up To 2 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$100.52	$0.00	$127.67
107213	Metal Open Wall Shelving Healthcare – Up To 3 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$110.58	$0.00	$137.73
107214	Metal Open Wall Shelving Healthcare – Up To 4 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$120.62	$0.00	$147.77
107215	Metal Wall Cabinet Healthcare – Up To 24" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$123.89	$0.00	$160.09
107216	Metal Wall Cabinet Healthcare – Up To 32" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$145.76	$0.00	$181.96
107217	Metal Wall Cabinet Healthcare – Up To 24" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$142.48	$0.00	$178.68
107218	Metal Wall Cabinet Healthcare – Up To 32" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$167.61	$0.00	$203.81
107219	Metal Base Cabinet Healthcare – Up To 36" Tall and 28" Deep Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$266.38	$0.00	$320.68
107220	Metal Base Cabinet Healthcare – Up To 36" Tall and 28" Deep (With Casters) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$281.45	$0.00	$335.75
107221	Metal Healthcare Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,122.07	$0.00	$2,393.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107222	Metal Healthcare Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,713.62	$0.00	$3,985.14
107223	Metal Healthcare Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,440.38	$0.00	$2,711.90
107224	Metal Healthcare Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,270.67	$0.00	$4,542.19
107225	Stainless Steel Open Wall Shelving Healthcare – Up To 2 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$190.46	$0.00	$217.61
107226	Stainless Steel Open Wall Shelving Healthcare – Up To 3 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$209.50	$0.00	$236.65
107227	Stainless Steel Open Wall Shelving Healthcare – Up To 4 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$228.55	$0.00	$255.70
107228	Stainless Steel Wall Cabinet Healthcare – Up To 24" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$234.74	$0.00	$270.94
107229	Stainless Steel Wall Cabinet Healthcare – Up To 32" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$276.16	$0.00	$312.36
107230	Stainless Steel Wall Cabinet Healthcare – Up To 24" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$269.95	$0.00	$306.15
107231	Stainless Steel Wall Cabinet Healthcare – Up To 32" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$317.59	$0.00	$353.79
107232	Stainless Steel Base Cabinet Healthcare – Up To 36" Tall and 28" Deep Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$504.71	$0.00	$559.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107233	Stainless Steel Base Cabinet Healthcare – Up To 36" Tall and 28" Deep (With Casters) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$533.28	$0.00	$587.58
107234	Stainless Steel Healthcare Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,020.76	$0.00	$4,292.28
107235	Stainless Steel Healthcare Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$7,036.34	$0.00	$7,307.86
107236	Stainless Steel Healthcare Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,623.89	$0.00	$4,895.41
107237	Stainless Steel Healthcare Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$8,091.80	$0.00	$8,363.32
107238	Wood Open Wall Shelving Healthcare – Up To 2 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$108.15	$0.00	$135.30
107239	Wood Open Wall Shelving Healthcare – Up To 3 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$118.96	$0.00	$146.11
107240	Wood Open Wall Shelving Healthcare – Up To 4 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$129.79	$0.00	$156.94
107241	Wood Wall Cabinet Healthcare – Up To 24" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$133.30	$0.00	$169.50
107242	Wood Wall Cabinet Healthcare – Up To 32" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$156.82	$0.00	$193.02
107243	Wood Wall Cabinet Healthcare – Up To 24" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$153.29	$0.00	$189.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107244	Wood Wall Cabinet Healthcare – Up To 32" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$180.35	$0.00	$216.55
107245	Wood Base Cabinet Healthcare – Up To 36" Tall and 28" Deep Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$286.61	$0.00	$340.91
107246	Wood Base Cabinet Healthcare – Up To 36" Tall and 28" Deep (With Casters) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$302.84	$0.00	$357.14
107247	Wood Healthcare Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,283.24	$0.00	$2,554.76
107248	Wood Healthcare Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,995.67	$0.00	$4,267.19
107249	Wood Healthcare Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,625.73	$0.00	$2,897.25
107250	Wood Healthcare Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$4,595.02	$0.00	$4,866.54
107251	Plastic Laminate Open Wall Shelving Healthcare – Up To 2 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$80.66	$0.00	$107.81
107252	Plastic Laminate Open Wall Shelving Healthcare – Up To 3 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$88.72	$0.00	$115.87
107253	Plastic Laminate Open Wall Shelving Healthcare – Up To 4 Shelves Includes shelving, supports, trim pieces and related hardware.	LF	$27.15	$96.79	$0.00	$123.94
107254	Plastic Laminate Wall Cabinet Healthcare – Up To 24" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$99.41	$0.00	$135.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107255	Plastic Laminate Wall Cabinet Healthcare – Up To 32" Tall (Solid Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$116.95	$0.00	$153.15
107256	Plastic Laminate Wall Cabinet Healthcare – Up To 24" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$114.32	$0.00	$150.52
107257	Plastic Laminate Wall Cabinet Healthcare – Up To 32" Tall (Glass Fronts) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$36.20	$134.49	$0.00	$170.69
107258	Plastic Laminate Base Cabinet Healthcare – Up To 36" Tall and 28" Deep Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$213.74	$0.00	$268.04
107259	Plastic Laminate Base Cabinet Healthcare – Up To 36" Tall and 28" Deep (With Casters) Includes all draws, doors, shelving, trim pieces and related hardware.	LF	$54.30	$225.84	$0.00	$280.14
107260	Plastic Laminate Healthcare Storage Case – Up To 4' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$1,702.78	$0.00	$1,974.30
107261	Plastic Laminate Healthcare Storage Case – Up To 8' X 7' X 1.5' (Solid Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$2,979.87	$0.00	$3,251.39
107262	Plastic Laminate Healthcare Storage Case – Up To 4' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$1,958.20	$0.00	$2,229.72
107263	Plastic Laminate Healthcare Storage Case – Up To 8' X 7' X 1.5' (Glass Fronts) Includes a chemical resistant finish. Includes all draws, doors, shelving, trim pieces and related hardware.	EA	$271.52	$3,426.85	$0.00	$3,698.37
107264	Stainless Steel Operating Room Storage Console – Up To 4' X 7' Steris or equal	EA	$543.04	$3,909.08	$0.00	$4,452.12
107265	[Modifier] Small Quantity of Cabinets <16 LF Quantity premium can be used when total quantity in section 12-35-70 Healthcare Casework are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-36-00 Countertops

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	12-36-13 Concrete Countertops					
107266	Concrete Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$44.24	$0.00	$55.10
107267	Concrete Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$67.41	$0.00	$78.27
107268	Concrete Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$90.60	$0.00	$101.46
107269	Backsplash - Concrete Countertop, Up To 4" Excludes Countertop	LF	$17.72	$45.71	$0.00	$63.43
107270	Concrete Integral Sink	EA	$90.50	$342.49	$0.00	$432.99
107271	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107272	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-13 Concrete Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-16 Metal Countertops					
107273	Stainless Steel Countertop Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$75.87	$0.00	$86.73
107274	Stainless Steel Integral Sink	EA	$90.50	$335.07	$0.00	$425.57
107275	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107276	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-16 Metal Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-19 Wood Countertops					
107277	Wood Countertop – Economy Birch or equal and fully finished. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$49.02	$0.00	$59.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107278	Wood Countertop – Standard Walnut or equal and fully finished. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$74.70	$0.00	$85.56
107279	Wood Countertop – Premium Exotic woods and fully finished. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$100.38	$0.00	$111.24
107280	Backsplash - Wood Countertop, Up To 4" Excludes Countertop	LF	$8.86	$21.33	$0.00	$30.19
107281	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107282	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-19 Wood Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-23 Plastic Countertops					
107283	Plastic Laminate Countertop – Economy Finished plastic laminate edges in a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$18.02	$0.00	$28.88
107284	Plastic Laminate Countertop – Standard Finished plastic laminate edges in a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$21.75	$0.00	$32.61
107285	Plastic Laminate Countertop – Premium Finished plastic laminate edges in a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$25.46	$0.00	$36.32
107286	Plastic Laminate Countertop – Up To 4" Backsplash	LF	$8.86	$9.14	$0.00	$18.00
107287	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107288	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-23 Plastic Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-26 Glass Countertops					
107289	Glass Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$48.21	$0.00	$59.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107290	Glass Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$73.47	$0.00	$84.33
107291	Glass Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$98.74	$0.00	$109.60
107292	Glass Countertop – Up To 4" Backsplash	LF	$8.86	$33.19	$0.00	$42.05
107293	Ceramic/Porcelain Tile – Up To 4" Backsplash	LF	$8.86	$18.28	$0.00	$27.14
107294	Glass Integral Sink	EA	$90.50	$354.62	$0.00	$445.12
107295	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107296	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-26 Glass Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-40 Stone Countertops					
107297	Granite Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$47.71	$0.00	$58.57
107298	Granite Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$72.73	$0.00	$83.59
107299	Granite Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$97.74	$0.00	$108.60
107300	Granite Countertop – Up To 4" Backsplash	LF	$8.86	$21.84	$0.00	$30.70
107301	Granite Integral Sink	EA	$90.50	$333.45	$0.00	$423.95
107302	Marble Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$54.88	$0.00	$65.74
107303	Marble Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$83.64	$0.00	$94.50
107304	Marble Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$112.39	$0.00	$123.25
107305	Marble Countertop – Up To 4" Backsplash	LF	$8.86	$28.09	$0.00	$36.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107306	Marble Integral Sink	EA	$90.50	$333.45	$0.00	$423.95
107307	Quartz Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$45.33	$0.00	$56.19
107308	Quartz Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$69.09	$0.00	$79.95
107309	Quartz Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$92.85	$0.00	$103.71
107310	Quartz Countertop – Up To 4" Backsplash	LF	$8.86	$40.57	$0.00	$49.43
107311	Quartz Integral Sink	EA	$90.50	$333.45	$0.00	$423.95
107312	Quartzite Countertop – Economy Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$54.88	$0.00	$65.74
107313	Quartzite Countertop – Standard Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$83.64	$0.00	$94.50
107314	Quartzite Countertop – Premium Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$112.39	$0.00	$123.25
107315	Quartzite Countertop – Up To 4" Backsplash	LF	$8.86	$19.37	$0.00	$28.23
107316	Quartzite Integral Sink	EA	$90.50	$333.45	$0.00	$423.95
107317	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107318	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-40 Stone Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-41 Solid Surface Countertops					
107319	Solid Surface Countertop – Economy Corian or equal. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$35.05	$0.00	$45.91
107320	Solid Surface Countertop – Standard Corian or equal. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$45.69	$0.00	$56.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107321	Solid Surface Countertop – Premium Corian or equal. Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$56.33	$0.00	$67.19
107322	Solid Surface Countertop – Up To 4" Backsplash	LF	$8.86	$21.33	$0.00	$30.19
107323	Solid Surface Integral Sink	EA	$90.50	$319.27	$0.00	$409.77
107324	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107325	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-41 Solid Surface Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88
	12-36-53 Laboratory Countertops					
107326	Epoxy Resin Countertop – Black Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$48.88	$0.00	$59.74
107327	Epoxy Resin Countertop – Color Other Than Black Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$58.66	$0.00	$69.52
107328	Epoxy Resin Countertop – Up To 4" Backsplash	LF	$8.86	$30.48	$0.00	$39.34
107329	Epoxy Resin Integral Sink	EA	$90.50	$319.27	$0.00	$409.77
107330	Phenolic Resin Countertop – Black Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$46.43	$0.00	$57.29
107331	Phenolic Resin Countertop – Color Other Than Black Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$55.72	$0.00	$66.58
107332	Phenolic Resin Countertop – Up To 4" Backsplash	LF	$8.86	$60.95	$0.00	$69.81
107333	Phenolic Resin Integral Sink	EA	$90.50	$319.27	$0.00	$409.77
107334	Chemical Resistant Plastic Laminate Countertop Finished plastic laminate edges in a variety of square, rounded, or ogee profiles. Includes sink cutouts	LF	$10.86	$25.46	$0.00	$36.32
107335	Stainless Steel Countertop Includes a variety of square, rounded, or ogee profiles. Includes sink cutouts	SF	$10.86	$75.87	$0.00	$86.73
107336	Stainless Steel Integral Sink	EA	$90.50	$335.07	$0.00	$425.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107337	[Modifier] Wall Mounted Application For use with direct wall mounting and Knee space applications. Includes all brackets and wall mounting hardware	LF	$5.43	$4.42	$0.00	$9.85
107338	[Modifier] Small Quantity of Countertops < 8 SF Quantity premium can be used when total quantity in section 12-36-53 Laboratory Countertops are within stated quantity. Can be applied cumulatively to base line items.	SF	$67.88	$0.00	$0.00	$67.88

12-40-00 Furnishings and Accessories

12-48-00 Rugs and Mats

12-48-13 Entrance Floor Mats and Frames

107339	Entrance Grid Flooring – Roll-Up Hinged. Stainless Steel With Recessed Frame Pedigrid or equal	SF	$6.60	$42.88	$0.00	$49.48
107340	Entrance Grid Flooring – Roll-Up Hinged. Aluminum With Recessed Frame Pedigrid or equal	SF	$6.60	$31.50	$0.00	$38.10
107341	Entrance Grid Flooring – Roll-Up Hinged. Galvanized Steel With Recessed Frame Pedigrid or equal	SF	$6.60	$20.10	$0.00	$26.70
107342	Entrance Mat – Surface Mounted Aluminum With Carpet Inserts Pedimat or equal	SF	$3.62	$8.94	$0.00	$12.56
107343	Entrance Mat – Recessed Aluminum With Carpet Inserts and Frame Pedimat or equal	SF	$3.62	$13.40	$0.00	$17.02

12-50-00 Furniture

12-51-00 Office Furniture

12-51-00 Office Furniture

107344	Standard Filing Cabinet – Metal (2 Drawer Tall) Includes Lock-Set	EA	$48.78	$201.04	$0.00	$249.82
107345	Standard Filing Cabinet – Metal (3 Drawer Tall) Includes Lock-Set	EA	$48.78	$256.88	$0.00	$305.66
107346	Standard Filing Cabinet – Metal (4 Drawer Tall) Includes Lock-Set	EA	$48.78	$312.72	$0.00	$361.50
107347	Standard Filing Cabinet – Metal (5 Drawer Tall) Includes Lock-Set	EA	$48.78	$424.42	$0.00	$473.20
107348	Standard Filing Cabinet – Metal (2 Drawer Tall) – 1 Hour Fire Rated Includes Lock-Set	EA	$48.78	$603.11	$0.00	$651.89
107349	Standard Filing Cabinet – Metal (3 Drawer Tall) – 1 Hour Fire Rated Includes Lock-Set	EA	$48.78	$770.65	$0.00	$819.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107350	Standard Filing Cabinet – Metal (4 Drawer Tall) – 1 Hour Fire Rated Includes Lock-Set	EA	$48.78	$938.18	$0.00	$986.96
107351	Standard Filing Cabinet – Metal (5 Drawer Tall) – 1 Hour Fire Rated Includes Lock-Set	EA	$48.78	$1,273.25	$0.00	$1,322.03
107352	Standard Filing Cabinet – Metal (2 Drawer Tall) – 2 Hour Fire Rated Includes Lock-Set	EA	$48.78	$1,206.22	$0.00	$1,255.00
107353	Standard Filing Cabinet – Metal (3 Drawer Tall) – 2 Hour Fire Rated Includes Lock-Set	EA	$48.78	$1,541.29	$0.00	$1,590.07
107354	Standard Filing Cabinet – Metal (4 Drawer Tall) – 2 Hour Fire Rated Includes Lock-Set	EA	$48.78	$1,876.36	$0.00	$1,925.14
107355	Standard Filing Cabinet – Metal (5 Drawer Tall) – 2 Hour Fire Rated Includes Lock-Set	EA	$48.78	$2,546.49	$0.00	$2,595.27
	12-59-00 Systems Furniture					
	12-59-16 Free-Standing Component System Furniture					
107356	Work Station - Cantilevered, 50" High Panels with Tackable Surface Includes L shaped laminate work surface (36"w x 24"d and 72"w x 24"d), electrical pass thru cables and harness, receptacles and power pole, matching file cabinet w/lock	EA	$443.61	$4,945.35	$0.00	$5,388.96
	12-60-00 Multiple Seating					
	12-61-00 Fixed Audience Seating					
	12-61-00 Fixed Audience Seating					
107357	Auditorium Seating – Steel Frame Plastic Seat and Back	EA	$45.25	$167.53	$0.00	$212.78
107358	Auditorium Seating – Steel Frame Plastic Seat and Back With Wood Arm Rest	EA	$45.25	$223.38	$0.00	$268.63
107359	Auditorium Seating – Steel Frame Plastic Seat and Back With Wood Arm Rest and Tablet Arm	EA	$45.25	$279.22	$0.00	$324.47
107360	Auditorium Seating – Steel Frame Vinyl Upholstered Seat and Back	EA	$45.25	$233.43	$0.00	$278.68
107361	Auditorium Seating – Steel Frame Vinyl Upholstered Seat and Back With Wood Arm Rest	EA	$45.25	$286.48	$0.00	$331.73
107362	Auditorium Seating – Steel Frame Vinyl Upholstered Seat and Back With Wood Arm Rest and Tablet Arm	EA	$45.25	$339.53	$0.00	$384.78
107363	Auditorium Seating – Steel Frame Fabric Upholstered Seat and Back	EA	$45.25	$245.71	$0.00	$290.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107364	Auditorium Seating – Steel Frame Fabric Upholstered Seat and Back With Wood Arm Rest	EA	$45.25	$301.56	$0.00	$346.81
107365	Auditorium Seating – Steel Frame Fabric Upholstered Seat and Back With Wood Arm Rest and Tablet Arm	EA	$45.25	$357.40	$0.00	$402.65
107366	Auditorium Seating – Steel Frame Leather Upholstered Seat and Back	EA	$45.25	$524.94	$0.00	$570.19
107367	Auditorium Seating – Steel Frame Leather Upholstered Seat and Back With Wood Arm Rest	EA	$45.25	$636.62	$0.00	$681.87
107368	Auditorium Seating – Steel Frame Leather Upholstered Seat and Back With Wood Arm Rest and Tablet Arm	EA	$45.25	$748.31	$0.00	$793.56
107369	Auditorium Seating – Recliner Steel Frame Vinyl Upholstered Seat and Back	EA	$67.88	$2,090.24	$0.00	$2,158.12
107370	Auditorium Seating – Recliner Steel Frame Fabric Upholstered Seat and Back	EA	$67.88	$2,200.25	$0.00	$2,268.13
107371	Auditorium Seating – Recliner Steel Frame Leather Upholstered Seat and Back	EA	$67.88	$3,037.91	$0.00	$3,105.79
107372	[Modifier] Integrally Wired Power and Data at Auditorium Seat	EA	$60.34	$114.16	$0.00	$174.50
	12-63-00 Stadium and Arena Seating					
	12-63-00 Stadium and Arena Seating					
107373	Arena Seating – Plastic Hussey or equal. Includes all mounting hardware	EA	$45.25	$106.42	$0.00	$151.67
107374	Arena Seating – Plastic With Padded Seat and Back Hussey or equal. Includes all mounting hardware	EA	$45.25	$127.71	$0.00	$172.96
107375	Arena Bench Seating Hussey or equal. Includes all mounting hardware	SEAT	$38.79	$67.01	$0.00	$105.80
107376	Arena Bench Seating – Padded Hussey or equal. Includes all mounting hardware	SEAT	$38.79	$83.77	$0.00	$122.56
	12-63-13 Stadium and Arena Bench Seating					
107377	Aluminum Bleachers Up To 4 Rows – Chain Link Guard Railing, Open Toe	SEAT	$35.30	$111.68	$0.00	$146.98
107378	Aluminum Bleachers Up To 5 Rows – Chain Link Guard Railing, Open Toe	SEAT	$36.72	$116.16	$0.00	$152.88
107379	Aluminum Bleachers Up To 6 Rows – Chain Link Guard Railing, Open Toe	SEAT	$38.57	$121.96	$0.00	$160.53
107380	Aluminum Bleachers Up To 7 Rows – Chain Link Guard Railing, Open Toe	SEAT	$40.49	$128.06	$0.00	$168.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107381	Aluminum Bleachers Up To 8 Rows – Chain Link Guard Railing, Open Toe	SEAT	$42.49	$134.46	$0.00	$176.95
107382	Aluminum Bleachers Up To 9 Rows – Chain Link Guard Railing, Open Toe	SEAT	$44.62	$141.18	$0.00	$185.80
107383	Aluminum Bleachers Up To 10 and Greater Rows – Chain Link Guard Railing, Open Toe	SEAT	$46.85	$148.24	$0.00	$195.09
107384	Aluminum Bleachers Up To 4 Rows – Pipe Guard Railing, Open Toe	SEAT	$35.30	$117.27	$0.00	$152.57
107385	Aluminum Bleachers Up To 5 Rows – Pipe Guard Railing, Open Toe	SEAT	$36.72	$121.96	$0.00	$158.68
107386	Aluminum Bleachers Up To 6 Rows – Pipe Guard Railing, Open Toe	SEAT	$38.57	$128.06	$0.00	$166.63
107387	Aluminum Bleachers Up To 7 Rows – Pipe Guard Railing, Open Toe	SEAT	$40.49	$134.46	$0.00	$174.95
107388	Aluminum Bleachers Up To 8 Rows – Pipe Guard Railing, Open Toe	SEAT	$42.49	$141.18	$0.00	$183.67
107389	Aluminum Bleachers Up To 9 Rows – Pipe Guard Railing, Open Toe	SEAT	$44.62	$148.24	$0.00	$192.86
107390	Aluminum Bleachers Up To 10 and Greater Rows – Pipe Guard Railing, Open Toe	SEAT	$46.85	$155.67	$0.00	$202.52
107391	Aluminum Bleachers Up To 4 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$40.62	$120.62	$0.00	$161.24
107392	Aluminum Bleachers Up To 5 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$42.23	$125.45	$0.00	$167.68
107393	Aluminum Bleachers Up To 6 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$44.33	$131.73	$0.00	$176.06
107394	Aluminum Bleachers Up To 7 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$46.58	$138.31	$0.00	$184.89
107395	Aluminum Bleachers Up To 8 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$48.88	$145.22	$0.00	$194.10
107396	Aluminum Bleachers Up To 9 Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$51.32	$152.48	$0.00	$203.80
107397	Aluminum Bleachers Up To 10 and Greater Rows – Chain Link Guard Railing, With Closed Riser Plate	SEAT	$53.88	$160.10	$0.00	$213.98
107398	Aluminum Bleachers Up To 4 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$40.62	$126.65	$0.00	$167.27
107399	Aluminum Bleachers Up To 5 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$42.23	$131.73	$0.00	$173.96
107400	Aluminum Bleachers Up To 6 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$44.33	$138.31	$0.00	$182.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107401	Aluminum Bleachers Up To 7 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$46.58	$145.22	$0.00	$191.80
107402	Aluminum Bleachers Up To 8 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$48.88	$152.48	$0.00	$201.36
107403	Aluminum Bleachers Up To 9 Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$51.32	$160.10	$0.00	$211.42
107404	Aluminum Bleachers Up To 10 and Greater Rows – Pipe Guard Railing, With Closed Riser Plate	SEAT	$53.88	$168.11	$0.00	$221.99

12-66-00 Telescoping Stands

12-66-00 Telescoping Stands

107405	Telescoping Bleachers With Bench Seating Hussey or equal. Includes all railings, stairs, installation hardware, and controls	SEAT	$27.15	$122.66	$0.00	$149.81
107406	Telescoping Bleachers With Bench Seating – Padded Hussey or equal. Includes all railings, stairs, installation hardware, and controls	SEAT	$27.15	$133.82	$0.00	$160.97
107407	Telescoping Bleachers With Fold Down Seats – Plastic Hussey or equal. Includes all railings, stairs, installation hardware, and controls	SEAT	$36.20	$335.07	$0.00	$371.27
107408	Telescoping Bleachers With Fold Down Seats – Plastic With Padded Seat and Back Hussey or equal. Includes all railings, stairs, installation hardware, and controls	SEAT	$36.20	$379.33	$0.00	$415.53

12-67-00 Pews and Benches

12-67-13 Pews

All solid oak unless noted otherwise

107409	Wood Pew With Backs – Hardwood With Bookracks and Enhanced Routing All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$148.41	$0.00	$175.56
107410	Wood Pew With Backs – Vinyl Upholstered With Bookracks and Enhanced Routing All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$171.25	$0.00	$198.40
107411	Wood Pew With Backs – Fabric Upholstered With Bookracks and Enhanced Routing All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$182.65	$0.00	$209.80
107412	Wood Pew With Backs – Leather Upholstered With Bookracks and Enhanced Routing All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$228.32	$0.00	$255.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107413	[Modifier] Small Quantity of Pews <16 LF Quantity premium can be used when total quantity in section 12-67-13 Pews are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-67-23 Benches

All solid oak unless noted otherwise

107414	Wood Bench With Backs – Hardwood All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$125.58	$0.00	$152.73
107415	Wood Bench With Backs – Vinyl Upholstered All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$148.41	$0.00	$175.56
107416	Wood Bench With Backs – Fabric Upholstered All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$159.82	$0.00	$186.97
107417	Wood Bench With Backs – Leather Upholstered All stained and sealed wood with finished wood end panels & Back. Anchored to floor	LF	$27.15	$205.49	$0.00	$232.64
107418	Wood Bench – Hardwood All stained and sealed wood. Anchored to floor	LF	$21.72	$57.09	$0.00	$78.81
107419	Wood Bench – Vinyl Upholstered All stained and sealed wood. Anchored to floor	LF	$21.72	$68.50	$0.00	$90.22
107420	Wood Bench – Fabric Upholstered All stained and sealed wood. Anchored to floor	LF	$21.72	$74.20	$0.00	$95.92
107421	Wood Bench – Leather Upholstered All stained and sealed wood. Anchored to floor	LF	$21.72	$97.03	$0.00	$118.75
107422	[Modifier] Small Quantity of Benches <16 LF Quantity premium can be used when total quantity in section 12-67-23 Benches are within stated quantity. Can be applied cumulatively to base line items.	LF	$33.94	$0.00	$0.00	$33.94

12-90-00 Other Furnishings

12-92-00 Interior Planters and Artificial Plants

12-92-43 Landscaping Accessories

107423	Living Wall System Includes 4" thick growing panels with mature plantings, delivery and installation with irrigation and catch basin	SF	$18.94	$126.37	$0.00	$145.31
107424	Green Wall Trellis For interior or exterior use. Includes trellis system and standoffs mounted to substrate. Refer to Division 32 for plantings	SF	$3.62	$12.26	$0.00	$15.88

13-00-00 Special Construction

13-00-00 Special Construction

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	13-01-00 Operation and Maintenance of Special Construction					
	13-01-11 Operation and Maintenance of Swimming Pools					
107425	Remove and Replace Pool Gutter System Includes removal of gutter system and recasting new coping with stainless steel gutter system and supply tube	LF	$377.81	$201.04	$0.00	$578.85
107426	Remove and Replace Fiberglass In Pool (> 500 SF) Includes removal of Fiberglass, drilling, dowelling, reinforcing, and new Fiberglass	SF	$28.27	$7.59	$0.00	$35.86
107427	Remove and Replace Fiberglass In Pool (101-500 SF) Includes removal of Fiberglass, drilling, dowelling, reinforcing, and new Fiberglass	SF	$33.10	$8.98	$0.00	$42.08
107428	Remove and Replace Fiberglass In Pool (51-100 SF) Includes removal of Fiberglass, drilling, dowelling, reinforcing, and new Fiberglass	SF	$39.90	$10.36	$0.00	$50.26
107429	Remove and Replace Fiberglass In Pool (< Or = To 50 SF) Includes removal of Fiberglass, drilling, dowelling, reinforcing, and new Fiberglass	SF	$50.24	$11.74	$0.00	$61.98
107430	Remove and Replace Gunite In Pool (> 500 SF) Includes removal of Gunite, drilling, dowelling, reinforcing, pouring, and finishing	SF	$39.58	$12.56	$0.00	$52.14
107431	Remove and Replace Gunite In Pool (101-500 SF) Includes removal of Gunite, drilling, dowelling, reinforcing, pouring, and finishing	SF	$46.33	$14.84	$0.00	$61.17
107432	Remove and Replace Gunite In Pool (51-100 SF) Includes removal of Gunite, drilling, dowelling, reinforcing, pouring, and finishing	SF	$55.87	$17.13	$0.00	$73.00
107433	Remove and Replace Gunite In Pool (< Or = To 50 SF) Includes removal of Gunite, drilling, dowelling, reinforcing, pouring, and finishing	SF	$70.35	$19.41	$0.00	$89.76
107434	Remove and Replace Concrete In Pool (> 500 SF) Includes removal of concrete, drilling, dowelling, reinforcing, pouring, and finishing	SF	$43.98	$13.81	$0.00	$57.79
107435	Remove and Replace Concrete In Pool (101-500 SF) Includes removal of concrete, drilling, dowelling, reinforcing, pouring, and finishing	SF	$51.49	$16.32	$0.00	$67.81
107436	Remove and Replace Concrete In Pool (51-100 SF) Includes removal of concrete, drilling, dowelling, reinforcing, pouring, and finishing	SF	$62.08	$18.83	$0.00	$80.91
107437	Remove and Replace Concrete In Pool (< Or = To 50 SF) Includes removal of concrete, drilling, dowelling, reinforcing, pouring, and finishing	SF	$78.15	$21.34	$0.00	$99.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107438	Re-Grout Pool Tile With Non-Epoxy Grout Includes removal of existing grout, cleaning, and re-grouting	SF	$3.97	$1.26	$0.00	$5.23
107439	Re-Grout Pool Tile With Epoxy Grout Includes removal of existing grout, cleaning, and re-grouting	SF	$7.24	$2.13	$0.00	$9.37
107440	Remove and Replace Existing Pool Tile Includes removal of existing tile, cleaning, application of waterproofing, and replacing with Manufacturer's standard pool tiles and epoxy grout	SF	$18.88	$15.68	$0.00	$34.56
107441	Replaster Existing Pool Includes removal of loose plaster, cleaning, and application of new plaster and screeding	SF	$9.05	$5.70	$0.00	$14.75
107442	Pool Grab Rails	EA	$543.04	$938.18	$0.00	$1,481.22
107443	Backstroke / Starting Bock Anchors	EA	$543.04	$446.75	$0.00	$989.79
107444	Restore Pool Lane Lines	LF	$7.24	$2.24	$0.00	$9.48
107445	Remove and Replace Pool Depth Markers	EA	$905.06	$570.81	$0.00	$1,475.87
107446	Remove and Replace Pool Rope Cup Anchors	EA	$434.44	$223.38	$0.00	$657.82
107447	Remove and Replace Pool Liner	SF	$2.89	$5.11	$0.00	$8.00
107448	Saw Cut Pool	LF	$13.58	$0.00	$0.00	$13.58
	13-10-00 Special Facility Components					
	13-11-00 Swimming Pools					
	13-11-13 Below-Grade Swimming Pools					
107449	Competition Cast In Place Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$150.85	$183.35	$0.00	$334.20
107450	Competition Gunite Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$125.71	$146.67	$0.00	$272.38
107451	Competition Fiberglass Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$114.28	$133.11	$0.00	$247.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107452	Residential Cast In Place Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$72.40	$89.05	$0.00	$161.45
107453	Residential Gunite Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$60.34	$74.20	$0.00	$134.54
107454	Residential Liner Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$50.28	$55.34	$0.00	$105.62
107455	Residential Fiberglass Drop In Pool – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, heater, deck equipment, and maintenance equipment. SF = Pool water surface area	SF	$41.91	$47.88	$0.00	$89.79
	13-11-20 Semi-Below-Grade Swimming Pools					
107456	18' Round – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,597.18	$6,837.54	$0.00	$8,434.72
107457	24' Round – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,751.74	$9,275.69	$0.00	$11,027.43
107458	27' Round – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,810.12	$10,666.20	$0.00	$12,476.32
107459	30' Round – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,939.42	$12,799.44	$0.00	$14,738.86
107460	12'6" X 21' Oval – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$2,088.61	$7,650.63	$0.00	$9,739.24
107461	15' X 24' Oval – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$2,468.36	$8,344.21	$0.00	$10,812.57
107462	15' X 30' Oval – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$2,858.10	$9,370.62	$0.00	$12,228.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107463	18' X 33' Oval – 52" Total Depth – Semi-Below-Grade Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$3,194.34	$10,299.87	$0.00	$13,494.21
107464	[Modifier] Saltwater System	EA	$0.00	$725.98	$0.00	$725.98
	13-11-23 On-Grade Swimming Pools					
107465	12' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$596.75	$2,697.27	$0.00	$3,294.02
107466	12' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$596.75	$3,509.23	$0.00	$4,105.98
107467	15' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$624.19	$2,839.11	$0.00	$3,463.30
107468	15' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$624.19	$3,537.16	$0.00	$4,161.35
107469	18' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$662.24	$2,987.65	$0.00	$3,649.89
107470	18' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$662.24	$3,685.71	$0.00	$4,347.95
107471	21' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$764.84	$3,238.96	$0.00	$4,003.80
107472	21' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$764.84	$3,964.92	$0.00	$4,729.76
107473	24' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$848.49	$3,374.09	$0.00	$4,222.58
107474	24' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$848.49	$4,100.07	$0.00	$4,948.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107475	27' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$920.40	$3,509.23	$0.00	$4,429.63
107476	27' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$920.40	$4,235.21	$0.00	$5,155.61
107477	30' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$987.34	$3,685.71	$0.00	$4,673.05
107478	30' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$987.34	$4,411.67	$0.00	$5,399.01
107479	33' Round – 52" Height – Steel Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,064.78	$3,869.98	$0.00	$4,934.76
107480	33' Round – 54" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,064.78	$4,595.96	$0.00	$5,660.74
107481	12' X 23' Oval – 52" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,551.53	$4,267.60	$0.00	$5,819.13
107482	15' X 30' Oval – 52" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$1,810.12	$5,168.91	$0.00	$6,979.03
107483	15' X 33' Oval – 52" Height – Aluminum Framed – Above Ground Pool Includes filter, pump, pool accessories, cover, site preparation, and 4" sand sitting bed	EA	$2,262.66	$5,521.85	$0.00	$7,784.51
107484	[Modifier] Saltwater System	EA	$0.00	$725.98	$0.00	$725.98
	13-11-46 Swimming Pool Accessories					
107485	Pool Ladder – Stainless Steel Up To 3 Step and 24" Wide	EA	$181.01	$725.98	$0.00	$906.99
107486	Elevated Lifeguard Chair – Stainless Steel	EA	$271.52	$2,792.20	$0.00	$3,063.72
107487	Pool ADA Lift – Up To 750 LB Capacity	EA	$1,086.07	$10,051.91	$0.00	$11,137.98
107488	Pool ADA Lift – Up to 400 LB Capacity	EA	$724.05	$6,142.83	$0.00	$6,866.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107489	Stainless Steel Pool Railing	LF	$45.25	$265.78	$0.00	$311.03
107490	Pool ADA Ramp Includes all rails and concrete sleeves	EA	$1,551.53	$9,493.47	$0.00	$11,045.00
107491	Pool Timing System – Per Competition Pool Pricing based upon Colorado Timing system includes all: touch pads (up to 12) mounting, wiring to all required points, lights and horns, software and hardware	EA	$4,344.31	$36,178.63	$0.00	$40,522.94
107492	Pool Scoreboard and Pace Clock – Per Competition Pool Pricing based upon Colorado LED Video Display system includes all: wiring to all required points, video controller horns, software and hardware.	EA	$8,688.61	$100,897.65	$0.00	$109,586.26
107493	Diving – 1 Meter Diving Board System Includes board, base, ladder, and adjustment wheel	EA	$3,620.26	$11,727.23	$0.00	$15,347.49
107494	Diving – 3 Meter Diving Board System Includes board, base, ladder, and adjustment wheel	EA	$7,757.69	$23,454.47	$0.00	$31,212.16
	13-11-53 Movable Pool Bulkheads					
107495	Pool Bulkhead – Up To 4' Wide Fiberglass Or Equal	LF	$543.04	$2,993.01	$0.00	$3,536.05
	13-12-00 Fountains					
	13-12-13 Exterior / Interior Fountains					
107496	Splash Pad Includes Excavation, structure, texture colored concrete finishes, matts and padding, circulation / chemical treatment system, deck equipment, maintenance equipment, all hydro jets & controls	SF	$60.34	$74.20	$0.00	$134.54
107497	Water Feature Concrete, single tier up to 25'-0" Diameter with a single spray	SF	$72.40	$89.05	$0.00	$161.45
	13-17-00 Tubs and Pools					
	13-17-23 Therapeutic Pools					
107498	Moveable Hydro-Therapy Tub (Warm) – Stainless Steel – Up To 110 Gallon Capacity	EA	$452.54	$6,924.65	$0.00	$7,377.19
107499	Moveable Hydro-Therapy Tub (Cold) – Stainless Steel – Up To 110 Gallon Capacity	EA	$452.54	$8,146.65	$0.00	$8,599.19
107500	Hydro-Therapy Tub (Warm) – Acrylic Shell – Up To 400 Gallon Capacity Includes water heating unit, skimmer, pump, controls, tile finish, steps, benches, and cover, for a complete tub system	EA	$2,715.20	$19,383.76	$0.00	$22,098.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107501	Hydro-Therapy Tub (Warm) – Stainless Shell – Up To 400 Gallon Capacity Includes water heating unit, skimmer, pump, controls, tile finish, steps, benches, and cover, for a complete tub system	EA	$2,715.20	$32,036.39	$0.00	$34,751.59
107502	Hydro-Therapy Tub (Cold) – Acrylic Shell – Up To 400 Gallon Capacity Includes water cooling unit, skimmer, pump, controls, tile finish, steps, benches, and cover, for a complete tub system	EA	$2,715.20	$22,804.42	$0.00	$25,519.62
107503	Hydro-Therapy Tub (Cold) – Stainless Shell – Up To 400 Gallon Capacity Includes water cooling unit, skimmer, pump, controls, tile finish, steps, benches, and cover, for a complete tub system	EA	$2,715.20	$37,689.87	$0.00	$40,405.07
	13-17-33 Whirlpool Tubs					
107504	CIP Concrete Whirlpool Spa – Pool SF Includes Excavation, structure, pool finishes, circulation / chemical treatment system, deck equipment, maintenance equipment. Includes Hydrotherapy Jets. SF = Pool water surface area	SF	$271.52	$389.29	$0.00	$660.81
	13-18-00 Ice Rinks					
	13-18-00 Ice Rinks					
107505	Ice Rink and Dasher Boards Price Includes rink concrete slab, dasher boards, refrigeration, plumbing, and cooling coils	SF	$31.46	$39.02	$0.00	$70.48
107506	Dasher Boards Plexiglass post and caps	LF	$47.23	$282.97	$0.00	$330.20
	13-20-00 Special Purpose Rooms					
	13-24-00 Special Activity Rooms					
	13-24-16 Saunas					
107507	Sauna All wood - Cedar or Mahogany, door with frosted light, bench seating, and heating unit	SF	$44.99	$199.78	$0.00	$244.77
	13-27-00 Vaults					
	13-27-53 Security Vaults					
107508	Vault Door – Bank – Steel Up to 8'-0" tall, 4'-0" Wide and 12" Deep. Includes prehung frame and all controlling, locking, and hinge hardware	EA	$1,393.68	$4,914.26	$0.00	$6,307.94
107509	Vault Door – Bank – Stainless Steel Up to 8'-0" tall, 4'-0" Wide and 12" Deep. Includes prehung frame and all controlling, locking, and hinge hardware	EA	$1,393.68	$9,158.41	$0.00	$10,552.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107510	Modular Fire Vault Up to 32' Long x 34' Wide x 9' High; Pricing includes wall, ceiling panels, track, gasketing, water shield roof deck, vapor barrier, Class 350 and Class 150 Four Hour door and stanchion, inner door and stanchion, HVAC damper assemblies, cable tray assembly and smoke detector activated automatic door closers/holders, Engineering Drawings	SF	$33.41	$163.10	$0.00	$196.51
107511	Safe – Up To 6 Cubic Feet Up to 6 Cubic Foot Outside Dimension. Heavy duty steel construction with tamper proof keyless locking system	EA	$162.60	$5,584.40	$0.00	$5,747.00
107512	[Modifier] Safe – Greater Than 6 Cubic Feet Cubic Feet Greater Than 6 Cubic Feet Outside Dimension. Example 8 Cubic Feet = 2 Cubic Feet Add	CF	$97.55	$698.05	$0.00	$795.60

13-28-00 Athletic and Recreational Special Construction

Courts include floor, ceiling, lighting, wall panels, glass back wall, court striping , and doors. All attached to substrate.

13-28-33 Athletic and Recreational Courts

107513	Squash Courts Includes floor, ceiling, and wall surface, with glass back wall and door. Excludes structural supporting walls surrounding the courts. Anderson Courts and Sports Surfaces, Inc. or equal	EA	$18,396.84	$33,054.51	$0.00	$51,451.35
107514	Racquetball Courts Includes floor, ceiling, and wall surface, with glass back wall and door. Excludes structural supporting walls surrounding the courts. Anderson Courts and Sports Surfaces, Inc. or equal	EA	$22,443.73	$36,349.75	$0.00	$58,793.48
107515	Conversion Courts With Movable Back Wall Includes floor, ceiling, and wall surface, with glass back wall and door. Excludes structural supporting walls surrounding the courts. Anderson Courts and Sports Surfaces, Inc. or equal	EA	$23,983.39	$43,735.64	$0.00	$67,719.03

13-30-00 Special Structures

13-31-00 Fabric Structures

Includes all steel, hardware, connections, and fabric roof structure. SF = Plan Surface Area

13-31-33 Framed Fabric Structures

107516	Steel and PTFE Fabric Structure	SF	$20.23	$80.42	$0.00	$100.65
107517	Steel and PVC Fabric Structure	SF	$20.23	$72.04	$0.00	$92.27

13-34-00 Fabricated Engineered Structures

13-34-19 Metal Building Systems

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107518	Pre-Engineered Metal Building Includes steel structure, metal panel sidewalls and roof, manufacturers standard and overhead coiling doors, and lighting. Excludes foundations and MEP	SF	$20.23	$30.16	$0.00	$50.39
	13-34-23 Fabricated Structures					
107519	Greenhouse Enclosure – Glass Includes glass panel self-supporting structure and roof. Excludes Foundations and MEP	SF	$80.68	$127.67	$0.00	$208.35
107520	Helipad System Fully supported single rotor pad with cantilevered safety netting, protection barriers for FATO are of elevated pads. Includes pad striping, safety signage, and VGSI ground lighting, and drainage system	SF	$39.32	$78.19	$0.00	$117.51
	13-40-00 Integrated Construction					
	13-49-00 Radiation Protection					
	13-49-00 Radiation Protection					
107521	Lead Glass With Frame – Up To 1/4" Thick Glass Lead sheets attached to substrate.	SF	$6.27	$294.52	$0.00	$300.79
107522	1/16" Lead Shielding Lead sheets attached to substrate.	SF	$5.43	$4.90	$0.00	$10.33
107523	1/8" Lead Shielding Lead sheets attached to substrate.	SF	$6.78	$9.23	$0.00	$16.01
107524	3/16" Lead Shielding Lead sheets attached to substrate.	SF	$7.74	$14.87	$0.00	$22.61
107525	Radio Frequency (RF) Shielding – Enclosure SF = Square foot of the room floor area which will receive the RF enclosure	SF	$36.20	$67.01	$0.00	$103.21
107526	Magnetic Shielding – Enclosure SF = Square foot of the room floor area which will receive the Magnetic enclosure	SF	$36.20	$67.01	$0.00	$103.21
	14-00-00 Conveying Equipment					
	14-00-00 Conveying Equipment					
	14-01-00 Operation and Maintenance of Conveying Equipment					
	14-01-20 Operation and Maintenance of Elevators					
107527	Hydraulic Elevator Controls - Non-Proprietary Microprocessor Controller - Solid-State by OEM	ELEV	$5,510.78	$11,119.40	$0.00	$16,630.18
107528	Hydraulic Elevator Controls - Non-Proprietary Microprocessor Controller - Solid-State by 3rd Party	ELEV	$5,510.78	$13,343.28	$0.00	$18,854.06
107529	Traction Elevator Controls - Non-Proprietary Microprocessor Controller - Regenerative VVVF by OEM	ELEV	$7,347.71	$16,679.10	$0.00	$24,026.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107530	Traction Elevator Controls - Non-Proprietary Microprocessor Controller - Regenerative VVVF by 3rd Party	ELEV	$7,347.71	$20,014.92	$0.00	$27,362.63
107531	Traction Elevator Controls - Automatic Return Unit	ELEV	$1,836.93	$8,895.52	$0.00	$10,732.45
107532	Hydraulic Elevator Controls - Battery Lowering Device	ELEV	$1,836.93	$3,891.79	$0.00	$5,728.72
107533	Hydraulic Elevator Power Unit Assembly (motor, tank, valves, mufflers, pump) - Dry Mount	ELEV	$4,592.74	$18,902.98	$0.00	$23,495.72
107534	Hydraulic Elevator Power Unit Assembly (motor, tank, valves, mufflers, pump) - Submersible	ELEV	$4,592.74	$15,567.15	$0.00	$20,159.89
107535	[Modifier] Hydraulic Elevator Power Unit Assembly - ADD for Custom Tank	ELEV	$0.00	$1,667.91	$0.00	$1,667.91
107536	Traction Elevator Machine Assembly - Gearless AC PM - Elevator Capacity =<3500 lbs	ELEV	$9,184.62	$26,686.56	$0.00	$35,871.18
107537	Traction Elevator Machine Assembly - Gearless AC PM - Elevator Capacity =>4000 lbs	ELEV	$9,184.62	$33,358.20	$0.00	$42,542.82
107538	Traction Elevator Machine Assembly - Geared AC - Elevator Capacity =<3500 lbs	ELEV	$9,184.62	$24,462.68	$0.00	$33,647.30
107539	Traction Elevator Machine Assembly - Geared AC - Elevator Capacity =>4000 lbs	ELEV	$9,184.62	$28,910.44	$0.00	$38,095.06
107540	Traction Elevator Machine - Rope Gripper	ELEV	$2,755.81	$10,007.47	$0.00	$12,763.28
107541	Traction Elevator Machine - AC Motor Only	ELEV	$5,510.78	$12,231.34	$0.00	$17,742.12
107542	Traction Elevator Machine - Rehabilitative Work (Armature, Turn/Undercut, etc.) - If Machine is Retained	ELEV	$5,510.78	$22,238.80	$0.00	$27,749.58
107543	Traction Elevator - Conventional Hoist Ropes	LF RUN	$114.64	$11.12	$0.00	$125.76
107544	Traction Elevator Overspeed Governor Assembly - Governor, Tail Sheave	ELEV	$4,592.74	$10,007.47	$0.00	$14,600.21
107545	Traction Elevator Overspeed Governor Ropes	LF RUN	$114.64	$7.79	$0.00	$122.43
107546	Traction Elevator Counterweight Assembly - Frame + Weight	ELEV	$4,592.74	$10,674.62	$0.00	$15,267.36
107547	Traction Elevator Counterweight Assembly - Weights Only	ELEV	$2,755.81	$5,559.70	$0.00	$8,315.51
107548	Traction Elevator Deflector Sheave	ELEV	$1,377.48	$3,891.79	$0.00	$5,269.27
107549	Traction Elevator Hoistway/Cartop Sheave 2:1	ELEV	$1,377.48	$2,779.84	$0.00	$4,157.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107550	Elevator Hoistway Door Interlocks	STOP	$459.45	$555.97	$0.00	$1,015.42
107551	Elevator Hoistway Door Pick-up Roller	STOP	$459.45	$111.20	$0.00	$570.65
107552	Elevator Hoistway Door Tracks	STOP	$229.30	$222.38	$0.00	$451.68
107553	Elevator Hoistway Door Hangers	STOP	$229.30	$111.20	$0.00	$340.50
107554	Elevator Hoistway Door Spirators	STOP	$229.30	$83.39	$0.00	$312.69
107555	Elevator Hoistway Door Closers	STOP	$229.30	$83.39	$0.00	$312.69
107556	Elevator Hoistway Door Headers	STOP	$459.45	$111.20	$0.00	$570.65
107557	Elevator Closed-Loop Car Door Operator - Harmonic Type	CAR OPNG	$918.88	$2,779.84	$0.00	$3,698.72
107558	Elevator Closed-Loop Car Door Operator - Linear Type	CAR OPNG	$918.88	$4,447.77	$0.00	$5,366.65
107559	Elevator Car Door Rollers	CAR OPNG	$459.45	$111.20	$0.00	$570.65
107560	Elevator Car Door Tracks	CAR OPNG	$459.45	$277.98	$0.00	$737.43
107561	Elevator Car Door Hangers	CAR OPNG	$459.45	$111.20	$0.00	$570.65
107562	Elevator Car Door Clutch	CAR OPNG	$459.45	$277.98	$0.00	$737.43
107563	Elevator Car Door Panels - Painted 42" x 84"	CAR OPNG	$918.88	$1,000.75	$0.00	$1,919.63
107564	Elevator Car Door Panels - Stainless Steel Type 304 42" x 84"	CAR OPNG	$918.88	$1,334.33	$0.00	$2,253.21
107565	Elevator Car Door Panels - Stainless Steel Type 316 42" x 84"	CAR OPNG	$918.88	$1,667.91	$0.00	$2,586.79
107566	Elevator Car Door Panels - ADD for >42" x 84" Doors	CAR OPNG	$0.00	$889.55	$0.00	$889.55
107567	Elevator Car Door Gate - Freight	CAR OPNG	$918.88	$4,447.77	$0.00	$5,366.65
107568	Elevator Car Sills - Stainless Steel	CAR OPNG	$688.75	$2,779.84	$0.00	$3,468.59
107569	Elevator Car Sills - Aluminum	CAR OPNG	$688.75	$1,111.94	$0.00	$1,800.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107570	Elevator Car Sills - Nickel Silver	CAR OPNG	$688.75	$3,891.79	$0.00	$4,580.54
107571	Elevator Hoistway Door Panels - Painted 42" x 84"	STOP	$918.88	$1,000.75	$0.00	$1,919.63
107572	Elevator Hoistway Door Panels - Stainless Steel Type 304 42" x 84"	STOP	$918.88	$1,334.33	$0.00	$2,253.21
107573	Elevator Hoistway Door Panels - Stainless Steel Type 316 42" x 84"	STOP	$918.88	$1,667.91	$0.00	$2,586.79
107574	Elevator Hoistway Door Panels - ADD for >42" x 84" Doors	STOP	$0.00	$889.55	$0.00	$889.55
107575	Elevator Hoistway Door Panel - Freight	STOP	$918.88	$5,559.70	$0.00	$6,478.58
107576	Elevator Hoistway Door Entrances - Clad in Stainless Steel	STOP	$0.00	$2,779.84	$0.00	$2,779.84
107577	Elevator Hoistway Door Entrances - Painted	STOP	$0.00	$1,667.91	$0.00	$1,667.91
107578	Elevator Hoistway Sills - Stainless Steel	STOP	$1,836.93	$1,667.91	$0.00	$3,504.84
107579	Elevator Hoistway Sills - Aluminum	STOP	$1,836.93	$1,334.33	$0.00	$3,171.26
107580	Elevator Hoistway Sills - Nickel Silver	STOP	$1,836.93	$2,223.88	$0.00	$4,060.81
107581	Elevator Infrared Door Protection Device - Standard 3D Edge	CAR OPNG	$459.45	$1,111.94	$0.00	$1,571.39
107582	Elevator Infrared Door Protection Device - Enhanced 3D Edge with Colored LED Indicators	CAR OPNG	$459.45	$2,223.88	$0.00	$2,683.33
107583	Elevator 2-Way Emergency Communication - Standard Phone Only	ELEV	$459.45	$1,667.91	$0.00	$2,127.36
107584	Elevator 2-Way Emergency Communication - CBC/ASME 2019 with Video, Talk-, Text Function	ELEV	$2,755.81	$5,559.70	$0.00	$8,315.51
107585	Elevator Car Operating Panel - Applied Mount	ELEV	$918.88	$3,335.82	$0.00	$4,254.70
107586	Elevator Car Operating Panel - Swing Type	ELEV	$918.88	$4,447.77	$0.00	$5,366.65
107587	Elevator Car Operating Panel - ADD for Type 316 Stainless Steel	ELEV	$0.00	$1,111.94	$0.00	$1,111.94
107588	Elevator In-Car Lantern - Digital	ELEV	$459.45	$833.95	$0.00	$1,293.40
107589	Elevator In-Car Lantern - Vandal Resistant	ELEV	$459.45	$833.95	$0.00	$1,293.40
107590	Elevator In-Car Lantern - ADD for Type 316 Stainless Steel	ELEV	$0.00	$555.97	$0.00	$555.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107591	Elevator Hall Pushbutton Stations - Standard	STOP	$459.45	$833.95	$0.00	$1,293.40
107592	Elevator Hall Pushbutton Stations - Vandal Resistant	STOP	$459.45	$1,000.75	$0.00	$1,460.20
107593	Elevator Hall Pushbutton Stations - ADD for Type 316 Stainless Steel	STOP	$0.00	$555.97	$0.00	$555.97
107594	Elevator Hall Lantern - Digital	STOP	$459.45	$833.95	$0.00	$1,293.40
107595	Elevator Hall Lantern - Vandal Resistant	STOP	$459.45	$833.95	$0.00	$1,293.40
107596	Elevator Hall Lantern - ADD for Type 316 Stainless Steel	STOP	$0.00	$555.97	$0.00	$555.97
107597	Elevator Jamb Braille	STOP	$229.30	$222.38	$0.00	$451.68
107598	Elevator Hoistway Access Keyswitches - Top Landing	ELEV	$459.45	$277.98	$0.00	$737.43
107599	Elevator Hoistway Access Keyswitches - Bottom Landing	ELEV	$459.45	$277.98	$0.00	$737.43
107600	Elevator Cab Interior Finishes Full - Wall Panels, Ceiling/Lighting, Flooring, Handrail	ELEV	$0.00	$55,597.01	$0.00	$55,597.01
107601	Elevator Cab Interior Finishes - Ceiling/Lighting Only	ELEV	$0.00	$20,014.92	$0.00	$20,014.92
107602	Elevator Transom Cladding - Stainless Steel Type 304	ELEV	$0.00	$2,779.84	$0.00	$2,779.84
107603	Elevator Transom Cladding - Stainless Steel Type 316	ELEV	$0.00	$3,113.44	$0.00	$3,113.44
107604	Elevator Front Return Cladding - Stainless Steel Type 304	ELEV	$0.00	$2,779.84	$0.00	$2,779.84
107605	Elevator Front Return Cladding - Stainless Steel Type 316	ELEV	$0.00	$3,113.44	$0.00	$3,113.44
107606	Elevator Cab Platform & Sling	ELEV	$3,673.85	$15,567.15	$0.00	$19,241.00
107607	Elevator Cab Shell	ELEV	$3,673.85	$20,014.92	$0.00	$23,688.77
107608	Hydraulic Elevator Car Guides - Slide Type	ELEV	$918.88	$1,111.94	$0.00	$2,030.82
107609	Traction Elevator Car Guides - Slide Type	ELEV	$918.88	$1,334.33	$0.00	$2,253.21
107610	Hydraulic Elevator Car Guides - Spring Loaded Roller Type	ELEV	$918.88	$2,223.88	$0.00	$3,142.76
107611	Traction Elevator Car Guides - Spring Loaded Roller Type	ELEV	$1,377.48	$3,335.82	$0.00	$4,713.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107612	Elevator Car Top Inspection Station	ELEV	$459.45	$2,223.88	$0.00	$2,683.33
107613	Elevator Car Top Handrail	ELEV	$459.45	$833.95	$0.00	$1,293.40
107614	Elevator Overspeed Rupture Valve	ELEV	$918.88	$4,114.17	$0.00	$5,033.05
107615	Hydraulic Elevator Feedline - Standard Schedule 80	LF RUN	$114.64	$22.23	$0.00	$136.87
107616	Hydraulic Elevator Feedline - Threaded Schedule 80	LF RUN	$114.64	$38.92	$0.00	$153.56
107617	Hydraulic Elevator Feedline Seals/Couplings	LF RUN	$114.64	$72.27	$0.00	$186.91
107618	Hydraulic Elevator Cylinder Assembly - 2-3 Stops	ELEV	$9,184.62	$35,582.09	$0.00	$44,766.71
107619	Hydraulic Elevator Cylinder Assembly - 4-6 Stops	ELEV	$9,184.62	$44,477.60	$0.00	$53,662.22
107620	Hydraulic Elevator Piston - 2-3 Stops	ELEV	$4,592.74	$22,238.80	$0.00	$26,831.54
107621	Hydraulic Elevator Piston - 4-6 Stops	ELEV	$5,970.22	$27,798.50	$0.00	$33,768.72
107622	Hydraulic Elevator Cylinder/Piston Packing	ELEV	$918.88	$833.95	$0.00	$1,752.83
107623	Hydraulic Elevator Spring Buffers	ELEV	$918.88	$2,779.84	$0.00	$3,698.72
107624	Traction Elevator Oil Buffers	ELEV	$1,836.93	$6,115.67	$0.00	$7,952.60
107625	Hydraulic Elevator Pit Channels	ELEV	$918.88	$1,334.33	$0.00	$2,253.21
107626	Traction Elevator Pit Channels	ELEV	$1,836.93	$5,003.73	$0.00	$6,840.66
107627	Hydraulic Elevator Hoistway Cleandown	ELEV	$1,836.93	$555.97	$0.00	$2,392.90
107628	Traction Elevator Hoistway Cleandown	ELEV	$2,296.37	$833.95	$0.00	$3,130.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107629	Elevator Machine Room & Pit Floor Paint	ELEV	$918.88	$277.98	$0.00	$1,196.86
107630	Traction Elevator Travelling Cable - Standard	LF RUN	$114.64	$20.02	$0.00	$134.66
107631	Traction Elevator Travelling Cable - Spare Wiring	LF RUN	$0.00	$5.56	$0.00	$5.56
107632	Elevator Machine Room Wiring	LF RUN	$114.64	$11.12	$0.00	$125.76
107633	Elevator Hoistway Wiring	LF RUN	$114.64	$11.12	$0.00	$125.76

14-10-00 Dumbwaiters

14-11-00 Manual Dumbwaiters

14-11-00 Manual Dumbwaiters

107634	Dumbwaiter Manual – 2 Stop Up To 150 LB Capacity Dimensions up to 23" x 56" x 48". Metal or Aluminum shaft. Doors and Frame. Includes all related hardware and pulleys. Attached to substrate.	EA	$4,319.92	$11,168.79	$0.00	$15,488.71
107635	[Modifier] Dumbwaiter Manual – Additional Stops	STOP	$1,079.98	$3,350.64	$0.00	$4,430.62

14-12-00 Electric Dumbwaiters

14-12-00 Electric Dumbwaiters

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107636	Dumbwaiter Electrical – 2 Stop Up To 300 LB Capacity Median dimensions 23" x 56" x 48". Metal or Aluminum shaft. Doors and Frame. Includes motor, controller and push button operations. Attached to substrate.	EA	$25,919.72	$30,714.19	$0.00	$56,633.91
107637	[Modifier] Dumbwaiter Electrical – Additional Stops	STOP	$6,479.89	$7,818.15	$0.00	$14,298.04

14-20-00 Elevators

14-21-00 Electric Traction Elevators

14-21-13 Electric Traction Freight Elevators

Standard Cab Finish is Stainless Steel.

107638	Elevator Traction – Freight, 2 Stop, Front Opening, Up To 5,000 LB Capacity and 150 FPM Includes but not limited to, the traction machine, counterweight, guide rails, cable, sheave, elevator car and components for a complete installation	EA	$34,559.37	$156,363.14	$0.00	$190,922.51
107639	[Modifier] Elevator Traction – Freight, Additional Stops Greater Than 2	STOP	$36,287.22	$30,155.74	$0.00	$66,442.96
107640	[Modifier] Elevator Traction – Freight, Weight Capacity Increase Of 500 LB	EA	$0.00	$5,584.40	$0.00	$5,584.40
107641	[Modifier] Elevator Traction – Freight, Speed Increase 50 FPM	EA	$0.00	$5,025.96	$0.00	$5,025.96
107642	[Modifier] Electric Traction – Freight, Add For Front and Rear Door Configuration	EA	$1,248.91	$5,333.10	$0.00	$6,582.01
107643	[Modifier] Electric Traction – Freight, Cab Finish Upgrade – Plastic Laminate Wall Panels and Acoustical Ceiling Treatment Or Equal	EA	$0.00	$6,142.83	$0.00	$6,142.83
107644	[Modifier] Electric Traction – Freight, Cab Finish Upgrade – Hardwood, Stone, Glass Wall and Ceiling Panels Or Equal	EA	$0.00	$12,285.68	$0.00	$12,285.68

14-21-23 Electric Traction Passenger Elevators

Standard Cab Finish is Stainless Steel.

107645	Elevator Traction – Passenger, 2 Stop, Front Opening, Up To 3000 LB and 200 FPM Includes but not limited to, the traction machine, counterweight, guide rails, cable, sheave, elevator car and components for a complete installation	EA	$34,559.37	$134,025.55	$0.00	$168,584.92
107646	[Modifier] Elevator Traction – Passenger, Additional Stops Greater Than 2	STOP	$31,103.37	$26,805.10	$0.00	$57,908.47
107647	[Modifier] Elevator Traction – Passenger, Weight Capacity Increase Of 500 LB	EA	$0.00	$5,025.96	$0.00	$5,025.96
107648	[Modifier] Elevator Traction – Passenger, Speed Increase 50 FPM	EA	$0.00	$4,467.51	$0.00	$4,467.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107649	[Modifier] Electric Traction – Passenger, Add For Front and Rear Door Configuration	EA	$1,248.91	$5,333.10	$0.00	$6,582.01
107650	[Modifier] Electric Traction – Passenger, Cab Finish Upgrade – Plastic Laminate Wall Panels and Acoustical Ceiling Treatment Or Equal	EA	$0.00	$5,584.40	$0.00	$5,584.40
107651	[Modifier] Electric Traction – Passenger, Cab Finish Upgrade – Hardwood, Stone, Glass Wall and Ceiling Panels Or Equal	EA	$0.00	$11,168.79	$0.00	$11,168.79
	14-24-00 Hydraulic Elevators					
	14-24-13 Hydraulic Freight Elevators					
	Standard Cab Finish is Stainless Steel.					
107652	Elevator Hydraulic – Freight, 2 Stop, Front Opening, Up To 4,000 LB Capacity and 50 FPM Includes but not limited to hydraulic cylinder with piston, reservoir for hydraulic fluid, pressurizing pump, pump motor, valves to control the fluid flow and components necessary for a complete installation	EA	$25,919.72	$102,752.92	$0.00	$128,672.64
107653	[Modifier] Elevator Hydraulic – Freight, Additional Stops Greater Than 2	STOP	$25,919.53	$24,571.35	$0.00	$50,490.88
107654	[Modifier] Elevator Hydraulic – Freight, Weight Capacity Increase Of 500 LB	EA	$0.00	$5,025.96	$0.00	$5,025.96
107655	[Modifier] Elevator Hydraulic – Freight, Speed Increase Of 25 FPM	EA	$0.00	$3,909.08	$0.00	$3,909.08
107656	[Modifier] Elevator Hydraulic – Freight, Add For Front and Rear Door Configuration	EA	$1,248.91	$5,333.10	$0.00	$6,582.01
107657	[Modifier] Elevator Hydraulic – Freight, Cab Finish Upgrade – Plastic Laminate Wall Panels and Acoustical Ceiling Treatment Or Equal	EA	$0.00	$6,142.83	$0.00	$6,142.83
107658	[Modifier] Elevator Hydraulic – Freight, Cab Finish Upgrade – Hardwood, Stone, Glass Wall and Ceiling Panels Or Equal	EA	$0.00	$12,285.68	$0.00	$12,285.68
	14-24-23 Hydraulic Passenger Elevators					
	Standard Cab Finish is Stainless Steel.					
107659	Elevator Hydraulic – Passenger, 2 Stop, Front Opening, Up To 2,000 LB Capacity and 100 FPM Includes but not limited to hydraulic cylinder with piston, reservoir for hydraulic fluid, pressurizing pump, pump motor, valves to control the fluid flow and components necessary for a complete installation	EA	$25,919.72	$89,350.37	$0.00	$115,270.09
107660	[Modifier] Elevator Hydraulic – Passenger, Additional Stops Greater Than 2	STOP	$21,599.59	$19,545.40	$0.00	$41,144.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107661	[Modifier] Elevator Hydraulic – Passenger, Weight Capacity Increase Of 500 LB	EA	$0.00	$4,467.51	$0.00	$4,467.51
107662	[Modifier] Elevator Hydraulic – Passenger, Speed Increase Of 25 FPM	EA	$0.00	$3,350.64	$0.00	$3,350.64
107663	[Modifier] Elevator Hydraulic – Passenger, Add For Front and Rear Door Configuration	EA	$1,248.91	$5,333.10	$0.00	$6,582.01
107664	[Modifier] Elevator Hydraulic – Passenger, Cab Finish Upgrade – Plastic Laminate Wall Panels and Acoustical Ceiling Treatment Or Equal	EA	$0.00	$5,321.20	$0.00	$5,321.20
107665	[Modifier] Elevator Hydraulic – Passenger, Cab Finish Upgrade – Hardwood, Stone, Glass Wall and Ceiling Panels Or Equal	EA	$0.00	$11,820.44	$0.00	$11,820.44

14-30-00 Escalators and Moving Walks

14-31-00 Escalators

14-31-00 Escalators

107666	Escalator – Indoor (Per Flight) Up to 48" wide inside clear. Includes motor with up to 140 HP. Rise up to 25'-0" connecting 2 floors.	FLT	$49,759.83	$134,025.55	$0.00	$183,785.38
107667	[Modifier] Escalator – Outdoor (Per Flight)	FLT	$2,467.37	$20,103.83	$0.00	$22,571.20

14-32-00 Moving Walks

14-32-00 Moving Walks

107668	Moving Walkway – Indoor Up to 48" wide inside clear.	LF	$505.82	$1,787.01	$0.00	$2,292.83
107669	[Modifier] Moving Walkway – Outdoor	LF	$97.74	$284.81	$0.00	$382.55

14-40-00 Lifts

14-42-00 Wheelchair Lifts

14-42-00 Wheelchair Lifts

107670	Wheelchair Lift with Enclosure – Straight Through 2-Stop Motorized lift for interior or exterior use. Hydraulic or screw drive up to 750 LB capacity. Includes prefinished mast, key controlled call stations at each level, metal panel walls and swinging gates, ramps and obstruction sensor.	EA	$5,281.26	$13,402.55	$0.00	$18,683.81
107671	Wheelchair Lift with Enclosure – Adjacent 2-Stop Motorized lift for interior or exterior use. Hydraulic or screw drive up to 750 LB capacity. Includes prefinished mast, key controlled call stations at each level, metal panel walls and swinging gates, ramps and obstruction sensor.	EA	$5,281.26	$20,393.87	$0.00	$25,675.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107672	Wheelchair Lift with Enclosure – Adjacent 2-Stop Premium Motorized lift for interior or exterior use. Hydraulic or screw drive up to 750 LB capacity. Includes prefinished mast, key controlled call stations at each level, metal panel walls and swinging gates, ramps and obstruction sensor. Garaventa Gensis OPAL or equal.	EA	$8,846.11	$32,624.10	$0.00	$41,470.21
107673	[Modifier] Wheel Chair Lift – Additional Stop Greater Than 2	EA	$1,727.97	$2,792.20	$0.00	$4,520.17
107674	[Modifier] Wheel Chair Lift – Glass Gates and Side Walls In lieu of metal panel	EA	$0.00	$3,909.08	$0.00	$3,909.08
107675	[Modifier] Wheel Chair Lift – Battery Backup	EA	$0.00	$1,116.88	$0.00	$1,116.88

14-46-00 Material Lifts

14-46-00 Material Lifts

107676	CXTS Single Girder Crane - 5-Ton TRSG Crane Includes freestanding runway system, runway conductor bar system, installation, transportation of runway, conductors, crane & components to site, erection of runway, conductor bar & 5-Ton TRSG crane, commissioning, testing & 100% load testing upon completion	EA	$37,173.72	$72,711.77	$0.00	$109,885.49
107677	Material Hoist - 3 Ton Freestanding Jib Crane Includes capacity of 6,000 lbs, push/pull trolly, single speed hoist, pendant type control	EA	$8,976.66	$31,250.00	$0.00	$40,226.66
107678	Material Hoist - Motorized Chain Hoist - 2 Ton Includes VFD and radios, self-retracting lifelines, anchor trolleys, all necessary material and labor for a complete installation. Similar to Coffing motorized trolly EC-2T-20-MT-16	EA	$5,123.95	$33,717.27	$0.00	$38,841.22

14-90-00 Other Conveying Equipment

14-92-00 Pneumatic Tube Systems

14-92-00 Pneumatic Tube Systems

107679	Pneumatic Tube Station	STOP	$14,612.99	$16,753.19	$0.00	$31,366.18
107680	[Modifier] Pneumatic Tube Station - High Pressure Tubing	STOP	$0.00	$2,660.60	$0.00	$2,660.60

21-00-00 Fire Suppression

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of fire protection systems or components shall be included under the General Trades Division 1 through 14.
• Installation and demolition/removal costs assume accessible locations. Removals and/or relocations of adjacent items required

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total

for access such as ceilings, walls, MEP systems, etc. to be priced separately.

21-00-00 Fire Suppression

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of fire protection systems or components shall be included under the General Trades Division 1 through 14.
• Installation and demolition/removal costs assume accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, MEP systems, etc. to be priced separately.

21-01-00 Operation and Maintenance of Fire Suppression

21-01-10 Operation and Maintenance of Fire-Protection Systems

107681	Fire Department Connection (FDC) - Cap & Chain Assembly Excludes Fire Department Connection.	EA	$49.27	$39.65	$0.00	$88.92
107682	Fire Department Connection (FDC) - Backflush Remove, flip/reverse existing check valve, attach hoses and discharge to sewer or planter, operate control valve to backflush, remove, flip/reverse check valve back to original orientation and replace gaskets.	EA	$505.47	$49.13	$0.00	$554.60
107683	Control Valves - Free Up Stuck Valves for Proper Operation	EA	$49.27	$0.00	$0.00	$49.27
107684	Relocate Sprinkler Head - Up to 5 LF Includes removals.	EA	$372.45	$94.11	$0.00	$466.56
107685	Replace Escutcheon - Recessed Includes removal.	EA	$24.63	$6.58	$0.00	$31.21
107686	Replace Escutcheon - Concealed Includes removal.	EA	$29.56	$10.17	$0.00	$39.73
107687	Replace Escutcheon - Institutional Includes removal.	EA	$34.49	$24.31	$0.00	$58.80
107688	Fire Hose- 2" Single Jacket.	LF	$0.64	$3.68	$0.00	$4.32
107689	Fire Hose Coupling & Nozzle	EA	$49.27	$149.67	$0.00	$198.94
107690	Fire Extinguisher- 5 Lb Dry Chemical.	EA	$25.62	$82.71	$0.00	$108.33
107691	Fire Extinguisher- 10 Lb Dry Chemical.	EA	$25.62	$112.90	$0.00	$138.52
107692	Fire Extinguisher- 20 Lb Dry Chemical.	EA	$25.62	$236.32	$0.00	$261.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107693	Inspect & Test Fire Sprinkler System - Hydrostatic Test Connect fire truck, hydrant, and fire department connection (FDC), perform 2-hour hydrostatic test, and remove all connections.	EA	$295.60	$0.00	$0.00	$295.60
107694	Inspect & Test Fire Sprinkler System - System Valves Includes Internal Inspections for Dry Valves, Deluge Valves, Pre-Action Valves, and Alarm Valves. Also Includes Cleaning and Inspection of Associated Strainers and Restricted Orifices.	EA	$517.29	$0.00	$0.00	$517.29
107695	Inspect & Test Fire Sprinkler System - Check Valves Internal Inspection	EA	$88.68	$0.00	$0.00	$88.68
107696	Inspect & Test Fire Sprinkler System - Fire Department Connections Includes Hydrostatic Testing of Pipe, Drain & Fill System, Cap Pipe at Check Valve & Reconnect, and Internal Inspection.	EA	$394.13	$0.00	$0.00	$394.13
107697	Inspect & Test Fire Sprinkler System - Backflow Preventers or Detector Double Check Valves Internal Inspection	EA	$221.70	$0.00	$0.00	$221.70
107698	Inspect & Test Fire Sprinkler System - Electric Fire Pump Test Per NFPA 25. Includes Churn Test, Running Pump, Recording Pressure Readings, Check Packing Glands, Adjust Gland Nuts, and Ensure Proper Operation.	EA	$2,167.70	$0.00	$0.00	$2,167.70
107699	Inspect & Test Fire Sprinkler System - Diesel Fire Pump Test Per NFPA 25. Includes Churn Test, Running Pump, Recording Pressure Readings, Check Packing Glands, Adjust Gland Nuts, and Ensure Proper Operation.	EA	$6,897.24	$0.00	$0.00	$6,897.24
107700	Inspect & Test Fire Sprinkler System - Annual or Start-Up Inspection (Per Inspector's Test Valve) Check working condition of control valves, OS&Y valves, post indicator valves (PIV), flow & tamper switches, and main drain valve (drained to open air).	EA	$788.26	$0.00	$0.00	$788.26
107701	Inspect & Test Fire Sprinkler System - 5-Year Inspection (Per Inspector's Test Valve) Includes visual inspection (ground) of exposed and attic sprinklers, piping, and supports. Check working condition of all control valves, OS&Y valves, post indicator valves (PIV), flow & tamper switches, and main drain valve (drained to open air).	EA	$1,182.38	$0.00	$0.00	$1,182.38
107702	Inspect and Test Fire Suppression System - Up to 30 Detectors Includes Kitchen Hood (Ansul), FM-200, Carbon Dioxide, Wet Chemical, or Dry Chemical Systems	EA	$788.26	$0.00	$0.00	$788.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107703	Damper Testing & Inspection per NFPA 80 - Fire Includes Time to Access the Damper (Such as Ceiling Tile or Access Panel Removal and Replacement) from the Ground or a Ladder, Replacing Fusible Links (as Required), and Provide Approval Stickers. Includes Reporting Damper Location, Number, Pass/Fail Status, and Detailed Explanation of any Failures.	EA	$70.94	$8.34	$0.00	$79.28
107704	Damper Testing & Inspection per NFPA 80 - Smoke Includes Time to Access the Damper (Such as Ceiling Tile or Access Panel Removal and Replacement) from the Ground or a Ladder, Replacing Fusible Links (as Required), and Provide Approval Stickers. Includes Reporting Damper Location, Number, Pass/Fail Status, and Detailed Explanation of any Failures.	EA	$64.04	$8.34	$0.00	$72.38
107705	Damper Testing & Inspection per NFPA 80 - Combination Fire & Smoke Includes Time to Access the Damper (Such as Ceiling Tile or Access Panel Removal and Replacement) from the Ground or a Ladder, Replacing Fusible Links (as Required), and Provide Approval Stickers. Includes Reporting Damper Location, Number, Pass/Fail Status, and Detailed Explanation of any Failures.	EA	$80.80	$8.34	$0.00	$89.14
107706	[Modifier] Damper Testing & Inspection per NFPA 80 - Survey & Document Location of Undocumented Dampers Includes Additional Time to Locate Undocumented Dampers and Update Drawings. Applies to All Damper Types.	EA	$24.63	$0.00	$0.00	$24.63
107707	[Modifier] Damper Testing & Inspection per NFPA 80 - Healthcare, Laboratory, or Correctional Facilities Applies to All Damper Types.	EA	$16.76	$0.00	$0.00	$16.76
107708	[Modifier] Damper Testing & Inspection per NFPA 80 - Total Quantity of 50 or Less Only Applies if Total Quantity of Dampers is 50 or Less. Applies to All Damper Types.	EA	$21.68	$0.00	$0.00	$21.68
107709	[Modifier] Damper Testing & Inspection per NFPA 80 - Before and After Photo Documentation Applies to All Damper Types.	EA	$14.78	$0.00	$0.00	$14.78
107710	Rebuild Detector Double Check Assembly - 4"	EA	$384.27	$539.59	$0.00	$923.86
107711	Rebuild Detector Double Check Assembly - 6"	EA	$461.13	$649.87	$0.00	$1,111.00
107712	Rebuild Detector Double Check Assembly - 8"	EA	$640.46	$899.32	$0.00	$1,539.78
107713	Fire Pump - Replace Packing & Gland Halves	EA	$1,034.59	$1,347.00	$0.00	$2,381.59
107714	Fire Pump - Clean Drain Lines & Drip Pockets	EA	$492.66	$0.00	$0.00	$492.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107715	Fire Pump - Replace Shaft and Associated Parts	EA	$3,153.02	$4,040.98	$0.00	$7,194.00
107716	Fire Pump - Replace Bearings	EA	$1,576.51	$1,054.44	$0.00	$2,630.95
107717	Fire Pump - Replace Controller or Control Panel	EA	$3,941.28	$18,285.00	$0.00	$22,226.28
107718	Repair / Upgrade Kitchen Hood (Ansul) Fire-Extinguishing System (Per Length of Hood) Relocate Remote Pull Station and Nozzles, Repair / Replace Detection Network, Replace R-102 Carbon Dioxide Cartridge	LF	$315.31	$162.80	$0.00	$478.11

21-05-00 Common Work Results for Fire Suppression

21-05-05 Selective Demolition for Fire Suppression

- Demolition/Removal costs exclude any salvage value.
- Fire Protection Equipment Demolition/Removal costs exclude piping, hook-ups, and electrical connections.

107719	Remove Sprinkler Head All Types.	EA	$15.92	$0.00	$0.00	$15.92
107720	Remove Double Check Detector - 4"	EA	$203.72	$0.00	$0.00	$203.72
107721	Remove Double Check Detector - 6"	EA	$302.40	$0.00	$0.00	$302.40
107722	Remove Double Check Detector - 8"	EA	$356.52	$0.00	$0.00	$356.52
107723	Remove Inspectors Test & Drain	EA	$178.26	$0.00	$0.00	$178.26
107724	Remove Fire Protection Cabinet Fire Extinguisher Cabinet, Hose Cabinet Or Valve Cabinet.	EA	$89.12	$0.00	$0.00	$89.12
107725	Remove Fire Department Connection/Wall Hydrant - 4" & Dn 2-Way Or 3-Way	EA	$101.87	$0.00	$0.00	$101.87
107726	Remove Fire Department Connection/Wall Hydrant - 6" to 8" 2-Way Or 3-Way	EA	$133.70	$0.00	$0.00	$133.70
107727	Remove Fire Pump, Jockey Pump & Controller - Up to 750 GPM Electric Or Diesel	EA	$2,546.56	$0.00	$0.00	$2,546.56
107728	Remove Fire Pump, Jockey Pump & Controller - 1,000 to 1,500 GPM Electric Or Diesel	EA	$3,819.84	$0.00	$0.00	$3,819.84
107729	Remove Packaged Fire System - 2" & Dn Dry, Deluge Or Preaction	EA	$381.98	$0.00	$0.00	$381.98
107730	Remove Packaged Fire System - 2-1/2" to 4" Dry, Deluge Or Preaction	EA	$636.64	$0.00	$0.00	$636.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107731	Remove Kitchen Hood Ansul System - Under 10' Hood Excludes Hood Removal	EA	$381.98	$0.00	$0.00	$381.98
107732	Remove Kitchen Hood Ansul System - 10' to 20' Hood Excludes Hood Removal	EA	$827.63	$0.00	$0.00	$827.63
107733	Remove Dry Pipe/Preaction Valve - 2" & Dn	EA	$171.89	$0.00	$0.00	$171.89
107734	Remove Dry Pipe/Preaction Valve - 2-1/2" to 4"	EA	$254.66	$0.00	$0.00	$254.66
107735	Remove Dry System Air Compressor - Up to 2 HP Includes Tank.	EA	$203.72	$0.00	$0.00	$203.72
107736	Remove Plastic Piping (All Types) - 2" & Dn Includes Hangers, Fittings, Valves & Specialties	LF	$4.46	$0.00	$0.00	$4.46
107737	Remove Steel Piping - 2" & Dn Includes Hangers, Fittings, Valves & Specialties	LF	$7.64	$0.00	$0.00	$7.64
107738	Remove Steel Piping - 2-1/2" to 4" Includes Hangers, Fittings, Valves & Specialties	LF	$10.19	$0.00	$0.00	$10.19
107739	Remove Steel Piping - 5" to 8" Includes Hangers, Fittings, Valves & Specialties	LF	$14.64	$0.00	$0.00	$14.64
107740	Remove Valve - 2" & Dn	EA	$31.83	$0.00	$0.00	$31.83
107741	Remove Valve - 2-1/2" to 4"	EA	$61.12	$0.00	$0.00	$61.12
107742	Remove Valve - 5" to 8"	EA	$133.70	$0.00	$0.00	$133.70
	21-05-17 Sleeves and Sleeve Seals for Fire-Suppression Piping					
107743	Firestopping Intumescent Sealant - Pipe Penetration Up to 2" Fireproofing size based on pipe outer diameter including insulation.	EA	$49.27	$4.06	$0.00	$53.33
107744	Firestopping Intumescent Sealant - Pipe Penetration 2-1/2" to 5" Fireproofing size based on pipe outer diameter including insulation.	EA	$56.17	$12.17	$0.00	$68.34
107745	Firestopping Intumescent Sealant - Pipe Penetration 6" to 12" Fireproofing size based on pipe outer diameter including insulation.	EA	$68.98	$36.48	$0.00	$105.46
107746	Firestopping Intumescent Sealant - Pipe Penetration 14" to 24" Fireproofing size based on pipe outer diameter including insulation.	EA	$128.09	$109.44	$0.00	$237.53
	21-05-19 Meters and Gauges for Fire-Suppression Systems					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107747	Pressure Gauge - Brass, Up to 2-1/2" Dial 1/4" NPT, Back or Lower Mount.	EA	$82.77	$20.72	$0.00	$103.49
107748	Pressure Gauge - Brass, 4" Dial 1/4" NPT, Back or Lower Mount.	EA	$82.77	$54.86	$0.00	$137.63
107749	Pressure Gauge - Stainless Steel, Up to 2-1/2" Dial 1/4" NPT, Back or Lower Mount.	EA	$82.77	$52.42	$0.00	$135.19
107750	Pressure Gauge - Stainless Steel, 4" Dial 1/4" NPT, Back or Lower Mount.	EA	$82.77	$70.70	$0.00	$153.47
	21-05-23 General-Duty Valves for Water-Based Fire-Suppression Piping					
107751	4" Double Check Detector Watts Series 909 Or Equal	EA	$633.56	$6,641.77	$0.00	$7,275.33
107752	6" Double Check Detector Watts Series 909 Or Equal	EA	$935.66	$8,637.32	$0.00	$9,572.98
107753	8" Double Check Detector Watts Series 909 Or Equal	EA	$1,108.29	$14,558.33	$0.00	$15,666.62
107754	2-1/2" Alarm Check Valve w/Trim Tyco Model Av-1 Gxg Pre-Assembeled Or Equal	EA	$96.57	$2,915.87	$0.00	$3,012.44
107755	4" Alarm Check Valve w/Trim Tyco Model Av-1 Gxg Pre-Assembeled Or Equal	EA	$163.56	$2,835.78	$0.00	$2,999.34
107756	6" Alarm Check Valve w/Trim Tyco Model Av-1 Gxg Pre-Assembeled Or Equal	EA	$291.65	$3,548.67	$0.00	$3,840.32
107757	8" Alarm Check Valve w/Trim Tyco Model Av-1 Gxg Pre-Assembeled Or Equal	EA	$412.85	$4,219.54	$0.00	$4,632.39
107758	2" Check Valve Tyco Model Cv-1F Or Equal	EA	$62.08	$338.72	$0.00	$400.80
107759	2-1/2" Check Valve Tyco Model Cv-1F Or Equal	EA	$78.82	$338.72	$0.00	$417.54
107760	3" Check Valve Tyco Model Cv-1F Or Equal	EA	$88.68	$338.72	$0.00	$427.40
107761	4" Check Valve Tyco Model Cv-1F Or Equal	EA	$119.22	$351.85	$0.00	$471.07
107762	6" Check Valve Tyco Model Cv-1F Or Equal	EA	$202.98	$878.30	$0.00	$1,081.28
107763	8" Check Valve Tyco Model Cv-1F Or Equal	EA	$287.72	$1,522.92	$0.00	$1,810.64
107764	2-1/2" Control Valve- OS&Y Gate Tyco Model Tjr Series Or Equal	EA	$120.21	$669.56	$0.00	$789.77
107765	3" Control Valve- OS&Y Gate Tyco Model Tjr Series Or Equal	EA	$134.00	$782.46	$0.00	$916.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107766	4" Control Valve- OS&Y Gate Tyco Model Tjr Series Or Equal	EA	$255.20	$903.25	$0.00	$1,158.45
107767	6" Control Valve- OS&Y Gate Tyco Model Tjr Series Or Equal	EA	$353.73	$1,320.74	$0.00	$1,674.47
107768	8" Control Valve- OS&Y Gate Tyco Model Tjr Series Or Equal	EA	$471.97	$2,163.60	$0.00	$2,635.57
107769	2-1/2" Control Valve- Butterfly Tyco Model Bfv-300 Or Equal	EA	$78.82	$596.04	$0.00	$674.86
107770	3" Control Valve- Butterfly Tyco Model Bfv-300 Or Equal	EA	$86.71	$644.62	$0.00	$731.33
107771	4" Control Valve- Butterfly Tyco Model Bfv-300 Or Equal	EA	$122.18	$676.12	$0.00	$798.30
107772	6" Control Valve- Butterfly Tyco Model Bfv-300 Or Equal	EA	$224.65	$961.01	$0.00	$1,185.66
107773	8" Control Valve- Butterfly Tyco Model Bfv-300 Or Equal	EA	$277.86	$1,471.72	$0.00	$1,749.58
	21-05-29 Hangers and Supports for Fire-Suppression Piping and Equipment					
107774	1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$5.50	$0.00	$105.22
107775	3/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$6.44	$0.00	$106.16
107776	1" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$6.28	$0.00	$106.00
107777	1-1/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$6.39	$0.00	$106.11
107778	1-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$6.57	$0.00	$106.29
107779	2" Pipe Hanger Includes Rod and Building Attachment.	EA	$99.72	$7.30	$0.00	$107.02
107780	2-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$104.25	$11.30	$0.00	$115.55
107781	3" Pipe Hanger Includes Rod and Building Attachment.	EA	$105.13	$13.56	$0.00	$118.69
107782	4" Pipe Hanger Includes Rod and Building Attachment.	EA	$126.91	$21.10	$0.00	$148.01
107783	5" Pipe Hanger Includes Rod and Building Attachment.	EA	$136.86	$21.58	$0.00	$158.44
107784	6" Pipe Hanger Includes Rod and Building Attachment.	EA	$143.27	$39.85	$0.00	$183.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107785	8" Pipe Hanger Includes Rod and Building Attachment.	EA	$144.15	$52.56	$0.00	$196.71
107786	10" Pipe Hanger Includes Rod and Building Attachment.	EA	$161.39	$74.43	$0.00	$235.82
107787	12" Pipe Hanger Includes Rod and Building Attachment.	EA	$162.28	$96.80	$0.00	$259.08
107788	14" Pipe Hanger Includes Rod and Building Attachment.	EA	$163.17	$165.21	$0.00	$328.38
107789	15" Pipe Hanger Includes Rod and Building Attachment.	EA	$163.17	$194.83	$0.00	$358.00
107790	16" Pipe Hanger Includes Rod and Building Attachment.	EA	$163.17	$208.28	$0.00	$371.45
107791	18" Pipe Hanger Includes Rod and Building Attachment.	EA	$176.77	$250.98	$0.00	$427.75
107792	20" Pipe Hanger Includes Rod and Building Attachment.	EA	$192.14	$421.47	$0.00	$613.61
107793	24" Pipe Hanger Includes Rod and Building Attachment.	EA	$208.50	$549.07	$0.00	$757.57
107794	28" Pipe Hanger Includes Rod and Building Attachment.	EA	$227.52	$754.90	$0.00	$982.42
	21-05-48 Vibration and Seismic Controls for Fire-Suppression Piping and Equipment					
107795	Seismic Restraints - Fire Protection System Includes additional bracing and supports as required for Seismic Restraints.	SF	$0.14	$0.07	$0.00	$0.21
	21-05-53 Identification for Fire-Suppression Piping and Equipment					
107796	Marking & Identification - Self-Adhesive Pipe Marker	EA	$29.96	$4.50	$0.00	$34.46
107797	Marking & Identification - Snap-On or Wrap Around Pipe Marker	EA	$29.96	$14.84	$0.00	$44.80
107798	Marking & Identification - Valve Tag Brass or plastic.	EA	$11.82	$1.40	$0.00	$13.22
107799	Marking & Identification - Plastic Sign	EA	$44.93	$23.86	$0.00	$68.79
107800	Marking & Identification - Aluminum Sign	EA	$44.93	$44.37	$0.00	$89.30
	21-05-85 Miscellaneous Fire-Protection					
107801	Fire Watch - Shutdowns & Hot Work (Per HR) Includes patrol of area(s) at risk as per guidelines of agencies having jurisdiction. Provide a schedule of all shutdowns and hot work to minimize downtime.	HR	$63.66	$0.00	$0.00	$63.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107802	Fire Sprinkler System - Temporary Shut-Down and Start-Up (Per HR) Includes Drain, Fill, Disarming, and Arming of Hydronic System.	HR	$63.66	$3.13	$0.00	$66.79
107803	Fire Sprinkler System - Temporary Shut-Down and Start-Up (Per LF of Pipe) Includes Drain, Fill, Disarming, and Arming of Hydronic System.	LF	$1.48	$0.00	$0.00	$1.48
107804	Fire Sprinkler System - Temporary Shut-Down and Start-Up (Per Sprinkler Head) Includes Drain, Fill, Disarming, and Arming of Hydronic System.	EA	$7.88	$0.00	$0.00	$7.88
107805	Sprinkler Head Cabinet - Up to 12 Heads	EA	$39.41	$31.45	$0.00	$70.86
107806	Sprinkler Head Wrench - Standard Head	EA	$9.86	$86.01	$0.00	$95.87
107807	Sprinkler Head Wrench - Recessed or Concealed Head	EA	$9.86	$143.21	$0.00	$153.07
107808	Sprinkler Head Wrench - Institutional Head	EA	$9.86	$247.96	$0.00	$257.82

21-09-00 Instrumentation and Control for Fire-Suppression Systems

21-09-13 Instrumentation and Control Devices for Fire-Suppression Systems

107809	Fire Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
107810	Packaged Fire System Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57

21-10-00 Water-Based Fire-Suppression Systems

• Fire Protection Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Fire Protection Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Fire Protection Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

21-11-00 Facility Fire-Suppression Water-Service Piping

21-11-19 Fire-Department Connections

107811	Standpipe Connection- 2-1/2" x 2-1/2" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$266.04	$221.87	$0.00	$487.91
107812	Standpipe Connection- 2-1/2" (2) x 4" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$315.31	$518.59	$0.00	$833.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107813	Standpipe Connection- 2-1/2" (3) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$344.86	$1,176.32	$0.00	$1,521.18
107814	Standpipe Connection- 2-1/2" (4) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$364.57	$1,739.55	$0.00	$2,104.12
107815	Fire Department Connection/Wall Hydrant- 2-1/2" x 2 -1/2" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$266.04	$257.32	$0.00	$523.36
107816	Fire Department Connection/Wall Hydrant- 2-1/2" (2) x 4" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$315.31	$685.31	$0.00	$1,000.62
107817	Fire Department Connection/Wall Hydrant- 2-1/2" (3) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$344.86	$1,483.54	$0.00	$1,828.40
107818	Fire Department Connection/Wall Hydrant- 2-1/2" (4) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$364.57	$1,969.29	$0.00	$2,333.86
107819	Roof Manifold- 2-1/2" x 4" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$157.65	$249.44	$0.00	$407.09
107820	Roof Manifold- 2-1/2" (2) x 4" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$266.04	$485.76	$0.00	$751.80
107821	Roof Manifold- 2-1/2" (3) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$315.31	$913.75	$0.00	$1,229.06
107822	Roof Manifold- 2-1/2" (4) x 6" Brass Or Chrome, Projecting Or Flush - Includes Cap & Chain	EA	$344.86	$1,121.19	$0.00	$1,466.05
107823	Fire Pump Test Connection 2-1/2" X 2-1/2" X 2-1/2" X 4"	EA	$635.54	$2,714.97	$0.00	$3,350.51
	21-12-26 Fire-Suppression Valve and Hose Cabinets					
107824	10 lb Fire Extinguisher Cabinet- Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$110.28	$0.00	$356.61
107825	10 lb Fire Extinguisher Cabinet- Aluminum Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$157.54	$0.00	$403.87
107826	10 lb Fire Extinguisher Cabinet- Stainless Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$215.31	$0.00	$461.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107827	20 lb Fire Extinguisher Cabinet- Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$129.97	$0.00	$376.30
107828	20 lb Fire Extinguisher Cabinet- Aluminum Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$177.24	$0.00	$423.57
107829	20 lb Fire Extinguisher Cabinet- Stainless Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, Full Or Half Glass - Not Equipped	EA	$246.33	$235.00	$0.00	$481.33
107830	Fire Hose & Extinguisher Cabinet - Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, 5 To 20 Lb Extinguisher - Not Equipped	EA	$295.60	$242.89	$0.00	$538.49
107831	Fire Hose & Extinguisher Cabinet - Aluminum Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, 5 To 20 Lb Extinguisher - Not Equipped	EA	$295.60	$295.39	$0.00	$590.99
107832	Fire Hose & Extinguisher Cabinet - Stainless Steel Flush, Semi-Recessed Or Recessed, Locking Or Non-Locking, 5 To 20 Lb Extinguisher - Not Equipped	EA	$295.60	$479.20	$0.00	$774.80
107833	Complete Fire Hose Rack Assembly - 1-1/2" Includes Hose Valve, 75 LF Hose, Nozzle & Accessories.	EA	$25.62	$576.34	$0.00	$601.96
107834	Complete Fire Hose Rack Assembly - 2-1/2" Includes Hose Valve, 75 LF Hose, Nozzle & Accessories.	EA	$25.62	$798.23	$0.00	$823.85
	21-13-00 Fire-Suppression Sprinkler Systems					
	21-13-13 Wet-Pipe Sprinkler Systems					
107835	Wet Sprinkler Head, Standard Response, Fusible Link - Upright or Pendant Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$23.42	$0.00	$72.69
107836	Wet Sprinkler Head, Standard Response, Fusible Link - Sidewall Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$37.39	$0.00	$86.66
107837	Wet Sprinkler Head, Standard Response, Glass Bulb - Upright or Pendant Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$15.62	$0.00	$64.89
107838	Wet Sprinkler Head, Standard Response, Glass Bulb - Sidewall Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$26.60	$0.00	$75.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107839	Wet Sprinkler Head, Quick Response, Fusible Link - Upright or Pendant Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$61.63	$0.00	$110.90
107840	Wet Sprinkler Head, Quick Response, Fusible Link - Sidewall Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$79.48	$0.00	$128.75
107841	Wet Sprinkler Head, Quick Response, Glass Bulb - Upright or Pendant Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$23.99	$0.00	$73.26
107842	Wet Sprinkler Head, Quick Response, Glass Bulb - Sidewall Standard Coverage, 1/2" NPT K=5.6, Chrome or Brass.	EA	$49.27	$42.69	$0.00	$91.96
107843	Wet Sprinkler Head, Standard Response, Fusible Link - Upright or Pendant Standard Coverage, 3/4" NPT K=8.0, Chrome or Brass.	EA	$49.27	$36.85	$0.00	$86.12
107844	Wet Sprinkler Head, Standard Response, Glass Bulb - Upright or Pendant Standard Coverage, 3/4" NPT K=8.0, Chrome or Brass.	EA	$49.27	$18.24	$0.00	$67.51
107845	Wet Sprinkler Head, Quick Response, Fusible Link - Upright or Pendant Standard Coverage, 3/4" NPT K=8.0, Chrome or Brass.	EA	$49.27	$83.05	$0.00	$132.32
107846	Wet Sprinkler Head, Quick Response, Glass Bulb - Upright or Pendant Standard Coverage, 3/4" NPT K=8.0, Chrome or Brass.	EA	$49.27	$32.08	$0.00	$81.35
107847	[Modifier] Wet Sprinkler Head - Add for Recessed Escutcheon Brass, Chrome or Painted. Applies to above pendant or sidewall sprinkler heads.	EA	$24.63	$6.58	$0.00	$31.21
107848	Wet Sprinkler Head - Pendant Concealed w/ Cover Plate Standard Coverage, 1/2" NPT K=5.6, Standard or Quick Response, Brass Head w/ Brass, Chrome, or Painted Cover Plate.	EA	$88.68	$45.53	$0.00	$134.21
107849	Wet Sprinkler Head - Sidewall Concealed w/ Cover Plate Standard Coverage, 1/2" NPT K=5.6, Standard or Quick Response, Brass Head w/ Brass, Chrome, or Painted Cover Plate.	EA	$88.68	$85.35	$0.00	$174.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107850	Wet Sprinkler Head - MRI Pendant Concealed w/ Cover Plate Standard Coverage, 1/2" NPT K=5.6, Standard or Quick Response, Brass Head w/ Brass, Chrome, or Painted Cover Plate.	EA	$88.68	$153.76	$0.00	$242.44
107851	Wet Sprinkler Head - Institutional Anti-Ligature Pendant w/Escutcheon Standard Coverage, 1/2" NPT K=5.6, Quick Response, Grey or White, Tyco Raven or Equal	EA	$81.29	$109.19	$0.00	$190.48
107852	Wet Sprinkler Head - Institutional Anti-Ligature Sidewall w/Escutcheon Standard Coverage, 1/2" NPT K=5.6, Quick Response, Grey or White, Tyco Raven or Equal	EA	$81.29	$126.25	$0.00	$207.54
107853	[Modifier] Wet Sprinkler Head - Add for Stainless Steel Escutcheon Applies to Raven type sprinkler heads only.	EA	$0.00	$31.02	$0.00	$31.02
107854	Wet Sprinkler Head - Institutional Prison Pendant w/Escutcheon Standard Coverage, 1/2" NPT K=5.6, Quick Response, Grey or White, Tyco TFP PH2 or Equal	EA	$81.29	$304.99	$0.00	$386.28
107855	Wet Sprinkler Head - Institutional Prison Sidewall w/Escutcheon Standard Coverage, 1/2" NPT K=5.6, Quick Response, Grey or White, Tyco TFP PH5 or Equal	EA	$81.29	$296.64	$0.00	$377.93
107856	Dry Barrell Sprinkler Head, Glass Bulb - Upright, Pendant or Sidewall (Up to 12" Length) Standard Coverage, 1" NPT K=5.6, Standard or Quick Response, Tyco Model DS-1 or Equal	EA	$60.59	$205.72	$0.00	$266.31
107857	Dry Barrell Sprinkler Head, Glass Bulb - Upright, Pendant or Sidewall (12-1/4" to 24" Length) Standard Coverage, 1" NPT K=5.6, Standard or Quick Response, Tyco Model DS-1 or Equal	EA	$60.59	$260.05	$0.00	$320.64
107858	[Modifier] Dry Barrell Sprinkler Head - Add for Standard or Recessed Escutcheon	EA	$24.63	$6.58	$0.00	$31.21
107859	Dry Barrell Sprinkler Head, Glass Bulb - Concealed w/Escutcheon (Up to 12" Length) Standard Coverage, 1" NPT K=5.6, Standard or Quick Response, Tyco Model DS-1 or Equal	EA	$60.59	$174.60	$0.00	$235.19
107860	Dry Barrell Sprinkler Head, Glass Bulb - Concealed w/Escutcheon (12-1/4" to 24" Length) Standard Coverage, 1" NPT K=5.6, Standard or Quick Response, Tyco Model DS-1 or Equal	EA	$60.59	$216.32	$0.00	$276.91
107861	Wet Sprinkler Head - Window Sidewall Tyco Model WS or Equal	EA	$73.90	$554.99	$0.00	$628.89
107862	Wet Sprinkler Head - High Temperature Brass Tyco Model Issue "D" Quartzoid Series Or Equal	EA	$73.90	$97.93	$0.00	$171.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107863	Wet Sprinkler Head - High Temperature Chrome Tyco Model Issue "D" Quartzoid Series Or Equal	EA	$73.90	$130.51	$0.00	$204.41
107864	Wet Sprinkler Head - Attic Tyco Model TY318x or Equal	EA	$73.90	$229.73	$0.00	$303.63
107865	1/2" or 3/4" Wet System Braided Flexible Sprinkler Connectors w/o Elbow - Up to 5 LF	EA	$37.05	$44.18	$0.00	$81.23
107866	1/2" or 3/4" Wet System Braided Flexible Sprinkler Connectors w/ Elbow - Up to 5 LF	EA	$37.05	$65.87	$0.00	$102.92
107867	3/4" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$14.78	$2.35	$0.00	$17.13
107868	1" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$13.80	$3.28	$0.00	$17.08
107869	1-1/4" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$13.80	$4.67	$0.00	$18.47
107870	1-1/2" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$12.81	$6.14	$0.00	$18.95
107871	2" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$13.80	$9.18	$0.00	$22.98
107872	2-1/2" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$13.80	$14.57	$0.00	$28.37
107873	3" Wet System Pipe - CPVC, SDR 13.5, Solid Core, Solvent Cement	LF	$15.77	$25.34	$0.00	$41.11
107874	3/4" Wet System Fitting - CPVC, Schedule 40, Solvent Cement	EA	$13.80	$2.34	$0.00	$16.14
107875	1" Wet System Fitting - CPVC, Schedule 40, Solvent Cement	EA	$13.80	$5.22	$0.00	$19.02
107876	1-1/4" Wet System Fitting - CPVC, Schedule 40, Solvent Cement	EA	$13.80	$7.06	$0.00	$20.86
107877	1-1/2" Wet System Fitting - CPVC, Schedule 40, Solvent Cement	EA	$13.80	$10.12	$0.00	$23.92
107878	2" Wet System Fitting - CPVC, Schedule 80, Solvent Cement	EA	$14.78	$13.42	$0.00	$28.20
107879	2-1/2" Wet System Fitting - CPVC, Schedule 80, Solvent Cement	EA	$17.73	$24.09	$0.00	$41.82
107880	3" Wet System Fitting - CPVC, Schedule 80, Solvent Cement	EA	$20.69	$30.90	$0.00	$51.59
107881	1/2" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.71	$6.34	$0.00	$26.05
107882	3/4" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$20.69	$7.73	$0.00	$28.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107883	1" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$21.68	$10.08	$0.00	$31.76
107884	1-1/4" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$23.64	$13.35	$0.00	$36.99
107885	1-1/2" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$20.69	$15.55	$0.00	$36.24
107886	2" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$21.68	$20.64	$0.00	$42.32
107887	1/2" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$53.21	$4.10	$0.00	$57.31
107888	3/4" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$72.91	$5.28	$0.00	$78.19
107889	1" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$89.67	$9.30	$0.00	$98.97
107890	1-1/4" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$103.45	$15.05	$0.00	$118.50
107891	1-1/2" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$112.33	$19.35	$0.00	$131.68
107892	2" Wet System Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$137.94	$33.03	$0.00	$170.97
107893	2-1/2" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$25.62	$12.41	$0.00	$38.03
107894	3" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$28.58	$14.59	$0.00	$43.17
107895	4" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$30.54	$18.71	$0.00	$49.25
107896	5" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$35.47	$24.18	$0.00	$59.65
107897	6" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$37.44	$29.56	$0.00	$67.00
107898	8" Wet System Pipe - Carbon Steel, Schedule 10, ERW, Grooved	LF	$46.31	$46.18	$0.00	$92.49
107899	2-1/2" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$84.73	$42.68	$0.00	$127.41
107900	3" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$92.62	$54.60	$0.00	$147.22
107901	4" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$128.09	$79.15	$0.00	$207.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107902	5" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$188.20	$163.69	$0.00	$351.89
107903	6" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$229.57	$191.27	$0.00	$420.84
107904	8" Wet System Fitting - Carbon Steel, Schedule 10, Grooved	EA	$323.18	$376.73	$0.00	$699.91
107905	2-1/2" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$29.56	$18.02	$0.00	$47.58
107906	3" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$32.51	$22.11	$0.00	$54.62
107907	4" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$37.44	$29.46	$0.00	$66.90
107908	5" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$41.39	$38.76	$0.00	$80.15
107909	6" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$46.31	$48.72	$0.00	$95.03
107910	8" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$53.21	$77.82	$0.00	$131.03
107911	10" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$63.07	$124.13	$0.00	$187.20
107912	12" Wet System Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$69.95	$151.10	$0.00	$221.05
107913	2-1/2" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$104.44	$71.60	$0.00	$176.04
107914	3" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$113.31	$93.72	$0.00	$207.03
107915	4" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$156.66	$125.95	$0.00	$282.61
107916	5" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$228.60	$240.97	$0.00	$469.57
107917	6" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$279.83	$282.52	$0.00	$562.35
107918	8" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$394.13	$541.64	$0.00	$935.77
107919	10" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$510.39	$871.06	$0.00	$1,381.45
107920	12" Wet System Fitting - Carbon Steel, Standard Weight, Grooved	EA	$551.78	$1,011.38	$0.00	$1,563.16
107921	Wet System Flow Switch Tyco Model Vsr-F Or Equal	EA	$98.53	$568.47	$0.00	$667.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107922	Wet System Riser Manifold w/Inspector's Test & Drain Assembly Tyco Model Rm-2 Or Equal	EA	$550.79	$122.22	$0.00	$673.01
107923	Wet System Pressure Switch Tyco Model Ps40 Or Equal	EA	$49.27	$437.18	$0.00	$486.45
107924	Wet System Tamper Switch Tyco Model Osysu Or Pcvs Or Equal	EA	$49.27	$374.16	$0.00	$423.43
	21-13-16 Dry-Pipe Sprinkler Systems					
107925	Dry Sprinkler Head- Upright/Pendant/Sidewall Includes Chrome, Brass, Quick Response, Standard Response, Fusible Link & Glass Bulb	EA	$49.27	$37.14	$0.00	$86.41
107926	Dry Sprinkler Head- Concealed W/Cover Plate Includes Chrome, Brass, Quick Response, Standard Response, Fusible Link & Glass Bulb	EA	$73.90	$68.86	$0.00	$142.76
107927	Dry Sprinkler Head W/Cover Plate- Prison/Security/Anti-Ligature Includes Chrome, Brass, Quick Response, Standard Response, Fusible Link & Glass Bulb	EA	$73.90	$118.43	$0.00	$192.33
107928	Dry Sprinkler Head Assembly- Upright/Pendant/Sidewall Includes Chrome, Brass, Quick Response, Standard Response, Fusible Link & Glass Bulb	EA	$60.59	$293.50	$0.00	$354.09
107929	Dry Sprinkler Head- Window Includes Chrome, Brass, Quick Response, Standard Response, Fusible Link & Glass Bulb	EA	$73.90	$409.54	$0.00	$483.44
107930	Dry System Braided Flexible Sprinkler Connectors- 1" x 3 LF	EA	$37.05	$50.86	$0.00	$87.91
107931	1/2" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$21.68	$9.81	$0.00	$31.49
107932	3/4" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$22.67	$11.74	$0.00	$34.41
107933	1" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$23.64	$14.98	$0.00	$38.62
107934	1-1/4" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$29.56	$21.03	$0.00	$50.59
107935	1-1/2" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$25.62	$25.22	$0.00	$50.84
107936	2" Dry System Pipe - Galvanized Steel, Standard Weight, Threaded	LF	$25.62	$31.91	$0.00	$57.53
107937	1/2" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$53.21	$4.10	$0.00	$57.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107938	3/4" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$72.91	$5.28	$0.00	$78.19
107939	1" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$89.67	$9.30	$0.00	$98.97
107940	1-1/4" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$103.45	$15.05	$0.00	$118.50
107941	1-1/2" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$112.33	$19.35	$0.00	$131.68
107942	2" Dry System Fitting - Galvanized, Malleable Iron 150 PSI, Threaded	EA	$137.94	$33.03	$0.00	$170.97
107943	2-1/2" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$30.54	$23.60	$0.00	$54.14
107944	3" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$33.50	$28.96	$0.00	$62.46
107945	4" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$38.43	$38.58	$0.00	$77.01
107946	5" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$43.36	$50.78	$0.00	$94.14
107947	6" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$48.28	$63.81	$0.00	$112.09
107948	8" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$55.18	$101.96	$0.00	$157.14
107949	10" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$65.03	$162.61	$0.00	$227.64
107950	12" Dry System Pipe - Galvanized Steel, Standard Weight, Grooved	LF	$71.93	$197.94	$0.00	$269.87
107951	2-1/2" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$104.44	$88.07	$0.00	$192.51
107952	3" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$113.31	$115.27	$0.00	$228.58
107953	4" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$156.66	$154.91	$0.00	$311.57
107954	5" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$228.60	$296.39	$0.00	$524.99
107955	6" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$279.83	$347.50	$0.00	$627.33
107956	8" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$393.14	$666.21	$0.00	$1,059.35
107957	10" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$510.39	$1,071.42	$0.00	$1,581.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107958	12" Dry System Fitting - Galvanized Steel, Standard Weight, Grooved	EA	$551.78	$1,244.00	$0.00	$1,795.78
107959	Dry System Air Compressor- Base Mount 1/3 HP Tyco/General Air "L" Series Or Equal	EA	$197.06	$4,696.11	$0.00	$4,893.17
107960	Dry System Air Compressor- Base Mount 1/2 HP Tyco/General Air "L" Series Or Equal	EA	$246.33	$4,978.37	$0.00	$5,224.70
107961	Dry System Air Compressor- Base Mount 3/4 HP Tyco/General Air "L" Series Or Equal	EA	$295.60	$5,254.07	$0.00	$5,549.67
107962	Dry System Air Compressor- Base Mount 1 HP Tyco/General Air "L" Series Or Equal	EA	$394.13	$6,242.67	$0.00	$6,636.80
107963	Dry System Air Compressor- Tank Mounted 1/3 HP Tyco/General Air "Lt" Series Or Equal	EA	$295.60	$8,192.27	$0.00	$8,487.87
107964	Dry System Air Compressor- Tank Mounted 1/2 HP Tyco/General Air "Lt" Series Or Equal	EA	$369.50	$7,932.31	$0.00	$8,301.81
107965	Dry System Air Compressor- Tank Mounted 3/4 HP Tyco/General Air "Lt" Series Or Equal	EA	$443.39	$8,632.07	$0.00	$9,075.46
107966	Dry System Air Compressor- Tank Mounted 1 HP Tyco/General Air "Lt" Series Or Equal	EA	$591.19	$9,238.62	$0.00	$9,829.81
107967	2-1/2" Dry Pipe Valve & Trim Tyco Pre-Assembled Dpv-1 W/Butterfly Valve Or Equal	EA	$295.60	$5,412.93	$0.00	$5,708.53
107968	3" Dry Pipe Valve & Trim Tyco Pre-Assembled Dpv-1 W/Butterfly Valve Or Equal	EA	$394.13	$5,412.93	$0.00	$5,807.06
107969	4" Dry Pipe Valve & Trim Tyco Pre-Assembled Dpv-1 W/Butterfly Valve Or Equal	EA	$591.19	$5,812.05	$0.00	$6,403.24
107970	6" Dry Pipe Valve & Trim Tyco Pre-Assembled Dpv-1 W/Butterfly Valve Or Equal	EA	$788.26	$6,623.40	$0.00	$7,411.66
107971	Dry System Flow Switch Tyco Model Vsr-F Or Equal	EA	$98.53	$568.47	$0.00	$667.00
107972	Dry System Riser Manifold w/Inspector's Test & Drain Assembly Tyco Model Rm-2 Or Equal	EA	$550.79	$122.22	$0.00	$673.01
107973	Dry System Tamper Switch Tyco Model Osysu Or Pcvs Or Equal	EA	$49.27	$374.16	$0.00	$423.43
	21-13-19 Preaction Sprinkler Systems					
107974	2" Preaction Valve & Trim Single Or Double Interlock - Tyco Pre-Trimmed Dv-5A Or Equal	EA	$394.13	$7,437.36	$0.00	$7,831.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107975	3" Preaction Valve & Trim Single Or Double Interlock - Tyco Pre-Trimmed Dv-5A Or Equal	EA	$492.66	$7,660.56	$0.00	$8,153.22
107976	4" Preaction Valve & Trim Single Or Double Interlock - Tyco Pre-Trimmed Dv-5A Or Equal	EA	$591.19	$9,839.90	$0.00	$10,431.09
107977	6" Preaction Valve & Trim Single Or Double Interlock - Tyco Pre-Trimmed Dv-5A Or Equal	EA	$788.26	$11,054.31	$0.00	$11,842.57
107978	1-1/2" Packaged Preaction System Includes Cabinet, Control Panel & Compressor, Single Or Double Interlock - Tyco Model Red-E Dv-5A Or Equal	EA	$1,182.38	$27,228.78	$0.00	$28,411.16
107979	2" Packaged Preaction System Includes Cabinet, Control Panel & Compressor, Single Or Double Interlock - Tyco Model Red-E Dv-5A Or Equal	EA	$1,182.38	$27,484.78	$0.00	$28,667.16
107980	3" Packaged Preaction System Includes Cabinet, Control Panel & Compressor, Single Or Double Interlock - Tyco Model Red-E Dv-5A Or Equal	EA	$1,773.58	$27,832.70	$0.00	$29,606.28
107981	4" Packaged Preaction System Includes Cabinet, Control Panel & Compressor, Single Or Double Interlock - Tyco Model Red-E Dv-5A Or Equal	EA	$1,773.58	$30,931.05	$0.00	$32,704.63
107982	6" Packaged Preaction System Includes Cabinet, Control Panel & Compressor, Single Or Double Interlock - Tyco Model Red-E Dv-5A Or Equal	EA	$2,364.77	$31,955.09	$0.00	$34,319.86
	21-13-26 Deluge Fire-Suppression Sprinkler Systems					
107983	1-1/2" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$1,182.38	$21,261.81	$0.00	$22,444.19
107984	2" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$1,182.38	$21,524.39	$0.00	$22,706.77
107985	3" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$1,773.58	$21,721.32	$0.00	$23,494.90
107986	4" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$1,773.58	$23,014.49	$0.00	$24,788.07
107987	6" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$2,364.77	$24,885.31	$0.00	$27,250.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
107988	1-1/2" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$295.60	$6,971.30	$0.00	$7,266.90
107989	2" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$394.13	$7,155.10	$0.00	$7,549.23
107990	3" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$492.66	$7,476.76	$0.00	$7,969.42
107991	4" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$591.19	$8,789.62	$0.00	$9,380.81
107992	6" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$788.26	$10,325.66	$0.00	$11,113.92
107993	8" Deluge Valve & Trim Tyco Pre-Trimmed Dv-5A Or Equal	EA	$1,182.38	$17,828.68	$0.00	$19,011.06
107994	8" Packaged Deluge System Includes Cabinet & Control Panel - Tyco Model Red-E Dv-5A Or Equal	EA	$2,955.96	$32,769.06	$0.00	$35,725.02

21-20-00 Fire-Extinguishing Systems

• Fire Protection Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Fire Protection Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Fire Protection Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

21-22-00 Clean-Agent Fire-Extinguishing Systems

21-22-13 Clean-Agent Fire-Extinguishing Piping

107995	Fire-Extinguishing System - Wet-Chemical (Ansul) Per Hood (Under 10')	EA	$1,576.51	$10,926.75	$0.00	$12,503.26
107996	Fire-Extinguishing System - Wet-Chemical (Ansul) Per Hood (10' to 20')	EA	$2,955.96	$13,663.25	$0.00	$16,619.21

21-30-00 Fire Pumps

21-31-00 Centrifugal Fire Pumps

21-31-13 Fire Pumps

Factory assembled and tested, w/piping, valves, sensors, and controls on skid or base.

107997	500 GPM, 25 HP Packaged Diesel Fire Pump w/Controller	EA	$4,493.06	$82,021.11	$0.00	$86,514.17
107998	750 GPM, 40 HP Packaged Diesel Fire Pump w/Controller	EA	$4,966.01	$105,455.71	$0.00	$110,421.72
107999	1,000 GPM, 75 HP Packaged Diesel Fire Pump w/Controller	EA	$5,675.45	$124,203.41	$0.00	$129,878.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108000	1,250 GPM, 100 HP Packaged Diesel Fire Pump w/Controller	EA	$6,621.36	$145,294.55	$0.00	$151,915.91
108001	500 GPM, 25 HP Packaged Electric Fire Pump w/Controller	EA	$4,493.06	$81,558.33	$0.00	$86,051.39
108002	750 GPM, 40 HP Packaged Electric Fire Pump w/Controller	EA	$4,966.01	$84,266.11	$0.00	$89,232.12
108003	1,000 GPM, 75 HP Packaged Electric Fire Pump w/Controller	EA	$5,675.45	$91,198.02	$0.00	$96,873.47
108004	1,250 GPM, 100 HP Packaged Electric Fire Pump w/Controller	EA	$6,621.36	$117,173.02	$0.00	$123,794.38
108005	4" Fire Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,724.71	$3,942.36	$0.00	$9,667.07
108006	6" Fire Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,286.54	$5,703.04	$0.00	$13,989.58
108007	8" Fire Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,444.39	$7,188.28	$0.00	$17,632.67
108008	3 HP Jockey Pump	EA	$945.91	$7,735.38	$0.00	$8,681.29

22-00-00 Plumbing

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of plumbing systems or components shall be included under the General Trades Division 1 through 14.
• Installation and Demolition/Removal costs assume accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, MEP systems, etc. to be priced separately.

22-00-00 Plumbing

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of plumbing systems or components shall be included under the General Trades Division 1 through 14.
• Installation and Demolition/Removal costs assume accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, MEP systems, etc. to be priced separately.

22-01-00 Operation and Maintenance of Plumbing

22-01-10 Operation and Maintenance of Plumbing Systems

108009	Sink/Lavatory- Replace Supply Lines Includes Hot & Cold Water.	EA	$35.42	$21.00	$0.00	$56.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108010	Sink/Lavatory- Replace Trap	EA	$42.50	$65.22	$0.00	$107.72
108011	Sink/Lavatory- Replace Pop-Up Drain or Basket Strainer	EA	$53.14	$35.45	$0.00	$88.59
108012	Sink/Lavatory- Faucet Repair	EA	$24.79	$10.51	$0.00	$35.30
108013	Shower- Replace Head	EA	$17.71	$30.19	$0.00	$47.90
108014	Shower- Replace Trim/Mixing Valve	EA	$60.23	$157.54	$0.00	$217.77
108015	Water Closet/Urinal- Rebuild Flush Valve Assembly	EA	$106.27	$157.54	$0.00	$263.81
108016	Water Closet- Replace Tank Type Flush Valve	EA	$79.71	$39.39	$0.00	$119.10
108017	Water Closet- Replace Wax Ring Gasket	EA	$168.27	$19.70	$0.00	$187.97
108018	Water Closet- Replace Seat	EA	$30.99	$51.20	$0.00	$82.19
108019	Water Closet- Replace Supply Line	EA	$17.71	$10.51	$0.00	$28.22
108020	Drinking Fountain/Water Cooler- Replace Bubbler	EA	$70.85	$99.78	$0.00	$170.63
108021	Internal Pipe Video or Camera Inspection - Up to 6" Pipe (Up to 350 LF) Excludes cleaning and jetting.	LF	$7.26	$0.00	$9.71	$16.97
108022	Internal Pipe Video or Camera Inspection - 8" to 12" Pipe (Up to 350 LF) Excludes cleaning and jetting.	LF	$11.51	$0.00	$15.39	$26.90
108023	Internal Pipe Cleaning & Jetting - Up To 6" Pipe (Up to 350 LF) Includes cleaning and jetting of pipe and fittings and disposal of all removed debris. Picote Maxi Miller pipe cleaner or equal.	LF	$23.12	$0.00	$18.83	$41.95
108024	Internal Pipe Cleaning & Jetting - 8" To 12" Pipe (Up to 350 LF) Includes cleaning and jetting of pipe and fittings and disposal of all removed debris. Picote Maxi Miller pipe cleaner or equal.	LF	$36.75	$0.00	$29.93	$66.68
108025	Internal Pipe Epoxy Lining - Up To 6" Pipe (Up to 350 LF) Includes pipe and fittings. Excludes cleaning, jetting, and video inspection. Picote Maxi Miller epoxy brush coating system and pump or equal.	LF	$72.37	$62.56	$68.00	$202.93

22-05-00 Common Work Results for Plumbing

22-05-05 Selective Demolition for Plumbing

- Demolition/Removal costs exclude any salvage value.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	• Plumbing Equipment and Fixture Demolition/Removal costs exclude piping, hook-ups, rough-ins, and electrical connections.					
108026	Plumbing System - Temporary Shut-Down & Start-Up Includes Drain and Fill of Hydronic Systems	HR	$63.66	$3.13	$0.00	$66.79
108027	Remove Water Heater - Point-Of-Use Gas Or Electric.	EA	$127.33	$0.00	$0.00	$127.33
108028	Remove Water Heater - Storage Type Under 100 GAL Gas, Steam Or Electric	EA	$190.99	$0.00	$0.00	$190.99
108029	Remove Water Heater - Storage Type 100 to 150 GAL Gas, Steam Or Electric	EA	$381.98	$0.00	$0.00	$381.98
108030	Remove Water Heater - Storage Type 151 to 500 GAL Gas, Steam Or Electric	EA	$1,018.62	$0.00	$0.00	$1,018.62
108031	Remove Water Heater - Storage Type 501 to 1,000 GAL Gas, Steam Or Electric	EA	$1,273.28	$0.00	$0.00	$1,273.28
108032	Remove Water Heater - Non-Storage Type Under 500 MBH Gas, Steam Or Electric	EA	$477.48	$0.00	$0.00	$477.48
108033	Remove Water Heater - Non-Storage Type 500 to 1,000 MBH Gas, Steam Or Electric	EA	$700.30	$0.00	$0.00	$700.30
108034	Remove Water Heater - Non-Storage Type 1,001 to 1,500 MBH Gas, Steam Or Electric	EA	$1,145.95	$0.00	$0.00	$1,145.95
108035	Remove Expansion Tank - Up to 60 GAL Compression & Bladder	EA	$89.12	$0.00	$0.00	$89.12
108036	Remove Circulating Pump - Up to 5 HP In-Line or Base Mounted	EA	$95.50	$0.00	$0.00	$95.50
108037	Remove Temperature Mixing Station - 2" & Down Includes Cabinet	EA	$127.33	$0.00	$0.00	$127.33
108038	Remove Temperature Mixing Station - 2-1/2" to 4" Includes Cabinet	EA	$254.66	$0.00	$0.00	$254.66
108039	Remove Hot Water Storage Tank - Under 500 GAL	EA	$477.48	$0.00	$0.00	$477.48
108040	Remove Hot Water Storage Tank - 500 to 1,000 GAL	EA	$763.97	$0.00	$0.00	$763.97
108041	Remove Hot Water Storage Tank - 1,001 to 1,500 GAL	EA	$954.96	$0.00	$0.00	$954.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108042	Remove Domestic Water Packaged Booster Pump - Simplex Includes Control Panel	EA	$509.31	$0.00	$0.00	$509.31
108043	Remove Domestic Water Packaged Booster Pump - Duplex Includes Control Panel	EA	$763.97	$0.00	$0.00	$763.97
108044	Remove Domestic Water Packaged Booster Pump - Triplex Includes Control Panel	EA	$1,145.95	$0.00	$0.00	$1,145.95
108045	Remove Water Softener - Under 100 GPM	EA	$356.52	$0.00	$0.00	$356.52
108046	Remove Water Softener - 100 GPM to 249 GPM	EA	$509.31	$0.00	$0.00	$509.31
108047	Remove Water Softener - 250 GPM to 500 GPM	EA	$1,018.62	$0.00	$0.00	$1,018.62
108048	Remove Reduced Pressure Backflow Preventer - 2" & Down	EA	$59.20	$0.00	$0.00	$59.20
108049	Remove Reduced Pressure Backflow Preventer - 2-1/2" to 4"	EA	$173.80	$0.00	$0.00	$173.80
108050	Remove Reduced Pressure Backflow Preventer - 6" to 8"	EA	$253.38	$0.00	$0.00	$253.38
108051	Remove Elevator Sump Pump - Up to 3 HP Submersible w/Oil Detection. Includes Control Panel.	EA	$190.99	$0.00	$0.00	$190.99
108052	Remove Submersible Ejector Pump - Simplex Up to 10 HP Sanitary or Storm. Includes Pump, Base Plate, Rails, Cover, Floats & Control Panel	EA	$763.97	$0.00	$0.00	$763.97
108053	Remove Submersible Ejector Pump - Duplex Up to 10 HP Sanitary or Storm. Includes Pumps, Base Plate, Rails, Cover, Floats & Control Panel	EA	$1,273.28	$0.00	$0.00	$1,273.28
108054	Remove Grease/Oil Interceptor - Under 250 GAL	EA	$445.65	$0.00	$0.00	$445.65
108055	Remove Grease/Oil Interceptor - 250 Gal to 499 GAL	EA	$763.97	$0.00	$0.00	$763.97
108056	Remove Grease/Oil Interceptor - 500 Gal to 1,000 GAL	EA	$1,145.95	$0.00	$0.00	$1,145.95
108057	Remove Stormwater Storage Tank - Under 1,000 GAL Plastic or Steel	EA	$458.38	$0.00	$0.00	$458.38
108058	Remove Stormwater Storage Tank - 1,000 to 2,499 GAL Plastic or Steel	EA	$916.76	$0.00	$0.00	$916.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108059	Remove Stormwater Storage Tank - 2,500 to 7,500 GAL Plastic or Steel	EA	$1,145.95	$0.00	$0.00	$1,145.95
108060	Remove Pipe & Insulation - Copper 2" & Down Includes Hangers and Fittings	LF	$7.64	$0.00	$0.00	$7.64
108061	Remove Pipe & Insulation - Copper 2-1/2" to 4" Includes Hangers and Fittings	LF	$9.54	$0.00	$0.00	$9.54
108062	Remove Pipe & Insulation - Copper 5" to 8" Includes Hangers and Fittings	LF	$15.92	$0.00	$0.00	$15.92
108063	Remove Pipe & Insulation - Plastic (All Types) 2" & Down Includes Hangers and Fittings	LF	$12.10	$0.00	$0.00	$12.10
108064	Remove Pipe & Insulation - Plastic (All Types) 2-1/2" to 4" Includes Hangers and Fittings	LF	$14.64	$0.00	$0.00	$14.64
108065	Remove Pipe & Insulation - Plastic (All Types) 6" to 10" Includes Hangers and Fittings	LF	$17.82	$0.00	$0.00	$17.82
108066	Remove Pipe & Insulation - Cast Iron 4" & Down Includes Hangers and Fittings	LF	$12.10	$0.00	$0.00	$12.10
108067	Remove Pipe & Insulation - Cast Iron 5" to 8" Includes Hangers and Fittings	LF	$17.82	$0.00	$0.00	$17.82
108068	Remove Pipe & Insulation - Cast Iron 10" to 15" Includes Hangers and Fittings	LF	$27.37	$0.00	$0.00	$27.37
108069	Remove Pipe & Insulation - Steel 2" & Down Includes Hangers and Fittings	LF	$6.37	$0.00	$0.00	$6.37
108070	Remove Pipe Valve or Specialty - 2" & Down Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$32.46	$0.00	$0.00	$32.46
108071	Remove Pipe Valve or Specialty - 2-1/2" to 4" Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$50.29	$0.00	$0.00	$50.29
108072	Remove Pipe Valve or Specialty - 5" to 8" Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$85.31	$0.00	$0.00	$85.31
108073	Remove Pipe Insulation - 2" & Down Includes Fittings. Not to be Combined with Piping Removal Items	LF	$1.59	$0.00	$0.00	$1.59
108074	Remove Pipe Insulation - 2-1/2" To 6" Includes Fittings. Not to be Combined with Piping Removal Items	LF	$2.68	$0.00	$0.00	$2.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108075	Remove Pipe Insulation - 8" To 12" Includes Fittings. Not to be Combined with Piping Removal Items	LF	$4.97	$0.00	$0.00	$4.97
108076	Remove Packaged Air Compressor or Vacuum Pump - Simplex Medical or Laboratory	EA	$954.96	$0.00	$0.00	$954.96
108077	Remove Packaged Air Compressor or Vacuum Pump - Duplex Medical or Laboratory	EA	$1,145.95	$0.00	$0.00	$1,145.95
108078	Remove Packaged Air Compressor or Vacuum Pump - Triplex Medical or Laboratory	EA	$1,591.60	$0.00	$0.00	$1,591.60
108079	Remove Packaged Air Compressor or Vacuum Pump - Quadraplex Medical or Laboratory	EA	$2,291.90	$0.00	$0.00	$2,291.90
108080	Remove General Service Air Compressor - Simplex Up to 15 HP Single Stage or Multi-Stage	EA	$381.98	$0.00	$0.00	$381.98
108081	Remove General Service Air Compressor - Duplex Up to 15 HP Single Stage or Multi-Stage	EA	$572.98	$0.00	$0.00	$572.98
108082	Remove Gas Valve Box or Alarm Panel Medical or Laboratory	EA	$159.16	$0.00	$0.00	$159.16
108083	Remove Bottled Gas Manifold Medical or Laboratory	EA	$159.16	$0.00	$0.00	$159.16
108084	Remove Acid Neutralization Tank - Point of Use	EA	$127.33	$0.00	$0.00	$127.33
108085	Remove Acid Neutralization Tank - Under 500 GAL	EA	$381.98	$0.00	$0.00	$381.98
108086	Remove Acid Neutralization Tank - 500 to 1,000 GAL	EA	$763.97	$0.00	$0.00	$763.97
108087	Remove Pure or Deionized Water System - Point of Use	EA	$190.99	$0.00	$0.00	$190.99
108088	Remove Pure or Deionized Water System - Under 50 L/DAY	EA	$509.31	$0.00	$0.00	$509.31
108089	Remove Pure or Deionized Water System - 50 to 200 L/DAY	EA	$763.97	$0.00	$0.00	$763.97
108090	Remove Plumbing Fixture Sinks, Lavatories, Water Closets, Urinals, Water Coolers, Drinking Fountains, Shower/Bathtub Valves, Etc. Includes Faucet or Flush Valve. Excludes Carrier and Rough-In Piping.	EA	$79.58	$0.00	$0.00	$79.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108091	Remove Plumbing Fixture & Re-Install Sinks, Lavatories, Water Closets, Urinals, Water Coolers, Drinking Fountains, Shower/Bathtub Valves, Etc. Includes Faucet or Flush Valve. Excludes Carrier and Rough-In Piping.	EA	$299.22	$53.76	$0.00	$352.98
108092	Remove Plumbing Fixture & Rough-In Sinks, Lavatories, Water Closets, Urinals, Water Coolers, Drinking Fountains, Shower/Bathtub Valves, Etc. Includes Faucet or Flush Valve and Carrier.	EA	$167.44	$0.00	$0.00	$167.44
108093	Remove Plumbing Fixture, Rough-In and Cap Pipe Services Sinks, Lavatories, Water Closets, Urinals, Water Coolers, Drinking Fountains, Shower/Bathtub Valves, Etc. Includes Faucet or Flush Valve and Carrier. Cap Pipe Services at Each Removal. Not to be Used for Multiple Adjacent Removals or if New Fixture Replaces Existing.	EA	$221.42	$32.61	$0.00	$254.03
108094	Remove Bathtub or Shower Basin Excludes Shower/Bathtub Faucet & Head	EA	$190.99	$30.28	$0.00	$221.27
108095	Remove Bathtub or Shower Basin and Enclosure Excludes Shower/Bathtub Faucet & Head	EA	$381.98	$30.28	$0.00	$412.26
108096	Remove Laboratory Faucet Excludes Rough-In.	EA	$31.83	$0.00	$0.00	$31.83
108097	Remove Laboratory Faucet & Rough-In	EA	$106.95	$0.00	$0.00	$106.95
108098	Remove Laboratory Faucet, Rough-In, and Cap Pipe Services Cap Pipe Services at Each Removal. Not to be Used for Multiple Adjacent Removals or if New Faucet Replaces Existing.	EA	$178.26	$31.67	$0.00	$209.93
108099	Remove Faucet or Flush Valve Excludes Fixture.	EA	$39.79	$0.00	$0.00	$39.79
108100	Remove Faucet or Flush Valve & Rough-In Excludes Fixture.	EA	$106.95	$0.00	$0.00	$106.95
108101	Remove Faucet or Flush Valve, Rough-In and Cap Pipe Services Cap Pipe Services at Each Removal. Not to be Used for Multiple Adjacent Fixture Removals or if New Fixture Replaces Existing.	EA	$178.26	$31.67	$0.00	$209.93
108102	Remove Medical or Laboratory Gas Outlet	EA	$15.92	$0.00	$0.00	$15.92
108103	Remove Medical or Laboratory Gas Outlet & Rough-In	EA	$40.11	$0.00	$0.00	$40.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108104	Remove Medical or Laboratory Gas Outlet, Rough-In and Cap Pipe Services Cap Pipe Services at Each Fixture Removal. Not to be Used for Multiple Adjacent Fixture Removals or if New Fixture Replaces Existing.	EA	$59.20	$5.72	$0.00	$64.92
108105	Remove Medical Gas Headwall or Laboratory Fume Hood	EA	$79.58	$0.00	$0.00	$79.58
108106	Remove Medical Gas Headwall or Laboratory Fume Hood & Rough-In	EA	$125.42	$0.00	$0.00	$125.42
108107	Remove Medical Gas Headwall or Laboratory Fume Hood, Rough-In and Cap Pipe Services Cap Pipe Services at Each Fixture Removal. Not to be Used for Multiple Adjacent Fixture Removals or if New Fixture Replaces Existing.	EA	$209.45	$17.15	$0.00	$226.60
108108	Remove Domestic Water Specialty - Hose Bibbs, Wall Hydrants, Water Hammer Arrestors, Trap Primers, Etc.	EA	$70.04	$0.00	$0.00	$70.04
108109	Remove Sanitary or Storm Water Specialty - Floor Drains, Roof Drains, Downspouts, Scuppers, Cleanouts, Etc.	EA	$143.24	$0.00	$0.00	$143.24
108110	Remove Sanitary or Storm Water Trench Drain Includes all types.	LF	$12.73	$0.00	$0.00	$12.73
	22-05-17 Sleeves and Sleeve Seals for Plumbing Piping					
108111	Firestopping Intumescent Sealant - Pipe Penetration Up to 2" Fireproofing size based on pipe outer diameter including insulation.	EA	$44.29	$4.06	$0.00	$48.35
108112	Firestopping Intumescent Sealant - Pipe Penetration 2-1/2" to 5" Fireproofing size based on pipe outer diameter including insulation.	EA	$50.48	$12.17	$0.00	$62.65
108113	Firestopping Intumescent Sealant - Pipe Penetration 6" to 12" Fireproofing size based on pipe outer diameter including insulation.	EA	$62.00	$36.48	$0.00	$98.48
108114	Firestopping Intumescent Sealant - Pipe Penetration 14" to 24" Fireproofing size based on pipe outer diameter including insulation.	EA	$115.13	$109.44	$0.00	$224.57
108115	Link Seal - Up to 2” Pipe w/ 4" Diameter Hole Watertight Seal	EA	$88.56	$81.67	$0.00	$170.23
108116	Link Seal - 4” Pipe w/ 6" Diameter Hole Watertight Seal	EA	$110.70	$114.59	$0.00	$225.29
108117	Link Seal - 6” Pipe w/ 10" Diameter Hole Watertight Seal	EA	$150.56	$203.57	$0.00	$354.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108118	Link Seal - 8” Pipe w/ 12" Diameter Hole Watertight Seal	EA	$185.98	$275.49	$0.00	$461.47
108119	Link Seal - 12” Pipe w/ 16" Diameter Hole Watertight Seal	EA	$247.97	$374.16	$0.00	$622.13

22-05-23 General-Duty Valves for Plumbing Piping

- 2" and down valves include threaded or soldered connections unless stated otherwise.
- 2-1/2" and up valves include flanged, grooved, lug, or wafer connections unless stated otherwise.

108120	1/2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$45.17	$12.15	$0.00	$57.32
108121	3/4" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$62.88	$22.51	$0.00	$85.39
108122	1" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$77.05	$34.67	$0.00	$111.72
108123	1-1/4" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$89.45	$48.26	$0.00	$137.71
108124	1-1/2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$100.07	$77.71	$0.00	$177.78
108125	2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$120.44	$110.23	$0.00	$230.67
108126	2-1/2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$203.69	$305.57	$0.00	$509.26
108127	3" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$240.89	$411.03	$0.00	$651.92
108128	4" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$320.60	$1,360.25	$0.00	$1,680.85
108129	2-1/2" Butterfly Valve - Iron Body, Locking Lever Handle 200 PSI WOG. NIBCO LD-2000 or Equal.	EA	$99.19	$259.59	$0.00	$358.78
108130	3" Butterfly Valve - Iron Body, Locking Lever Handle 200 PSI WOG. NIBCO LD-2000 or Equal.	EA	$100.07	$267.25	$0.00	$367.32
108131	4" Butterfly Valve - Iron Body, Locking Lever Handle 200 PSI WOG. NIBCO LD-2000 or Equal.	EA	$179.78	$324.80	$0.00	$504.58
108132	6" Butterfly Valve - Iron Body, Locking Lever Handle 200 PSI WOG. NIBCO LD-2000 or Equal.	EA	$224.95	$638.09	$0.00	$863.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108133	8" Butterfly Valve - Iron Body, Locking Lever Handle 200 PSI WOG. NIBCO LD-2000 or Equal.	EA	$249.75	$865.70	$0.00	$1,115.45
108134	1/2" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$46.94	$32.45	$0.00	$79.39
108135	3/4" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$64.65	$41.08	$0.00	$105.73
108136	1" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$79.71	$57.09	$0.00	$136.80
108137	1-1/4" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$93.87	$85.89	$0.00	$179.76
108138	1-1/2" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$104.50	$110.47	$0.00	$214.97
108139	2" Gate Valve - Brass, Non-Rising Stem (NRS), Full Port 200 PSI WOG. NIBCO TI-8 or Equal.	EA	$128.41	$168.38	$0.00	$296.79
108140	2-1/2" Gate Valve - Iron Body, Outside Stem & Yoke (OS&Y), Full Port Class 125, Solid Wedge. NIBCO F-617-O or Equal.	EA	$142.59	$1,038.94	$0.00	$1,181.53
108141	3" Gate Valve - Iron Body, Outside Stem & Yoke (OS&Y), Full Port Class 125, Solid Wedge. NIBCO F-617-O or Equal.	EA	$156.76	$1,140.61	$0.00	$1,297.37
108142	4" Gate Valve - Iron Body, Outside Stem & Yoke (OS&Y), Full Port Class 125, Solid Wedge. NIBCO F-617-O or Equal.	EA	$286.05	$1,661.09	$0.00	$1,947.14
108143	6" Gate Valve - Iron Body, Outside Stem & Yoke (OS&Y), Full Port Class 125, Solid Wedge. NIBCO F-617-O or Equal.	EA	$393.21	$2,735.98	$0.00	$3,129.19
108144	8" Gate Valve - Iron Body, Outside Stem & Yoke (OS&Y), Full Port Class 125, Solid Wedge. NIBCO F-617-O or Equal.	EA	$536.68	$4,869.41	$0.00	$5,406.09
108145	1/2" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$45.17	$51.77	$0.00	$96.94
108146	3/4" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$62.88	$118.85	$0.00	$181.73
108147	1" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$77.05	$144.95	$0.00	$222.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108148	1-1/4" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$89.45	$308.41	$0.00	$397.86
108149	1-1/2" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$100.07	$383.30	$0.00	$483.37
108150	2" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$120.44	$579.52	$0.00	$699.96
108151	2-1/2" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. NIBCO T-585 or Equal.	EA	$175.35	$1,551.26	$0.00	$1,726.61
108152	3" Medical Gas Cleaned Ball Valve - Bronze, Two Piece, Standard Port 600 PSI WOG. NIBCO T-580 or Equal.	EA	$224.07	$1,841.37	$0.00	$2,065.44
108153	1/2" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$85.02	$180.06	$0.00	$265.08
108154	3/4" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$87.68	$222.11	$0.00	$309.79
108155	1" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$102.73	$309.97	$0.00	$412.70
108156	1-1/4" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$113.36	$433.74	$0.00	$547.10
108157	1-1/2" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$123.10	$537.44	$0.00	$660.54
108158	2" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$147.90	$880.41	$0.00	$1,028.31
108159	2-1/2" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Full Port 600 PSI WOG. NIBCO T-595 or Equal.	EA	$215.20	$1,844.96	$0.00	$2,060.16
108160	3" Medical Gas Cleaned Ball Valve - Bronze, Three Piece, Conventional Port 600 PSI WOG. NIBCO T-590 or Equal.	EA	$275.42	$1,924.62	$0.00	$2,200.04
108161	1/2" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$45.17	$190.20	$0.00	$235.37
108162	3/4" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$62.88	$215.64	$0.00	$278.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108163	1" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$77.05	$227.86	$0.00	$304.91
108164	1-1/4" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$88.56	$295.52	$0.00	$384.08
108165	1-1/2" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$100.07	$310.30	$0.00	$410.37
108166	2" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$120.44	$440.36	$0.00	$560.80
108167	3" Ball Valve - Polypropylene, Two Piece, Full Port GF Piping 546 or Equal.	EA	$100.07	$522.57	$0.00	$622.64
108168	1/2” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$35.42	$3.79	$0.00	$39.21
108169	3/4” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$47.83	$4.90	$0.00	$52.73
108170	1” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$59.34	$6.38	$0.00	$65.72
108171	1-1/4” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$66.42	$9.92	$0.00	$76.34
108172	1-1/2” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$70.85	$12.87	$0.00	$83.72
108173	2” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$88.56	$16.35	$0.00	$104.91
108174	2-1/2” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$144.36	$47.39	$0.00	$191.75
108175	3” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$172.70	$66.79	$0.00	$239.49
108176	4” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$233.81	$125.72	$0.00	$359.53
108177	6” Ball Valve - PVC Schedule 40 or 80, One Piece, Standard Port Hayward QVC Series or Equal.	EA	$282.51	$219.42	$0.00	$501.93
108178	1/2” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$35.42	$92.05	$0.00	$127.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108179	3/4” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$47.83	$120.62	$0.00	$168.45
108180	1” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$59.34	$160.65	$0.00	$219.99
108181	1-1/4” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$66.42	$215.76	$0.00	$282.18
108182	1-1/2” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$70.85	$224.26	$0.00	$295.11
108183	2” Ball Valve - CPVC, Two Piece, Full Port GF Piping 546 or Equal.	EA	$88.56	$350.50	$0.00	$439.06
	22-05-29 Hangers and Supports for Plumbing Piping and Equipment					
108184	1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$5.50	$0.00	$95.12
108185	3/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.44	$0.00	$96.06
108186	1" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.28	$0.00	$95.90
108187	1-1/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.39	$0.00	$96.01
108188	1-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.57	$0.00	$96.19
108189	2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$7.30	$0.00	$96.92
108190	2-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$93.70	$11.30	$0.00	$105.00
108191	3" Pipe Hanger Includes Rod and Building Attachment.	EA	$94.50	$13.56	$0.00	$108.06
108192	4" Pipe Hanger Includes Rod and Building Attachment.	EA	$114.07	$21.10	$0.00	$135.17
108193	5" Pipe Hanger Includes Rod and Building Attachment.	EA	$123.02	$21.58	$0.00	$144.60
108194	6" Pipe Hanger Includes Rod and Building Attachment.	EA	$128.77	$39.85	$0.00	$168.62
108195	8" Pipe Hanger Includes Rod and Building Attachment.	EA	$129.57	$52.56	$0.00	$182.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108196	10" Pipe Hanger Includes Rod and Building Attachment.	EA	$145.06	$74.43	$0.00	$219.49
108197	12" Pipe Hanger Includes Rod and Building Attachment.	EA	$145.87	$96.80	$0.00	$242.67
108198	14" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$165.21	$0.00	$311.87
108199	15" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$194.83	$0.00	$341.49
108200	16" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$208.28	$0.00	$354.94
108201	18" Pipe Hanger Includes Rod and Building Attachment.	EA	$158.88	$250.98	$0.00	$409.86
108202	20" Pipe Hanger Includes Rod and Building Attachment.	EA	$172.70	$421.47	$0.00	$594.17
108203	24" Pipe Hanger Includes Rod and Building Attachment.	EA	$187.39	$549.07	$0.00	$736.46
108204	28" Pipe Hanger Includes Rod and Building Attachment.	EA	$204.49	$754.90	$0.00	$959.39
	22-05-48 Vibration and Seismic Controls for Plumbing Piping and Equipment					
108205	Seismic Restraints Allowance	SF	$0.15	$0.07	$0.00	$0.22
108206	Seismic Restraints Allowance- California	SF	$0.60	$0.28	$0.00	$0.88
	22-05-53 Identification for Plumbing Piping and Equipment					
108207	Marking & Identification - Adhesive Pipe Marker	EA	$26.92	$4.50	$0.00	$31.42
108208	Marking & Identification - Snap-On or Wrap Around Pipe Marker	EA	$26.92	$14.84	$0.00	$41.76
108209	Marking & Identification - Valve Tag Brass or Plastic	EA	$10.63	$1.47	$0.00	$12.10
108210	Marking & Identification - Plastic Sign	EA	$40.39	$23.86	$0.00	$64.25
108211	Marking & Identification - Aluminum Sign	EA	$40.39	$44.37	$0.00	$84.76
	22-05-85 Miscellaneous Plumbing					
108212	Roof Pipe Portal or Boot w/Flashing - 8" Diameter Opening Up to (1) 8" Pipe or (2) 2" Pipes, etc.	EA	$30.99	$59.21	$0.00	$90.20
108213	Roof Pipe Portal or Boot w/Flashing - 12" Diameter Opening Up to (1) 12" Pipe or (2) 4" Pipes, etc.	EA	$39.85	$157.53	$0.00	$197.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108214	Roof Pipe Portal or Boot w/Curb - 12" x 12" Opening Up to (4) 1" Pipes	EA	$132.85	$226.33	$0.00	$359.18
108215	Roof Pipe Portal or Boot w/Curb - 16" x 16" Opening Up to (4) 2" Pipes	EA	$177.12	$320.96	$0.00	$498.08
108216	Roof Pipe Portal or Boot w/Curb - 20" x 20" Opening Up to (5) 2" Pipes	EA	$221.41	$462.78	$0.00	$684.19
108217	Medical Gas Certification/System Purge - Per LF of Pipe	LF	$4.96	$0.00	$0.00	$4.96
108218	Potable Water Pipe Testing & Disinfection - Per LF of Pipe	LF	$0.89	$0.00	$0.00	$0.89

22-07-00 Plumbing Insulation

- Piping insulation includes factory applied all service jacket as required.
- Piping insulation items include fittings.
- Sizes shown for piping insulation line items are based on nominal pipe sizes.

22-07-19 Plumbing Piping Insulation

108219	2" Armaflex Sheet	SF	$12.71	$10.01	$0.00	$22.72
108220	1/2" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
108221	3/4" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
108222	1" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
108223	1-1/4" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
108224	1-1/2" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$10.43	$0.00	$15.44
108225	2" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$11.56	$0.00	$16.57
108226	2-1/2" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.32	$0.00	$18.39
108227	3" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.91	$0.00	$18.98
108228	4" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$14.70	$0.00	$20.77
108229	5" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$16.51	$0.00	$24.56
108230	6" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$17.35	$0.00	$25.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108231	8" Domestic Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$24.37	$0.00	$34.47
108232	1/2" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
108233	3/4" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
108234	1" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
108235	1-1/4" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
108236	1-1/2" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$10.43	$0.00	$15.44
108237	2" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$11.56	$0.00	$16.57
108238	2-1/2" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.32	$0.00	$18.39
108239	3" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.91	$0.00	$18.98
108240	4" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$14.70	$0.00	$20.77
108241	5" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$16.51	$0.00	$24.56
108242	6" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$17.35	$0.00	$25.40
108243	8" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$24.37	$0.00	$34.47
108244	10" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$26.23	$0.00	$36.33
108245	12" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$29.83	$0.00	$41.91
108246	15" Storm Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$35.52	$0.00	$47.60
108247	1/2" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
108248	3/4" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
108249	1" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
108250	1-1/4" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108251	1-1/2" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$10.43	$0.00	$15.44
108252	2" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$11.56	$0.00	$16.57
108253	2-1/2" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.32	$0.00	$18.39
108254	3" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.91	$0.00	$18.98
108255	4" Non-Potable Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$14.70	$0.00	$20.77
108256	1/2" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
108257	3/4" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
108258	1" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
108259	1-1/4" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
108260	1-1/2" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$10.43	$0.00	$15.44
108261	2" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$11.56	$0.00	$16.57
108262	2-1/2" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.32	$0.00	$18.39
108263	3" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.91	$0.00	$18.98
108264	4" Tempered Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$14.70	$0.00	$20.77
108265	6” Armaflex Fitting Insulation Cover	EA	$19.48	$44.97	$0.00	$64.45
108266	12” Armaflex Fitting Insulation Cover	EA	$30.11	$82.60	$0.00	$112.71

22-09-00 Instrumentation and Control for Plumbing

22-09-13 Instrumentation and Control Devices for Plumbing

108267	Domestic Water Booster Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
108268	Domestic Water Recirculating Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108269	Ejector Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
108270	Sump Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
108271	Water Heater Temperature Control	EA	$2,261.84	$2,166.22	$0.00	$4,428.06
108272	Air Compressor Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
108273	Vacuum Pump Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57
108274	Pure Water System Temperature Control	EA	$804.61	$1,220.96	$0.00	$2,025.57

22-10-00 Plumbing Piping

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.
• Cast iron no hub pipe and fittings including heavy-duty shielded couplings.

22-11-00 Facility Water Distribution

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

22-11-13 Facility Water Distribution Piping

108275	1/2" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
108276	3/4" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
108277	1" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
108278	1-1/4" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
108279	1-1/2" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
108280	2" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
108281	2-1/2" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$23.02	$38.40	$0.00	$61.42
108282	3" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$25.68	$52.61	$0.00	$78.29
108283	4" Non-Potable Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$28.34	$84.29	$0.00	$112.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108284	1/2" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
108285	3/4" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70
108286	1" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
108287	1-1/4" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
108288	1-1/2" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
108289	2" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
108290	2-1/2" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$130.18	$115.35	$0.00	$245.53
108291	3" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$155.87	$164.81	$0.00	$320.68
108292	4" Non-Potable Water Fitting - Copper, Wrot, Soldered	EA	$209.00	$372.87	$0.00	$581.87
108293	1/2" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.11	$4.36	$0.00	$34.47
108294	3/4" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$28.34	$4.63	$0.00	$32.97
108295	1" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$26.56	$5.13	$0.00	$31.69
108296	1-1/4" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$31.88	$7.92	$0.00	$39.80
108297	1-1/2" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.99	$10.23	$0.00	$41.22
108298	2" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$29.22	$11.29	$0.00	$40.51
108299	2-1/2" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$27.45	$14.37	$0.00	$41.82
108300	3" Non-Potable Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$33.65	$11.40	$0.00	$45.05
108301	4" Non-Potable Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.99	$23.39	$0.00	$54.38
108302	1/2" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$8.67	$0.00	$26.38
108303	3/4" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$9.93	$0.00	$27.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108304	1" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$14.08	$0.00	$31.79
108305	1-1/4" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$20.37	$28.16	$0.00	$48.53
108306	1-1/2" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$23.91	$28.93	$0.00	$52.84
108307	2" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$24.79	$35.73	$0.00	$60.52
108308	2-1/2" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$30.99	$54.99	$0.00	$85.98
108309	3" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$36.31	$64.74	$0.00	$101.05
108310	4" Non-Potable Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$77.94	$87.41	$0.00	$165.35
108311	1/2" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
108312	3/4" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
108313	1" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
108314	1-1/4" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
108315	1-1/2" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
108316	2" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
108317	2-1/2" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$23.02	$38.40	$0.00	$61.42
108318	3" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$25.68	$52.61	$0.00	$78.29
108319	4" Tempered Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$28.34	$84.29	$0.00	$112.63
108320	1/2" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
108321	3/4" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70
108322	1" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108323	1-1/4" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
108324	1-1/2" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
108325	2" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
108326	2-1/2" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$130.18	$115.35	$0.00	$245.53
108327	3" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$155.87	$164.81	$0.00	$320.68
108328	4" Tempered Water Fitting - Copper, Wrot, Soldered	EA	$209.00	$372.87	$0.00	$581.87
	22-11-16 Domestic Water Piping					
108329	1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
108330	3/4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
108331	1" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
108332	1-1/4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
108333	1-1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
108334	2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
108335	2-1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$23.02	$38.40	$0.00	$61.42
108336	3" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$25.68	$52.61	$0.00	$78.29
108337	4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$28.34	$84.29	$0.00	$112.63
108338	5" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$34.53	$119.75	$0.00	$154.28
108339	6" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$39.85	$159.76	$0.00	$199.61
108340	8" Domestic Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$49.60	$300.95	$0.00	$350.55
108341	1/2" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
108342	3/4" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108343	1" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
108344	1-1/4" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
108345	1-1/2" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
108346	2" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
108347	2-1/2" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$130.18	$115.35	$0.00	$245.53
108348	3" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$155.87	$164.81	$0.00	$320.68
108349	4" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$209.00	$372.87	$0.00	$581.87
108350	5" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$331.22	$1,306.67	$0.00	$1,637.89
108351	6" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$475.57	$1,759.76	$0.00	$2,235.33
108352	8" Domestic Water Fitting - Copper, Wrot, Soldered	EA	$652.69	$6,629.36	$0.00	$7,282.05
108353	1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$19.48	$5.46	$0.00	$24.94
108354	3/4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$7.40	$0.00	$27.77
108355	1" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$9.74	$0.00	$30.11
108356	1-1/4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$14.90	$0.00	$36.15
108357	1-1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$20.05	$0.00	$40.42
108358	2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$28.35	$0.00	$49.60
108359	2-1/2" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$38.40	$0.00	$58.77
108360	3" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$22.14	$52.61	$0.00	$74.75
108361	4" Domestic Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$24.79	$84.29	$0.00	$109.08
108362	1/2" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$10.63	$6.46	$0.00	$17.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108363	3/4" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$15.05	$10.96	$0.00	$26.01
108364	1" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$15.94	$21.15	$0.00	$37.09
108365	1-1/4" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$18.60	$39.93	$0.00	$58.53
108366	1-1/2" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$22.14	$75.80	$0.00	$97.94
108367	2" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$25.68	$100.70	$0.00	$126.38
108368	2-1/2" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$31.88	$298.63	$0.00	$330.51
108369	3" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$37.19	$372.15	$0.00	$409.34
108370	4" Domestic Water Fitting - Copper, Wrot, Press Joint	EA	$49.60	$487.40	$0.00	$537.00
108371	1/2" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$31.88	$3.88	$0.00	$35.76
108372	3/4" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$30.11	$3.69	$0.00	$33.80
108373	1" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$28.34	$3.71	$0.00	$32.05
108374	1-1/4" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$35.42	$5.86	$0.00	$41.28
108375	1-1/2" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$32.76	$7.89	$0.00	$40.65
108376	2" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$32.76	$8.24	$0.00	$41.00
108377	2-1/2" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$29.22	$11.21	$0.00	$40.43
108378	3" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$33.65	$11.96	$0.00	$45.61
108379	4" Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$33.65	$12.02	$0.00	$45.67
108380	1/2" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$17.71	$0.57	$0.00	$18.28
108381	3/4" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$17.71	$0.65	$0.00	$18.36
108382	1" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$16.82	$1.21	$0.00	$18.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108383	1-1/4" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$20.37	$1.99	$0.00	$22.36
108384	1-1/2" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$23.91	$2.26	$0.00	$26.17
108385	2" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$24.79	$3.45	$0.00	$28.24
108386	2-1/2" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$30.11	$10.67	$0.00	$40.78
108387	3" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$36.31	$13.47	$0.00	$49.78
108388	4" Domestic Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$76.16	$24.20	$0.00	$100.36
108389	1/2" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.11	$4.58	$0.00	$34.69
108390	3/4" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$28.34	$4.86	$0.00	$33.20
108391	1" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$26.56	$5.39	$0.00	$31.95
108392	1-1/4" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$31.88	$8.31	$0.00	$40.19
108393	1-1/2" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.99	$10.73	$0.00	$41.72
108394	2" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$29.22	$11.84	$0.00	$41.06
108395	2-1/2" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$27.45	$15.08	$0.00	$42.53
108396	3" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.99	$20.38	$0.00	$51.37
108397	4" Domestic Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$30.99	$24.54	$0.00	$55.53
108398	6" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$33.65	$40.28	$0.00	$73.93
108399	8" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$37.19	$57.24	$0.17	$94.60
108400	10" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$43.39	$83.18	$0.22	$126.79
108401	12" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$46.06	$110.95	$0.26	$157.27
108402	14" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$50.48	$158.24	$0.31	$209.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108403	16" Domestic Water Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$55.80	$249.48	$0.33	$305.61
108404	1/2" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$9.09	$0.00	$26.80
108405	3/4" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$10.42	$0.00	$28.13
108406	1" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$14.77	$0.00	$32.48
108407	1-1/4" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$20.37	$29.54	$0.00	$49.91
108408	1-1/2" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$23.91	$30.34	$0.00	$54.25
108409	2" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$24.79	$37.48	$0.00	$62.27
108410	2-1/2" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$30.99	$57.68	$0.00	$88.67
108411	3" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$36.31	$67.91	$0.00	$104.22
108412	4" Domestic Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$77.94	$91.69	$0.00	$169.63
108413	6" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$202.80	$281.83	$0.00	$484.63
108414	8" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$314.40	$720.56	$4.17	$1,039.13
108415	10" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$402.07	$2,874.95	$4.38	$3,281.40
108416	12" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$497.72	$3,854.94	$5.67	$4,358.33
108417	14" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$660.66	$5,894.73	$5.67	$6,561.06
108418	16" Domestic Water Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$818.31	$8,208.16	$5.67	$9,032.14
108419	1/2" Domestic Water Pipe - PEX, Crimp Ring	LF	$19.48	$2.38	$0.00	$21.86
108420	3/4" Domestic Water Pipe - PEX, Crimp Ring	LF	$19.48	$2.67	$0.00	$22.15
108421	1" Domestic Water Pipe - PEX, Crimp Ring	LF	$15.05	$2.88	$0.00	$17.93
108422	1-1/4" Domestic Water Pipe - PEX, Crimp Ring	LF	$18.60	$4.25	$0.00	$22.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108423	1-1/2" Domestic Water Pipe - PEX, Crimp Ring	LF	$18.60	$6.11	$0.00	$24.71
108424	2" Domestic Water Pipe - PEX, Crimp Ring	LF	$18.60	$7.09	$0.00	$25.69
108425	1/2" Domestic Water Fitting - PEX, Crimp Ring	EA	$7.97	$1.61	$0.00	$9.58
108426	3/4" Domestic Water Fitting - PEX, Crimp Ring	EA	$10.63	$2.15	$0.00	$12.78
108427	1" Domestic Water Fitting - PEX, Crimp Ring	EA	$12.40	$4.22	$0.00	$16.62
108428	1-1/4" Domestic Water Fitting - PEX, Crimp Ring	EA	$15.05	$10.12	$0.00	$25.17
108429	1-1/2" Domestic Water Fitting - PEX, Crimp Ring	EA	$18.60	$13.99	$0.00	$32.59
108430	2" Domestic Water Fitting - PEX, Crimp Ring	EA	$23.02	$38.52	$0.00	$61.54
108431	1/2" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$19.96	$7.12	$0.00	$27.08
108432	3/4" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$20.78	$11.13	$0.00	$31.91
108433	1" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$20.78	$13.71	$0.00	$34.49
108434	1-1/4" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$22.82	$17.50	$0.00	$40.32
108435	1-1/2" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$21.39	$24.08	$0.00	$45.47
108436	2" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$23.01	$32.94	$0.00	$55.95
108437	2-1/2" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$23.00	$46.05	$0.00	$69.05
108438	3" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$25.83	$62.66	$0.00	$88.49
108439	4" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$29.90	$104.98	$0.00	$134.88
108440	6" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$43.76	$152.46	$0.00	$196.22
108441	8" Domestic Water Pipe - Copper, Type K, Hard Drawn, Soldered	LF	$53.53	$417.61	$0.00	$471.14
108442	1-1/2" & Down Domestic Water Pipe Connection - Insert Tee Cut, Prepare and Tie-In to Existing Copper Pipe.	EA	$83.25	$12.54	$0.00	$95.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108443	2" to 4" Domestic Water Pipe Connection - Insert Tee Cut, Prepare and Tie-In to Existing Copper Pipe	EA	$194.83	$85.88	$0.00	$280.71
108444	1-1/2" & Down Domestic Water Pipe Connection - Insert Tee & Shut-Off Valve Cut, Prepare and Tie-In to Existing Copper Pipe	EA	$194.83	$57.68	$0.00	$252.51
108445	2" to 4" Domestic Water Pipe Connection - Insert Tee & Shut-Off Valve Cut, Prepare and Tie-In to Existing Copper Pipe	EA	$319.71	$397.03	$0.00	$716.74

22-11-19 Domestic Water Piping Specialties

- 2" and down valves include threaded or soldered connections unless stated otherwise.
- 2-1/2" and up valves include flanged, grooved, lug, or wafer connections unless stated otherwise.

108446	1/2" or 3/4" Hose Bibb or Silcock - Standard	EA	$31.18	$16.42	$0.00	$47.60
108447	1/2" or 3/4" Hose Bibb or Silcock - Non-Freeze	EA	$58.45	$54.84	$0.00	$113.29
108448	3/4" Wall Hydrant - Non-Freeze, Flush Mount Includes integral vacuum breaker. Watts HY-420 or Equal.	EA	$71.91	$448.84	$0.00	$520.75
108449	3/4" Wall Hydrant - Non-Freeze, Concealed w/ Locking Box Includes integral vacuum breaker. Watts HY-725 or Equal.	EA	$87.85	$718.65	$0.00	$806.50
108450	3/4" Ground Hydrant - Non-Freeze, Concealed w/ Locking Box	EA	$95.65	$782.60	$0.00	$878.25
108451	4" Post Hydrant (Mechanical Joint x Female Iron Pipe) Self Draining Flushing Hydrant w/4.5' Bury set in place (similar to MainGuard #7500)	EA	$299.34	$4,269.19	$0.00	$4,568.53
108452	1/2" Water Hammer Arrestor Watts LF15M2 or Equal.	EA	$31.88	$63.30	$0.00	$95.18
108453	3/4" Water Hammer Arrestor Watts LF15M2 or Equal.	EA	$32.76	$91.42	$0.00	$124.18
108454	1" Water Hammer Arrestor Watts LF15M2 or Equal.	EA	$33.65	$151.40	$0.00	$185.05
108455	Water Solenoid Valve - 1" & Down Granzow Series W or Equal.	EA	$52.26	$597.31	$0.00	$649.57
108456	Water Solenoid Valve & Wall Switch - 1" & Down Asco 8221G005 & 173A19 Or Equal.	EA	$136.39	$979.39	$0.00	$1,115.78
108457	1" & Down Check Valve Bronze Swing	EA	$74.39	$21.20	$0.00	$95.59
108458	1-1/4" to 2" Check Valve Bronze Swing	EA	$114.24	$58.52	$0.00	$172.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108459	1" & Down Balancing Valve Bell & Gossett CB or Equal	EA	$104.50	$149.61	$0.00	$254.11
108460	1-1/4" to 2" Balancing Valve Bell & Gossett CB or Equal	EA	$110.70	$280.04	$0.00	$390.74
108461	1/2" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$109.81	$359.32	$0.00	$469.13
108462	3/4" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$133.73	$370.83	$0.00	$504.56
108463	1" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$156.76	$475.69	$0.00	$632.45
108464	1-1/4" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$179.78	$904.06	$0.00	$1,083.84
108465	1-1/2" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$188.63	$1,205.85	$0.00	$1,394.48
108466	2" Water Pressure Reducing Valve ASSE 1003, Watts LF25AUB-Z3 or Equal.	EA	$225.84	$1,760.81	$0.00	$1,986.65
108467	1/2" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$66.42	$122.75	$0.00	$189.17
108468	3/4" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$81.48	$148.33	$0.00	$229.81
108469	1" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$93.87	$170.07	$0.00	$263.94
108470	1-1/4" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$103.62	$221.22	$0.00	$324.84
108471	1-1/2" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$111.58	$248.08	$0.00	$359.66
108472	2" Wye Strainer Watts LF777SM1-20 Or Equal.	EA	$131.07	$397.69	$0.00	$528.76
108473	3/8" Vacuum Breaker - Laboratory Faucet ASSE 1035, T&S BL-5550-09 or Equal.	EA	$60.23	$90.79	$0.00	$151.02
108474	3/4" Vacuum Breaker - Hose Connection ASSE 1011, Watts Series LF8 or Equal.	EA	$86.79	$57.54	$0.00	$144.33
108475	1/2" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$72.62	$153.45	$0.00	$226.07
108476	3/4" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$86.79	$182.86	$0.00	$269.65
108477	1" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$99.19	$294.11	$0.00	$393.30
108478	1-1/4" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$111.58	$514.05	$0.00	$625.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108479	1-1/2" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$118.67	$602.28	$0.00	$720.95
108480	2" Vacuum Breaker - Atmospheric or Anti-Siphon ASSE 1001, Watts Series LF288A or Equal.	EA	$139.93	$937.31	$0.00	$1,077.24
108481	3/4" Backflow Preventer - Hose Connection ASSE 1052, Watts Series LFN9-CD or Equal.	EA	$97.06	$262.13	$0.00	$359.19
108482	1/2" Backflow Preventer - Intermediate Atmospheric Vent Dual Check ASSE 1012, Watts Series 9D or Equal.	EA	$77.94	$152.19	$0.00	$230.13
108483	3/4" Backflow Preventer - Intermediate Atmospheric Vent Dual Check ASSE 1012, Watts Series 9D or Equal.	EA	$97.06	$162.40	$0.00	$259.46
108484	1/2" Backflow Preventer - Dual Check Valve ASSE 1024, Watts Series LF7 or Equal.	EA	$78.82	$112.53	$0.00	$191.35
108485	3/4" Backflow Preventer - Dual Check Valve ASSE 1024, Watts Series LF7 or Equal.	EA	$97.42	$125.31	$0.00	$222.73
108486	1" Backflow Preventer - Dual Check Valve ASSE 1024, Watts Series LF7 or Equal.	EA	$116.01	$138.10	$0.00	$254.11
108487	1/2" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$78.82	$464.93	$0.00	$543.75
108488	3/4" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$97.42	$472.96	$0.00	$570.38
108489	1" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$116.01	$461.04	$0.00	$577.05
108490	1-1/4" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$134.62	$1,053.47	$0.00	$1,188.09
108491	1-1/2" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$143.47	$1,108.34	$0.00	$1,251.81
108492	2" Backflow Preventer - Double Check Valve Assembly ASSE 1015, Watts Series 007 or Equal.	EA	$178.89	$1,184.01	$0.00	$1,362.90
108493	1/2" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$78.82	$480.80	$0.00	$559.62
108494	3/4" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$108.04	$485.92	$0.00	$593.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108495	1" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$122.21	$732.72	$0.00	$854.93
108496	1-1/4" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$162.96	$1,148.30	$0.00	$1,311.26
108497	1-1/2" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$170.92	$1,244.21	$0.00	$1,415.13
108498	2" Backflow Preventer - Reduced Pressure Zone Assembly ASSE 1013, Watts Series 009 or Equal.	EA	$194.83	$1,427.06	$0.00	$1,621.89
108499	2-1/2" Backflow Preventer - Reduced Pressure Detector Assembly ASSE 1047, OS&Y. Watts Series 957 or Equal.	EA	$335.82	$5,483.20	$0.00	$5,819.02
108500	3" Backflow Preventer - Reduced Pressure Detector Assembly ASSE 1047, OS&Y. Watts Series 957 or Equal.	EA	$401.19	$5,515.17	$0.00	$5,916.36
108501	4" Backflow Preventer - Reduced Pressure Detector Assembly ASSE 1047, OS&Y. Watts Series 957 or Equal.	EA	$569.45	$6,065.02	$0.00	$6,634.47
108502	6" Backflow Preventer - Reduced Pressure Detector Assembly ASSE 1047, OS&Y. Watts Series 957 or Equal.	EA	$841.34	$9,653.14	$0.00	$10,494.48
108503	8" Backflow Preventer - Reduced Pressure Detector Assembly ASSE 1047, OS&Y. Watts Series 957 or Equal.	EA	$996.31	$16,756.50	$0.00	$17,752.81
108504	1" & Down Domestic Water Service Meter Submeter	EA	$55.80	$246.30	$0.00	$302.10
108505	1-1/4" To 2" Domestic Water Service Meter Submeter	EA	$93.87	$867.01	$0.00	$960.88
108506	3" Domestic Water Service Meter Submeter	EA	$308.19	$3,763.32	$0.00	$4,071.51
108507	4" Domestic Water Service Meter Submeter	EA	$433.07	$6,689.49	$0.00	$7,122.56
108508	6" Domestic Water Service Meter Submeter	EA	$615.50	$15,053.28	$0.00	$15,668.78
108509	8" Domestic Water Service Meter Submeter	EA	$838.67	$21,696.70	$0.00	$22,535.37
108510	1-1/2" Ultrasonic Water Meter w/ Analog Pulse Kit	EA	$337.42	$5,285.58	$0.00	$5,623.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108511	2" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,270.85	$1,458.75	$0.00	$2,729.60
108512	3" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,803.99	$2,610.21	$0.00	$4,414.20
108513	4" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,578.02	$4,522.15	$0.00	$7,100.17
108514	6" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,897.45	$9,538.30	$0.00	$14,435.75
108515	8" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,562.41	$13,313.56	$0.00	$19,875.97
108516	Air Admittance Valve Oatey 39223 Or Equal.	EA	$16.82	$43.48	$0.00	$60.30
108517	2 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$141.70	$79.32	$0.00	$221.02
108518	5 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$212.54	$105.43	$0.00	$317.97
108519	10 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$212.54	$330.40	$0.00	$542.94
108520	15 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$212.54	$420.40	$0.00	$632.94
108521	20 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$212.54	$500.23	$0.00	$712.77
108522	35 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$212.54	$697.46	$0.00	$910.00
108523	45 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$265.68	$957.70	$0.00	$1,223.38
108524	60 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$265.68	$1,310.73	$0.00	$1,576.41
108525	2 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$141.70	$2,230.27	$0.00	$2,371.97
108526	6.4 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$212.54	$2,426.31	$0.00	$2,638.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108527	8 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$212.54	$2,500.29	$0.00	$2,712.83
108528	14 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$212.54	$3,521.92	$0.00	$3,734.46
108529	16.6 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$265.68	$2,922.56	$0.00	$3,188.24
108530	18 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$265.68	$2,995.24	$0.00	$3,260.92
108531	25 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$265.68	$3,375.09	$0.00	$3,640.77
108532	34 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$265.68	$3,903.90	$0.00	$4,169.58
108533	53 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$318.83	$5,169.56	$0.00	$5,488.39
108534	77 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$318.83	$7,057.92	$0.00	$7,376.75
108535	90 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$318.83	$8,215.78	$0.00	$8,534.61
108536	3.5 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$141.70	$3,558.86	$0.00	$3,700.56
108537	5 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$212.54	$3,711.49	$0.00	$3,924.03
108538	8 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$212.54	$4,017.88	$0.00	$4,230.42
108539	15 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$265.68	$4,738.64	$0.00	$5,004.32
108540	22 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$265.68	$5,467.58	$0.00	$5,733.26
108541	26 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$265.68	$5,887.78	$0.00	$6,153.46
108542	35 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$265.68	$6,843.03	$0.00	$7,108.71
108543	68 Gallon Expansion Tank - Steel Diaphragm Type, ASME	EA	$318.83	$6,311.91	$0.00	$6,630.74
108544	45 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$265.68	$7,920.26	$0.00	$8,185.94
108545	60 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$318.83	$9,567.41	$0.00	$9,886.24
108546	70 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$318.83	$10,686.36	$0.00	$11,005.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108547	80 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$318.83	$11,822.02	$0.00	$12,140.85
108548	90 Gallon Expansion Tank - Steel Bladder Type, ASME	EA	$318.83	$12,974.38	$0.00	$13,293.21
108549	85 Gallon Expansion Tank - Steel Diaphragm Type, Non-ASME	EA	$265.68	$1,535.50	$0.00	$1,801.18
108550	1/2" Thermostatic Tempering Valve Watts Powers HydroGuard Series LFLM490, LFLM495 or Equal.	EA	$100.96	$405.35	$0.00	$506.31
108551	3/4" Thermostatic Tempering Valve Watts Powers HydroGuard Series LFLM490, LFLM495 or Equal.	EA	$122.21	$511.49	$0.00	$633.70
108552	1" Thermostatic Tempering Valve Watts Powers HydroGuard Series LFLM490, LFLM495 or Equal.	EA	$143.47	$602.28	$0.00	$745.75
108553	1/2" Emergency Tempering Valve w/ Cold Water Bypass Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$147.90	$1,551.10	$0.00	$1,699.00
108554	1" Emergency Tempering Valve w/ Cold Water Bypass Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$210.77	$2,439.82	$0.00	$2,650.59
108555	1-1/2" Emergency Tempering Valve w/ Cold Water Bypass Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$236.46	$3,799.11	$0.00	$4,035.57
108556	2" Emergency Tempering Valve w/ Cold Water Bypass Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$267.46	$5,180.14	$0.00	$5,447.60
108557	[Modifier] Emergency Tempering Valve - Chrome Finish Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$0.00	$329.91	$0.00	$329.91
108558	[Modifier] Emergency Tempering Valve - Temperature & Pressure Gauge on Outlet Rough Bronze Finish. Watts Powers HydroGuard XP or Equal.	EA	$0.00	$198.20	$0.00	$198.20
108559	3/4" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor. Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$197.49	$3,741.56	$0.00	$3,939.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108560	1" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor. Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$229.38	$4,521.59	$0.00	$4,750.97
108561	1-1/4" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor. Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$276.31	$5,250.46	$0.00	$5,526.77
108562	1-1/2" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor. Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$295.79	$6,339.95	$0.00	$6,635.74
108563	2" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor. Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$363.10	$8,399.98	$0.00	$8,763.08
108564	2-1/2" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor.	EA	$425.10	$12,527.72	$0.00	$12,952.82
108565	3" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor.	EA	$566.79	$17,495.60	$0.00	$18,062.39
108566	4" Thermostatic Temperature Actuated Mixing Valve ASSE 1017. Rough Bronze Finish. Includes Piping Kit, Thermometer, and Temperature Range Motor.	EA	$708.49	$24,437.83	$0.00	$25,146.32
108567	[Modifier] Thermostatic Temperature Actuated Mixing Valve - Chrome Finish Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$0.00	$744.22	$0.00	$744.22
108568	[Modifier] Thermostatic Temperature Actuated Mixing Valve - Cold Water Bypass Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$0.00	$2,223.71	$0.00	$2,223.71
108569	[Modifier] Thermostatic Temperature Actuated Mixing Valve - Combination Temperature & Pressure Gauges on Inlets Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$0.00	$676.45	$0.00	$676.45
108570	[Modifier] Thermostatic Temperature Actuated Mixing Valve - Painted Cabinet Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$177.12	$2,012.73	$0.00	$2,189.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108571	[Modifier] Thermostatic Temperature Actuated Mixing Valve - Stainless Steel Cabinet Watts Powers HydroGuard XP Series LFMM430 or Equal.	EA	$177.12	$3,070.23	$0.00	$3,247.35
108572	3/8" x 50' Hose Reel Assembly - Single Arm/Pedestal, Water or Air Reelcraft 7650 OLP or Equal.	EA	$302.88	$525.39	$0.00	$828.27
108573	3/8" x 50' Hose Reel Assembly - Dual Arm/Pedestal, Water or Air Reelcraft DP7650 OLP or Equal.	EA	$302.88	$655.82	$0.00	$958.70
108574	3/8" x 50' Hose Reel Assembly - Enclosed, Water or Air Reelcraft 7650 ELP or Equal.	EA	$302.88	$720.43	$0.00	$1,023.31
108575	1/2" x 50' Hose Reel Assembly - Single Arm/Pedestal, Water or Air Reelcraft 7850 OLP or Equal.	EA	$302.88	$508.32	$0.00	$811.20
108576	1/2" x 50' Hose Reel Assembly - Dual Arm/Pedestal, Water or Air Reelcraft DP7850 OLP or Equal.	EA	$302.88	$685.08	$0.00	$987.96
108577	1/2" x 50' Hose Reel Assembly - Enclosed, Water or Air Reelcraft 7850 ELP or Equal.	EA	$302.88	$827.70	$0.00	$1,130.58
108578	3/8" x 50' Hose Reel Assembly - Single Arm/Pedestal, Grease Reelcraft 7650 OHP or Equal.	EA	$302.88	$941.07	$0.00	$1,243.95
108579	3/8" x 50' Hose Reel Assembly - Dual Arm/Pedestal, Grease Reelcraft DP7650 OHP or Equal.	EA	$302.88	$984.95	$0.00	$1,287.83
108580	1/2" x 50' Hose Reel Assembly - Single Arm/Pedestal, Oil Reelcraft 7850 OMP or Equal.	EA	$302.88	$732.62	$0.00	$1,035.50
108581	1/2" x 50' Hose Reel Assembly - Dual Arm/Pedestal, Oil Reelcraft DP7850 OMP or Equal.	EA	$302.88	$894.75	$0.00	$1,197.63
108582	3” Romac Macro HP Extended Range Coupling Connects pipes of various material types.	EA	$130.18	$866.66	$0.00	$996.84
108583	6” Romac Macro HP Extended Range Coupling Connects pipes of various material types.	EA	$321.48	$1,512.08	$0.00	$1,833.56
108584	12” Romac Macro HP Extended Range Coupling Connects pipes of various material types.	EA	$528.71	$2,605.71	$0.00	$3,134.42
108585	1" McDonnell & Miller Flow Switch W/ 10” Paddle	EA	$221.41	$426.67	$0.00	$648.08

22-11-23 Domestic Water Pumps

Packaged booster pumps to be factory assembled and tested w/variable speed drives, piping, valves, sensors and

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	control panel on skid or base.					
108586	1/4 HP & Dn Bronze In-Line Centrifugal Pump Single Stage, Close Coupled.	EA	$212.54	$632.64	$0.00	$845.18
108587	1/3 HP In-Line Centrifugal Pump Single Stage, Close Coupled.	EA	$212.54	$1,515.20	$0.00	$1,727.74
108588	1/2 HP In-Line Centrifugal Pump Single Stage, Close Coupled.	EA	$212.54	$2,384.00	$0.00	$2,596.54
108589	1 To 3 HP In-Line Centrifugal Pump Single Stage, Close Coupled.	EA	$283.39	$2,635.67	$0.00	$2,919.06
108590	5 HP In-Line Centrifugal Pump Single Stage, Close Coupled.	EA	$566.79	$4,673.19	$0.00	$5,239.98
108591	60 HP End Suction Centrifugal Pump Peerless Model 3AE9 HCS or equal.	EA	$2,550.57	$26,206.06	$0.00	$28,756.63
108592	2 HP Simplex Booster Pump Includes control panel. Goulds Aquavar e-AB or equal.	EA	$836.90	$4,645.61	$0.00	$5,482.51
108593	2-1/2 HP Duplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$1,416.98	$36,105.05	$0.00	$37,522.03
108594	5 HP Duplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$1,416.98	$46,113.00	$0.00	$47,529.98
108595	7-1/2 HP Duplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$1,416.98	$54,768.71	$0.00	$56,185.69
108596	10 HP Duplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$1,416.98	$63,532.06	$0.00	$64,949.04
108597	2-1/2 HP Triplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$2,125.48	$53,156.51	$0.00	$55,281.99
108598	5 HP Triplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$2,125.48	$55,874.13	$0.00	$57,999.61
108599	7-1/2 HP Triplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$2,125.48	$71,778.16	$0.00	$73,903.64
108600	10 HP Triplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$2,125.48	$86,004.34	$0.00	$88,129.82
108601	20 HP Triplex Packaged Booster Pump Prefabricated System Including Pumps, Piping, Valves, Specialties and Control Panel	EA	$2,125.48	$101,739.01	$0.00	$103,864.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108602	3" Packaged Booster Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,709.23	$4,313.74	$0.00	$6,022.97
108603	4" Packaged Booster Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,647.99	$6,704.80	$0.00	$9,352.79
108604	6" Packaged Booster Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,923.27	$9,925.60	$0.00	$13,848.87
108605	1" & DN In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$425.10	$767.29	$0.00	$1,192.39
108606	1-1/4" To 2" In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$611.08	$1,525.64	$0.00	$2,136.72
	22-12-23 Facility Indoor Potable-Water Storage Tanks					
108607	80 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$265.68	$1,847.83	$0.00	$2,113.51
108608	120 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$637.64	$3,665.06	$0.00	$4,302.70
108609	140 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$637.64	$4,583.14	$0.00	$5,220.78
108610	200 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$850.20	$5,732.93	$0.00	$6,583.13
108611	250 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$1,062.74	$9,508.74	$0.00	$10,571.48
108612	350 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$1,062.74	$13,029.53	$0.00	$14,092.27
108613	500 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$1,275.28	$16,455.59	$0.00	$17,730.87
108614	750 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$1,700.38	$22,058.82	$0.00	$23,759.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108615	1,000 Gallon Hot Water Storage Tank - Glass Lined Steel ASME	EA	$2,125.48	$24,866.13	$0.00	$26,991.61
108616	250 Gallon Potable Water Storage Tank - Polyethylene Norwesco 41854 or Equal.	EA	$418.90	$1,465.24	$0.00	$1,884.14
108617	1,000 Gallon Potable Water Storage Tank - Polyethylene Norwesco 44113 or Equal.	EA	$297.56	$4,172.64	$0.00	$4,470.20

22-13-00 Facility Sanitary Sewerage

• Plumbing Equipment costs exclude balancing, temperature controls, electrical, and piping hook-ups (connections), unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

22-13-16 Sanitary Waste and Vent Piping

108618	2" & Down Sanitary Waste or Vent Pipe Connection - Insert Tee or WYE Cut, Prepare and Tie-In to Existing Pipe	EA	$44.29	$34.83	$0.00	$79.12
108619	3" to 4" Sanitary Waste or Vent Pipe Connection - Insert Tee or WYE Cut, Prepare and Tie-In to Existing Pipe	EA	$87.68	$59.23	$0.00	$146.91
108620	5" to 6" Sanitary Waste or Vent Pipe Connection - Insert Tee or WYE Cut, Prepare and Tie-In to Existing Pipe	EA	$132.85	$146.68	$0.00	$279.53
108621	8" to 10" Sanitary Waste or Vent Pipe Connection - Insert Tee or WYE Cut, Prepare and Tie-In to Existing Pipe	EA	$156.76	$335.72	$0.00	$492.48
108622	1-1/2" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$0.98	$0.00	$6.29
108623	2" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.32	$0.00	$6.63
108624	3" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$2.63	$0.00	$8.83
108625	4" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$3.56	$0.00	$9.76
108626	6" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$10.63	$6.72	$0.00	$17.35
108627	8" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$11.51	$10.45	$0.00	$21.96
108628	10" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$14.17	$14.71	$0.00	$28.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108629	12" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$15.05	$19.52	$0.00	$34.57
108630	1-1/2" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.02	$4.29	$0.00	$27.31
108631	2" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$24.79	$5.06	$0.00	$29.85
108632	3" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$35.42	$14.08	$0.00	$49.50
108633	4" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$76.16	$25.10	$0.00	$101.26
108634	6" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$167.38	$83.01	$0.00	$250.39
108635	8" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$201.92	$126.06	$0.00	$327.98
108636	10" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$222.30	$238.89	$0.00	$461.19
108637	12" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$235.58	$330.32	$0.00	$565.90
108638	1-1/2" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$2.90	$0.00	$32.12
108639	2" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.24	$0.00	$32.46
108640	3" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$5.50	$0.00	$33.84
108641	4" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$7.75	$0.00	$39.63
108642	6" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$12.59	$0.00	$46.24
108643	8" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$19.76	$0.00	$58.72
108644	10" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$24.20	$0.00	$63.16
108645	12" Sanitary Waste Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$36.31	$28.60	$0.00	$64.91
108646	1-1/2" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$23.02	$4.29	$0.00	$27.31
108647	2" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$24.79	$5.06	$0.00	$29.85
108648	3" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$35.42	$14.08	$0.00	$49.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108649	4" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$76.16	$25.10	$0.00	$101.26
108650	6" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$167.38	$83.01	$0.00	$250.39
108651	8" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$201.92	$126.06	$0.00	$327.98
108652	10" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$222.30	$238.89	$0.00	$461.19
108653	12" Sanitary Waste Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$235.58	$330.32	$0.00	$565.90
108654	2" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$10.63	$14.12	$0.00	$24.75
108655	3" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$14.17	$18.57	$0.00	$32.74
108656	4" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$18.60	$24.14	$0.00	$42.74
108657	5" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$22.14	$34.06	$0.00	$56.20
108658	6" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$26.56	$41.48	$0.00	$68.04
108659	8" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$34.53	$64.59	$0.00	$99.12
108660	10" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$46.06	$107.49	$0.00	$153.55
108661	12" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$49.60	$156.18	$0.00	$205.78
108662	15" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$59.34	$228.26	$0.00	$287.60
108663	2" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$43.39	$27.96	$0.00	$71.35
108664	3" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$63.77	$47.63	$0.00	$111.40
108665	4" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$86.79	$66.72	$0.00	$153.51
108666	5" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$108.04	$105.88	$0.00	$213.92
108667	6" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$122.21	$132.87	$0.00	$255.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108668	8" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$158.53	$356.05	$0.00	$514.58
108669	10" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$224.07	$544.71	$0.00	$768.78
108670	12" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$282.51	$1,220.65	$0.00	$1,503.16
108671	15" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$372.84	$2,035.69	$0.00	$2,408.53
108672	2" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$11.41	$26.49	$0.00	$37.90
108673	3" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$17.93	$35.78	$0.00	$53.71
108674	4" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$22.00	$46.86	$0.00	$68.86
108675	5" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$26.89	$62.10	$0.00	$88.99
108676	6" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$30.14	$69.90	$0.00	$100.04
108677	8" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$44.00	$122.03	$0.00	$166.03
108678	10" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$52.96	$198.60	$0.00	$251.56
108679	12" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$57.84	$281.13	$0.00	$338.97
108680	15" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$70.89	$434.65	$0.00	$505.54
108681	2" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$45.08	$54.55	$0.00	$99.63
108682	3" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$67.90	$104.24	$0.00	$172.14
108683	4" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$89.62	$151.02	$0.00	$240.64
108684	5" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$111.62	$215.68	$0.00	$327.30
108685	6" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$128.73	$254.52	$0.00	$383.25
108686	8" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$182.24	$632.44	$0.00	$814.68
108687	10" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$243.62	$894.98	$0.00	$1,138.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108688	12" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$297.11	$1,813.69	$0.00	$2,110.80
108689	15" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$373.16	$3,185.76	$0.00	$3,558.92
108690	1-1/2" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$25.68	$15.75	$0.00	$41.43
108691	2" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$26.56	$15.79	$0.00	$42.35
108692	3" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$31.88	$21.84	$0.00	$53.72
108693	4" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$38.96	$28.88	$0.00	$67.84
108694	5" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$41.62	$42.92	$0.00	$84.54
108695	6" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$46.06	$51.53	$0.00	$97.59
108696	8" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$56.68	$82.93	$0.00	$139.61
108697	10" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$68.20	$129.74	$0.00	$197.94
108698	12" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$73.51	$177.94	$0.00	$251.45
108699	15" Sanitary Waste Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$83.25	$260.63	$0.00	$343.88
108700	1-1/2" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$27.45	$34.79	$0.00	$62.24
108701	2" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$35.42	$35.77	$0.00	$71.19
108702	3" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$53.14	$46.18	$0.00	$99.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108703	4" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$69.97	$60.82	$0.00	$130.79
108704	5" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$87.68	$140.64	$0.00	$228.32
108705	6" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$106.27	$150.60	$0.00	$256.87
108706	8" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$125.75	$344.70	$0.00	$470.45
108707	10" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$176.24	$617.97	$0.00	$794.21
108708	12" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$232.92	$1,084.61	$0.00	$1,317.53
108709	15" Sanitary Waste Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$325.91	$2,214.95	$0.00	$2,540.86
108710	2" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$27.45	$15.51	$0.00	$42.96
108711	3" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$31.88	$20.92	$0.00	$52.80
108712	4" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$40.73	$28.01	$0.00	$68.74
108713	5" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$45.17	$37.92	$0.00	$83.09
108714	6" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$49.60	$47.53	$0.00	$97.13
108715	8" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$62.00	$74.15	$0.00	$136.15
108716	10" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$72.62	$118.19	$0.00	$190.81
108717	12" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$77.05	$168.30	$0.00	$245.35
108718	15" Sanitary Waste Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$88.56	$247.88	$0.00	$336.44
108719	2" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$43.39	$27.96	$0.00	$71.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108720	3" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$63.77	$47.63	$0.00	$111.40
108721	4" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$86.79	$66.72	$0.00	$153.51
108722	5" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$108.04	$105.88	$0.00	$213.92
108723	6" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$122.21	$132.87	$0.00	$255.08
108724	8" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$158.53	$356.05	$0.00	$514.58
108725	10" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$224.07	$544.71	$0.00	$768.78
108726	12" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$282.51	$1,220.65	$0.00	$1,503.16
108727	15" Sanitary Waste Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$372.84	$2,035.69	$0.00	$2,408.53
108728	2" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$28.52	$27.88	$0.00	$56.40
108729	3" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$36.02	$38.13	$0.00	$74.15
108730	4" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$44.82	$50.73	$0.00	$95.55
108731	5" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$49.70	$65.97	$0.00	$115.67
108732	6" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$53.94	$75.93	$0.00	$129.87
108733	8" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$71.21	$131.60	$0.00	$202.81
108734	10" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$80.18	$209.30	$0.00	$289.48
108735	12" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$85.07	$293.24	$0.00	$378.31
108736	15" Sanitary Waste Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$100.21	$454.27	$0.00	$554.48
108737	2" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$45.08	$54.55	$0.00	$99.63
108738	3" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$67.90	$104.24	$0.00	$172.14
108739	4" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$89.62	$151.02	$0.00	$240.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108740	5" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$111.62	$215.68	$0.00	$327.30
108741	6" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$128.73	$254.52	$0.00	$383.25
108742	8" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$182.24	$632.44	$0.00	$814.68
108743	10" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$243.62	$894.98	$0.00	$1,138.60
108744	12" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$297.11	$1,813.69	$0.00	$2,110.80
108745	15" Sanitary Waste Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$373.16	$3,185.76	$0.00	$3,558.92
108746	1-1/2" Sanitary Waste Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$13.68	$0.00	$30.50
108747	2" Sanitary Waste Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$17.80	$0.00	$34.62
108748	3" Sanitary Waste Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$31.13	$0.00	$47.95
108749	1-1/2" Sanitary Waste Fitting - Copper, DWV, Wrot, Soldered	EA	$61.11	$45.13	$0.00	$106.24
108750	2" Sanitary Waste Fitting - Copper, DWV, Wrot, Soldered	EA	$69.08	$67.53	$0.00	$136.61
108751	3" Sanitary Waste Fitting - Copper, DWV, Wrot, Soldered	EA	$127.52	$153.28	$0.00	$280.80
108752	1-1/2" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.38	$0.00	$6.69
108753	2" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.80	$0.00	$7.11
108754	3" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$3.63	$0.00	$8.94
108755	4" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$5.44	$0.00	$11.64
108756	6" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$9.74	$14.53	$0.00	$24.27
108757	1-1/2" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.02	$2.97	$0.00	$25.99
108758	2" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.91	$4.19	$0.00	$28.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108759	3" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$35.42	$9.51	$0.00	$44.93
108760	4" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$75.28	$18.65	$0.00	$93.93
108761	6" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$164.73	$69.00	$0.00	$233.73
108762	1-1/2" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.36	$0.00	$32.58
108763	2" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.78	$0.00	$33.00
108764	3" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$6.58	$0.00	$34.92
108765	4" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$9.74	$0.00	$41.62
108766	6" Sanitary Waste Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$20.58	$0.00	$54.23
108767	1-1/2" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.02	$2.97	$0.00	$25.99
108768	2" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.91	$4.19	$0.00	$28.10
108769	3" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$35.42	$9.51	$0.00	$44.93
108770	4" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$75.28	$18.65	$0.00	$93.93
108771	6" Sanitary Waste Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$164.73	$69.00	$0.00	$233.73
108772	1-1/2" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$2.90	$0.00	$32.12
108773	2" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.24	$0.00	$32.46
108774	3" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$5.50	$0.00	$33.84
108775	4" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$7.75	$0.00	$39.63
108776	6" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$12.59	$0.00	$46.24
108777	8" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$19.76	$0.00	$58.72
108778	10" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$24.20	$0.00	$63.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108779	12" Sanitary Vent Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$36.31	$28.60	$0.00	$64.91
108780	1-1/2" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$23.02	$4.29	$0.00	$27.31
108781	2" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$24.79	$5.06	$0.00	$29.85
108782	3" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$35.42	$14.08	$0.00	$49.50
108783	4" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$76.16	$25.10	$0.00	$101.26
108784	6" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$167.38	$83.01	$0.00	$250.39
108785	8" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$201.92	$126.06	$0.00	$327.98
108786	10" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$222.30	$238.89	$0.00	$461.19
108787	12" Sanitary Vent Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$235.58	$330.32	$0.00	$565.90
108788	1-1/2" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$25.68	$15.75	$0.00	$41.43
108789	2" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$26.56	$15.79	$0.00	$42.35
108790	3" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$31.88	$21.84	$0.00	$53.72
108791	4" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$38.96	$28.88	$0.00	$67.84
108792	5" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$41.62	$42.92	$0.00	$84.54
108793	6" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$46.06	$51.53	$0.00	$97.59
108794	8" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$56.68	$82.93	$0.00	$139.61
108795	10" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$68.20	$129.74	$0.00	$197.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108796	12" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$73.51	$177.94	$0.00	$251.45
108797	15" Sanitary Vent Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$83.25	$260.63	$0.00	$343.88
108798	1-1/2" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$27.45	$34.79	$0.00	$62.24
108799	2" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$35.42	$35.77	$0.00	$71.19
108800	3" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$53.14	$46.18	$0.00	$99.32
108801	4" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$69.97	$60.82	$0.00	$130.79
108802	5" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$87.68	$140.64	$0.00	$228.32
108803	6" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$106.27	$150.60	$0.00	$256.87
108804	8" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$125.75	$344.70	$0.00	$470.45
108805	10" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$176.24	$617.97	$0.00	$794.21
108806	12" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$232.92	$1,084.61	$0.00	$1,317.53
108807	15" Sanitary Vent Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$325.91	$2,214.95	$0.00	$2,540.86
108808	2" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$27.45	$15.51	$0.00	$42.96
108809	3" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$31.88	$20.92	$0.00	$52.80
108810	4" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$40.73	$28.01	$0.00	$68.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108811	5" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$45.17	$37.92	$0.00	$83.09
108812	6" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$49.60	$47.53	$0.00	$97.13
108813	8" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$62.00	$74.15	$0.00	$136.15
108814	10" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$72.62	$118.19	$0.00	$190.81
108815	12" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$77.05	$168.30	$0.00	$245.35
108816	15" Sanitary Vent Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$88.56	$247.88	$0.00	$336.44
108817	2" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$43.39	$27.96	$0.00	$71.35
108818	3" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$63.77	$47.63	$0.00	$111.40
108819	4" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$86.79	$66.72	$0.00	$153.51
108820	5" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$108.04	$105.88	$0.00	$213.92
108821	6" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$122.21	$132.87	$0.00	$255.08
108822	8" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$158.53	$356.05	$0.00	$514.58
108823	10" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$224.07	$544.71	$0.00	$768.78
108824	12" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$282.51	$1,220.65	$0.00	$1,503.16
108825	15" Sanitary Vent Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$372.84	$2,035.69	$0.00	$2,408.53
108826	1-1/2" Sanitary Vent Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$13.68	$0.00	$30.50
108827	2" Sanitary Vent Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$17.80	$0.00	$34.62
108828	3" Sanitary Vent Pipe - Copper, DWV, Hard Drawn, Soldered	LF	$16.82	$31.13	$0.00	$47.95
108829	1-1/2" Sanitary Vent Fitting - Copper, DWV, Wrot, Soldered	EA	$61.11	$45.13	$0.00	$106.24
108830	2" Sanitary Vent Fitting - Copper, DWV, Wrot, Soldered	EA	$69.08	$67.50	$0.00	$136.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108831	3" Sanitary Vent Fitting - Copper, DWV, Wrot, Soldered	EA	$127.52	$153.28	$0.00	$280.80
108832	1-1/2" Sanitary Vent Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.36	$0.00	$32.58
108833	2" Sanitary Vent Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.78	$0.00	$33.00
108834	3" Sanitary Vent Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$6.58	$0.00	$34.92
108835	4" Sanitary Vent Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$9.74	$0.00	$41.62
108836	6" Sanitary Vent Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$20.58	$0.00	$54.23
108837	1-1/2" Sanitary Vent Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.02	$2.97	$0.00	$25.99
108838	2" Sanitary Vent Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.91	$4.19	$0.00	$28.10
108839	3" Sanitary Vent Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$35.42	$9.51	$0.00	$44.93
108840	4" Sanitary Vent Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$75.28	$18.65	$0.00	$93.93
108841	6" Sanitary Vent Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$164.73	$69.00	$0.00	$233.73
	22-13-19 Sanitary Waste Piping Specialties					
108842	Floor Drain Nickel Bronze Adjustable Strainer. Up To 4" Pipe. Includes P-Trap. Zurn ZN415-6B-VP or Equal w/Vandal Resistant Hardware.	EA	$159.41	$755.40	$0.00	$914.81
108843	Floor Drain - Flushing Rim (Healthcare or Vivarium) Cast Iron Body w/ Acid Resistant Epoxy Coated Exterior and Interior, Seepage Pan, Nickel Bronze Top and Slotted Hinge Grate. Zurn Z310 or Equal. Includes P-Trap.	EA	$318.83	$2,700.19	$0.00	$3,019.02
108844	Floor Sink - Cast Iron (Kitchen) 12" X 12" X 6" Cast Iron w/Grate. Zurn Z1900 or Equal.	EA	$201.92	$2,201.66	$0.00	$2,403.58
108845	Floor Drain w/Sediment Bucket (Mechanical Rooms) Nickel Bronze Adjustable Strainer. Up To 4" Pipe. Includes P-Trap. Zurn Z541-VP or Equal w/Vandal Resistant Hardware.	EA	$212.54	$1,586.71	$0.00	$1,799.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108846	Floor Drain w/Sediment Bucket- Stainless Steel (Kitchen) 304 Stainless Steel. Up To 4" Pipe. Includes P-Trap. Zurn Z1805-12(B or S)-VP or Equal w/Vandal Resistant Hardware.	EA	$212.54	$1,896.72	$0.00	$2,109.26
108847	Floor Sink - Stainless Steel (Kitchen) 12" X 12" X 6" 304 Stainless Steel w/Grate. Zurn Z1750 or Equal.	EA	$201.92	$4,338.79	$0.00	$4,540.71
108848	Floor Drain w/Sediment Bucket (Area/Garage) Extra Heavy-Duty Cast-Iron Grate. Up To 4" Pipe. Includes P-Trap. Zurn Z675 or Equal w/Vandal Resistant Hardware.	EA	$265.68	$3,388.53	$0.00	$3,654.21
108849	Wall or Stack Cleanout Cast Iron Body W/Stainless Access Cover. Zurn Z1446-VP or Equal.	EA	$56.68	$712.37	$0.00	$769.05
108850	Trap Guard or Seal Chemical Resistant Elastomeric Material. Mifab Mi-Guard Or Equal.	EA	$8.86	$84.03	$0.00	$92.89
108851	Floor Cleanout Cast Iron Body & Nickle Bronze Adjustable Cover. Zurn Z1400 or Equal.	EA	$110.70	$797.15	$0.00	$907.85
108852	Trap Primer- Manual Mifab Mr-500 And Mi-Gap Or Equal.	EA	$44.29	$90.58	$0.00	$134.87
108853	Trap Primer- Electronic (5-Ports) Mifab Mi-100-5 Or Equal.	EA	$70.85	$1,835.39	$0.00	$1,906.24
108854	Trench Drain- 6" Polymer Body & Galvanized Grate Aco K100 Drain, Type 425Q C Class Grate & Universal Endcap Or Equal.	LF	$29.22	$168.05	$0.00	$197.27
108855	Trench Drain- 6" Polymer Body & Ductile Iron Grate Aco S100K Drain, Type 461Q Grate & Universal Endcap Or Equal.	LF	$29.22	$210.06	$0.00	$239.28
108856	Trench Drain- 6" Polymer Body & Stainless Steel Grate Aco Ks100 Drain, Type 455Q C Class Grate & Universal Endcap Or Equal.	LF	$29.22	$354.47	$0.00	$383.69
108857	Trench Drain- 12" Polymer Body & Galvanized Grate Aco K300 Drain, Type 811Q C Class Grate & Universal Endcap Or Equal.	LF	$31.88	$670.88	$0.00	$702.76
108858	Trench Drain- 12" Polymer Body & Ductile Iron Grate Aco S300K Drain, Type 861Q Grate & Universal Endcap Or Equal.	LF	$31.88	$701.07	$0.00	$732.95
108859	Trench Drain- 12" Polymer Body & Stainless Steel Grate Aco Ks300 Drain, Type 856Q C Class Grate & Universal Endcap Or Equal.	LF	$31.88	$1,339.12	$0.00	$1,371.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108860	Trench Drain- 6" Stainless Grate Only Aco Type 455Q C Class Or Equal.	LF	$29.22	$206.12	$0.00	$235.34
108861	Trench Drain- 4" Stainless Body & Grate (Shower) Zurn Zs880 Or Equal.	LF	$29.22	$393.86	$0.00	$423.08
108862	Trench Drain- 6" Stainless Body & Grate Blucher Bt-6 Or Equal.	LF	$29.22	$322.96	$0.00	$352.18
108863	Trench Drain- 12" Stainless Body & Grate Blucher Bt-12 Or Equal.	LF	$31.88	$1,210.45	$0.00	$1,242.33
	22-13-23 Sanitary Waste Interceptors					
108864	4 GPM, 8 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1170 Or Equal.	EA	$425.10	$1,239.58	$0.00	$1,664.68
108865	10 GPM, 20 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1170 Or Equal.	EA	$425.10	$2,128.78	$0.00	$2,553.88
108866	15 GPM, 30 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1170 Or Equal.	EA	$637.64	$3,150.14	$0.00	$3,787.78
108867	25 GPM, 50 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1170 Or Equal.	EA	$850.20	$4,331.38	$0.00	$5,181.58
108868	50 GPM, 100 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1170 Or Equal.	EA	$850.20	$7,087.30	$0.00	$7,937.50
108869	75 GPM, 150 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$956.47	$9,028.47	$0.00	$9,984.94
108870	100 GPM, 200 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,062.74	$10,158.26	$0.00	$11,221.00
108871	125 GPM, 250 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,062.74	$10,720.03	$0.00	$11,782.77
108872	150 GPM, 300 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,062.74	$11,283.12	$0.00	$12,345.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108873	200 GPM, 400 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,275.28	$16,361.21	$0.00	$17,636.49
108874	250 GPM, 500 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,275.28	$18,554.39	$0.00	$19,829.67
108875	300 GPM, 600 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,275.28	$21,868.86	$0.00	$23,144.14
108876	350 GPM, 700 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,487.84	$24,288.22	$0.00	$25,776.06
108877	400 GPM, 800 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,487.84	$26,758.72	$0.00	$28,246.56
108878	450 GPM, 900 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,700.38	$30,116.67	$0.00	$31,817.05
108879	500 GPM, 1,000 Lb Grease/Oil Interceptor Steel Hydro Mechanical Grease/Oil Interceptor. Acid Resistant Coated Interior and Exterior, Above Or Below Grade. Zurn Z1172 Or Equal.	EA	$1,700.38	$31,671.61	$0.00	$33,371.99
108880	[Modifier] Grease/Oil Interceptor Notification System Includes Encased Fiberglass Sensor Box Containing An Electronic Grease Level Sensor , A Fiberglass Display Box With One Green Power Light, Red Grease Level Light, Audio Alarm, And Junction Box.	EA	$265.68	$3,758.19	$0.00	$4,023.87
108881	2" 30 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$371.96	$4,135.24	$0.00	$4,507.20
108882	6" 300 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$1,328.42	$5,932.03	$0.00	$7,260.45
108883	6" 400 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$1,328.42	$6,775.99	$0.00	$8,104.41
108884	6" 500 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$1,328.42	$7,594.38	$0.00	$8,922.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108885	3" 70 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$637.64	$4,686.91	$0.00	$5,324.55
108886	4" 100 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$637.64	$5,512.95	$0.00	$6,150.59
108887	4" 200 GPM Lint Interceptor Acid Resistant Coated Interior and Exterior. Zurn Z1185 Or Equal.	EA	$956.47	$5,926.38	$0.00	$6,882.85
108888	15 GPM In-Line Solids Interceptor, Acid Resistant - Up To 2" Acid Resistant Composite Interceptor To Be Used In Lieu Of Fixture 'P' Trap, For On-Floor Installation.	EA	$154.99	$1,869.91	$0.00	$2,024.90
108889	30 GPM In-Line Solids Interceptor, Acid Resistant - Up To 3" Acid Resistant Composite Interceptor To Be Used In Lieu Of Fixture 'P' Trap, For On-Floor Installation. Zurn Z1181 Or Equal.	EA	$371.96	$6,729.57	$0.00	$7,101.53
108890	15 GPM In-Line Solids Interceptor - Up To 3" Stainless Steel Composite Interceptor To Be Used In Lieu Of Fixture 'P' Trap, For On-Floor Installation. Zurn Z1183 Or Equal.	EA	$154.99	$1,006.32	$0.00	$1,161.31
108891	35 GPM In-Line Solids Interceptor - Up To 4" Stainless Steel Composite Interceptor To Be Used In Lieu Of Fixture 'P' Trap, For On-Floor Installation. Zurn Z1183 Or Equal.	EA	$371.96	$1,207.08	$0.00	$1,579.04
108892	1-1/2" In-Line Hair Interceptor Dura-Coated Cast Iron, In Lieu Of Fixture 'P' Trap.	EA	$154.99	$515.42	$0.00	$670.41

22-13-29 Sanitary Sewerage Pumps

Packaged pumps to be factory assembled and tested, single-stage, automatic operation, submersible, direct connected w/control panel.

108893	1/2 HP Simplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$991.89	$844.66	$0.00	$1,836.55
108894	3/4 HP Simplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$991.89	$2,016.84	$0.00	$3,008.73
108895	1 HP Simplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,700.38	$2,189.21	$0.00	$3,889.59
108896	1/2 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$9,282.06	$0.00	$11,194.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108897	3/4 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$12,203.24	$0.00	$14,116.17
108898	1 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$12,788.47	$0.00	$14,701.40
108899	1-1/2 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$14,297.41	$0.00	$16,210.34
108900	3 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$2,869.39	$21,508.63	$0.00	$24,378.02
108901	5 HP Duplex Packaged Ejector Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$2,869.39	$21,675.37	$0.00	$24,544.76
108902	2" Packaged Ejector Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$951.15	$497.27	$0.00	$1,448.42
108903	3" Packaged Ejector Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,293.00	$1,138.39	$0.00	$2,431.39
108904	4" Packaged Ejector Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,904.08	$2,102.10	$0.00	$4,006.18
108905	6" Packaged Ejector Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,090.80	$4,204.21	$0.00	$7,295.01

22-14-00 Facility Storm Drainage

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

22-14-13 Facility Storm Drainage Piping

108906	1-1/2" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$0.98	$0.00	$6.29
108907	2" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.32	$0.00	$6.63
108908	3" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$2.63	$0.00	$8.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108909	4" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$3.56	$0.00	$9.76
108910	6" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$10.63	$6.72	$0.00	$17.35
108911	8" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$11.51	$10.45	$0.00	$21.96
108912	10" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$14.17	$14.71	$0.00	$28.88
108913	12" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$15.05	$19.52	$0.00	$34.57
108914	1-1/2" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.02	$4.29	$0.00	$27.31
108915	2" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$24.79	$5.06	$0.00	$29.85
108916	3" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$35.42	$14.08	$0.00	$49.50
108917	4" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$76.16	$25.10	$0.00	$101.26
108918	6" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$167.38	$83.01	$0.00	$250.39
108919	8" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$201.92	$126.06	$0.00	$327.98
108920	10" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$222.30	$238.89	$0.00	$461.19
108921	12" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$235.58	$330.32	$0.00	$565.90
108922	1-1/2" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$2.90	$0.00	$32.12
108923	2" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.24	$0.00	$32.46
108924	3" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$5.50	$0.00	$33.84
108925	4" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$7.75	$0.00	$39.63
108926	6" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$12.59	$0.00	$46.24
108927	8" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$19.76	$0.00	$58.72
108928	10" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$38.96	$24.20	$0.00	$63.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108929	12" Storm Water Pipe - PVC, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$36.31	$28.60	$0.00	$64.91
108930	1-1/2" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$23.02	$4.29	$0.00	$27.31
108931	2" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$24.79	$5.06	$0.00	$29.85
108932	3" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$35.42	$14.08	$0.00	$49.50
108933	4" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$76.16	$25.10	$0.00	$101.26
108934	6" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$167.38	$83.01	$0.00	$250.39
108935	8" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$201.92	$126.06	$0.00	$327.98
108936	10" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$222.30	$238.89	$0.00	$461.19
108937	12" Storm Water Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$235.58	$330.32	$0.00	$565.90
108938	2" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$10.63	$14.12	$0.00	$24.75
108939	3" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$14.17	$18.57	$0.00	$32.74
108940	4" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$18.60	$24.14	$0.00	$42.74
108941	5" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$22.14	$34.06	$0.00	$56.20
108942	6" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$26.56	$41.48	$0.00	$68.04
108943	8" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$34.53	$64.59	$0.00	$99.12
108944	10" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$46.06	$107.49	$0.00	$153.55
108945	12" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$49.60	$156.18	$0.00	$205.78
108946	15" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	LF	$59.34	$228.26	$0.00	$287.60
108947	2" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$43.39	$27.96	$0.00	$71.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108948	3" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$63.77	$47.63	$0.00	$111.40
108949	4" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$86.79	$66.72	$0.00	$153.51
108950	5" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$108.04	$105.88	$0.00	$213.92
108951	6" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$122.21	$132.87	$0.00	$255.08
108952	8" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$158.53	$356.05	$0.00	$514.58
108953	10" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$224.07	$544.71	$0.00	$768.78
108954	12" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$282.51	$1,220.65	$0.00	$1,503.16
108955	15" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint, w/o Hangers	EA	$372.84	$2,035.69	$0.00	$2,408.53
108956	2" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$11.41	$26.49	$0.00	$37.90
108957	3" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$17.93	$35.78	$0.00	$53.71
108958	4" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$22.00	$46.86	$0.00	$68.86
108959	5" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$26.89	$62.10	$0.00	$88.99
108960	6" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$30.14	$69.90	$0.00	$100.04
108961	8" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$44.00	$122.03	$0.00	$166.03
108962	10" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$52.96	$198.60	$0.00	$251.56
108963	12" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$57.84	$281.13	$0.00	$338.97
108964	15" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	LF	$70.89	$434.65	$0.00	$505.54
108965	2" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$45.08	$54.55	$0.00	$99.63
108966	3" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$67.90	$104.24	$0.00	$172.14
108967	4" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$89.62	$151.02	$0.00	$240.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108968	5" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$111.62	$215.68	$0.00	$327.30
108969	6" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$128.73	$254.52	$0.00	$383.25
108970	8" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$182.24	$632.44	$0.00	$814.68
108971	10" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$243.62	$894.98	$0.00	$1,138.60
108972	12" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$297.11	$1,813.69	$0.00	$2,110.80
108973	15" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint, w/o Hangers	EA	$373.16	$3,185.76	$0.00	$3,558.92
108974	1-1/2" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$25.68	$15.75	$0.00	$41.43
108975	2" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$26.56	$15.79	$0.00	$42.35
108976	3" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$31.88	$21.84	$0.00	$53.72
108977	4" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$38.96	$28.88	$0.00	$67.84
108978	5" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$41.62	$42.92	$0.00	$84.54
108979	6" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$46.06	$51.53	$0.00	$97.59
108980	8" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$56.68	$82.93	$0.00	$139.61
108981	10" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$68.20	$129.74	$0.00	$197.94
108982	12" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$73.51	$177.94	$0.00	$251.45
108983	15" Storm Water Pipe - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	LF	$83.25	$260.63	$0.00	$343.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
108984	1-1/2" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$27.45	$34.79	$0.00	$62.24
108985	2" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$35.42	$35.77	$0.00	$71.19
108986	3" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$53.14	$46.18	$0.00	$99.32
108987	4" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$69.97	$60.82	$0.00	$130.79
108988	5" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$87.68	$140.64	$0.00	$228.32
108989	6" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$106.27	$150.60	$0.00	$256.87
108990	8" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$125.75	$344.70	$0.00	$470.45
108991	10" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$176.24	$617.97	$0.00	$794.21
108992	12" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$232.92	$1,084.61	$0.00	$1,317.53
108993	15" Storm Water Fitting - Cast Iron, Service Weight, No-Hub Includes Heavy-Duty Shielded Couplings	EA	$325.91	$2,214.95	$0.00	$2,540.86
108994	2" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$27.45	$15.51	$0.00	$42.96
108995	3" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$31.88	$20.92	$0.00	$52.80
108996	4" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$40.73	$28.01	$0.00	$68.74
108997	5" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$45.17	$37.92	$0.00	$83.09
108998	6" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$49.60	$47.53	$0.00	$97.13
108999	8" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$62.00	$74.15	$0.00	$136.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109000	10" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$72.62	$118.19	$0.00	$190.81
109001	12" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$77.05	$168.30	$0.00	$245.35
109002	15" Storm Water Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$88.56	$247.88	$0.00	$336.44
109003	2" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$43.39	$27.96	$0.00	$71.35
109004	3" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$63.77	$47.63	$0.00	$111.40
109005	4" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$86.79	$66.72	$0.00	$153.51
109006	5" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$108.04	$105.88	$0.00	$213.92
109007	6" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$122.21	$132.87	$0.00	$255.08
109008	8" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$158.53	$356.05	$0.00	$514.58
109009	10" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$224.07	$544.71	$0.00	$768.78
109010	12" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$282.51	$1,220.65	$0.00	$1,503.16
109011	15" Storm Water Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$372.84	$2,035.69	$0.00	$2,408.53
109012	2" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$28.52	$27.88	$0.00	$56.40
109013	3" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$36.02	$38.13	$0.00	$74.15
109014	4" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$44.82	$50.73	$0.00	$95.55
109015	5" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$49.70	$65.97	$0.00	$115.67
109016	6" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$53.94	$75.93	$0.00	$129.87
109017	8" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$71.21	$131.60	$0.00	$202.81
109018	10" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$80.18	$209.30	$0.00	$289.48
109019	12" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$85.07	$293.24	$0.00	$378.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109020	15" Storm Water Pipe - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	LF	$100.21	$454.27	$0.00	$554.48
109021	2" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$45.08	$54.55	$0.00	$99.63
109022	3" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$67.90	$104.24	$0.00	$172.14
109023	4" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$89.62	$151.02	$0.00	$240.64
109024	5" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$111.62	$215.68	$0.00	$327.30
109025	6" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$128.73	$254.52	$0.00	$383.25
109026	8" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$182.24	$632.44	$0.00	$814.68
109027	10" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$243.62	$894.98	$0.00	$1,138.60
109028	12" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$297.11	$1,813.69	$0.00	$2,110.80
109029	15" Storm Water Fitting - Cast Iron, Extra Heavy, Single Hub, Gasketed Joint	EA	$373.16	$3,185.76	$0.00	$3,558.92
109030	1-1/2" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.38	$0.00	$6.69
109031	2" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$1.80	$0.00	$7.11
109032	3" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$5.31	$3.63	$0.00	$8.94
109033	4" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$6.20	$5.44	$0.00	$11.64
109034	6" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement, w/o Hangers	LF	$9.74	$14.53	$0.00	$24.27
109035	1-1/2" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.02	$2.97	$0.00	$25.99
109036	2" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$23.91	$4.19	$0.00	$28.10
109037	3" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$35.42	$9.51	$0.00	$44.93
109038	4" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$75.28	$18.65	$0.00	$93.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109039	6" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement, w/o Hangers	EA	$164.73	$69.00	$0.00	$233.73
109040	1-1/2" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.36	$0.00	$32.58
109041	2" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$29.22	$3.78	$0.00	$33.00
109042	3" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$28.34	$6.58	$0.00	$34.92
109043	4" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$31.88	$9.74	$0.00	$41.62
109044	6" Storm Water Pipe - ABS, Schedule 40, DWV, Solid Core, Solvent Cement	LF	$33.65	$20.58	$0.00	$54.23
109045	1-1/2" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.02	$2.97	$0.00	$25.99
109046	2" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$23.91	$4.19	$0.00	$28.10
109047	3" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$35.42	$9.51	$0.00	$44.93
109048	4" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$75.28	$18.65	$0.00	$93.93
109049	6" Storm Water Fitting - ABS, Schedule 40, DWV, Solvent Cement	EA	$164.73	$69.00	$0.00	$233.73
109050	4" PVC Drain Tile w/ Filter Fabric - Bell & Spigot (Includes Fittings) Perforated, Cellular Core Pipe And Fittings W/ Bell-And-Spigot Joints.	LF	$5.76	$2.21	$0.00	$7.97
109051	4" PVC Schedule 40 Drain Tile w/ Filter Fabric - Solvent Cement (Includes Fittings) Solid Core Pipe, Socket Fittings	LF	$6.20	$3.96	$0.00	$10.16
109052	6" PVC Schedule 40 Drain Tile w/ Filter Fabric - Solvent Cement (Includes Fittings) Solid Core Pipe, Socket Fittings	LF	$10.63	$7.19	$0.00	$17.82
	22-14-26 Facility Storm Drains					
109053	Roof Drain - Standard, Cast Iron Body & Dome 4" To 8" Pipe, 15" Diameter, Cast Iron Body & Dome. Zurn Z100F Or Equal.	EA	$239.12	$1,195.73	$0.00	$1,434.85
109054	Roof Drain - Standard, Cast Iron Body & Polyethylene Dome 4" To 8" Pipe, 15" Diameter, Cast Iron Body & Polyethylene Dome. Zurn Z100F Or Equal.	EA	$239.12	$990.74	$0.00	$1,229.86
109055	Roof Drain - Overflow, Cast Iron Body & Dome 4" To 8" Pipe, 15" Diameter, Cast Iron Body & Dome. Zurn Z100F-89 Or Equal.	EA	$239.12	$1,427.28	$0.00	$1,666.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109056	Roof Drain - Overflow, Cast Iron Body & Polyethylene Dome 4" To 8" Pipe, 15" Diameter, Cast Iron Body & Polyethylene Dome. Zurn Z100F-89 Or Equal.	EA	$239.12	$1,222.30	$0.00	$1,461.42
109057	Roof Drain - Combination Main and Overflow, Cast Iron Body & Dome 4" To 8" Pipe, 15" Diameter. Zurn Z163 Or Equal.	EA	$398.53	$3,432.81	$0.00	$3,831.34
109058	Roof Drain - Combination Main and Overflow, Cast Iron Body & Polyethylene Dome 4" To 8" Pipe, 15" Diameter. Zurn Z163 Or Equal.	EA	$398.53	$3,026.66	$0.00	$3,425.19
109059	Roof Drain - Bi-Functional / Dual Outlet 4" To 8" Pipe, Cast Iron Body & Dome W/Overflow Strainer. Froet 100C Or Equal.	EA	$239.12	$1,751.20	$0.00	$1,990.32
109060	Roof Drain - Wall Downspout / Overflow Nozzle 4" To 8" Pipe, Bronze Body. Zurn Z199 Or Equal.	EA	$88.56	$1,463.98	$0.00	$1,552.54
109061	Roof Drain - Parapet Scupper 4" To 8" Pipe. Cast Iron Body W/Aluminum Grate. Zurn Z187 Or Equal.	EA	$221.41	$1,175.48	$0.00	$1,396.89
109062	Roof Drain - Green Roof Box, HDPE Perforated Screen Assembly Adjustable Round Non-Removable Cover. Accommodates all Froet Drains except 100C8. Up to 48". Zurn ZF110-R or Equal.	EA	$265.68	$2,092.84	$0.00	$2,358.52
109063	Roof Drain - Green Roof Box, Stainless Perforated Screen Assembly Non-Adjustable Square Removable Cover. Up to 28". Zurn ZF110-S or Equal.	EA	$265.68	$5,687.62	$0.00	$5,953.30
109064	Roof Drain Flow Sensor - Single Channel Indicates Primary System Blockage or Excessive Flow. Froet Z7001 or Equal.	EA	$354.25	$1,061.60	$0.00	$1,415.85
109065	Roof Drain Flow Sensor - 5 Channel Indicates Primary System Blockage or Excessive Flow. Froet Z7005 or Equal.	EA	$442.81	$1,691.74	$0.00	$2,134.55
109066	[Modifier] Roof Drain Flow Sensor - Building Management System Connection	EA	$531.37	$2,662.24	$0.00	$3,193.61
109067	Roof Drain - Downspout Boot (Gutter to Pipe) 5" X 4" X 24" Cast Iron. Zurn Z191 Or Equal.	EA	$185.98	$1,364.01	$0.00	$1,549.99
109068	Roof Drain - Cornice (Inside Gutter) 4" Pipe Cast Iron Body W/6" Diameter Bronze Dome. Zurn Z181 Or Equal.	EA	$141.70	$1,086.91	$0.00	$1,228.61
109069	Roof Drain - Retrofit/Replacement, Aluminum 4" To 6" Pipe	EA	$232.92	$381.06	$0.00	$613.98
109070	Roof Drain - Retrofit/Replacement, Copolymer 4" To 6" Pipe	EA	$232.92	$76.72	$0.00	$309.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109071	Roof Drain - Retrofit/Replacement, Stainless Steel 4" To 6" Pipe. Included Stainless Steel Strainer, ProSeal and Standard Hardware. Marathon BSS Or Equal.	EA	$232.92	$482.08	$0.00	$715.00
109072	Roof Drain - Retrofit/Replacement, Copper 4" To 6" Pipe. Includes Polyethylene Strainer and Tape Seal. Marathon BSTR Or Equal.	EA	$232.92	$258.31	$0.00	$491.23
109073	Area/Garage Drain Cast Iron Extra Heavy Duty Drain W/Sediment Bucket.	EA	$150.56	$1,021.41	$0.00	$1,171.97
109074	Wall Cleanout- Up To 8" Hubless, Cast-Iron Soil Pipe Tee W/Plug & Wall Cover Plate.	EA	$332.11	$1,039.78	$0.00	$1,371.89
109075	Floor Cleanout- Up To 8" Adjustable Housing, Cast-Iron Soil Pipe With Cast-Iron Ferrule Cleanout.	EA	$332.11	$832.36	$0.00	$1,164.47

22-14-29 Sump Pumps

Packaged pumps to be factory assembled and tested, single-stage, automatic operation, submersible, direct connected w/control panel.

109076	1/2 HP Submersible Sump Pump Cast Iron Casing & Cast Bronze Impeller. Zoeller M95 Series or Equal.	EA	$318.83	$580.24	$0.00	$899.07
109077	1/2 HP Submersible Sump Pump - Effluent Cast Iron Casing & Cast Bronze Impeller. Zoeller 161 Series or Equal.	EA	$318.83	$1,227.53	$0.00	$1,546.36
109078	1/2 HP Submersible Sump Pump - Elevator w/ Oil Detection Cast Iron Casing & Cast Bronze Impeller. Oil Detector Control, Mechanical Float Switch And Remote Alarm.	EA	$797.05	$2,566.64	$0.00	$3,363.69
109079	2" Submersible Sump Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$433.95	$254.49	$0.00	$688.44
109080	1 HP Simplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$991.89	$5,168.22	$0.00	$6,160.11
109081	1-1/2 HP Simplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$991.89	$5,317.10	$0.00	$6,308.99
109082	3 HP Simplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,700.38	$6,486.86	$0.00	$8,187.24
109083	1/2 HP Duplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$10,917.72	$0.00	$12,830.65
109084	1 HP Duplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$12,610.07	$0.00	$14,523.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109085	1-1/2 HP Duplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$1,912.93	$15,471.21	$0.00	$17,384.14
109086	3 HP Duplex Sump Pump w/Basin & Control Panel Cast Iron Casing & Cast Bronze Impeller	EA	$2,869.39	$21,508.63	$0.00	$24,378.02
109087	2" Sump Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$554.39	$497.27	$0.00	$1,051.66
109088	3" Sump Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,293.00	$1,138.39	$0.00	$2,431.39
109089	4" Sump Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,904.08	$2,102.10	$0.00	$4,006.18
109090	6" Sump Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,798.55	$4,204.21	$0.00	$7,002.76

22-15-00 General Service Compressed-Air Systems

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

22-15-19 General Service Packaged Air Compressors and Receivers

109091	3 HP Simplex Single Stage Air Compressor- General Service Ingersoll Rand SS3L3 Or Equal.	EA	$850.20	$1,535.94	$0.00	$2,386.14
109092	5 HP Simplex Single Stage Air Compressor- General Service Ingersoll Rand SS5L5 Or Equal.	EA	$850.20	$2,413.62	$0.00	$3,263.82
109093	5 HP Simplex 2-Stage Air Compressor- General Service Ingersoll Rand 2340L5 Or Equal.	EA	$850.20	$3,620.43	$0.00	$4,470.63
109094	7-1/2 HP Simplex 2-Stage Air Compressor- General Service Ingersoll Rand 2475N7.5 Or Equal.	EA	$850.20	$5,052.76	$0.00	$5,902.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109095	10 HP Simplex 2-Stage Air Compressor- General Service Ingersoll Rand 2545K10 Or Equal.	EA	$850.20	$7,344.48	$0.00	$8,194.68
109096	15 HP Simplex 2-Stage Air Compressor- General Service Ingersoll Rand 7100E15 Or Equal.	EA	$1,275.28	$8,484.24	$0.00	$9,759.52
109097	5 HP Duplex 2-Stage Air Compressor- General Service Ingersoll Rand 2475E5 Or Equal.	EA	$1,275.28	$10,654.06	$0.00	$11,929.34
109098	7-1/2 HP Duplex 2-Stage Air Compressor- General Service Ingersoll Rand 2475E7.5 Or Equal.	EA	$1,275.28	$12,622.74	$0.00	$13,898.02
109099	10 HP Duplex 2-Stage Air Compressor- General Service Ingersoll Rand 2545E10 Or Equal.	EA	$1,275.28	$15,859.19	$0.00	$17,134.47
109100	15 CFM Refrigerated Compressed Air Dryer	EA	$850.20	$3,949.56	$0.00	$4,799.76
109101	50 CFM Refrigerated Compressed Air Dryer	EA	$850.20	$5,997.48	$0.00	$6,847.68
109102	75 CFM Refrigerated Compressed Air Dryer	EA	$850.20	$7,100.68	$0.00	$7,950.88
109103	100 CFM Refrigerated Compressed Air Dryer	EA	$850.20	$8,569.57	$0.00	$9,419.77
109104	125 CFM Refrigerated Compressed Air Dryer	EA	$1,275.28	$10,489.50	$0.00	$11,764.78

22-30-00 Plumbing Equipment

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

22-31-00 Domestic Water Softeners

Water softeners to be factory assembled and tested w/piping, valves, sensors and control panel on skid or base.

22-31-16 Commercial Domestic Water Softeners

109105	15,000 Grains 10 GPM Packaged Water Softener	EA	$637.64	$7,127.65	$0.00	$7,765.29
109106	30,000 Grains 20 GPM Packaged Water Softener	EA	$637.64	$13,065.61	$0.00	$13,703.25
109107	45,000 Grains 30 GPM Packaged Water Softener	EA	$797.05	$14,832.73	$0.00	$15,629.78
109108	60,000 Grains 35 GPM Packaged Water Softener	EA	$797.05	$16,938.07	$0.00	$17,735.12
109109	90,000 Grains 40 GPM Packaged Water Softener	EA	$850.20	$21,475.82	$0.00	$22,326.02
109110	120,000 Grains 50 GPM Packaged Water Softener	EA	$850.20	$25,738.30	$0.00	$26,588.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109111	150,000 Grains 60 GPM Packaged Water Softener	EA	$1,062.74	$31,433.77	$0.00	$32,496.51
109112	210,000 Grains 75 GPM Packaged Water Softener	EA	$1,062.74	$40,646.24	$0.00	$41,708.98
109113	240,000 Grains 100 GPM Packaged Water Softener	EA	$1,133.59	$44,036.05	$0.00	$45,169.64
109114	300,000 Grains 125 GPM Packaged Water Softener	EA	$1,133.59	$52,335.97	$0.00	$53,469.56
109115	450,000 Grains 150 GPM Packaged Water Softener	EA	$1,416.98	$65,014.52	$0.00	$66,431.50
109116	600,000 Grains 175 GPM Packaged Water Softener	EA	$1,416.98	$79,324.50	$0.00	$80,741.48
109117	900,000 Grains 200 GPM Packaged Water Softener	EA	$1,771.23	$98,541.57	$0.00	$100,312.80
109118	1,200,000 Grains 250 GPM Packaged Water Softener	EA	$1,771.23	$120,231.99	$0.00	$122,003.22
109119	Spill Containment Pallet - 2 Drum JUSTRITE H-4032 or equal.	EA	$53.14	$554.64	$0.00	$607.78
109120	1" & Dn Water Softener Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$403.85	$424.31	$0.00	$828.16
109121	1-1/4" To 2" Water Softener Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$536.68	$1,042.20	$0.00	$1,578.88
109122	2-1/2" Water Softener Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,416.98	$2,954.10	$0.00	$4,371.08
109123	3" Water Softener Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,585.25	$3,345.41	$0.00	$4,930.66
109124	4" Water Softener Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,435.45	$5,393.53	$0.00	$7,828.98
	22-32-13 Domestic-Water Filters					
109125	Water Filter- Point-Of-Use Aqua Pure Sst1Ha	EA	$59.34	$261.26	$0.00	$320.60
109126	Water Filter, Cartridge Type 32 GPM- Stainless Steel Body Sediment, Rust, Chlorine Taste/Odor And Scale. Aqua-Pure SS4 EPE-316L, Harmsco WB-40-SC-2 or Equal	EA	$283.39	$1,746.83	$0.00	$2,030.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109127	Water Filter, Cartridge Type 64 GPM- Stainless Steel Body Sediment, Rust, Chlorine Taste/Odor And Scale. Aqua-Pure SS8 EPE-316L or Equal	EA	$354.25	$2,107.65	$0.00	$2,461.90
109128	Water Filter, Cartridge Type 96 GPM- Stainless Steel Body Sediment, Rust, Chlorine Taste/Odor And Scale. Aqua-Pure SS12 EPE-316L, Harmsco WB-90-SC-2 or Equal	EA	$354.25	$2,424.59	$0.00	$2,778.84
109129	Water Filter, Cartridge Type 150 GPM- Stainless Steel Body Sediment, Rust, Chlorine Taste/Odor And Scale. Harmsco WB-170-SC-2 or Equal	EA	$531.37	$3,477.81	$0.00	$4,009.18
109130	Water Filter, Cartridge Type 66 GPM- Plastic Body Sediment, Rust, Chlorine Taste/Odor And Scale. Includes (2) Pressure Gauges. Atlas Filter Hydra Big RA6314303 Or Equal	EA	$354.15	$449.51	$0.00	$803.66
109131	Water Filter- Anti-Scale 10 GPM Watts OneFlow OF744-10 Or Equal	EA	$708.49	$1,219.65	$0.00	$1,928.14
109132	Water Filter- Anti-Scale 20 GPM Watts OneFlow OF1054-20 Or Equal	EA	$708.49	$1,836.69	$0.00	$2,545.18
109133	Water Filter- Anti-Scale 30 GPM Watts OneFlow OF1252-30 Or Equal	EA	$708.49	$2,746.50	$0.00	$3,454.99
109134	Water Filter- Anti-Scale 50 GPM Watts OneFlow OF1465-50 Or Equal	EA	$708.49	$4,793.27	$0.00	$5,501.76
109135	Water Filter- Anti-Scale 75 GPM Watts OneFlow OF1665-75 Or Equal	EA	$708.49	$7,525.33	$0.00	$8,233.82
109136	Greensand Filter System - CSI CFD70GPA-15C Includes Filter, Greensand Media, Anthracite Media, 'B' Gravel, Resin Tank, Control Valve, Potassium Permanganate Bottles, Controller Hub and Leak Detector For DROP-1 Proplex System.	EA	$619.93	$5,974.32	$0.00	$6,594.25
	22-33-00 Electric Domestic Water Heaters					
	22-33-36 Domestic Water Electric Heaters					
109137	2 Gallon, 120V Plug-In Electric Water Heater Includes Mounting Bracket.	EA	$132.85	$271.35	$0.00	$404.20
109138	4 Gallon, 120V Plug-In Electric Water Heater Includes Mounting Bracket.	EA	$177.12	$323.58	$0.00	$500.70
109139	6 Gallon, 120V Plug-In Electric Water Heater Includes Mounting Bracket.	EA	$177.12	$543.31	$0.00	$720.43
109140	Point-Of-Use Electric Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$243.55	$291.63	$0.00	$535.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109141	1" & Dn Electric Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$283.39	$1,048.33	$0.00	$1,331.72
109142	1-1/4" To 2" Electric Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$688.13	$1,740.88	$0.00	$2,429.01
109143	2-1/2" Electric Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,452.40	$4,020.80	$0.00	$5,473.20
	22-34-00 Domestic Water Heaters					
	22-33-36 Domestic Water Electric Heaters					
109144	0 To 10 KW Tankless Electric Water Heater-Residential Instantaneous Point-Of-Use.	EA	$336.54	$299.34	$0.00	$635.88
109145	11 To 19 KW Tankless Electric Water Heater-Residential Instantaneous Point-Of-Use.	EA	$336.54	$589.47	$0.00	$926.01
109146	20 To 36 KW Tankless Electric Water Heater-Residential Instantaneous Point-Of-Use.	EA	$336.54	$925.56	$0.00	$1,262.10
109147	40 Gal, 4.5 KW Electric Water Heater- Residential	EA	$425.10	$458.19	$0.00	$883.29
109148	50 Gal, 5.5 KW Electric Water Heater- Residential	EA	$425.10	$738.29	$0.00	$1,163.39
109149	0 To 12 KW Tankless Electric Water Heater Instantaneous Point-Of-Use.	EA	$336.54	$694.50	$0.00	$1,031.04
109150	15 To 20 KW Tankless Electric Water Heater Instantaneous Point-Of-Use.	EA	$336.54	$1,138.39	$0.00	$1,474.93
109151	24 To 32 KW Tankless Electric Water Heater Instantaneous Point-Of-Use.	EA	$336.54	$1,974.80	$0.00	$2,311.34
109152	52 KW Tankless Electric Water Heater Instantaneous Point-Of-Use.	EA	$453.43	$5,968.38	$0.00	$6,421.81
109153	96 KW Tankless Electric Water Heater Instantaneous Point-Of-Use.	EA	$453.43	$8,687.74	$0.00	$9,141.17
109154	63 KW Tankless Electric Water Heater - Emergency Safety Shower	EA	$752.78	$35,509.47	$0.00	$36,262.25
109155	25 MBH, 9 KW, 30 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$425.10	$5,514.02	$0.00	$5,939.12
109156	50 MBH, 15 KW, 40 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$425.10	$6,104.81	$0.00	$6,529.91

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109157	75 MBH, 24 KW, 50 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$566.79	$8,848.70	$0.00	$9,415.49
109158	100 MBH, 30 KW, 65 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$566.79	$10,345.36	$0.00	$10,912.15
109159	150 MBH, 45 KW, 80 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$566.79	$13,062.99	$0.00	$13,629.78
109160	200 MBH, 60 KW, 100 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$566.79	$16,568.33	$0.00	$17,135.12
109161	250 MBH, 75 KW, 120 Gallon Electric Water Heater AO Smith Dura-Power DSE or Equal	EA	$708.49	$19,797.97	$0.00	$20,506.46
	22-34-36 Domestic Water Gas Heaters					
109162	150 MBH Tankless Gas Fired Water Heater-Residential Instantaneous Point-Of-Use.	EA	$425.10	$1,084.26	$0.00	$1,509.36
109163	180 MBH Tankless Gas Fired Water Heater-Residential Instantaneous Point-Of-Use.	EA	$425.10	$1,291.12	$0.00	$1,716.22
109164	200 MBH Tankless Gas Fired Water Heater-Residential Instantaneous Point-Of-Use.	EA	$425.10	$1,761.71	$0.00	$2,186.81
109165	150 MBH Tankless Gas Fired Water Heater Instantaneous Point-Of-Use.	EA	$425.10	$2,008.22	$0.00	$2,433.32
109166	180 MBH Tankless Gas Fired Water Heater Instantaneous Point-Of-Use.	EA	$425.10	$2,356.42	$0.00	$2,781.52
109167	200 MBH Tankless Gas Fired Water Heater Instantaneous Point-Of-Use.	EA	$425.10	$2,704.62	$0.00	$3,129.72
109168	400 MBH Tankless Gas Fired Water Heater Instantaneous Point-Of-Use. AO Smith ACI-CRS-26IL or Equal.	EA	$850.20	$7,223.79	$0.00	$8,073.99
109169	600 MBH Tankless Gas Fired Water Heater Instantaneous Point-Of-Use. AO Smith ACI-CRS-33WM or Equal.	EA	$1,275.28	$10,824.72	$0.00	$12,100.00
109170	Point-Of-Use Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$243.55	$291.63	$0.00	$535.18
109171	75 MBH, 50 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$425.10	$6,288.61	$0.00	$6,713.71
109172	100 MBH, 75 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$850.20	$9,649.54	$0.00	$10,499.74
109173	150 MBH, 100 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$850.20	$13,017.03	$0.00	$13,867.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109174	200 MBH, 100 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$1,062.74	$15,570.56	$0.00	$16,633.30
109175	250 MBH, 100 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$1,062.74	$17,999.35	$0.00	$19,062.09
109176	500 MBH, 130 Gallon Gas Fired Water Heater AO Smith Cyclone Mxi or Equal	EA	$1,328.42	$23,375.53	$0.00	$24,703.95
109177	750 MBH, 250 Gallon Gas Fired Condensing Water Heater PVI Power VTX or equal.	EA	$1,594.11	$104,440.35	$0.00	$106,034.46
109178	38 MBH, 40 Gallon Gas Fired Water Heater-Residential 9 Year Warranty	EA	$425.10	$714.20	$0.00	$1,139.30
109179	40 MBH, 50 Gallon Gas Fired Water Heater-Residential 9 Year Warranty	EA	$425.10	$799.53	$0.00	$1,224.63
109180	500 MBH Gas Fired Semi-Instantaneous Water Heater	EA	$1,700.38	$15,827.87	$0.00	$17,528.25
109181	1,000 MBH Gas Fired Semi-Instantaneous Water Heater	EA	$2,125.48	$25,010.04	$0.00	$27,135.52
109182	2,000 MBH Gas Fired Semi-Instantaneous Water Heater	EA	$2,550.57	$43,350.74	$0.00	$45,901.31
109183	4,000 MBH Gas Fired Semi-Instantaneous Water Heater	EA	$3,188.21	$83,366.80	$0.00	$86,555.01
109184	6,000 MBH Gas Fired Semi-Instantaneous Water Heater	EA	$3,400.76	$108,967.63	$0.00	$112,368.39
109185	150 MBH Indirect Gas Fired Condensing Water Heater	EA	$637.64	$8,115.37	$0.00	$8,753.01
109186	200 MBH Indirect Gas Fired Condensing Water Heater	EA	$850.20	$9,383.96	$0.00	$10,234.16
109187	285 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,062.74	$12,346.71	$0.00	$13,409.45
109188	400 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,169.01	$17,305.30	$0.00	$18,474.31
109189	500 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,275.28	$20,440.90	$0.00	$21,716.18
109190	600 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,594.11	$24,238.51	$0.00	$25,832.62
109191	700 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,594.11	$29,878.68	$0.00	$31,472.79
109192	800 MBH Indirect Gas Fired Condensing Water Heater	EA	$1,594.11	$34,763.88	$0.00	$36,357.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109193	1,000 MBH Indirect Gas Fired Condensing Water Heater	EA	$2,550.57	$41,746.01	$0.00	$44,296.58
109194	1,500 MBH Indirect Gas Fired Condensing Water Heater	EA	$2,550.57	$55,084.11	$0.00	$57,634.68
109195	1" & Dn Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$283.39	$1,048.33	$0.00	$1,331.72
109196	1-1/4" To 2" Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$688.13	$1,757.62	$0.00	$2,445.75
109197	2-1/2" Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,452.40	$4,059.47	$0.00	$5,511.87
109198	3" Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,629.53	$5,999.97	$0.00	$7,629.50
109199	4" Gas Fired Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,364.60	$8,866.13	$0.00	$11,230.73
109200	2" Single Wall Exhaust Flue - Stainless Steel	LF	$12.13	$4.95	$0.00	$17.08
109201	4" Single Wall Exhaust Flue - Stainless Steel	LF	$24.17	$9.91	$0.00	$34.08
109202	8" Single Wall Exhaust Flue - Stainless Steel	LF	$48.36	$19.81	$0.00	$68.17
109203	12" Single Wall Exhaust Flue - Stainless Steel	LF	$72.53	$29.69	$0.00	$102.22
109204	2" Double Wall Exhaust Flue/B-Vent - Stainless Steel Interior & Exterior	LF	$27.28	$50.77	$0.00	$78.05
109205	4" Double Wall Exhaust Flue/B-Vent - Stainless Steel Interior & Exterior	LF	$38.88	$101.55	$0.00	$140.43
109206	8" Double Wall Exhaust Flue/B-Vent - Stainless Steel Interior & Exterior	LF	$54.56	$165.60	$0.00	$220.16
109207	12" Double Wall Exhaust Flue/B-Vent - Stainless Steel Interior & Exterior	LF	$64.47	$210.91	$0.00	$275.38

22-35-23 Domestic Water Heat Exchangers

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109208	10 GPM Steam Fired Semi-Instantaneous Water Heater Packaged Assembly Of Tank, Heat-Exchanger Coils, Controls, And Specialties.	EA	$850.20	$40,646.24	$0.00	$41,496.44
109209	20 GPM Steam Fired Semi-Instantaneous Water Heater Packaged Assembly Of Tank, Heat-Exchanger Coils, Controls, And Specialties.	EA	$1,062.74	$41,414.26	$0.00	$42,477.00
109210	40 GPM Steam Fired Semi-Instantaneous Water Heater Packaged Assembly Of Tank, Heat-Exchanger Coils, Controls, And Specialties.	EA	$1,700.38	$55,665.39	$0.00	$57,365.77
109211	80 GPM Steam Fired Semi-Instantaneous Water Heater Packaged Assembly Of Tank, Heat-Exchanger Coils, Controls, And Specialties.	EA	$2,125.48	$71,419.75	$0.00	$73,545.23
109212	120 GPM Steam Fired Semi-Instantaneous Water Heater Packaged Assembly Of Tank, Heat-Exchanger Coils, Controls, And Specialties.	EA	$2,550.57	$94,526.14	$0.00	$97,076.71
	22-35-00 Domestic Water Heat Exchangers					
	22-35-23 Domestic Water Heat Exchangers					
109213	1-1/4" To 2" Steam Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,072.33	$2,645.34	$0.00	$4,717.67
109214	2-1/2" Steam Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,647.99	$4,904.80	$0.00	$7,552.79
109215	3" Steam Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,842.82	$5,569.49	$0.00	$8,412.31
109216	4" Steam Water Heater Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,524.75	$7,690.67	$0.00	$11,215.42
109217	80 MBH, 80 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$1,700.38	$18,067.62	$0.00	$19,768.00
109218	125 MBH, 125 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$2,125.48	$23,615.78	$0.00	$25,741.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109219	250 MBH, 250 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$2,125.48	$36,333.48	$0.00	$38,458.96
109220	350 MBH, 350 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$2,656.84	$37,746.34	$0.00	$40,403.18
109221	500 MBH, 500 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$2,656.84	$47,232.87	$0.00	$49,889.71
109222	750 MBH, 750 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$3,188.21	$53,928.47	$0.00	$57,116.68
109223	1,000 MBH, 1,000 Gallon Hot Water Storage Tank W/Steam Tube Bundle Packaged Assembly Mounted on Skid w/ Cement Lined Steel Tank, Heat-Exchanger Coils, Controls, and Specialties.	EA	$3,453.90	$87,684.80	$0.00	$91,138.70

22-40-00 Plumbing Fixtures

• Plumbing Fixture Rough-Ins (connections) include all required pipe, fittings, valves, and specialties within 5 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.

22-41-00 Residential Plumbing Fixtures

22-41-13 Residential Water Closets, Urinals, and Bidets

109224	Water Closet- Floor Mount, Tank Type, Vitreous China, Residential Standard Includes Seat. Kohler Wellworth Or Equal.	EA	$247.97	$156.23	$0.00	$404.20
109225	Water Closet- Floor Mount, Tank Type, Vitreous China, Residential Premium Includes Seat. Kohler Cimarron Or Equal.	EA	$247.97	$313.77	$0.00	$561.74
109226	Water Closet Rough-In	EA	$327.68	$291.21	$0.00	$618.89

22-41-16 Residential Lavatories and Sinks

109227	Sink- Single Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim, Residential Standard Elkay Signature Sink And Delta Foundations Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$236.32	$0.00	$457.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109228	Sink- Single Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim, Residential Premium Elkay Avenue Sink And Delta Leland Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$548.78	$0.00	$770.19
109229	Sink- Double Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim, Residential Standard Elkay Signature Sink And Delta Foundations Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$265.68	$321.66	$0.00	$587.34
109230	Sink- Double Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim, Residential Premium Elkay Avenue Sink And Delta Leland Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$265.68	$726.01	$0.00	$991.69
109231	Lavatory- Drop-In Or Undermount, Vitreous China, W/Faucet & Trim, Residential Standard Kohler Pennington Sink And Delta Foundations Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$168.05	$0.00	$389.46
109232	Lavatory- Drop-In Or Undermount, Vitreous China, W/Faucet & Trim, Residential Premium Kohler Claxton Sink And Delta Porter Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$410.92	$0.00	$632.33
109233	Sink or Lavatory Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-41-19 Residential Bathtubs					
109234	Bath Tub- Acrylic W/Mixing Valve, Showerhead & Tub Spout- Residential Delta Classic Tub And Delta Classic Faucet Or Equal. Includes Pop-Up Drain And Cast P-Trap W/Cleanout. Excludes Door.	EA	$531.37	$768.02	$0.00	$1,299.39
109235	Bath Tub- Acrylic W/Enclosure, Basin, Mixing Valve, Showerhead & Tub Spout- Residential Delta Classic Tub W/Surround And Delta Classic Faucet. Includes Pop-Up Drain And Cast P-Trap W/Cleanout. Excludes Door.	EA	$1,062.74	$1,146.13	$0.00	$2,208.87
109236	Bath Tub Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-41-23 Residential Showers					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109237	Shower- Mixing Valve, Showerhead & Drain- Residential Delta Classic Or Equal. Includes Drain. Excludes Basin, Door And Enclosure.	EA	$371.96	$463.44	$0.00	$835.40
109238	Shower- Basin W/Mixing Valve, Showerhead & Drain - Residential Delta Classic Basin And Delta Classic Faucet Or Equal. Excludes Door And Enclosure.	EA	$513.66	$850.74	$0.00	$1,364.40
109239	Shower- Enclosure, Basin W/ Mixing Valve, Showerhead & Drain- Residential Delta Classic Basin W/Surround And Delta Classic Faucet Or Equal. Excludes Door.	EA	$938.76	$1,112.00	$0.00	$2,050.76
109240	Shower Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-42-00 Commercial Plumbing Fixtures					
	22-42-13 Commercial Water Closets, Urinals, and Bidets					
109241	Urinal- Wall Mount, Vitreous China, w/ Flush Valve & Carrier Standard Kohler K4991 Urinal W/Sloan Royal 186 Or Equal.	EA	$380.81	$918.67	$0.00	$1,299.48
109242	Urinal- Wall Mount, Vitreous China, w/ Flush Valve & Carrier Premium Kohler K4989 Urinal W/Sloan Royal 186 Or Equal.	EA	$380.81	$1,303.40	$0.00	$1,684.21
109243	Urinal- Wall Mount, Vitreous China, w/ Carrier- Waterless Sloan Wes-1000 Or Equal.	EA	$354.25	$1,044.73	$0.00	$1,398.98
109244	Urinal Rough-In	EA	$327.68	$291.21	$0.00	$618.89
109245	Water Closet- Floor Mount, Tank Type, Vitreous China Kohler K-3505, K-3493 Water Closet Or Equal. Includes Seat.	EA	$283.39	$637.67	$0.00	$921.06
109246	Water Closet- Floor Mount, Siphon Jet, Vitreous China, w/ Flush Valve Kohler K-4405, K-4368 Water Closet W/Sloan Royal 115 Flush Valve Or Equal. Includes Seat.	EA	$301.10	$545.55	$0.00	$846.65
109247	Water Closet- Floor Mount, Siphon Jet, Stainless Steel, w/ Flush Valve, Penal Type Acorn 1685 Water Closet W/Sloan Royal 9603 Flush Valve Or Equal.	EA	$637.64	$2,257.43	$0.00	$2,895.07
109248	Water Closet- Floor Mount, Siphon Jet, Stainless Steel, w/ Flush Valve, Bariatric (Hospital) Acorn 2125A Water Closet W/Sloan Royal 115 Flush Valve.	EA	$637.64	$5,511.38	$0.00	$6,149.02
109249	Water Closet- Wall Mount, Siphon Jet, Vitreous China, w/ Flush Valve & Carrier Kohler K-4330, K-4325 Water Closet W/Sloan Royal 115 Flush Valve Or Equal. Includes Carrier And Seat.	EA	$371.96	$1,236.24	$0.00	$1,608.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109250	Water Closet- Wall Mount, Siphon Jet, Vitreous China, w/ Flush Valve, Carrier & Bedpan Washer (Hospital) Kohler K-4330L Water Closet W/Sloan Royal Bpw-1000 Flush Valve. Includes Carrier And Seat.	EA	$522.51	$1,642.96	$0.00	$2,165.47
109251	Water Closet Rough-In	EA	$327.68	$291.21	$0.00	$618.89
109252	[Modifier] Urinal - Sensor Flush Valve Additional Cost From Sloan Royal 186 Manual To Sloan 186-1.0 Es-S Ac, Sloan 8186 Dc Or Equal.	EA	$26.56	$337.41	$0.00	$363.97
109253	[Modifier] Urinal - Sensor Flush Valve Concealed/Security Additional Cost From Sloan Royal 186 Manual To Sloan Royal 195 Wb Es-S Or Equal.	EA	$70.85	$628.30	$0.00	$699.15
109254	[Modifier] Water Closet - Sensor Flush Valve Additional Cost From Sloan Royal 115-1.6 Manual To Sloan Royal 115-1.6 Es-S Ac, Sloan Optima 8111, 8115 Dc Or Equal.	EA	$26.56	$684.36	$0.00	$710.92
109255	[Modifier] Water Closet - Sensor Flush Valve Concealed/Security Additional Cost From Sloan Royal 115-1.6 Manual To Sloan Royal 140-Wb Es-S Or Equal.	EA	$70.85	$1,474.81	$0.00	$1,545.66
109256	[Modifier] Water Closet - Sensor Flush Valve Premium Additional Cost From Sloan Royal 115-1.6 Manual To Sloan Royal Optimal Smooth 111-1.28-Hws Or Equal.	EA	$26.56	$957.07	$0.00	$983.63
	22-42-16 Commercial Lavatories and Sinks					
109257	Sink- Single Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim- Standard Elkay Lr1919, Eluh2115 Sink W/Chicago Faucet 786-E3, 895-317 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$1,089.68	$0.00	$1,311.09
109258	Sink- Single Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim- Premium Elkay Llvr1916, Eluh2115 Sink W/Chicago Faucet 786-E3, 895-317 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$1,291.86	$0.00	$1,513.27
109259	Sink- Double Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim- Standard Elkay Lr3322, Eluh3118 Sink W/Chicago Faucet 786-E3, 895-317 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$265.68	$1,563.62	$0.00	$1,829.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109260	Sink- Double Bowl, Drop-In Or Undermount, Stainless Steel, W/Faucet & Trim- Premium Elkay Lrad3722 Sink W/Chicago Faucet 786-E3, 895 -317 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$265.68	$1,967.98	$0.00	$2,233.66
109261	Sink- Classroom, Double Bowl, Stainless Steel, W/Faucet, Trim & Bubbler Elkay Drkad371755Rc Stainless Steel Sink W/Faucet & Bubbler Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$309.97	$3,462.02	$0.00	$3,771.99
109262	Sink- Wall Hung, Stainless Steel, W/Faucet, Trim & Carrier Elkay Elv22191 Sink W/Chicago Faucet 786-E3, 895 -317 Combination Faucet Or Equal. Includes Carrier Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$309.97	$2,431.42	$0.00	$2,741.39
109263	Kitchen Sink- Install Only Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug.	EA	$265.68	$0.00	$0.00	$265.68
109264	Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109265	[Modifier] Sink - Floor Pedals Chicago Faucets 834-Epsloab Or Equal.	EA	$115.13	$670.88	$0.00	$786.01
109266	[Modifier] Sink - Sensor Operated Faucet Additional Cost From Chicago Faucet 786-E3 Or 895 -317 Manual To Sloan Eaf-100, Eaf-150 Dc, Chicago 116.101 Ac Or Equal.	EA	$26.56	$435.87	$0.00	$462.43
109267	[Modifier] Sink - Sensor Operated Concealed Security Faucet Additional Cost From Chicago Faucet 786-E3 Or 895 -317 Manual To Chicago Faucet Bsp Sf390 Or Equal.	EA	$70.85	$837.94	$0.00	$908.79
109268	Lavatory- Drop-In Or Undermount, Vitreous China, W/Faucet & Trim- Standard Kohler K2196, K2210 Lavatory W/Chicago Faucet 2200 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$221.41	$1,094.77	$0.00	$1,316.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109269	Lavatory- Drop-In Or Undermount, Vitreous China, W/Faucet & Trim- Premium Kohler K2895, K2215 Lavatory W/Chicago Faucet 2200 Combination Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$221.41	$1,562.32	$0.00	$1,783.73
109270	Lavatory- Wall Hung, Vitreous China, W/Faucet, Carrier & Trim- Standard Kohler K2005, K2006, K2007 Lavatory W/Chicago Faucet 2200 Combination Faucet Or Equal. Includes Carrier, Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$309.97	$1,523.81	$0.00	$1,833.78
109271	Lavatory- Wall Hung, Vitreous China, W/Faucet, Carrier & Trim- Premium Kohler K2053, K2054, K2084 Lavatory W/Chicago Faucet 2200 Combination Faucet Or Equal. Includes Carrier, Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$309.97	$1,750.86	$0.00	$2,060.83
109272	Lavatory- Wall Hung, Vitreous China, W/Faucet, Carrier & Trim- Wheelchair Kohler K12634 Lavatory W/Chicago Faucet 2200 Combination Faucet Or Equal. Includes Carrier, Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$309.97	$1,986.87	$0.00	$2,296.84
109273	Lavatory- Wall Hung, Solid Surface, W/Faucet, Carrier & Trim- Behavorial Health Bestcare/Whitehall Wh3775 W/Automatic Faucet. Includes Carrier, Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$398.53	$3,019.02	$0.00	$3,417.55
109274	Lavatory Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109275	[Modifier] Lavatory - Foot Pedals Chicago Faucets 834-Epsloab Or Equal.	EA	$115.13	$1,097.33	$0.00	$1,212.46
109276	[Modifier] Lavatory - Sensor Operated Faucet Additional Cost From Chicago Faucet 2200 Manual To Sloan Eaf-100, Eaf-150 Dc, Chicago 116.101 Ac Or Equal.	EA	$26.56	$245.19	$0.00	$271.75
109277	[Modifier] Lavatory - Sensor Operated Concealed Security Faucet Additional Cost From Chicago Faucet 2200 Manual To Bsp Sf390 Or Equal.	EA	$70.85	$411.44	$0.00	$482.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109278	[Modifier] Lavatory - Metered Faucet Additional Cost From Chicago Faucet 2200 Manual	EA	$17.71	$164.11	$0.00	$181.82
	22-42-19 Commercial Bathtubs					
109279	Bath Tub- Cast Iron W/Mixing Valve, Showerhead & Tub Spout Kohler K-715, K-716 Tub W/Symmons C-96-2-X Pressure Balancing Mixing Valve & Institutional Shower Head Or Equal. Includes Pop-Up Drain And Cast P-Trap W/Cleanout. Excludes Door.	EA	$531.37	$989.90	$0.00	$1,521.27
109280	Bath Tub- Cast Iron W/Mixing Valve, Showerhead & Tub Spout- ADA Kohler K-715, K-716 Tub W/Symmons C-96-400 Pressure Balancing Mixing Valve & Institutional Shower Head Or Equal. Includes Wall/Hand Showerhead W/Glide Bar, Pop-Up Drain And Cast P-Trap W/Cleanout. Excludes Door.	EA	$531.37	$1,268.22	$0.00	$1,799.59
109281	Bath Tub- Acrylic W/Enclosure, Basin, Mixing Valve, Showerhead & Tub Spout Best Bath Cts6030Cp One-Piece Gelcoat/Fiberglass Tub & Enclosure W/Symmons C-96-1-295-X-A Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head And Cast P-Trap W/Cleanout. Excludes Door.	EA	$1,062.74	$2,277.82	$0.00	$3,340.56
109282	Bath Tub- Acrylic W/Enclosure, Basin, Mixing Valve, Showerhead & Tub Spout- ADA Best Bath Cts6030Cp One-Piece Gelcoat/Fiberglass Tub & Enclosure W/Symmons C-96-400 Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Ada Accessories, Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head And Cast P-Trap W/Cleanout. Excludes Door.	EA	$1,062.74	$3,337.29	$0.00	$4,400.03
109283	Bath Tub Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-42-23 Commercial Showers					
109284	Shower- Mixing Valve, Showerhead & Drain Symmons C-96-1-295-X-A Pressure Balancing Mixing Valve, Institutional Shower Head Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head, And Cast P-Trap W/Cleanout. Excludes Basin, Door And Enclosure.	EA	$371.96	$598.66	$0.00	$970.62
109285	Shower- Mixing Valve, Showerhead & Drain, ADA Symmons C-96-300-B30-V-X Pressure Balancing Mixing Valve, Institutional Shower Head Or Equal. Includes Hand/Wall Showerhead & Glide Bar, Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head, And Cast P-Trap W/Cleanout. Excludes Basin, Door And Enclosure.	EA	$442.81	$762.78	$0.00	$1,205.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109286	Shower- Mixing Valve, Showerhead & Drain, Ligature Resistant Bradley HSC95, Acorn LR1741 Pressure Balancing Mixing Valve, Institutional Shower Head Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head, And Cast P-Trap W/Cleanout. Excludes Basin, Door And Enclosure.	EA	$425.10	$1,445.47	$0.00	$1,870.57
109287	Shower- Mixing Valve, Showerhead & Drain, Ligature Resistant, ADA Acorn LR1741ADA, Bradley HSC91 Pressure Balancing Mixing Valve, Institutional Shower Head Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head, And Cast P-Trap W/Cleanout. Excludes Basin, Door And Enclosure.	EA	$513.66	$2,162.29	$0.00	$2,675.95
109288	Shower- Mixing Valve, Showerhead & Drain, Electronic, Penal Armstrong Sense Model DMV 2 Temperature & Duration Electronic Mixing Valve W/Speakman S2460-AF Showerhead Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head, And Cast P-Trap W/Cleanout. Excludes Basin, Door And Enclosure.	EA	$699.64	$2,126.84	$0.00	$2,826.48
109289	Shower- Basin W/Mixing Valve, Showerhead & Drain Swanstone STS-3738 Solid Surface Basin W/Symmons C-96-1-295-X-A Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head And Cast P-Trap W/Cleanout. Excludes Door And Enclosure.	EA	$513.66	$1,105.43	$0.00	$1,619.09
109290	Shower- Basin W/Mixing Valve, Showerhead & Drain, ADA Swanstone SBF-3060 Solid Surface Basin W/Symmons C-96-300-B30-V-X Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Hand/Wall Showerhead & Glide Bar, Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head And Cast P-Trap W/Cleanout. Excludes Door And Enclosure.	EA	$619.93	$1,613.50	$0.00	$2,233.43
109291	Shower- Enclosure, Basin W/ Mixing Valve, Showerhead & Drain Best Bath LSS4038A5 One-Piece Gelcoat/Fiberglass Basin & Enclosure W/Symmons C-96-1-295-X-A Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Cast Iron Body Drain W/Nickel Bronze Adjustable Strainer Head And Cast P-Trap W/Cleanout. Excludes Door.	EA	$938.76	$2,809.53	$0.00	$3,748.29
109292	Shower- Enclosure, Basin W/ Mixing Valve, Showerhead, Drain & Accessories, ADA Best Bath LSS6337A75 One-Piece Gelcoat/Fiberglass Basin & Enclosure W/Symons C-96-300-B30-V-X Pressure Balancing Mixing Valve, Institutional Showerhead Or Equal. Includes Hand/Wall Showerhead & Glide Bar, Safety Bar, Seat, Drain, And Cast P-Trap W/Cleanout. Excludes Door.	EA	$974.18	$4,844.46	$0.00	$5,818.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109293	Shower Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-42-33 Wash Fountains					
109294	Lavatory System- Solid Surface, W/Sensor Faucet, 1 Station Bradley Fl-1, Terreon Solid Surface, Integral Bowl, Infrared Sensor Faucet Or Equal.	EA	$389.67	$4,926.23	$0.00	$5,315.90
109295	Lavatory System- Solid Surface, W/Sensor Faucet, 2 Station Bradley Mg-2, Terreon Solid Surface, Integral Bowl, Infrared Sensor Faucet Or Equal.	EA	$779.34	$8,191.68	$0.00	$8,971.02
109296	Lavatory System- Solid Surface, W/Sensor Faucet, 3 Station Bradley Mg-3, Terreon Solid Surface, Integral Bowl, Infrared Sensor Faucet Or Equal.	EA	$1,169.01	$14,072.27	$0.00	$15,241.28
109297	Lavatory System- Solid Surface, W/Sensor Faucet, Soap & Hand Dryer, 3 Station Bradley Av90, Terreon Solid Surface, Integral Bowl, Infrared Sensor Faucet Or Equal.	EA	$1,169.01	$12,985.28	$0.00	$14,154.29
109298	Wash Fountain- 36" Semi-Circular, Solid Surface, W/Sensor Faucet, 3 Station Bradley Tdb3103, Terreon Solid Surface, 36" Semi-Circular, Sensor Faucet, 3 Station Or Equal.	EA	$779.34	$11,377.33	$0.00	$12,156.67
109299	Wash Fountain- 54" Semi-Circular, Solid Surface, W/Sensor Faucet, 4 Station Bradley Tdb3104, Terreon Solid Surface, 54" Semi-Circular, Sensor Faucet, 3 Station Or Equal.	EA	$779.34	$11,377.33	$0.00	$12,156.67
109300	Lavatory System Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109301	Wash Fountain- 36" Circular, Solid Surface, W/Sensor Faucet, 5 Station Bradley Tdb3104, Terreon Solid Surface, 36" Circular, Sensor Faucet, 5 Station Or Equal.	EA	$850.20	$10,870.04	$0.00	$11,720.24
109302	Wash Fountain- 54" Circular, Solid Surface, W/Sensor Faucet, 8 Station Bradley Tdb3108, Terreon Solid Surface, 54" Circular, Sensor Faucet, 8 Station Or Equal.	EA	$850.20	$13,644.45	$0.00	$14,494.65
109303	Wash Fountain Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-42-36 Commercial Laundry, Mop and Utility Sinks					
109304	Utility/Scullery Sink- Free Standing, Single Basin, Stainless Steel, W/Faucet & Trim Elkay Ss81362 Sink W/Elkay Lk940Bp07T6S Wall Mount Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$398.53	$3,527.66	$0.00	$3,926.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109305	Utility/Scullery Sink- Free Standing, Double Basin, Stainless Steel, W/Faucet & Trim Elkay Ss8260 Sink W/Elkay Lk940Bp07T6S Wall Mount Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$531.37	$5,342.04	$0.00	$5,873.41
109306	Laundry Sink- Molded Stone, Single Compartment, W/Faucet & Trim Fiat Serv-A-Sink Model L7 Wall Hung Tub W/A-3 Assembly Kit Or Equal. Includes Chromium Plated Brass Strainer, Stopper And Faucet W/Swing Spout & Supply Stops.	EA	$221.41	$368.92	$0.00	$590.33
109307	Laundry Sink- Molded Stone, Double Compartment, W/Faucet & Trim Fiat Serv-A-Sink Model Ltd Ii Wall Hung Double Tub W/A-3 Assembly Kit Or Equal. Includes Chromium Plated Brass Strainer, Stopper And Faucet W/Swing Spout & Supply Stops.	EA	$265.68	$500.20	$0.00	$765.88
109308	Laundry Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109309	Mop Sink- Molded Stone, W/Faucet Fiat Msb-3624 Molded Stone Receptor W/Chicago Faucet 911-Is Wall Mounted Service Sink Faucet Or Equal. Includes P-Trap.	EA	$265.68	$1,076.55	$0.00	$1,342.23
109310	Mop Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109311	Utility/Scullery Sink- Free Standing, Triple Basin, Stainless Steel, W/Faucets & Trim Elkay Ss83724 Sink W/(2) Elkay Lk940Bp07T6S Wall Mount Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$797.05	$7,580.47	$0.00	$8,377.52
109312	Utility/Scullery Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109313	-Add- Utility/Scullery Sink Single Drain Board Elkay Ss8136R2, Ss8160R2 Or Equal.	EA	$44.29	$1,159.26	$0.00	$1,203.55
109314	-Add- Utility/Scullery Sink Double Drain Board Elkay Ss8136Lr2, Ss8160Lr2 Or Equal.	EA	$88.56	$2,234.49	$0.00	$2,323.05
	22-42-39 Commercial Faucets					
109315	Faucet - Deck Mounted w/ Trim Chicago Faucet 2200 Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$110.70	$1,004.37	$0.00	$1,115.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109316	Faucet - Deck Mounted w/ Trim, Sensor Operated Chicago Faucet 116.101 Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And Ada Insulator Kit For Water Supply And Drainage Assemblies.	EA	$132.85	$1,243.32	$0.00	$1,376.17
109317	Faucet - Deck Mounted w/ Trim, Sensor Operated, Anti-Ligature Behavioral Saftey SF400 Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug And ADA Insulator Kit For Water Supply And Drainage Assemblies.	EA	$132.85	$1,431.11	$0.00	$1,563.96
109318	Faucet Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109319	Washing Machine Box Guy Gray T200 Or Equal.	EA	$88.56	$183.80	$0.00	$272.36
109320	Vacuum Breaker Spout	EA	$29.22	$104.18	$0.00	$133.40
109321	Water Outlet Box Water Tite Model 87978 Or Ab9700Ha	EA	$66.42	$69.58	$0.00	$136.00
109322	Washing Machine Box Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109323	Trap Wrap - ADA P-Trap Cover	EA	$44.29	$41.68	$0.00	$85.97
	22-42-43 Flushometers					
109324	Flush Valve- Urinal Sloan Royal 186 Or Equal.	EA	$88.56	$250.38	$0.00	$338.94
109325	Flush Valve- Urinal W/Sensor Sloan Royal 186-1.0 Es-S Or Equal.	EA	$88.56	$587.79	$0.00	$676.35
109326	Flush Valve- Water Closet Sloan Royal 115 Or Equal.	EA	$88.56	$250.38	$0.00	$338.94
109327	Flush Valve- Water Closet W/Sensor Sloan Royal 115 Es-S Or Equal.	EA	$88.56	$934.74	$0.00	$1,023.30
109328	Flush Valve- Water Closet, Ant-Ligature Behavioral Saftey FV600 Or Equal.	EA	$110.70	$1,474.81	$0.00	$1,585.51
109329	Flush Valve Rough-In	EA	$327.68	$291.21	$0.00	$618.89
	22-42-45 Equipment Connections					
109330	Equipment Rough-In- Natural Gas	EA	$108.93	$16.21	$0.00	$125.14
109331	Equipment Rough-In- CW or HW Excludes Waste.	EA	$227.61	$85.49	$0.00	$313.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109332	Equipment Rough-In- CW & HW Excludes Waste.	EA	$227.61	$85.49	$0.00	$313.10
109333	Equipment Rough-In- Indirect Waste Excludes Water.	EA	$227.61	$85.49	$0.00	$313.10
109334	Equipment Rough-In- Waste & Vent Excludes Water.	EA	$227.61	$85.49	$0.00	$313.10
109335	Equipment Rough-In- CW, HW, Waste & Vent	EA	$455.20	$170.98	$0.00	$626.18
	22-43-00 Healthcare, Laboratory and Security Plumbing Fixtures					
	22-43-13 Healthcare Fixtures					
109336	Hospital Patient Care Module - Lavatory W/Fixed Water Closet Acorn Versalette 4047 Or Equal. Includes Supply Pipes W/Loose Key Control Stops And Escutcheons.	EA	$850.20	$12,414.43	$0.00	$13,264.63
109337	Hospital Patient Care Module - Lavatory W/Pivoting Water Closet Acorn Swivette 4010 Or Equal. Includes Supply Pipes W/Loose Key Control Stops And Escutcheons.	EA	$850.20	$14,213.05	$0.00	$15,063.25
109338	Hospital Patient Care Module Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109339	Hospital Clinical Sink - Floor Mounted Kohler K-6676 Service Sink W/Chicago Faucet 814-Vb Combination Faucet, Chicago Faucet 910-G Wall Hung Double Pedal Valve, Sloan Royal 117 Flush Valve Or Equal. Includes Vacuum Breaker Assembly, Wall Spout W/4' Hose & E21 Rose Spray.	EA	$460.52	$3,523.73	$0.00	$3,984.25
109340	Hospital Clinical Sink - Wall Mounted Kohler K-12867 Service Sink W/Chicago Faucet 814-Vb Combination Faucet, Chicago Faucet 910-G Wall Hung Double Pedal Valve, Sloan Royal 117 Flush Valve Or Equal. Includes Carrier, Vacuum Breaker Assembly, Wall Spout W/4' Hose & E21 Rose Spray.	EA	$531.37	$3,741.66	$0.00	$4,273.03
109341	Hospital Clinical Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109342	Hospital Surgeon Scrub Sink - Vitreous China, Wall Mounted Kohler K-12793 W/Chicago Faucet 626-E3 & 745-Vo Knee Operated Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$469.37	$2,806.91	$0.00	$3,276.28
109343	Hospital Surgeon Scrub Sink - Stainless Steel, Wall Mounted Elkay Ews-2520-K-C W/Knee Operated Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$469.37	$3,866.38	$0.00	$4,335.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109344	Hospital Surgeon Scrub Sink - Single Station, Stainless Steel, Wall Mounted Sloan Ess-2100-C-Adm W/Sensor Operated Faucet Or Equal. Includes Manual Above Deck Thermostatic Mixing Valve, Supply Pipes W/Loose Key Control Stops, Escutcheons And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$637.64	$9,641.67	$0.00	$10,279.31
109345	Hospital Surgeon Scrub Sink - Double Station, Stainless Steel, Wall Mounted Sloan Ess-2200-C-Adm W/Sensor Operated Faucet Or Equal. Includes Manual Above Deck Thermostatic Mixing Valve, Supply Pipes W/Loose Key Control Stops, Escutcheons And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$850.20	$13,041.98	$0.00	$13,892.18
109346	Hospital Surgeon Scrub Sink - Triple Station, Stainless Steel, Wall Mounted Sloan Ess-2300-C-Adm W/Sensor Operated Faucet Or Equal. Includes Manual Above Deck Thermostatic Mixing Valve, Supply Pipes W/Loose Key Control Stops, Escutcheons And Cast Adjustable P-Trap W/Cleanout Plug.	EA	$1,062.74	$16,854.54	$0.00	$17,917.28
109347	Hospital Surgeon Scrub Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109348	Hospital Dialysis Box - Recessed w/Locking Door, Single RO/DI Water Connection Whitehall/Acorn Model 8196 or Equal, Ligature Resistant	EA	$132.85	$2,343.45	$0.00	$2,476.30
109349	Hospital Dialysis Box - Recessed w/Locking Door, Dual RO/DI Water Connection Whitehall/Acorn Model 8195 or Equal, Ligature Resistant	EA	$132.85	$2,717.63	$0.00	$2,850.48
109350	Hospital Dialysis Box - Recessed w/Locking Door, Domestic Cold Water Connection Whitehall Model 8193 or Equal, Ligature Resistant	EA	$221.41	$5,861.94	$0.00	$6,083.35
109351	Hospital Dialysis Box - Recessed w/Locking Door, Domestic Cold and Hot Water Connection Whitehall Model 8194 or Equal, Ligature Resistant	EA	$221.41	$6,800.63	$0.00	$7,022.04
109352	Hospital Dialysis Box Rough-In	EA	$227.61	$85.49	$0.00	$313.10
	22-43-53 Laboratory Fixtures					
109353	Cold Water Laboratory Faucet- Install Only Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug. Excludes Faucet Cost.	EA	$88.56	$137.84	$0.00	$226.40
109354	Cold Water & Hot Water Laboratory Faucet- Install Only Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug. Excludes Faucet Cost.	EA	$88.56	$174.61	$0.00	$263.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109355	Reverse Osmosis or Deionized Water (RO/DI) Laboratory Faucet- Install Only Includes Supply Pipes W/Loose Key Control Stops And Escutcheons. Excludes Faucet Cost.	EA	$88.56	$0.00	$0.00	$88.56
109356	Cold Water Laboratory Faucet w/ Vacuum Breaker Spout Chicago Faucet 928 Lab Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug.	EA	$88.56	$351.85	$0.00	$440.41
109357	Cold Water & Hot Water Laboratory Faucet w/ Vacuum Breaker Spout Chicago Faucet 930 Lab Faucet Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug.	EA	$88.56	$448.99	$0.00	$537.55
109358	Reverse Osmosis or Deionized Water (RO/DI) Laboratory Faucet Chicago Faucet 969-Ctf Or Equal.	EA	$88.56	$267.83	$0.00	$356.39
109359	Laboratory Sink - Epoxy w/ Faucet Chicago Faucet 930 Lab Faucet And Sink Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug.	EA	$221.41	$1,059.48	$0.00	$1,280.89
109360	Laboratory Cup Sink - Epoxy w/Faucet Chicago Faucet 928 Lab Faucet And Cup Sink Or Equal. Includes Drain, Tailpiece, Supply Pipes W/Loose Key Control Stops, Escutcheons, Cast Adjustable P-Trap W/Cleanout Plug.	EA	$132.85	$564.53	$0.00	$697.38
109361	Cold Water Faucet Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109362	Cold Water & Hot Water Faucet Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109363	Reverse Osmosis or Deionized Water (RO/DI) Faucet Rough-In	EA	$227.61	$85.49	$0.00	$313.10
109364	Laboratory Sink Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109365	Laboratory Cup Sink Rough-In	EA	$227.61	$85.49	$0.00	$313.10
	22-43-57 Laboratory Equipment Connections					
109366	Equipment Rough-In- Med/Lab Gas	EA	$67.31	$2.63	$0.00	$69.94
109367	Equipment Rough-In- Lab Waste Excludes Water.	EA	$227.61	$85.49	$0.00	$313.10
109368	Equipment Rough-In- Lab CW, HW, Waste & Vent	EA	$455.20	$170.98	$0.00	$626.18
109369	Equipment Rough-In- RO/DI Water	EA	$227.61	$85.49	$0.00	$313.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	22-46-13 Security Fixtures					
109370	Penal Lavatory Acorn Model 1652 Or Equal. Includes Supply Pipes W/Loose Key Control Stops And Escutcheons.	EA	$619.93	$1,480.91	$0.00	$2,100.84
109371	Penal Lavatory Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109372	Penal Water Closet Acorn Model R2100 W/Sloan Royal 9603 Or Equal. Includes Supply Pipes W/Loose Key Control Stops And Escutcheons.	EA	$797.05	$1,593.82	$0.00	$2,390.87
109373	Penal Water Closet Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109374	Penal Combination Lavatory/Water Closet Acorn Model 1418 Or Equal. Includes Supply Pipes W/Loose Key Control Stops And Escutcheons.	EA	$1,062.74	$3,003.84	$0.00	$4,066.58
109375	Penal Combination Lavatory/Water Closet Rough-In	EA	$455.20	$170.98	$0.00	$626.18
	22-45-00 Emergency Plumbing Fixtures					
	22-45-13 Emergency Showers					
109376	Emergency Shower Thermostatic Mixing Valve Bradley S19-2100, Guardian G3800 Or Equal. Excludes Cabinet.	EA	$292.25	$1,564.93	$0.00	$1,857.18
109377	Emergency Shower- Ceiling Mounted, Exposed Water Saver Esbf658 Or Equal.	EA	$495.95	$756.21	$0.00	$1,252.16
109378	Emergency Shower- Wall Mounted, Recessed Water Saver Esbf670 Or Equal.	EA	$619.93	$929.51	$0.00	$1,549.44
109379	Emergency Shower Rough-In	EA	$227.61	$85.49	$0.00	$313.10
	22-45-16 Eyewash Equipment					
109380	Emergency Eyewash Thermostatic Mixing Valve Bradley S19-2000, Haws G3600 Or Equal. Excludes Cabinet.	EA	$185.98	$756.21	$0.00	$942.19
109381	Emergency Eye/Face Wash- Install Only	EA	$132.85	$0.00	$0.00	$132.85
109382	Emergency Eye/Face Wash- Deck Mounted Water Saver Ew1022 Or Equal. Includes Locking Squeeze Handle, Under Counter Hose Guide And Deck Flange.	EA	$132.85	$509.40	$0.00	$642.25
109383	Emergency Eye/Face Wash- Wall Mounted, Exposed Water Saver Ew814 Or Equal. Includes Stainless Steel Bowl, 2 Outlets W/Aerators And Volume Control.	EA	$212.54	$467.38	$0.00	$679.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109384	Emergency Eye/Face Wash- Wall Mounted, Recessed Water Saver Febf735Dp Or Equal.	EA	$265.68	$1,862.95	$0.00	$2,128.63
109385	Emergency Eye/Face Wash- Floor Mounted Haws 7361 Or Equal.	EA	$265.68	$685.31	$0.00	$950.99
109386	Emergency Eye Wash Rough-In	EA	$227.61	$85.49	$0.00	$313.10
	22-45-33 Combination Emergency Fixture Units					
109387	Emergency Shower & Eye Wash- Floor Mounted Haws 8300 Or Equal.	EA	$566.79	$1,209.15	$0.00	$1,775.94
109388	Emergency Shower & Eye Wash- Wall Mounted, Recessed Water Saver Ssbf2150 Or Equal.	EA	$708.49	$2,751.76	$0.00	$3,460.25
109389	Emergency Shower, Eye Wash & Safety Station- Wall Mounted Recessed Guardian Gsc2652K Or Equal. Includes Fire Extinguisher And Lower Storage Housings.	EA	$974.18	$5,489.08	$0.00	$6,463.26
109390	Emergency Eye Wash/Shower Rough-In	EA	$227.61	$85.49	$0.00	$313.10
	22-46-00 Security Plumbing Fixtures					
	22-46-13 Security Fixtures					
109391	Penal Urinal - Wall Mount, Stainless Steel, W/Flush Valve & Carrier Metcraft 7120 & Sloan 995 or Equal. Includes Washdown Back, Flush Valve Connector and Metal Template.	EA	$566.79	$2,472.12	$0.00	$3,038.91
109392	Penal Urinal Rough-In	EA	$327.68	$270.39	$0.00	$598.07
109393	Penal Shower - Stainless Steel Cabinet, Basin w/ Mixing Valve, Showerhead & Drain Metcraft 8160 or 8660 or equal. 36" x 36" x 88". Includes Trim. Excludes Door.	EA	$1,062.74	$9,769.96	$0.00	$10,832.70
109394	Penal Shower Rough-In	EA	$455.20	$158.75	$0.00	$613.95
	22-47-00 Drinking Fountains and Water Coolers					
	22-47-13 Drinking Fountains					
109395	Drinking Fountain - Classroom Bubbler Elkay LK1141A or Equal.	EA	$132.85	$424.05	$0.00	$556.90
109396	Drinking Fountain - Wall Mounted Single Height Elkay EMABFDS or Equal.	EA	$177.12	$1,021.41	$0.00	$1,198.53
109397	Drinking Fountain - Wall Mounted Dual Height Elkay EMABFTLDDSC or Equal.	EA	$212.54	$2,044.13	$0.00	$2,256.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109398	Drinking Fountain - Recessed Single Height Includes Wall Mounting Back Plate. Elkay EDFPBWM114C or Equal.	EA	$177.12	$2,423.54	$0.00	$2,600.66
109399	Drinking Fountain - Recessed Dual Height Includes Wall Mounting Back Plate. Elkay EDFPBM117C or Equal.	EA	$212.54	$3,950.40	$0.00	$4,162.94
109400	Drinking Fountain - Outdoor Wall Mounted Single Height Elkay LK4405 or Equal.	EA	$265.68	$2,520.70	$0.00	$2,786.38
109401	Drinking Fountain - Outdoor Wall Mounted Dual Height Elkay LK4406 or Equal.	EA	$265.68	$7,193.17	$0.00	$7,458.85
109402	Drinking Fountain - Outdoor Pedestal Single Height Elkay LK4410 or Equal.	EA	$265.68	$4,809.02	$0.00	$5,074.70
109403	Drinking Fountain - Outdoor Pedestal Dual Height Elkay LK4420 or Equal.	EA	$354.25	$5,854.05	$0.00	$6,208.30
109404	Drinking Fountain Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109405	Drinking Fountain - Outdoor Wall Mounted Single Height w/Bottle Filler Elkay LK4408BF or Equal.	EA	$231.02	$7,104.19	$0.00	$7,335.21
109406	Drinking Fountain - Outdoor Wall Mounted Dual Height w/ Bottle Filler Elkay LK4409BF or Equal.	EA	$231.02	$8,696.48	$0.00	$8,927.50
109407	Drinking Fountain - Outdoor Pedestal w/ Bottle Filler Single Height Elkay LK4420BF1U or Equal.	EA	$308.04	$7,142.00	$0.00	$7,450.04
109408	Drinking Fountain - Outdoor Pedestal w/ Bottle Filler Dual Height Elkay LK4430BF1U or Equal.	EA	$395.83	$8,988.93	$0.00	$9,384.76
109409	[Modifier] Drinking Fountain - Filtered or Vandal Resistant Elkay FPK or Equal.	EA	$0.00	$195.61	$0.00	$195.61
109410	[Modifier] Drinking Fountain - Freeze Resistant Elkay FPK or Equal.	EA	$0.00	$1,056.86	$0.00	$1,056.86
109411	[Modifier] Drinking Fountain - Outdoor Freeze Resistant Elkay FR or Equal.	EA	$0.00	$4,022.61	$0.00	$4,022.61
	22-47-19 Water-Station Water Coolers					
109412	Water Cooler - Wall Mounted Single Height Elkay EZS8S or Equal.	EA	$212.54	$1,297.11	$0.00	$1,509.65
109413	Water Cooler - Wall Mounted Dual Height Elkay EZSTL8SC or Equal.	EA	$283.39	$2,269.94	$0.00	$2,553.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109414	Water Cooler - Wall Mounted w/Bottle Filler Single Height Elkay EZS8WSSK or Equal.	EA	$212.54	$2,243.68	$0.00	$2,456.22
109415	Water Cooler - Wall Mounted w/Bottle Filler Dual Height Elkay EZSTL8WSSK or Equal.	EA	$354.25	$3,217.83	$0.00	$3,572.08
109416	Water Cooler - Recessed Single Height Includes Mounting Frame. Elkay ERPBM8K or Equal.	EA	$265.68	$4,201.16	$0.00	$4,466.84
109417	Water Cooler - Recessed Dual Height Includes Mounting Frame. Elkay ERPBM28K or Equal.	EA	$354.25	$5,777.91	$0.00	$6,132.16
109418	Water Cooler - Recessed w/Bottle Filler Single Height Includes Mounting Frame. Elkay EZWS-ERPBM8K or Equal.	EA	$265.68	$7,039.57	$0.00	$7,305.25
109419	Water Cooler - Recessed w/Bottle Filler Dual Height Includes Mounting Frame. Elkay EZWS-ERPBM28K or Equal.	EA	$495.95	$9,662.67	$0.00	$10,158.62
109420	Water Cooler Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109421	Bottle Filler - Wall Mounted Non-Refrigerated Elkay EZWSSM or Equal.	EA	$212.54	$1,587.25	$0.00	$1,799.79
109422	Bottle Filler - Wall Mounted Refrigerated Elkay EZ8WSSMC or Equal.	EA	$212.54	$1,923.35	$0.00	$2,135.89
109423	Bottle Filler - Recessed Non-Refrigerated Includes Mounting Frame. Elkay EZWSMDK or Equal.	EA	$265.68	$2,129.46	$0.00	$2,395.14
109424	Bottle Filler - Recessed Refrigerated Includes Mounting Frame. Elkay EZWSM8 or Equal.	EA	$265.68	$3,467.27	$0.00	$3,732.95
109425	Bottle Filler Rough-In	EA	$455.20	$170.98	$0.00	$626.18
109426	[Modifier] Water Cooler or Bottle Filler - Filtered or Vandal Resistant Elkay Models w/ "L" or "V".	EA	$0.00	$195.61	$0.00	$195.61
109427	[Modifier] Water Cooler or Bottle Filler - Hands Free Activation or High Efficiency Elkay Models w/ "OB" or "GRN".	EA	$0.00	$340.03	$0.00	$340.03

22-50-00 Pool and Fountain Plumbing Systems

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

- Piping items include hangers and couplings (as required) unless stated otherwise.
- Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

22-51-00 Swimming Pool Plumbing Systems

22-51-13 Swimming Pool Piping

		Units	Labor	Material	Equipment	Total
109428	1-1/2" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$6.33	$0.00	$26.70
109429	2" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$8.16	$0.00	$28.53
109430	2-1/2" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$12.45	$0.00	$32.82
109431	3" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$14.86	$0.00	$35.23
109432	4" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$23.91	$21.81	$0.00	$45.72
109433	6" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$30.11	$40.74	$0.00	$70.85
109434	8" Pool Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$36.31	$68.35	$0.00	$104.66
109435	1-1/2" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$23.91	$14.48	$0.00	$38.39
109436	2" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$24.79	$16.91	$0.00	$41.70
109437	2-1/2" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$30.99	$40.58	$0.00	$71.57
109438	3" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$36.31	$43.68	$0.00	$79.99
109439	4" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$77.94	$70.57	$0.00	$148.51
109440	6" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$202.80	$155.39	$0.00	$358.19
109441	8" Pool Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$314.40	$405.13	$0.00	$719.53

22-51-19 Swimming Pool Water Treatment Equipment

109442	Pool Filter- Regenerative Media Pool Surface Area= 6,016 Sf	EA	$3,542.46	$161,482.15	$0.00	$165,024.61
109443	Pool Pump w/VFD Pool Surface Area= 6,016 Sf	EA	$637.64	$12,340.91	$0.00	$12,978.55
109444	Calcium Hypochlorite Feed System Pool Surface Area= 6,016 Sf	EA	$2,125.48	$20,086.80	$0.00	$22,212.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109445	CO2 PH Buffer System Pool Surface Area= 6,016 Sf	EA	$637.64	$2,264.69	$0.00	$2,902.33
109446	Chemical Controller Pool Surface Area= 6,016 Sf	EA	$637.64	$11,487.55	$0.00	$12,125.19
109447	Enclosed Surge Tank Pool Surface Area= 6,016 Sf	EA	$3,188.21	$42,339.83	$0.00	$45,528.04
109448	Water Level Controller Pool Surface Area= 6,016 Sf	EA	$637.64	$8,664.90	$0.00	$9,302.54
109449	Pool Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$616.39	$2,338.75	$0.00	$2,955.14

22-60-00 Gas and Vacuum Systems for Laboratory and Healthcare Facilities

• Plumbing Equipment costs exclude temperature controls, electrical connections, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Plumbing Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Plumbing Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

22-61-00 Compressed-Air Systems for Laboratory and Healthcare Facilities

22-61-13 Compressed-Air Piping for Laboratory and Healthcare Facilities

109450	1/2" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$4.53	$0.00	$24.01
109451	3/4" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$6.97	$0.00	$27.34
109452	1" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$9.69	$0.00	$30.06
109453	1-1/4" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$14.90	$0.00	$33.50
109454	1-1/2" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.71	$18.10	$0.00	$35.81
109455	2" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$27.92	$0.00	$46.52
109456	2-1/2" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$40.71	$0.00	$60.19
109457	3" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$56.43	$0.00	$76.80
109458	4" Compressed Air Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.56	$94.30	$0.00	$120.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109459	1/2" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$39.85	$3.17	$0.00	$43.02
109460	3/4" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$54.03	$7.27	$0.00	$61.30
109461	1" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$64.65	$19.75	$0.00	$84.40
109462	1-1/4" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$69.97	$28.18	$0.00	$98.15
109463	1-1/2" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$74.39	$43.23	$0.00	$117.62
109464	2" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$85.90	$73.70	$0.00	$159.60
109465	2-1/2" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$136.39	$134.96	$0.00	$271.35
109466	3" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$163.84	$192.82	$0.00	$356.66
109467	4" Compressed Air Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$218.74	$436.26	$0.00	$655.00
109468	1/2" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$17.71	$6.34	$0.00	$24.05
109469	3/4" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$7.73	$0.00	$26.33
109470	1" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$10.08	$0.00	$29.56
109471	1-1/4" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$21.25	$13.35	$0.00	$34.60
109472	1-1/2" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$15.55	$0.00	$34.15
109473	2" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$20.64	$0.00	$40.12
109474	1/2" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$47.83	$4.10	$0.00	$51.93
109475	3/4" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$65.54	$5.28	$0.00	$70.82
109476	1" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$80.59	$9.30	$0.00	$89.89
109477	1-1/4" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$92.99	$15.05	$0.00	$108.04
109478	1-1/2" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$100.96	$19.35	$0.00	$120.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109479	2" Compressed Air Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$123.98	$33.03	$0.00	$157.01
109480	2-1/2" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
109481	3" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
109482	4" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
109483	5" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
109484	6" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
109485	8" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
109486	10" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
109487	12" Compressed Air Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
109488	2-1/2" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
109489	3" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
109490	4" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
109491	5" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
109492	6" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
109493	8" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
109494	10" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
109495	12" Compressed Air Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
109496	1/2" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.15	$6.47	$0.00	$25.62
109497	3/4" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$11.35	$0.00	$31.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109498	1" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$14.34	$0.00	$34.30
109499	1-1/4" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.74	$17.60	$0.00	$36.34
109500	1-1/2" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.22	$22.81	$0.00	$40.03
109501	2" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.03	$33.27	$0.00	$51.30
109502	2-1/2" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.83	$49.69	$0.00	$69.52
109503	3" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.45	$68.17	$0.00	$88.62
109504	4" Compressed Air Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.07	$118.52	$0.00	$144.59

22-61-19 Compressed-Air Equipment for Laboratory and Healthcare Facilities

Air compressors to be factory assembled, wired, piped, and tested on skid or base. Electric-motor-driven, air-cooled, continuous-duty air compressors and receivers. Includes control panel.

109505	Install Lab Turret- Air Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$170.04	$21.00	$0.00	$191.04
109506	Single Lab Turret- Air Chicago Faucet 980. Includes Rough-In.	EA	$170.04	$157.54	$0.00	$327.58
109507	Double Lab Turret- Air Chicago Faucet 982. Includes Rough-In.	EA	$170.04	$186.42	$0.00	$356.46
109508	Install Hospital Outlet- Air Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$170.04	$21.00	$0.00	$191.04
109509	Hospital Outlet- Air Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$170.04	$129.97	$0.00	$300.01
109510	2-1/2 HP Duplex Packaged Air Compressor- Medical/Lab	EA	$1,700.38	$43,712.47	$0.00	$45,412.85
109511	5 HP Duplex Packaged Air Compressor- Medical/Lab	EA	$1,700.38	$62,641.84	$0.00	$64,342.22
109512	10 HP Duplex Packaged Air Compressor- Medical/Lab	EA	$2,869.39	$78,879.10	$0.00	$81,748.49
109513	15 HP Duplex Packaged Air Compressor- Medical/Lab	EA	$2,869.39	$95,118.01	$0.00	$97,987.40
109514	5 HP Triplex Packaged Air Compressor- Medical/Lab	EA	$3,666.44	$93,961.93	$0.00	$97,628.37
109515	10 HP Triplex Packaged Air Compressor- Medical/Lab	EA	$3,666.44	$118,319.48	$0.00	$121,985.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109516	15 HP Triplex Packaged Air Compressor-Medical/Lab	EA	$3,666.44	$142,677.01	$0.00	$146,343.45
109517	15 HP Quadplex Packaged Air Compressor-Medical/Lab	EA	$4,463.50	$170,833.81	$0.00	$175,297.31
109518	15 HP Hexaplex Packaged Air Compressor-Medical/Lab	EA	$5,738.79	$263,970.66	$0.00	$269,709.45
109519	1" & Dn Air Compressor Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$485.31	$669.08	$0.00	$1,154.39
109520	1-1/4" To 2" Air Compressor Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$644.72	$1,641.58	$0.00	$2,286.30
109521	2-1/2" Air Compressor Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$869.68	$2,157.02	$0.00	$3,026.70
109522	3" Air Compressor Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,045.03	$2,600.47	$0.00	$3,645.50
109523	4" Air Compressor Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,496.69	$3,722.74	$0.00	$5,219.43
	22-62-00 Vacuum Systems for Laboratory and Healthcare Facilities					
	22-62-13 Vacuum Piping for Laboratory and Healthcare Facilities					
109524	1/2" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$4.53	$0.00	$24.01
109525	3/4" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$6.97	$0.00	$27.34
109526	1" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$9.69	$0.00	$30.06
109527	1-1/4" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$14.53	$0.00	$33.13
109528	1-1/2" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.71	$18.10	$0.00	$35.81
109529	2" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$27.92	$0.00	$46.52
109530	2-1/2" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$40.71	$0.00	$60.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109531	3" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$56.43	$0.00	$76.80
109532	4" Vacuum Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.56	$94.30	$0.00	$120.86
109533	1/2" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$39.85	$3.17	$0.00	$43.02
109534	3/4" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$54.03	$7.27	$0.00	$61.30
109535	1" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$64.65	$19.75	$0.00	$84.40
109536	1-1/4" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$69.97	$28.18	$0.00	$98.15
109537	1-1/2" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$74.39	$43.23	$0.00	$117.62
109538	2" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$85.90	$73.70	$0.00	$159.60
109539	2-1/2" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$136.39	$134.96	$0.00	$271.35
109540	3" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$163.84	$192.82	$0.00	$356.66
109541	4" Vacuum Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$218.74	$436.26	$0.00	$655.00
109542	1/2" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.15	$6.47	$0.00	$25.62
109543	3/4" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$11.35	$0.00	$31.31
109544	1" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$14.34	$0.00	$34.30
109545	1-1/4" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.74	$17.60	$0.00	$36.34
109546	1-1/2" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.22	$22.81	$0.00	$40.03
109547	2" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.03	$33.27	$0.00	$51.30
109548	2-1/2" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.83	$49.69	$0.00	$69.52
109549	3" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.45	$68.17	$0.00	$88.62
109550	4" Vacuum Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.07	$118.51	$0.00	$144.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	22-62-19 Vacuum Equipment for Laboratory and Healthcare Facilities					
	Vacuum pumps to be factory-assembled, wired, piped, and tested on skid or base. Electric-motor-driven, air-cooled, continuous-duty vacuum pumps and receivers. Includes control panel.					
109551	Install Lab Turret- Vacuum Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$195.72	$21.00	$0.00	$216.72
109552	Single Lab Turret- Vacuum Chicago Faucet 980. Includes Rough-In.	EA	$195.72	$157.54	$0.00	$353.26
109553	Double Lab Turret- Vacuum Chicago Faucet 982. Includes Rough-In.	EA	$195.72	$186.42	$0.00	$382.14
109554	Install Hospital Outlet- Vacuum Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$195.72	$21.00	$0.00	$216.72
109555	Hospital Outlet- Vacuum Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$195.72	$129.97	$0.00	$325.69
109556	2-1/2 HP Duplex Packaged Vacuum Pump- Medical/Lab	EA	$1,700.38	$36,352.05	$0.00	$38,052.43
109557	5 HP Duplex Packaged Vacuum Pump- Medical/Lab	EA	$1,700.38	$52,501.28	$0.00	$54,201.66
109558	7-1/2 HP Duplex Packaged Vacuum Pump- Medical/Lab	EA	$2,869.39	$88,046.20	$0.00	$90,915.59
109559	10 HP Duplex Packaged Vacuum Pump- Medical/Lab	EA	$2,869.39	$105,884.70	$0.00	$108,754.09
109560	7-1/2 HP Triplex Packaged Vacuum Pump- Medical/Lab	EA	$3,666.44	$117,533.54	$0.00	$121,199.98
109561	10 HP Triplex Packaged Vacuum Pump- Medical/Lab	EA	$3,666.44	$133,987.68	$0.00	$137,654.12
109562	15 HP Quadplex Packaged Vacuum Pump- Medical/Lab	EA	$4,463.50	$160,145.38	$0.00	$164,608.88
109563	3 HP Simplex Packaged Vacuum Pump- Dental	EA	$850.20	$18,681.50	$0.00	$19,531.70
109564	5 HP Simplex Packaged Vacuum Pump- Dental	EA	$850.20	$28,024.30	$0.00	$28,874.50
109565	1" & Dn Vacuum Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$485.31	$669.08	$0.00	$1,154.39
109566	1-1/4" To 2" Vacuum Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$644.72	$1,641.58	$0.00	$2,286.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109567	2-1/2" Vacuum Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$869.68	$2,157.02	$0.00	$3,026.70
109568	3" Vacuum Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,045.03	$2,600.47	$0.00	$3,645.50
109569	4" Vacuum Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,496.69	$3,722.74	$0.00	$5,219.43
	22-63-00 Gas Systems for Laboratory and Healthcare Facilities					
	22-63-13 Gas Piping for Laboratory and Healthcare Facilities					
109570	1/2" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$4.53	$0.00	$24.01
109571	3/4" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$6.97	$0.00	$27.34
109572	1" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$9.69	$0.00	$30.06
109573	1-1/4" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$14.53	$0.00	$33.13
109574	1-1/2" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.71	$18.10	$0.00	$35.81
109575	2" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.60	$27.92	$0.00	$46.52
109576	2-1/2" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.48	$40.71	$0.00	$60.19
109577	3" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.37	$56.43	$0.00	$76.80
109578	4" Medical Gas Pipe - Copper, Type L, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.56	$94.30	$0.00	$120.86
109579	1/2" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$39.85	$3.17	$0.00	$43.02
109580	3/4" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$54.03	$7.27	$0.00	$61.30
109581	1" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$64.65	$19.75	$0.00	$84.40
109582	1-1/4" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$69.97	$28.18	$0.00	$98.15
109583	1-1/2" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$74.39	$43.23	$0.00	$117.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109584	2" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$85.90	$73.70	$0.00	$159.60
109585	2-1/2" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$136.39	$134.96	$0.00	$271.35
109586	3" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$163.84	$192.82	$0.00	$356.66
109587	4" Medical Gas Fitting - Copper, Wrot, Medical Gas Cleaned, Brazed	EA	$218.74	$436.26	$0.00	$655.00
109588	1/2" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$18.60	$6.86	$0.00	$25.46
109589	3/4" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$19.48	$8.37	$0.00	$27.85
109590	1" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$21.25	$10.81	$0.00	$32.06
109591	1-1/4" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$25.68	$15.08	$0.00	$40.76
109592	1-1/2" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$23.02	$17.91	$0.00	$40.93
109593	2" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Threaded	LF	$23.02	$22.11	$0.00	$45.13
109594	2-1/2" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Butt Weld	LF	$38.96	$35.14	$0.00	$74.10
109595	3" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Butt Weld	LF	$41.62	$44.20	$0.00	$85.82
109596	4" Medical Gas Pipe - Stainless Steel, Type 304, Standard Weight, Butt Weld	LF	$49.60	$60.02	$0.00	$109.62
109597	1/2" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$55.80	$8.25	$0.00	$64.05
109598	3/4" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$78.82	$9.41	$0.00	$88.23
109599	1" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$95.65	$12.57	$0.00	$108.22
109600	1-1/4" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$110.70	$20.06	$0.00	$130.76
109601	1-1/2" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$120.44	$24.23	$0.00	$144.67
109602	2" Medical Gas Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$147.90	$32.89	$0.00	$180.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109603	2-1/2" Medical Gas Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$691.67	$56.94	$0.00	$748.61
109604	3" Medical Gas Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$726.20	$49.27	$0.00	$775.47
109605	4" Medical Gas Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$900.67	$77.30	$0.00	$977.97
109606	1/2" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.15	$6.47	$0.00	$25.62
109607	3/4" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$11.35	$0.00	$31.31
109608	1" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.96	$14.34	$0.00	$34.30
109609	1-1/4" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.74	$17.60	$0.00	$36.34
109610	1-1/2" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$17.22	$22.81	$0.00	$40.03
109611	2" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$18.03	$33.27	$0.00	$51.30
109612	2-1/2" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$19.83	$49.69	$0.00	$69.52
109613	3" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$20.45	$68.17	$0.00	$88.62
109614	4" Medical Gas Pipe - Copper, Type K, Hard Drawn, Medical Gas Cleaned, Brazed	LF	$26.07	$118.51	$0.00	$144.58
	22-63-19 Gas Equipment for Laboratory and Healthcare Facilities					
109615	Headwall/Boom Rough-In - 3 Gas Connection Only, Excludes Equipment.	EA	$204.57	$38.51	$0.00	$243.08
109616	Headwall/Boom Rough-In - 6 Gas Connection Only, Excludes Equipment.	EA	$409.16	$86.20	$0.00	$495.36
109617	Fume Hood Rough-In - 3 Gas Connection Only, Excludes Equipment.	EA	$204.57	$42.49	$0.00	$247.06
109618	Fume Hood Rough-In - 6 Gas Connection Only, Excludes Equipment.	EA	$409.16	$86.20	$0.00	$495.36
109619	Fume Hood Rough-In - Water & Waste Connection Only, Excludes Equipment.	EA	$419.78	$177.84	$0.00	$597.62
109620	Install Lab Turret- Gas Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$170.04	$21.00	$0.00	$191.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109621	Install Lab Turret- Natural Gas Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$177.12	$21.00	$0.00	$198.12
109622	Install Lab Turret- Nitrogen Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$170.04	$21.00	$0.00	$191.04
109623	Install Lab Turret- Oxygen Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet Cost.	EA	$170.04	$21.00	$0.00	$191.04
109624	Single Lab Turret- Gas Chicago Faucet 980. Includes Rough-In.	EA	$170.04	$157.54	$0.00	$327.58
109625	Single Lab Turret- Natural Gas Chicago Faucet 980. Includes Rough-In.	EA	$177.12	$157.54	$0.00	$334.66
109626	Single Lab Turret- Nitrogen Chicago Faucet 980. Includes Rough-In.	EA	$170.04	$157.54	$0.00	$327.58
109627	Single Lab Turret- Oxygen Chicago Faucet 980. Includes Rough-In.	EA	$170.04	$157.54	$0.00	$327.58
109628	Double Lab Turret- Gas Chicago Faucet 982. Includes Rough-In.	EA	$170.04	$186.42	$0.00	$356.46
109629	Double Lab Turret- Natural Gas Chicago Faucet 982. Includes Rough-In.	EA	$177.12	$186.42	$0.00	$363.54
109630	Double Lab Turret- Nitrogen Chicago Faucet 982. Includes Rough-In.	EA	$170.04	$186.42	$0.00	$356.46
109631	Double Lab Turret- Oxygen Chicago Faucet 982. Includes Rough-In.	EA	$170.04	$186.42	$0.00	$356.46
109632	Install Hospital Outlet- Gas Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$170.04	$21.00	$0.00	$191.04
109633	Install Hospital Outlet- Natural Gas Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$177.12	$21.00	$0.00	$198.12
109634	Install Hospital Outlet- Nitrogen Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$170.04	$21.00	$0.00	$191.04
109635	Install Hospital Outlet- Oxygen Includes Rough-In. Excludes Pipe. Install Only, Excludes Outlet.	EA	$170.04	$21.00	$0.00	$191.04
109636	Hospital Outlet- Gas Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$170.04	$129.97	$0.00	$300.01
109637	Hospital Outlet- Natural Gas Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$177.12	$129.97	$0.00	$307.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109638	Hospital Outlet- Nitrogen Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$170.04	$129.97	$0.00	$300.01
109639	Hospital Outlet- Oxygen Beaconmedaes Series B Concealed Outlet. Includes Rough-In.	EA	$170.04	$129.97	$0.00	$300.01
109640	Medical Gas Line Pressure Alarm- 3 Gas Separate Trouble Alarm Signals, Pressure And Vacuum Gages, And Indicators For Medical Gas Piping Systems.	EA	$610.19	$2,245.00	$0.00	$2,855.19
109641	Medical Gas Line Pressure Alarm- 6 Gas Separate Trouble Alarm Signals, Pressure And Vacuum Gages, And Indicators For Medical Gas Piping Systems.	EA	$1,087.53	$4,063.32	$0.00	$5,150.85
109642	Medical Gas Master Alarm Excludes Wiring.	EA	$464.94	$2,522.38	$0.00	$2,987.32
109643	Medical Gas Master Alarm Wiring- 3 Gas	EA	$3,542.46	$3,013.08	$0.00	$6,555.54
109644	Medical Gas Master Alarm Wiring- 6 Gas	EA	$7,084.92	$5,439.67	$0.00	$12,524.59
109645	Medical Gas Valve Box- 3 Gas Includes Valves, Gauges And Box.	EA	$331.22	$1,046.83	$0.00	$1,378.05
109646	Medical Gas Valve Box- 6 Gas Includes Valves, Gauges And Box.	EA	$595.14	$2,093.66	$0.00	$2,688.80
109647	Nitrogen Control Panel	EA	$221.41	$1,062.89	$0.00	$1,284.30
109648	Bottled Laboratory Gas Manifold- 4 Cylinder	EA	$354.25	$2,565.43	$0.00	$2,919.68
109649	Bottled Laboratory Gas Manifold- 12 Cylinder	EA	$442.81	$3,267.71	$0.00	$3,710.52
109650	Bottled Medical Gas Manifold- 4 Cylinder	EA	$637.64	$10,195.03	$0.00	$10,832.67
109651	Bottled Medical Gas Manifold- 12 Cylinder	EA	$983.03	$13,034.11	$0.00	$14,017.14
109652	Bottled Medical Gas Manifold- 28 Cylinder	EA	$1,328.42	$12,986.88	$0.00	$14,315.30
109653	1" & Dn Bottled Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$580.97	$766.32	$0.00	$1,347.29
109654	1-1/4" To 2" Bottled Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$828.93	$2,365.13	$0.00	$3,194.06

22-66-00 Chemical-Waste Systems for Laboratory and Healthcare Facilities

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	22-66-53 Laboratory Chemical-Waste and Vent Piping					
109655	1-1/2" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	LF	$6.20	$3.21	$0.00	$9.41
109656	2" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	LF	$7.08	$4.29	$0.00	$11.37
109657	3" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	LF	$10.63	$8.83	$0.00	$19.46
109658	4" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	LF	$11.51	$11.24	$0.00	$22.75
109659	6" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	LF	$15.05	$22.48	$0.00	$37.53
109660	1-1/2" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	EA	$65.54	$14.31	$0.00	$79.85
109661	2" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	EA	$74.39	$18.93	$0.00	$93.32
109662	3" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	EA	$109.81	$33.25	$0.00	$143.06
109663	4" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	EA	$145.24	$41.79	$0.00	$187.03
109664	6" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion, w/o Hangers	EA	$217.86	$111.99	$0.00	$329.85
109665	1-1/2" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$38.08	$7.61	$0.00	$45.69
109666	2" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$38.96	$8.95	$0.00	$47.91
109667	3" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$35.42	$15.64	$0.00	$51.06
109668	4" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$39.85	$20.82	$0.00	$60.67
109669	6" Chemical Waste Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$45.17	$38.83	$0.00	$84.00
109670	1-1/2" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$65.54	$14.31	$0.00	$79.85
109671	2" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$74.39	$18.93	$0.00	$93.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109672	3" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$109.81	$33.25	$0.00	$143.06
109673	4" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$149.67	$41.79	$0.00	$191.46
109674	6" Chemical Waste Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$217.86	$111.99	$0.00	$329.85
109675	1-1/2" Chemical Vent Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$38.08	$7.61	$0.00	$45.69
109676	2" Chemical Vent Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$38.96	$8.95	$0.00	$47.91
109677	3" Chemical Vent Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$35.42	$15.64	$0.00	$51.06
109678	4" Chemical Vent Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$39.85	$20.82	$0.00	$60.67
109679	6" Chemical Vent Pipe - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	LF	$45.17	$38.83	$0.00	$84.00
109680	1-1/2" Chemical Vent Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$65.54	$14.31	$0.00	$79.85
109681	2" Chemical Vent Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$74.39	$18.93	$0.00	$93.32
109682	3" Chemical Vent Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$109.81	$33.25	$0.00	$143.06
109683	4" Chemical Vent Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$149.67	$41.79	$0.00	$191.46
109684	6" Chemical Vent Fitting - Polypropylene, Schedule 40, DWV, Socket Fusion With Fire Retardant Additive	EA	$217.86	$111.99	$0.00	$329.85
109685	1-1/2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$16.82	$44.54	$0.00	$61.36
109686	2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$17.71	$47.19	$0.00	$64.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109687	3" x 6" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$23.91	$70.70	$0.00	$94.61
109688	4" x 8" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$29.22	$79.08	$0.00	$108.30
109689	6" x 10" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$38.08	$114.18	$0.00	$152.26
109690	8" x 12" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$46.94	$154.33	$0.00	$201.27
109691	1-1/2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$210.77	$264.21	$0.00	$474.98
109692	2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$218.74	$264.21	$0.00	$482.95
109693	3" x 6" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$327.68	$295.39	$0.00	$623.07
109694	4" x 8" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$449.01	$633.44	$0.00	$1,082.45
109695	6" x 10" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$608.42	$809.95	$0.00	$1,418.37
109696	8" x 12" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers	EA	$773.14	$1,427.30	$0.00	$2,200.44
109697	1-1/2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$46.06	$49.98	$0.00	$96.04
109698	2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$46.06	$52.62	$0.00	$98.68
109699	3" x 6" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$55.80	$80.97	$0.00	$136.77
109700	4" x 8" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$62.00	$92.61	$0.00	$154.61
109701	6" x 10" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$74.39	$133.35	$0.00	$207.74
109702	8" x 12" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$84.13	$179.24	$0.00	$263.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109703	1-1/2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$210.77	$264.21	$0.00	$474.98
109704	2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$218.74	$264.21	$0.00	$482.95
109705	3" x 6" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$327.68	$295.39	$0.00	$623.07
109706	4" x 8" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$449.01	$633.44	$0.00	$1,082.45
109707	6" x 10" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$608.42	$809.95	$0.00	$1,418.37
109708	8" x 12" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion	EA	$773.14	$1,427.30	$0.00	$2,200.44
109709	1-1/2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$16.82	$55.55	$0.00	$72.37
109710	2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$17.71	$59.69	$0.00	$77.40
109711	3" x 6" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$23.91	$90.22	$0.00	$114.13
109712	4" x 8" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$29.22	$105.50	$0.00	$134.72
109713	6" x 10" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$38.08	$147.46	$0.00	$185.54
109714	8" x 12" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion, w/o Hangers With Fire Retardant Additive.	EA	$46.94	$201.12	$0.00	$248.06
109715	1-1/2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$210.77	$328.96	$0.00	$539.73
109716	2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$218.74	$328.96	$0.00	$547.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109717	3" x 6" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$327.68	$398.81	$0.00	$726.49
109718	4" x 8" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$449.01	$760.12	$0.00	$1,209.13
109719	6" x 10" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$608.42	$971.90	$0.00	$1,580.32
109720	8" x 12" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$773.14	$1,712.79	$0.00	$2,485.93
109721	1-1/2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	EA	$46.06	$60.99	$0.00	$107.05
109722	2" x 4" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	EA	$46.06	$65.13	$0.00	$111.19
109723	3" x 6" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	LF	$55.80	$100.47	$0.00	$156.27
109724	4" x 8" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	LF	$62.00	$119.04	$0.00	$181.04
109725	6" x 10" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	LF	$74.39	$166.63	$0.00	$241.02
109726	8" x 12" Double Containment Chemical Waste Pipe - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive.	LF	$84.13	$226.05	$0.00	$310.18
109727	1-1/2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$210.77	$328.96	$0.00	$539.73
109728	2" x 4" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$218.74	$328.96	$0.00	$547.70
109729	3" x 6" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$327.68	$398.81	$0.00	$726.49
109730	4" x 8" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$449.01	$760.12	$0.00	$1,209.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109731	6" x 10" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$608.42	$971.90	$0.00	$1,580.32
109732	8" x 12" Double Containment Chemical Waste Fitting - Polypropylene, Schedule 40 DWV, Electrofusion With Fire Retardant Additive	EA	$773.14	$1,712.79	$0.00	$2,485.93
	22-66-83 Chemical-Waste Tanks					
109733	Point-Of-Use Polypropylene Acid Neutralization Tank	EA	$177.12	$1,442.60	$0.00	$1,619.72
109734	15 Gallon Polypropylene Acid Neutralization Tank	EA	$531.37	$2,163.91	$0.00	$2,695.28
109735	30 Gallon Polypropylene Acid Neutralization Tank	EA	$664.22	$2,992.44	$0.00	$3,656.66
109736	55 Gallon Polypropylene Acid Neutralization Tank	EA	$708.49	$3,850.20	$0.00	$4,558.69
109737	100 Gallon Polypropylene Acid Neutralization Tank	EA	$1,062.74	$5,166.09	$0.00	$6,228.83
109738	150 Gallon Polypropylene Acid Neutralization Tank	EA	$1,239.86	$6,520.97	$0.00	$7,760.83
109739	175 Gallon Polypropylene Acid Neutralization Tank	EA	$1,284.14	$9,006.54	$0.00	$10,290.68
109740	200 Gallon Polypropylene Acid Neutralization Tank	EA	$1,328.42	$10,234.71	$0.00	$11,563.13
109741	300 Gallon Polypropylene Acid Neutralization Tank	EA	$1,461.27	$13,158.91	$0.00	$14,620.18
109742	500 Gallon Polypropylene Acid Neutralization Tank	EA	$1,461.27	$17,447.74	$0.00	$18,909.01
	22-67-00 Processed Water Systems for Laboratory and Healthcare Facilities					
	22-67-13 Processed Water Piping for Laboratory and Healthcare Facilities					
109743	1/2" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$38.96	$4.75	$0.00	$43.71
109744	3/4" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$38.96	$6.18	$0.00	$45.14
109745	1" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$38.96	$7.20	$0.00	$46.16
109746	1-1/2" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$37.19	$11.70	$0.00	$48.89
109747	2" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$34.53	$14.97	$0.00	$49.50
109748	3" Process Water Pipe - Polypropylene, Schedule 80, Electrofusion	LF	$37.19	$27.07	$0.00	$64.26
109749	1/2" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$47.83	$11.09	$0.00	$58.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109750	3/4" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$51.37	$13.03	$0.00	$64.40
109751	1" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$55.80	$15.85	$0.00	$71.65
109752	1-1/2" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$64.65	$21.86	$0.00	$86.51
109753	2" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$74.39	$29.80	$0.00	$104.19
109754	3" Process Water Fitting - Polypropylene, Schedule 80, Electrofusion	EA	$110.70	$50.32	$0.00	$161.02
109755	1/2" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$23.02	$3.01	$0.00	$26.03
109756	3/4" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$23.02	$3.55	$0.00	$26.57
109757	1" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$22.14	$4.38	$0.00	$26.52
109758	1-1/2" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$6.33	$0.00	$26.70
109759	2" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$8.16	$0.00	$28.53
109760	3" Process Water Pipe - CPVC, Schedule 80, Solid Core, Solvent Cement	LF	$20.37	$14.86	$0.00	$35.23
109761	1/2" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$17.71	$3.74	$0.00	$21.45
109762	3/4" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$17.71	$4.24	$0.00	$21.95
109763	1" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$17.71	$6.00	$0.00	$23.71
109764	1-1/2" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$23.91	$14.48	$0.00	$38.39
109765	2" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$24.79	$16.91	$0.00	$41.70
109766	3" Process Water Fitting - CPVC, Schedule 80, Solvent Cement	EA	$36.31	$43.68	$0.00	$79.99

23-00-00 Heating, Ventilating, and Air Conditioning (HVAC)

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of HVAC systems or components shall be included

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total

under the General Trades Division 1 through 14.
• Installation and Demolition/Removal costs assume accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, MEP systems, etc. to be priced separately.

23-00-00 Heating, Ventilating, and Air Conditioning (HVAC)

• Item costs include all labor, material (including gaskets, bolts, etc.), small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Item costs exclude rigging equipment. Refer to (CSI) - MasterFormat® Division 01 - General Requirements for Assembly Items: Construction Aids.
• Cutting and patching work required for the installation or demolition/removal of HVAC systems or components shall be included under the General Trades Division 1 through 14.
• Installation and Demolition/Removal costs assume accessible locations. Removals and/or relocations of adjacent items required for access such as ceilings, walls, MEP systems, etc. to be priced separately.

23-01-00 Operation and Maintenance of HVAC Systems

23-01-20 Operation and Maintenance of HVAC Piping and Pumps

109767	1" Fiberglass Pipe Repair Kit Includes 3 LF of pipe, (2) couplings, and adhesive kits.	EA	$248.33	$1,140.98	$0.00	$1,389.31

23-01-30 Operation and Maintenance of HVAC Air Distribution

109768	Clean Round Ductwork - Up to 8" (Per LF) Includes Duct, Diffusers, Reheat Coils & Inline Sound Traps. Excludes AHU's	LF	$3.27	$0.00	$0.00	$3.27
109769	Clean Round Ductwork - 10" to 16" (Per LF) Includes Duct, Diffusers, Reheat Coils & Inline Sound Traps. Excludes AHU's	LF	$6.45	$0.00	$0.00	$6.45
109770	Clean Rectangular Ductwork - Up to 12" x 12" (Per LF) Includes Duct, Diffusers, Reheat Coils & Inline Sound Traps. Excludes AHU's	LF	$5.30	$0.00	$0.00	$5.30
109771	Clean Rectangular Ductwork - 14" x 14" to 24" x 24" (Per LF) Includes Duct, Diffusers, Reheat Coils & Inline Sound Traps. Excludes AHU's	LF	$10.92	$0.00	$0.00	$10.92
109772	Clean Rectangular Ductwork - 26" x 26" to 36" x 36" (Per LF) Includes Duct, Diffusers, Reheat Coils & Inline Sound Traps. Excludes AHU's	LF	$14.32	$0.00	$0.00	$14.32
109773	Clean Registers, Grilles & Diffusers - Up to 24" x 24" (Each)	EA	$16.56	$0.00	$0.00	$16.56
109774	Clean Registers, Grilles & Diffusers - Over 24" x 24" (Per SF)	SF	$4.14	$0.00	$0.00	$4.14
109775	Clean Duct Damper - Up To 24" x 24" (Each)	EA	$33.11	$0.00	$0.00	$33.11
109776	Clean Duct Damper - Over 24" x 24" (Per SF)	SF	$8.28	$0.00	$0.00	$8.28
109777	Clean Reheat Coil - Up to 24" x 24" (Each)	EA	$49.67	$0.00	$0.00	$49.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109778	Clean Reheat Coil - Over 24" x 24" (Per SF)	SF	$10.35	$0.00	$0.00	$10.35
109779	Clean Variable or Constant Air Volume (VAV/CV) Box	EA	$33.11	$0.00	$0.00	$33.11
109780	Clean Variable or Constant Air Volume (VAV/CV) Box w/Reheat	EA	$82.78	$0.00	$0.00	$82.78
109781	Clean Fan- 5,000 CFM & Dn	EA	$165.55	$0.00	$0.00	$165.55
109782	Clean Fan- 5,000 to 20,000 CFM	EA	$248.33	$0.00	$0.00	$248.33
109783	Duct Sealing	SF	$6.01	$1.17	$0.00	$7.18
	23-01-70 Operation and Maintenance of Central HVAC Equipment					
109784	Air Handling Unit (AHU) - Replace Bearings, Belts, Sheaves, and Lubricate Unit Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.33	$0.30	$0.00	$0.63
109785	Air Handling Unit (AHU) - Replace Supply & Return Fan Motors Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.13	$0.51	$0.00	$0.64
109786	Air Handling Unit (AHU) - Replace Supply & Return Fan Variable Frequency / Speed Drives (VFD/VSD) Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.21	$0.94	$0.00	$1.15
109787	Air Handling Unit (AHU) - Replace Supply & Return Fans Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation. Excludes Variable Frequency / Speed Drives (VFD/VSD).	CFM	$0.33	$1.46	$0.00	$1.79
109788	Air Handling Unit (AHU) - Replace Dampers and Actuators Includes Outside Air, Relief Air, Return/Exhaust Air, and Mixed Air Dampers. Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation. Excludes Controls.	CFM	$0.13	$0.28	$0.02	$0.43
109789	Air Handling Unit (AHU) - Repair Coil Includes Inspect, Test, and Verify Proper Operation.	CFM	$0.08	$0.04	$0.00	$0.12
109790	Air Handling Unit (AHU) - Replace Pre Filter- Merv 8 Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.01	$0.05	$0.00	$0.06
109791	Air Handling Unit (AHU) - Replace Final Filter- Merv 13 Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.01	$0.12	$0.00	$0.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109792	Air Handling Unit (AHU) - Replace Final Filter- Merv 15 (95%) Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.02	$0.22	$0.00	$0.24
109793	Air Handling Unit (AHU) - Replace HEPA Filter Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.02	$0.39	$0.00	$0.41
109794	Air Handling Unit (AHU) - Replace Hot Water Coil Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.16	$0.55	$0.00	$0.71
109795	Air Handling Unit (AHU) - Replace Chilled Water Coil Includes Removals, Disposals, Inspect, Test, and Verify Proper Operation.	CFM	$0.21	$0.78	$0.00	$0.99

23-01-80 Operation and Maintenance of Decentralized HVAC Equipment

109796	Clean Terminal Unit - Non-Powered	EA	$103.62	$22.65	$0.00	$126.27
109797	Clean Terminal Unit - Powered	EA	$129.29	$28.31	$0.00	$157.60
109798	Refurbish Terminal Unit - Powered	EA	$217.86	$113.23	$0.00	$331.09

23-05-00 Common Work Results for HVAC

23-05-05 Selective Demolition for Heating, Ventilating, and Air Conditioning (HVAC)

- Demolition/Removal costs exclude any salvage value.
- HVAC Equipment and Terminal Unit Demolition/Removal costs exclude piping, ductwork, hook-ups, and electrical connections.

109799	HVAC Hydronic Systems - Temporary Shut-Down and Start-Up Includes Drain and Fill of All Hydronic Systems	HR	$63.66	$3.13	$0.00	$66.79
109800	Remove Fuel Oil Tank - 249 GAL & Dn Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$206.91	$177.24	$0.00	$384.15
109801	Remove Fuel Oil Tank - 250 To 499 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$328.51	$196.93	$0.00	$525.44
109802	Remove Fuel Oil Tank - 500 To 999 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$521.41	$301.96	$0.00	$823.37
109803	Remove Fuel Oil Tank - 1,000 To 4,999 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$827.63	$774.59	$0.00	$1,602.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109804	Remove Fuel Oil Tank - 5,000 to 14,999 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$1,464.27	$2,297.51	$0.00	$3,761.78
109805	Remove Fuel Oil Tank - 15,000 to 29,999 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$2,037.25	$4,319.32	$0.00	$6,356.57
109806	Remove Fuel Oil Tank - 30,000 to 50,000 GAL Includes Hold Down Straps, Anchor Bolts & Saddles. Excludes Excavate & Backfill, Foundations, Fuel Oil Removal, Contaminated Soil Removal & Rigging Equipment	EA	$3,055.87	$8,389.19	$0.00	$11,445.06
109807	Remove Fuel Oil Tank Accessories - Under 2,500 GAL Overfill Assembly, Manholes, Spill Container, Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$490.21	$0.00	$0.00	$490.21
109808	Remove Fuel Oil Tank Accessories - 2,500 to 14,999 GAL Overfill Assembly, Manholes, Spill Container, Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$1,241.45	$0.00	$0.00	$1,241.45
109809	Remove Fuel Oil Tank Accessories - 15,000 GAL & Up Overfill Assembly, Manholes, Spill Container, Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$2,037.25	$0.00	$0.00	$2,037.25
109810	Remove Fuel Oil From Tank Includes Vacuum Pump Truck and Tanker. Excludes Sludge Removal, Flushing and Cleaning.	GAL	$0.07	$0.00	$0.91	$0.98
109811	Remove Fuel Oil Sludge and Flush System Includes Removal and Disposal of Remaining Sludge Contents from Tank Bottom. Excludes Draining Fuel Oil Tank. Quantity to be Calculated Based on Roughly 15% of Total Tank Capacity.	GAL	$0.67	$1.54	$0.00	$2.21
109812	Remove Fuel Oil Pump - Simplex Up to 5 HP	EA	$381.98	$0.00	$0.00	$381.98
109813	Remove Fuel Oil Pump - Duplex Up to 10 HP per Pump	EA	$572.98	$0.00	$0.00	$572.98
109814	Remove Natural Gas Meter - 2" & Dn	EA	$56.66	$0.00	$0.00	$56.66
109815	Remove Natural Gas Meter - 2-1/2" to 6"	EA	$161.70	$0.00	$0.00	$161.70
109816	Remove Natural Gas Pressure Regulator - 2" & Dn	EA	$88.49	$0.00	$0.00	$88.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109817	Remove Natural Gas Pressure Regulator - 2-1/2" to 6"	EA	$258.47	$0.00	$0.00	$258.47
109818	Remove Boiler - Up To 1,000 MBH Includes All Boiler Types.	EA	$611.18	$446.37	$0.00	$1,057.55
109819	Remove Boiler - 1,001 To 2,500 MBH Includes All Boiler Types.	EA	$1,222.35	$662.99	$0.00	$1,885.34
109820	Remove Boiler - 2,501 MBH to 5,000 MBH Includes All Boiler Types.	EA	$1,909.92	$3,321.54	$0.00	$5,231.46
109821	Remove Boiler - 5,001 MBH to 7,500 MBH Includes All Boiler Types.	EA	$3,246.86	$5,559.98	$0.00	$8,806.84
109822	Remove Boiler Flue - Under 24" Single Wall, Double Wall, or B-Vent	LF	$15.92	$0.00	$0.00	$15.92
109823	Remove Boiler Flue - 24" to 36" Single Wall, Double Wall, or B-Vent	LF	$33.11	$0.00	$0.00	$33.11
109824	Remove Boiler Flue - 42" to 50" Single Wall, Double Wall, or B-Vent	LF	$62.39	$0.00	$0.00	$62.39
109825	Remove Heat Exchanger - Up to 750 MBH Shell & Tube or Plate & Frame	EA	$286.49	$157.54	$0.00	$444.03
109826	Remove Heat Exchanger - 751 to 5,000 MBH Shell & Tube or Plate & Frame	EA	$381.98	$354.47	$0.00	$736.45
109827	Remove Heat Exchanger - 5,001 to 12,000 MBH Shell & Tube or Plate & Frame	EA	$572.98	$695.82	$0.00	$1,268.80
109828	Remove Steam Pressure Reducing Valve (PRV) / Station - 2-1/2" Diameter Includes All Associated Fittings, Valves And Specialties.	EA	$1,973.58	$0.00	$0.00	$1,973.58
109829	Remove Steam Pressure Reducing Valve (PRV) / Station - 4" Diameter Includes All Associated Fittings, Valves And Specialties.	EA	$2,801.22	$0.00	$0.00	$2,801.22
109830	Remove Steam Pressure Reducing Valve (PRV) / Station - 6" Diameter Includes All Associated Fittings, Valves And Specialties.	EA	$3,756.18	$0.00	$0.00	$3,756.18
109831	Remove Steam Pressure Reducing Valve (PRV) / Station - 8" Diameter Includes All Associated Fittings, Valves And Specialties.	EA	$4,456.48	$0.00	$0.00	$4,456.48
109832	Remove Steam Condensate Pump & Receiver - Under 100 Gallon	EA	$381.98	$0.00	$0.00	$381.98
109833	Remove Steam Condensate Pump & Receiver - 101 to 500 Gallon	EA	$808.53	$0.00	$0.00	$808.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109834	Remove Clean Steam Generator - 500 #/Hr & Down	EA	$515.68	$0.00	$0.00	$515.68
109835	Remove Clean Steam Generator - 501 to 1,000 #/HR	EA	$916.76	$0.00	$0.00	$916.76
109836	Remove Geothermal Field or Well - Closed Loop Per foot of depth.	LF	$7.83	$0.00	$0.00	$7.83
109837	Remove Chiller - Air Cooled Under 100 Ton	EA	$1,145.95	$1,247.22	$0.00	$2,393.17
109838	Remove Chiller - Air Cooled 100 To 199 Ton	EA	$1,527.94	$2,323.77	$0.00	$3,851.71
109839	Remove Chiller - Air Cooled 200 To 349 Ton	EA	$1,718.93	$3,872.95	$0.00	$5,591.88
109840	Remove Chiller - Air Cooled 350 to 500 Ton	EA	$2,037.25	$6,085.13	$0.00	$8,122.38
109841	Remove Chiller - Water Cooled Under 250 Ton	EA	$1,082.29	$2,212.17	$0.00	$3,294.46
109842	Remove Chiller - Water Cooled 250 To 499 Ton	EA	$1,464.27	$3,872.95	$0.00	$5,337.22
109843	Remove Chiller - Water Cooled 500 To 749 Ton	EA	$2,037.25	$7,745.89	$0.00	$9,783.14
109844	Remove Chiller - Water Cooled 750 To 1,000 Ton	EA	$2,546.56	$10,502.90	$0.00	$13,049.46
109845	Remove Cooling Tower - Open-Circuit 150 Ton & Dn	EA	$1,718.93	$656.43	$0.00	$2,375.36
109846	Remove Cooling Tower - Open-Circuit 151 to 500 Ton	EA	$2,673.89	$2,566.64	$0.00	$5,240.53
109847	Remove Cooling Tower - Open-Circuit 501 to 750 Ton	EA	$5,347.78	$4,864.15	$0.00	$10,211.93
109848	Remove Cooling Tower - Open-Circuit 751 to 1,000 Ton	EA	$8,148.99	$7,128.85	$0.00	$15,277.84
109849	Remove Cooling Tower - Closed-Circuit 100 Ton & Dn	EA	$2,164.58	$1,673.89	$0.00	$3,838.47
109850	Remove Cooling Tower - Closed-Circuit 101 to 250 Ton	EA	$3,374.19	$3,590.67	$0.00	$6,964.86
109851	Remove Cooling Tower - Closed-Circuit 251 to 500 Ton	EA	$4,583.81	$5,612.50	$0.00	$10,196.31
109852	Remove Cooling Tower - Closed-Circuit 501 to 750 Ton	EA	$6,748.38	$9,807.09	$0.00	$16,555.47
109853	Remove Cooling Tower - Closed-Circuit 751 to 1,000 Ton	EA	$10,186.24	$13,592.91	$0.00	$23,779.15
109854	Remove Refrigerant Condensing Unit - Under 10 Ton	EA	$458.38	$0.00	$0.00	$458.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109855	Remove Refrigerant Condensing Unit - 10 to 24 Ton	EA	$572.98	$0.00	$0.00	$572.98
109856	Remove Refrigerant Condensing Unit - 25 to 49 Ton	EA	$859.46	$0.00	$0.00	$859.46
109857	Remove Refrigerant Condensing Unit - 50 to 100 Ton	EA	$1,289.20	$0.00	$0.00	$1,289.20
109858	Remove Refrigerant Condenser - Under 10 Ton	EA	$222.82	$0.00	$0.00	$222.82
109859	Remove Refrigerant Condenser - 10 to 49 Ton	EA	$350.15	$0.00	$0.00	$350.15
109860	Remove Refrigerant Condenser - 50 to 99 Ton	EA	$859.46	$0.00	$0.00	$859.46
109861	Remove Refrigerant Condenser - 100 to 249 Ton	EA	$1,002.71	$0.00	$0.00	$1,002.71
109862	Remove Refrigerant Condenser - 250 to 500 Ton	EA	$1,145.95	$0.00	$0.00	$1,145.95
109863	Remove & Recover HVAC Refrigerant - All Types	LB	$12.73	$0.00	$0.00	$12.73
109864	Remove Air Handling Unit, Makeup Air Unit, or Rooftop Unit (AHU/MAU/RTU) - Under 7,500 CFM	EA	$891.30	$420.12	$0.00	$1,311.42
109865	Remove Air Handling Unit, Makeup Air Unit, or Rooftop Unit (AHU/MAU/RTU) - 7,500 to 14,999 CFM	EA	$2,419.23	$708.95	$0.00	$3,128.18
109866	Remove Air Handling Unit, Makeup Air Unit, or Rooftop Unit (AHU/MAU/RTU) - 15,000 to 34,999 CFM	EA	$3,628.85	$1,247.22	$0.00	$4,876.07
109867	Remove Air Handling Unit, Makeup Air Unit, or Rooftop Unit (AHU/MAU/RTU) - 35,000 to 50,000 CFM	EA	$4,583.81	$1,759.24	$0.00	$6,343.05
109868	Remove Furnace - Residential Up to 150 MBH Includes Gas, Oil or Electric Furnace.	EA	$171.89	$0.00	$0.00	$171.89
109869	Remove Refrigerant Condensing Unit & DX Cooling Coil - Residential Up to 5 Ton	EA	$200.54	$0.00	$0.00	$200.54
109870	Remove Fan - Residential Bathroom or Attic	EA	$47.75	$0.00	$0.00	$47.75
109871	Remove Fan - General Under 5,000 CFM Roof, Wall, Propeller Or Utility	EA	$190.99	$0.00	$0.00	$190.99
109872	Remove Fan - General 5,000 to 25,000 CFM Roof, Wall, Propeller Or Utility	EA	$445.65	$0.00	$0.00	$445.65
109873	Remove Fan - Centrifugal/Axial Under 5,000 CFM	EA	$381.98	$0.00	$0.00	$381.98
109874	Remove Fan - Centrifugal/Axial 5,000 To 15,000 CFM	EA	$763.97	$0.00	$0.00	$763.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109875	Remove Fan - Centrifugal/Axial 15,001 to 25,000 CFM	EA	$1,209.62	$0.00	$0.00	$1,209.62
109876	Remove Fan - Centrifugal/Axial 25,001 to 50,000 CFM	EA	$1,718.93	$0.00	$0.00	$1,718.93
109877	Remove Fan - High Plume Laboratory Exhaust Under 7,500 CFM	EA	$509.31	$0.00	$0.00	$509.31
109878	Remove Fan - High Plume Laboratory Exhaust 7,500 to 15,000 CFM	EA	$891.30	$0.00	$0.00	$891.30
109879	Remove Fan - High Plume Laboratory Exhaust 15,001 to 35,000 CFM	EA	$1,527.94	$0.00	$0.00	$1,527.94
109880	Remove Fan - High Plume Laboratory Exhaust 35,001 to 50,000 CFM	EA	$2,546.56	$0.00	$0.00	$2,546.56
109881	Remove Fan - High Plume Laboratory Exhaust w/Heat Recovery Under 7,500 CFM	EA	$1,145.95	$0.00	$0.00	$1,145.95
109882	Remove Fan - High Plume Laboratory Exhaust w/Heat Recovery 7,500 to 14,999 CFM	EA	$1,591.60	$0.00	$0.00	$1,591.60
109883	Remove Fan - High Plume Laboratory Exhaust w/Heat Recovery 15,000 to 34,999 CFM	EA	$2,673.89	$0.00	$0.00	$2,673.89
109884	Remove Fan - High Plume Laboratory Exhaust w/Heat Recovery 35,000 to 50,000 CFM	EA	$3,692.51	$0.00	$0.00	$3,692.51
109885	Remove Gravity Intake / Relief Vent - Up to 6,000 CFM	EA	$254.66	$0.00	$0.00	$254.66
109886	Remove Gravity Intake / Relief Vent - Over 6,000 CFM	CFM	$0.03	$0.00	$0.00	$0.03
109887	Remove Hood - Kitchen, Autoclave, Welding, Etc.	LF	$63.66	$0.00	$0.00	$63.66
109888	Remove Louver (Per SF)	SF	$4.97	$0.00	$0.00	$4.97
109889	Cap Duct - 18" x 18"	EA	$40.11	$16.64	$0.00	$56.75
109890	Cap Duct - 36" x 36"	EA	$114.60	$47.53	$0.00	$162.13
109891	Cap Duct - 54" x 54"	EA	$206.28	$85.33	$0.00	$291.61
109892	Cap Duct - 72" x 72"	EA	$275.03	$112.90	$0.00	$387.93
109893	Remove Ductwork & Insulation - 8" x 8", 8" ø, or Equal (Per LF) Includes Hangers, Fittings, Volume Dampers & Access Doors	LF	$4.46	$0.00	$0.00	$4.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109894	Remove Ductwork & Insulation - 12" x 12", 12" ø, or Equal (Per LF) Includes Hangers, Fittings, Volume Dampers & Access Doors	LF	$6.37	$0.00	$0.00	$6.37
109895	Remove Ductwork & Insulation - 16" x 16", 16" ø, or Equal (Per LF) Includes Hangers, Fittings, Volume Dampers & Access Doors	LF	$8.91	$0.00	$0.00	$8.91
109896	Remove Ductwork & Insulation - 20" x 20", 20" ø, or Equal (Per LF) Includes Hangers, Fittings, Volume Dampers & Access Doors	LF	$10.82	$0.00	$0.00	$10.82
109897	Remove Ductwork & Insulation - 24" x 24", 24' ø, or Equal (Per LF) Includes Hangers, Fittings, Volume Dampers & Access Doors	LF	$12.73	$0.00	$0.00	$12.73
109898	Remove Ductwork & Insulation (Per Lb) Includes Hangers, Fittings, Volume Dampers & Access Doors	LB	$1.02	$0.00	$0.00	$1.02
109899	Remove Ductwork Insulation - Duct Wrap (Per SF) Includes Fittings. Not to be Combined with Ductwork Removal Items	SF	$0.48	$0.00	$0.00	$0.48
109900	Remove Ductwork Insulation - Duct Board (Per SF) Includes Fittings. Not to be Combined with Ductwork Removal Items	SF	$0.79	$0.00	$0.00	$0.79
109901	Remove Register, Grille or Diffuser - Up to 24" x 24"	EA	$23.87	$0.00	$0.00	$23.87
109902	Remove Register, Grille or Diffuser - Over 24" x 24" (Per SF)	SF	$4.77	$0.00	$0.00	$4.77
109903	Remove Register, Grille or Diffuser - Linear	LF	$2.54	$0.00	$0.00	$2.54
109904	Remove Operating Room Diffuser & Grid System Includes Diffusers, Ceiling Panels, Hangers & Grid	EA	$3,819.84	$0.00	$0.00	$3,819.84
109905	Remove Air Terminal Unit Includes All Duct Mounted Terminal Units - VAV Boxes, Reheat Coils, Etc.	EA	$114.60	$0.00	$0.00	$114.60
109906	Remove Duct Accessory - 24" x 24" & Dn Includes All Duct Mounted Accessories - Dampers, Sound Attenuators, Filters, Etc. Excludes Volume Dampers and Access Doors.	EA	$41.38	$0.00	$0.00	$41.38
109907	Remove Duct Accessory - 36" x 36" Includes All Duct Mounted Accessories - Dampers, Sound Attenuators, Filters, Etc. Excludes Volume Dampers and Access Doors.	EA	$82.77	$0.00	$0.00	$82.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109908	Remove Duct Accessory - 48" x 48" & Up (Per SF) Includes All Duct Mounted Accessories - Dampers, Sound Attenuators, Filters, Etc. Excludes Volume Dampers and Access Doors.	SF	$7.00	$0.00	$0.00	$7.00
109909	Remove Terminal Unit - Fin Tube or Radiant Panel	LF	$12.73	$0.00	$0.00	$12.73
109910	Remove Terminal Unit - General Includes All Terminal Units Not Specifically Listed Otherwise - Unit Heaters, Convectors, Etc.	EA	$159.16	$0.00	$0.00	$159.16
109911	Remove Terminal Unit- Valance Unit	LF	$15.92	$0.00	$0.00	$15.92
109912	Remove Terminal Unit- Fan Coil Unit (FCU) Includes 2-Pipe & 4-Pipe Fan Coil Units	EA	$190.99	$0.00	$0.00	$190.99
109913	Remove Terminal Unit - Unit Ventilator	EA	$334.24	$0.00	$0.00	$334.24
109914	Remove Terminal Unit - Unit Ventilator Shelving	LF	$15.92	$0.00	$0.00	$15.92
109915	Remove Terminal Unit - Computer Room Air Conditioner (AC) Unit w/o Condenser - 20 Ton & Down	EA	$509.31	$0.00	$0.00	$509.31
109916	Remove Terminal Unit - Computer Air Conditioner (AC) Unit w/Condenser - 20 Ton & Dn	EA	$1,145.95	$0.00	$0.00	$1,145.95
109917	Remove Terminal Unit - Split System AC Unit - Up to 5 Ton Includes Indoor & Outdoor Units	EA	$509.31	$0.00	$0.00	$509.31
109918	Remove Terminal Unit - Thru-Wall AC Unit	EA	$127.33	$0.00	$0.00	$127.33
109919	Remove Terminal Unit - Window AC Unit	EA	$95.50	$0.00	$0.00	$95.50
109920	Remove Piping & Insulation - Plastic (All Types) 2" & Down Includes Hangers and Fittings	LF	$12.10	$0.00	$0.00	$12.10
109921	Remove Piping & Insulation - Plastic (All Types) 2-1/2" to 4" Includes Hangers and Fittings	LF	$14.64	$0.00	$0.00	$14.64
109922	Remove Piping & Insulation - Plastic (All Types) 6" to 10" Includes Hangers and Fittings	LF	$17.82	$0.00	$0.00	$17.82
109923	Remove Piping & Insulation - Copper 2" & Down Includes Hangers and Fittings	LF	$7.00	$0.00	$0.00	$7.00
109924	Remove Piping & Insulation - Copper 2-1/2" & Up Includes Hangers and Fittings	LF	$8.28	$0.00	$0.00	$8.28
109925	Remove Piping & Insulation - Steel 2" & Down Includes Hangers and Fittings	LF	$6.37	$0.00	$0.00	$6.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109926	Remove Piping & Insulation - Steel 2-1/2" To 6" Includes Hangers and Fittings	LF	$12.10	$0.00	$0.00	$12.10
109927	Remove Piping & Insulation - Steel 8" To 12" Includes Hangers and Fittings	LF	$21.01	$0.00	$0.00	$21.01
109928	Remove Piping & Insulation - Steel 14" To 18" Includes Hangers and Fittings	LF	$28.34	$0.00	$0.00	$28.34
109929	Remove Piping & Insulation - Steel 20" To 24" Includes Hangers and Fittings	LF	$33.42	$0.00	$0.00	$33.42
109930	Remove Piping & Insulation - Double Wall Plastic Containment Pipe 2" & Down Includes Fittings	LF	$4.46	$0.00	$0.00	$4.46
109931	Remove Piping & Insulation - Pre-Insulated System - 2" & Down Includes Carrier Pipe, Insulation, Conduit, and Fittings	LF	$15.28	$0.00	$0.00	$15.28
109932	Remove Piping & Insulation - Pre-Insulated System - 2-1/2" to 6" Includes Carrier Pipe, Insulation, Conduit, and Fittings	LF	$24.83	$0.00	$0.00	$24.83
109933	Remove Piping & Insulation - Pre-Insulated System - 8" to 12" Includes Carrier Pipe, Insulation, Conduit, and Fittings	LF	$41.07	$0.00	$0.00	$41.07
109934	Remove Piping Valve or Specialty - Up To 2" Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$39.79	$0.00	$0.00	$39.79
109935	Remove Piping Valve or Specialty - 2-1/2" To 6" Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$79.58	$0.00	$0.00	$79.58
109936	Remove Piping Valve or Specialty - 8" To 12" Shut-Off Valves, Strainers, Balancing Valves, Control Valves, etc.	EA	$101.87	$0.00	$0.00	$101.87
109937	Remove Piping Insulation - 2" & Dn Includes Fittings. Not to be Combined with Piping Removal Items.	LF	$1.59	$0.00	$0.00	$1.59
109938	Remove Piping Insulation - 2-1/2" To 6" Includes Fittings. Not to be Combined with Piping Removal Items.	LF	$2.68	$0.00	$0.00	$2.68
109939	Remove Piping Insulation - 8" To 12" Includes Fittings. Not to be Combined with Piping Removal Items.	LF	$4.97	$0.00	$0.00	$4.97
109940	Remove Pump - Under 5 HP Includes All Types Except Packaged (Skid) Pumping Systems	EA	$240.65	$0.00	$0.00	$240.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109941	Remove Pump - 5 to 20 HP Includes All Types Except Packaged (Skid) Pumping Systems	EA	$381.98	$0.00	$0.00	$381.98
109942	Remove Pump - 25 To 60 HP Includes All Types Except Packaged (Skid) Pumping Systems	EA	$1,209.62	$0.00	$0.00	$1,209.62
109943	Remove Pump - 75 HP to 150 HP Includes All Types Except Packaged (Skid) Pumping Systems	EA	$2,419.23	$0.00	$0.00	$2,419.23
109944	Remove Air/Dirt Separator - 2" & Dn	EA	$22.92	$0.00	$0.00	$22.92
109945	Remove Air/Dirt Separator - 2-1/2" to 6"	EA	$89.12	$0.00	$0.00	$89.12
109946	Remove Air/Dirt Separator - 8" to 12"	EA	$222.82	$0.00	$0.00	$222.82
109947	Remove Air/Dirt Separator - 14" to 18"	EA	$381.98	$0.00	$0.00	$381.98
109948	Remove Air/Dirt Separator - 20" to 24"	EA	$541.14	$0.00	$0.00	$541.14
109949	Remove Expansion Tank - Up to 250 Gal	EA	$143.24	$0.00	$0.00	$143.24
109950	Remove Expansion Tank - 251 to 750 Gal	EA	$305.59	$0.00	$0.00	$305.59
109951	Remove Expansion Tank - 751 to 1,500 Gal	EA	$477.48	$0.00	$0.00	$477.48
109952	Remove Temperature Controls Per Point	PT	$68.76	$0.00	$0.00	$68.76
	23-05-13 Common Motor Requirements for HVAC Equipment					
109953	1 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$120.69	$2,914.56	$0.00	$3,035.25
109954	2 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$129.63	$3,301.86	$0.00	$3,431.49
109955	3 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$129.63	$3,593.31	$0.00	$3,722.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109956	5 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$143.04	$3,963.53	$0.00	$4,106.57
109957	7-1/2 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$174.33	$4,316.70	$0.00	$4,491.03
109958	10 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$178.80	$4,669.85	$0.00	$4,848.65
109959	15 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$201.15	$5,671.57	$0.00	$5,872.72
109960	20 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$227.98	$6,889.91	$0.00	$7,117.89
109961	25 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$250.32	$8,435.15	$0.00	$8,685.47
109962	30 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$281.61	$9,652.16	$0.00	$9,933.77
109963	40 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$326.31	$11,320.82	$0.00	$11,647.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109964	50 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$397.83	$14,373.23	$0.00	$14,771.06
109965	60 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$442.53	$16,788.90	$0.00	$17,231.43
109966	75 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$625.81	$18,783.13	$0.00	$19,408.94
109967	100 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$715.21	$22,801.81	$0.00	$23,517.02
109968	125 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$728.62	$27,390.26	$0.00	$28,118.88
109969	150 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$826.95	$31,680.70	$0.00	$32,507.65
109970	200 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,206.91	$41,481.22	$0.00	$42,688.13
109971	250 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,341.02	$44,238.23	$0.00	$45,579.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109972	300 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,430.42	$51,457.66	$0.00	$52,888.08
109973	350 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,609.22	$57,448.26	$0.00	$59,057.48
109974	400 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 1 Indoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,788.02	$65,589.32	$0.00	$67,377.34
109975	1 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$120.69	$5,646.87	$0.00	$5,767.56
109976	2 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$129.63	$6,375.75	$0.00	$6,505.38
109977	3 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$129.63	$6,932.00	$0.00	$7,061.63
109978	5 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$143.04	$7,430.71	$0.00	$7,573.75
109979	7-1/2 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$174.33	$7,623.80	$0.00	$7,798.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109980	10 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$178.80	$8,173.65	$0.00	$8,352.45
109981	15 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$201.15	$9,572.58	$0.00	$9,773.73
109982	20 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$227.98	$11,214.47	$0.00	$11,442.45
109983	25 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$250.32	$13,179.88	$0.00	$13,430.20
109984	30 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$281.61	$14,695.18	$0.00	$14,976.79
109985	40 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$326.31	$16,746.26	$0.00	$17,072.57
109986	50 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$397.83	$21,225.65	$0.00	$21,623.48
109987	60 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$442.53	$24,769.02	$0.00	$25,211.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109988	75 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$625.81	$27,696.03	$0.00	$28,321.84
109989	100 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$715.21	$28,812.37	$0.00	$29,527.58
109990	125 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$728.62	$33,052.64	$0.00	$33,781.26
109991	150 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$826.95	$38,212.32	$0.00	$39,039.27
109992	200 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,206.91	$52,162.00	$0.00	$53,368.91
109993	250 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,341.02	$68,207.51	$0.00	$69,548.53
109994	300 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,430.42	$77,150.96	$0.00	$78,581.38
109995	350 HP Variable Frequency / Speed Drive (VFD / VSD) - NEMA 3R Outdoor Enclosure w/Circuit Breaker Disconnect & Bypass. Labor Includes Mounting Only. Excludes Electrical Connections and Controls. ABB ACH580 Series or Equal.	EA	$1,609.22	$93,353.75	$0.00	$94,962.97
	23-05-16 Expansion Fittings and Loops for HVAC Piping					
109996	1" & Down Pipe Expansion Joint - Loop Type	EA	$132.85	$700.92	$0.00	$833.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
109997	1-1/4" To 2" Pipe Expansion Joint - Loop Type	EA	$177.12	$1,277.51	$0.00	$1,454.63
109998	2-1/2" To 4" Pipe Expansion Joint - Loop Type	EA	$432.18	$1,613.96	$0.00	$2,046.14
109999	2" to 5" Pipe Expansion Joint - Bellows Type	EA	$467.60	$354.73	$0.00	$822.33
110000	6" to 8" Pipe Expansion Joint - Bellows Type	EA	$962.66	$587.56	$0.00	$1,550.22
110001	10" To 12" Pipe Expansion Joint - Bellows Type	EA	$1,467.47	$1,314.08	$0.00	$2,781.55
110002	Pipe Guide Or Anchor- 3/4" To 2"	EA	$221.41	$230.10	$0.00	$451.51
110003	Pipe Guide Or Anchor- 2-1/2" To 8"	EA	$308.19	$318.46	$0.00	$626.65
110004	Pipe Guide Or Anchor- 10" To 14"	EA	$379.04	$700.28	$0.00	$1,079.32
	23-05-17 Sleeves and Sleeve Seals for HVAC Piping and Ductwork					
110005	Firestopping Intumescent Sealant - Pipe Penetration Up to 2" Fireproofing size based on pipe outer diameter including insulation.	EA	$41.39	$4.06	$0.00	$45.45
110006	Firestopping Intumescent Sealant - Pipe Penetration 2-1/2" to 5" Fireproofing size based on pipe outer diameter including insulation.	EA	$47.18	$12.17	$0.00	$59.35
110007	Firestopping Intumescent Sealant - Pipe Penetration 6" to 12" Fireproofing size based on pipe outer diameter including insulation.	EA	$57.95	$36.48	$0.00	$94.43
110008	Firestopping Intumescent Sealant - Pipe Penetration 14" to 24" Fireproofing size based on pipe outer diameter including insulation.	EA	$107.61	$109.44	$0.00	$217.05
110009	Firestopping Intumescent Sealant - Duct Penetration 12" x 12" Fireproofing size based on outer dimensions of duct including insulation.	EA	$73.67	$35.61	$0.00	$109.28
110010	Firestopping Intumescent Sealant - Duct Penetration 18" x 18" Fireproofing size based on outer dimensions of duct including insulation.	EA	$110.09	$57.24	$0.00	$167.33
110011	Firestopping Intumescent Sealant - Duct Penetration 24" x 24" Fireproofing size based on outer dimensions of duct including insulation.	EA	$138.24	$103.01	$0.00	$241.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110012	Firestopping Intumescent Sealant - Duct Penetration 36" x 36" Fireproofing size based on outer dimensions of duct including insulation.	EA	$165.55	$165.42	$0.00	$330.97
110013	Firestopping Intumescent Sealant - Duct Penetration 48" x 48" & Up Fireproofing size based on outer perimeter of duct including insulation.	LF	$3.47	$3.39	$0.00	$6.86
	23-05-19 Meters and Gauges for HVAC Piping					
110014	Thermometer - Aluminum Stem, Up To 6" Adjustable Angle Stem, 9" Scale. 30° to 240° F.	EA	$148.79	$65.34	$0.00	$214.13
110015	Thermometer - Aluminum Stem, 8" To 12" Adjustable Angle Stem, 9" Scale. 30° to 240° F.	EA	$148.79	$199.79	$0.00	$348.58
110016	Thermometer - Brass Stem, Up To 6" Adjustable Angle Stem, Lead Free, 9" Scale. 30° to 240° F.	EA	$148.79	$203.32	$0.00	$352.11
110017	Thermometer - Brass Stem, 8" To 12" Adjustable Angle Stem, Lead Free, 9" Scale. 30° to 240° F.	EA	$148.79	$309.46	$0.00	$458.25
110018	Thermometer - Stainless Steel Stem, Up To 6" Adjustable Angle Stem, 9" Scale. 30° to 240° F.	EA	$148.79	$328.63	$0.00	$477.42
110019	Thermometer - Stainless Steel Stem, 8" To 12" Adjustable Angle Stem, 9" Scale. 30° to 240° F.	EA	$148.79	$488.48	$0.00	$637.27
110020	Thermowell - Brass, 3-1/2" Stem Length, 3/4" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$8.53	$0.00	$82.92
110021	Thermowell - Brass, 3-1/2" Stem Length, 1" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$110.59	$0.00	$184.98
110022	Thermowell - Brass, 6" Stem Length, 3/4" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$21.73	$0.00	$96.12
110023	Thermowell - Brass, 6" Stem Length, 1" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$200.01	$0.00	$274.40
110024	Thermowell - Brass, 8" Stem Length, 3/4" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$72.98	$0.00	$147.37
110025	Thermowell - Brass, 8" Stem Length, 1" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$224.59	$0.00	$298.98
110026	Thermowell - Brass, 12" Stem Length, 1" NPT Up To 575 PSI. Excludes Lagging Extension.	EA	$74.39	$304.69	$0.00	$379.08
110027	Thermowell - 304 Stainless Steel, 3-1/2" Stem Length, 3/4" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$96.36	$0.00	$170.75
110028	Thermowell - 304 Stainless Steel, 3-1/2" Stem Length, 1" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$107.86	$0.00	$182.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110029	Thermowell - 304 Stainless Steel, 6" Stem Length, 3/4" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$147.39	$0.00	$221.78
110030	Thermowell - 304 Stainless Steel, 6" Stem Length, 1" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$162.81	$0.00	$237.20
110031	Thermowell - 304 Stainless Steel, 8" Stem Length, 3/4" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$228.00	$0.00	$302.39
110032	Thermowell - 304 Stainless Steel, 8" Stem Length, 1" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$239.61	$0.00	$314.00
110033	Thermowell - 304 Stainless Steel, 12" Stem Length, 1" NPT Up To 850 PSI. Excludes Lagging Extension.	EA	$74.39	$319.89	$0.00	$394.28
110034	Pressure Gauge - Brass, Up To 2-1/2" Dial 1/4" NPT, 0 To 100 PSI, Back Or Lower Mount.	EA	$74.39	$21.73	$0.00	$96.12
110035	Pressure Gauge - Brass, 4" Dial 1/4" NPT, 0 To 100 PSI, Back Or Lower Mount.	EA	$74.39	$57.54	$0.00	$131.93
110036	Pressure Gauge - 304 Stainless Steel, Up To 2-1/2" Dial 1/4" NPT, 0 To 100 PSI, Back Or Lower Mount.	EA	$74.39	$54.99	$0.00	$129.38
110037	Pressure Gauge - 304 Stainless Steel, 4" Dial 1/4" NPT, 0 To 100 PSI, Back Or Lower Mount.	EA	$74.39	$74.16	$0.00	$148.55

23-05-23 General-Duty Valves for HVAC Piping

- 2" and down valves include threaded or soldered connections unless stated otherwise.
- 2-1/2" and up valves include flanged, grooved, lug, or wafer connections unless stated otherwise.

110038	1/2" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$45.17	$7.64	$0.00	$52.81
110039	3/4" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$62.88	$10.39	$0.00	$73.27
110040	1" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$77.05	$33.60	$0.00	$110.65
110041	1-1/4" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$89.45	$59.89	$0.00	$149.34
110042	1-1/2" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$100.07	$85.12	$0.00	$185.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110043	2" Natural Gas Ball Valve - Brass, Two Piece, Standard Port 600 PSI WOG. AY McDonald 10710 or Equal.	EA	$120.44	$138.65	$0.00	$259.09
110044	1/2" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$45.17	$48.25	$0.00	$93.42
110045	3/4" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$62.88	$93.27	$0.00	$156.15
110046	1" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$77.05	$106.49	$0.00	$183.54
110047	1-1/4" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$89.45	$204.62	$0.00	$294.07
110048	1-1/2" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$100.07	$235.17	$0.00	$335.24
110049	2" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 50GB or Equal.	EA	$120.44	$344.11	$0.00	$464.55
110050	2-1/2" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 8010 or Equal.	EA	$193.06	$1,148.26	$0.00	$1,341.32
110051	3" Natural Gas Ball Valve - Bronze, Two Piece, Full Port 600 PSI WOG. Apollo 8010 or Equal.	EA	$224.95	$1,371.89	$0.00	$1,596.84
110052	1/2" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$193.06	$202.04	$0.00	$395.10
110053	3/4" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$224.95	$240.40	$0.00	$465.35
110054	1" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$265.68	$483.36	$0.00	$749.04
110055	1-1/4" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$321.48	$497.43	$0.00	$818.91
110056	1-1/2" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$349.82	$649.59	$0.00	$999.41
110057	2" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$442.81	$1,355.45	$0.00	$1,798.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110058	2-1/2" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$498.61	$1,622.71	$0.00	$2,121.32
110059	3" Natural Gas Solenoid Valve 2-Way, Normally Open or Normally Closed, 120 VAC. ASCO Series 8210 or Equal.	EA	$615.50	$2,045.97	$0.00	$2,661.47
110060	3/4" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$130.18	$127.87	$0.00	$258.05
110061	1" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI, Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$150.56	$145.13	$0.00	$295.69
110062	1-1/4" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$170.04	$149.61	$0.00	$319.65
110063	1-1/2" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$191.29	$217.38	$0.00	$408.67
110064	2" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$217.86	$540.91	$0.00	$758.77
110065	2-1/2" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$268.34	$882.32	$0.00	$1,150.66
110066	3" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$268.34	$965.45	$0.00	$1,233.79
110067	4" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$498.61	$1,350.34	$0.00	$1,848.95
110068	6" Natural Gas Earthquake Shut-Off Valve Aluminum, 5 PSI. Little Firefighter AGV Horizontal, VAGV Vertical, or Equal.	EA	$727.09	$2,598.38	$0.00	$3,325.47
110069	2-1/2" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$491.52	$1,256.03	$0.00	$1,747.55
110070	3" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$546.42	$1,367.85	$0.00	$1,914.27
110071	4" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$735.94	$1,543.73	$0.00	$2,279.67
110072	5" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$891.81	$2,153.55	$0.00	$3,045.36
110073	6" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$1,019.35	$2,572.88	$0.00	$3,592.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110074	8" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$1,264.66	$3,609.71	$0.00	$4,874.37
110075	10" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$1,714.55	$4,876.96	$0.00	$6,591.51
110076	12" Gate Valve- Iron Body, Class 250 Os&Y, Flanged.	EA	$1,941.27	$6,528.21	$0.00	$8,469.48
110077	1/2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$45.17	$12.15	$0.00	$57.32
110078	3/4" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$62.88	$22.51	$0.00	$85.39
110079	1" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$77.05	$34.67	$0.00	$111.72
110080	1-1/4" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$89.45	$48.26	$0.00	$137.71
110081	1-1/2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$100.07	$77.71	$0.00	$177.78
110082	2" Ball Valve - Brass, Two Piece, Full Port 600 PSI WOG. Watts LFFBV or Equal. Threaded or Sweat.	EA	$120.44	$110.23	$0.00	$230.67
110083	2-1/2" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Lever Operated, Lug or Wafer Style.	EA	$99.19	$334.01	$0.00	$433.20
110084	3" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Lever Operated, Lug or Wafer Style.	EA	$100.07	$364.48	$0.00	$464.55
110085	4" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Lever Operated, Lug or Wafer Style.	EA	$179.78	$449.81	$0.00	$629.59
110086	5" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Lever Operated, Lug or Wafer Style.	EA	$220.51	$644.85	$0.00	$865.36
110087	6" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Lever Operated, Lug or Wafer Style.	EA	$224.95	$737.50	$0.00	$962.45
110088	8" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$249.75	$1,450.61	$0.00	$1,700.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110089	10" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$372.84	$1,985.75	$0.00	$2,358.59
110090	12" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$454.32	$2,295.38	$0.00	$2,749.70
110091	14" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$687.24	$4,509.08	$0.00	$5,196.32
110092	16" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$816.53	$6,563.10	$0.00	$7,379.63
110093	18" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$923.69	$8,227.03	$0.00	$9,150.72
110094	20" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$1,115.88	$10,989.28	$0.00	$12,105.16
110095	24" Butterfly Valve - Class 150 Cast or Ductile Iron Body, EPDM or NBR Seat, Gear Operated w/Handwheel, Lug or Wafer Style.	EA	$1,398.39	$18,676.30	$0.00	$20,074.69
110096	6" High Performance Butterfly Valve - Class 150 Carbon Steel Body and Stainless Steel Disc. Includes Gear Operator and Handwheel. Lug or Wafer Style.	EA	$224.95	$1,827.28	$0.00	$2,052.23
110097	8" High Performance Butterfly Valve - Class 150 Carbon Steel Body and Stainless Steel Disc. Includes Gear Operator and Handwheel. Lug or Wafer Style.	EA	$259.49	$2,203.95	$0.00	$2,463.44
110098	10" High Performance Butterfly Valve - Class 150 Carbon Steel Body and Stainless Steel Disc. Includes Gear Operator and Handwheel. Lug or Wafer Style.	EA	$382.58	$3,048.72	$0.00	$3,431.30
110099	12" High Performance Butterfly Valve - Class 150 Carbon Steel Body and Stainless Steel Disc. Includes Gear Operator and Handwheel. Lug or Wafer Style.	EA	$448.12	$4,374.99	$0.00	$4,823.11
110100	1/2" Check Valve	EA	$54.03	$116.11	$0.00	$170.14
110101	3/4" Check Valve	EA	$74.39	$134.25	$0.00	$208.64
110102	1" Check Valve	EA	$90.33	$186.12	$0.00	$276.45
110103	1-1/4" Check Valve	EA	$105.39	$264.05	$0.00	$369.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110104	1-1/2" Check Valve	EA	$114.24	$307.14	$0.00	$421.38
110105	2" Check Valve	EA	$142.59	$450.54	$0.00	$593.13
110106	2-1/2" Check Valve	EA	$109.81	$606.77	$0.00	$716.58
110107	3" Check Valve	EA	$127.52	$684.35	$0.00	$811.87
110108	4" Check Valve	EA	$237.35	$918.78	$0.00	$1,156.13
110109	10” Silent Check Valve, Globe Style Flanged, Class 150	EA	$619.93	$4,483.85	$0.00	$5,103.78
110110	12” Silent Check Valve, Globe Style Flanged, Class 150	EA	$708.49	$8,188.00	$0.00	$8,896.49
110111	1" and Down Circuit Setter Balance Valve	EA	$101.84	$93.08	$0.00	$194.92
110112	1-1/4" to 2" Circuit Setter Balance Valve	EA	$138.16	$286.06	$0.00	$424.22
110113	2-1/2" Circuit Setter Balance Valve	EA	$157.64	$946.36	$0.00	$1,104.00
110114	3" Circuit Setter Balance Valve	EA	$171.81	$1,446.26	$0.00	$1,618.07
110115	4" Circuit Setter Balance Valve	EA	$321.48	$2,237.47	$0.00	$2,558.95
110116	6" Circuit Setter Balance Valve	EA	$474.69	$4,307.75	$0.00	$4,782.44
110117	8" Circuit Setter Balance Valve	EA	$483.54	$8,531.04	$0.00	$9,014.58
110118	10" Circuit Setter Balance Valve	EA	$635.87	$11,978.61	$0.00	$12,614.48
110119	12" Circuit Setter Balance Valve	EA	$756.32	$26,079.20	$0.00	$26,835.52
110120	1-1/4" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Threaded. LFF115 Or Equal.	EA	$224.95	$2,519.64	$0.00	$2,744.59
110121	1-1/2" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Threaded or Flanged. LFF115 Or Equal.	EA	$235.58	$2,652.63	$0.00	$2,888.21
110122	2" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Threaded or Flanged. LFF115 Or Equal.	EA	$282.51	$3,249.87	$0.00	$3,532.38
110123	2-1/2" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Threaded or Flanged. LFF115 Or Equal.	EA	$292.25	$3,348.14	$0.00	$3,640.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110124	3" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Threaded or Flanged. LFF115 Or Equal.	EA	$302.88	$3,484.07	$0.00	$3,786.95
110125	4" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Flanged. LFF115 Or Equal.	EA	$552.62	$4,475.56	$0.00	$5,028.18
110126	6" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Flanged. LFF115 Or Equal.	EA	$839.56	$6,776.90	$0.00	$7,616.46
110127	8" Pressure Reducing Control Valve Ductile Iron, Epoxy Coated, 150#, Pilot Operated, Flanged. LFF115 Or Equal.	EA	$1,036.17	$11,605.50	$0.00	$12,641.67
110128	2" Blow Down Valve Slow Opening Hand Wheel Type.	EA	$759.86	$2,997.52	$0.00	$3,757.38
	23-05-29 Hangers and Supports for HVAC Piping and Equipment					
110129	2" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$106.27	$672.61	$0.00	$778.88
110130	3" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$125.75	$696.91	$0.00	$822.66
110131	4" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$144.36	$763.40	$0.00	$907.76
110132	6" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$147.90	$831.18	$0.00	$979.08
110133	8" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$188.63	$878.48	$0.00	$1,067.11
110134	10" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$188.63	$911.74	$0.00	$1,100.37
110135	12" Pipe Saddle Support - Stainless Steel, Adjustable w/ U-Bolt Kit	EA	$195.72	$947.54	$0.00	$1,143.26
110136	1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$5.50	$0.00	$95.12
110137	3/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.44	$0.00	$96.06
110138	1" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.28	$0.00	$95.90
110139	1-1/4" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.39	$0.00	$96.01
110140	1-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$6.57	$0.00	$96.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110141	2" Pipe Hanger Includes Rod and Building Attachment.	EA	$89.62	$7.30	$0.00	$96.92
110142	2-1/2" Pipe Hanger Includes Rod and Building Attachment.	EA	$93.70	$11.30	$0.00	$105.00
110143	3" Pipe Hanger Includes Rod and Building Attachment.	EA	$94.50	$13.56	$0.00	$108.06
110144	4" Pipe Hanger Includes Rod and Building Attachment.	EA	$114.07	$21.10	$0.00	$135.17
110145	5" Pipe Hanger Includes Rod and Building Attachment.	EA	$123.02	$21.58	$0.00	$144.60
110146	6" Pipe Hanger Includes Rod and Building Attachment.	EA	$128.77	$39.85	$0.00	$168.62
110147	8" Pipe Hanger Includes Rod and Building Attachment.	EA	$129.57	$52.56	$0.00	$182.13
110148	10" Pipe Hanger Includes Rod and Building Attachment.	EA	$145.06	$74.43	$0.00	$219.49
110149	12" Pipe Hanger Includes Rod and Building Attachment.	EA	$145.87	$96.80	$0.00	$242.67
110150	14" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$165.21	$0.00	$311.87
110151	15" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$194.83	$0.00	$341.49
110152	16" Pipe Hanger Includes Rod and Building Attachment.	EA	$146.66	$208.28	$0.00	$354.94
110153	18" Pipe Hanger Includes Rod and Building Attachment.	EA	$158.88	$250.98	$0.00	$409.86
110154	20" Pipe Hanger Includes Rod and Building Attachment.	EA	$172.70	$421.47	$0.00	$594.17
110155	24" Pipe Hanger Includes Rod and Building Attachment.	EA	$187.39	$549.07	$0.00	$736.46
110156	28" Pipe Hanger Includes Rod and Building Attachment.	EA	$204.49	$754.90	$0.00	$959.39
	23-05-48 Vibration and Seismic Controls for HVAC					
110157	Inertia Base - 6" Thick Includes Concrete And Spring Isolators.	SF	$12.42	$25.79	$0.00	$38.21
110158	Inertia Base - 8" Thick Includes Concrete And Spring Isolators.	SF	$16.56	$34.40	$0.00	$50.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110159	Inertia Base - 10" Thick Includes Concrete And Spring Isolators.	SF	$20.70	$42.99	$0.00	$63.69
110160	Inertia Base - 12" Thick Includes Concrete And Spring Isolators.	SF	$24.83	$51.60	$0.00	$76.43
110161	Seismic Restraints Allowance (SF)	SF	$0.20	$0.48	$0.00	$0.68
110162	Seismic Restraints Allowance - California (SF)	SF	$0.76	$1.78	$0.00	$2.54
	23-05-53 Identification for HVAC Piping and Equipment					
110163	Marking & Identification - Adhesive Pipe or Duct Marker	EA	$25.16	$4.50	$0.00	$29.66
110164	Marking & Identification - Snap-On or Wrap Around Pipe Marker	EA	$26.92	$14.84	$0.00	$41.76
110165	Marking & Identification - Valve Tag Brass or Plastic	EA	$10.63	$1.47	$0.00	$12.10
110166	Marking & Identification - Plastic Sign	EA	$40.39	$23.86	$0.00	$64.25
110167	Marking & Identification - Aluminum Sign	EA	$40.39	$44.37	$0.00	$84.76
	23-05-85 Miscellaneous HVAC					
110168	3" Equipment Pad - Up To 36” x 36” 3” High. DiversiTech EL-3636-3 Or Equal.	EA	$38.92	$111.20	$0.00	$150.12
110169	Drain or Drip Pan - Stainless Steel Up to 16 Gauge and 2-1/2" High Edge. With or Without Discharge Hole.	SF	$34.76	$25.17	$0.00	$59.93
110170	Drain or Drip Pan - Galvanized Steel Up to 16 Gauge and 2-1/2" High Edge. With or Without Discharge Hole.	SF	$31.45	$18.89	$0.00	$50.34
110171	2-3/4" Pipe Enclosure or Line Set Cover - Includes Fittings Slimduct or equal.	LF	$7.45	$10.84	$0.00	$18.29
110172	3-3/4" Pipe Enclosure or Line Set Cover - Includes Fittings Slimduct or equal.	LF	$7.45	$16.76	$0.00	$24.21
110173	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 250 to 999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$1,324.43	$1,266.92	$0.00	$2,591.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110174	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 1,000 to 2,499 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$1,821.09	$1,687.02	$0.00	$3,508.11
110175	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 2,500 to 4,999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$2,483.31	$2,231.87	$0.00	$4,715.18
110176	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 5,000 to 9,999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$3,311.08	$2,967.07	$0.00	$6,278.15
110177	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 10,000 to 19,999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$4,635.51	$3,947.78	$0.00	$8,583.29
110178	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 20,000 to 34,999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$6,456.61	$5,251.45	$0.00	$11,708.06
110179	Temporary HVAC Equipment Mobilization, Setup & Demobilization - 35,000 to 49,999 LBS Includes all Labor, Material and Equipment (Truck, Trailer, Crane, etc.) to Deliver, Unload, Setup, Connect Mechanical and Electrical Services (within 25'), Disassemble and Pickup (Within 30 Miles)	EA	$8,691.58	$6,983.11	$0.00	$15,674.69
110180	Temporary Mobile HEPA Containment Cart System Rental	WK	$0.00	$1,019.66	$0.00	$1,019.66
110181	Temporary Evaporative Cooling Fan Rental - Up to 48"	WK	$0.00	$505.45	$0.00	$505.45
110182	Temporary Portable Spot Cooler / Air Conditioner / Dehumidifier Rental - 1 TON Oceanaire 2OAC1211, Airrex AHSC-12, CLIMATE PRO D12HP or Equal	WK	$0.00	$359.60	$0.00	$359.60
110183	Temporary Portable Spot Cooler / Air Conditioner / Dehumidifier Rental - 1-1/2 TON	WK	$0.00	$677.76	$0.00	$677.76
110184	Temporary Portable Spot Cooler / Air Conditioner / Dehumidifier Rental - 2 TON	WK	$0.00	$910.59	$0.00	$910.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110185	Temporary Portable Spot Cooler / Air Conditioner / Dehumidifier Rental - 3 TON	WK	$0.00	$1,225.10	$0.00	$1,225.10
110186	Temporary Portable Spot Cooler / Air Conditioner / Dehumidifier Rental - 5 TON	WK	$0.00	$1,635.90	$0.00	$1,635.90
110187	Temporary Air Scrubber, Air Purifier, or Negative Air Machine w/HEPA Filtration Rental - Under 1,000 CFM	WK	$0.00	$315.09	$0.00	$315.09
110188	Temporary Air Scrubber, Air Purifier, or Negative Air Machine w/HEPA Filtration Rental - 1,000 to 2,499 CFM	WK	$0.00	$411.36	$0.00	$411.36
110189	Temporary Air Scrubber, Air Purifier, or Negative Air Machine w/HEPA Filtration Rental - 2,500 to 5,000 CFM	WK	$0.00	$505.45	$0.00	$505.45
110190	Temporary Packaged DX Air Conditioning Unit Rental - Under 5 TON	WK	$0.00	$229.74	$0.00	$229.74
110191	Temporary Packaged DX Air Conditioning Unit Rental - 5 to 9 TON	WK	$0.00	$525.15	$0.00	$525.15
110192	Temporary Packaged DX Air Conditioning Unit Rental - 10 to 19 TON	WK	$0.00	$1,135.19	$0.00	$1,135.19
110193	Temporary Packaged DX Air Conditioning Unit Rental - 20 to 29 TON	WK	$0.00	$1,418.77	$0.00	$1,418.77
110194	Temporary Packaged DX Air Conditioning Unit Rental - 30 to 39 TON	WK	$0.00	$1,702.35	$0.00	$1,702.35
110195	Temporary Packaged DX Air Conditioning Unit Rental - 40 to 49 TON	WK	$0.00	$2,529.89	$0.00	$2,529.89
110196	Temporary Chilled Water Air Handling Unit Rental - Under 1,000 CFM	WK	$0.00	$357.09	$0.00	$357.09
110197	Temporary Chilled Water Air Handling Unit Rental - 1,000 to 2,499 CFM	WK	$0.00	$492.76	$0.00	$492.76
110198	Temporary Chilled Water Air Handling Unit Rental - 2,500 to 5,000 CFM	WK	$0.00	$628.86	$0.00	$628.86
110199	Temporary Chilled Water Air Handling Unit Rental - 5,000 to 9,999 CFM	WK	$0.00	$969.76	$0.00	$969.76
110200	Temporary Chilled Water Air Handling Unit Rental - 10,000 to 19,999 CFM	WK	$0.00	$1,422.27	$0.00	$1,422.27
110201	Temporary Chilled Water Air Handling Unit Rental - 20,000 to 29,999 CFM	WK	$0.00	$1,859.89	$0.00	$1,859.89
110202	Temporary Centrifugal Pump Rental - Under 5 HP	WK	$0.00	$420.56	$0.00	$420.56
110203	Temporary Centrifugal Pump Rental - 5 to 20 HP	WK	$0.00	$774.06	$0.00	$774.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110204	Temporary Centrifugal Pump Rental - 25 to 60 HP	WK	$0.00	$1,103.20	$0.00	$1,103.20
110205	Temporary Centrifugal Pump Rental - 75 to 150 HP	WK	$0.00	$1,706.60	$0.00	$1,706.60
110206	Temporary Air Cooled Water Chiller Rental - Under 50 TON	WK	$0.00	$1,531.67	$0.00	$1,531.67
110207	Temporary Air Cooled Water Chiller Rental - 50 to 99 TON	WK	$0.00	$1,805.19	$0.00	$1,805.19
110208	Temporary Air Cooled Water Chiller Rental - 99 to 149 TON	WK	$0.00	$2,078.70	$0.00	$2,078.70
110209	Temporary Air Cooled Water Chiller Rental - 150 to 199 TON	WK	$0.00	$2,680.43	$0.00	$2,680.43
110210	Temporary Air Cooled Water Chiller Rental - 200 to 299 TON	WK	$0.00	$3,282.16	$0.00	$3,282.16
110211	Temporary Air Cooled Water Chiller Rental - 300 to 399 TON	WK	$0.00	$4,595.02	$0.00	$4,595.02
110212	Temporary Air Cooled Water Chiller Rental - 400 to 499 TON	WK	$0.00	$5,907.88	$0.00	$5,907.88
110213	Temporary Water Cooled Water Chiller Rental - 200 to 299 TON	WK	$0.00	$3,391.56	$0.00	$3,391.56
110214	Temporary Water Cooled Water Chiller Rental - 300 to 399 TON	WK	$0.00	$4,266.80	$0.00	$4,266.80
110215	Temporary Water Cooled Water Chiller Rental - 400 to 499 TON	WK	$0.00	$5,196.74	$0.00	$5,196.74
110216	Temporary Water Cooled Water Chiller Rental - 500 to 599 TON	WK	$0.00	$6,126.69	$0.00	$6,126.69
110217	Temporary Cooling Tower Rental - 200 to 299 TON	WK	$0.00	$2,328.29	$0.00	$2,328.29
110218	Temporary Cooling Tower Rental - 300 to 399 TON	WK	$0.00	$2,821.98	$0.00	$2,821.98
110219	Temporary Cooling Tower Rental - 400 to 499 TON	WK	$0.00	$3,565.58	$0.00	$3,565.58
110220	Temporary Cooling Tower Rental - 500 to 599 TON	WK	$0.00	$4,114.12	$0.00	$4,114.12
110221	Temporary Hot Water Boiler Rental - Under 1,000 MBH Skid Mounted, Natural Gas Fired w/ All Standard Boiler Trim and Controls	WK	$0.00	$2,100.58	$0.00	$2,100.58
110222	Temporary Hot Water Boiler Rental - 1,000 to 2,999 MBH Skid Mounted, Natural Gas Fired w/ All Standard Boiler Trim and Controls	WK	$0.00	$2,406.92	$0.00	$2,406.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110223	Temporary Hot Water Boiler Rental - 3,000 to 5,999 MBH Skid Mounted, Natural Gas Fired w/ All Standard Boiler Trim and Controls	WK	$0.00	$2,844.54	$0.00	$2,844.54
110224	Temporary Hot Water Boiler Rental - 6,000 to 7,499 MBH Skid Mounted, Natural Gas Fired w/ All Standard Boiler Trim and Controls	WK	$0.00	$3,500.97	$0.00	$3,500.97
110225	Temporary Steam Boiler Rental - Under 50 HP Skid Mounted w/ Feed Water System (Including Tank and Pump), Dual Fuel Burner, All Standard Boiler Trim, and Controls	WK	$0.00	$2,757.01	$0.00	$2,757.01
110226	Temporary Steam Boiler Rental - 50 to 99 HP Skid Mounted w/ Feed Water System (Including Tank and Pump), Dual Fuel Burner, All Standard Boiler Trim, and Controls	WK	$0.00	$4,091.76	$0.00	$4,091.76
110227	Temporary Steam Boiler Plant Rental - 100 to 199 HP Mobile Steam Plant in Enclosed Trailer w/ Feed Water System, Deaerator (Or Heated Storage/Condensatereturn Tank), Pumps, Water Softener, Chemical Injection, Blowdown Separator, Dual Fuel Burner, All Standard Boiler Trim, and Controls	WK	$0.00	$5,426.50	$0.00	$5,426.50
110228	Temporary Steam Boiler Plant Rental - 200 to 299 HP Mobile Steam Plant in Enclosed Trailer w/ Feed Water System, Deaerator (Or Heated Storage/Condensatereturn Tank), Pumps, Water Softener, Chemical Injection, Blowdown Separator, Dual Fuel Burner, All Standard Boiler Trim, and Controls	WK	$0.00	$6,564.32	$0.00	$6,564.32
110229	Temporary Steam Boiler Plant Rental - 300 to 399 HP Mobile Steam Plant in Enclosed Trailer w/ Feed Water System, Deaerator (Or Heated Storage/Condensatereturn Tank), Pumps, Water Softener, Chemical Injection, Blowdown Separator, Dual Fuel Burner, All Standard Boiler Trim, and Controls	WK	$0.00	$7,658.37	$0.00	$7,658.37
110230	Temporary Fuel Oil Tank Rental- Under 500 GAL Single Wall	WK	$0.00	$525.15	$0.00	$525.15
110231	Temporary Fuel Oil Tank Rental- 500 to 999 GAL Double Wall	WK	$0.00	$1,102.80	$0.00	$1,102.80
110232	Temporary Fuel Oil Tank Rental- 1,000 to 1,999 GAL Double Wall	WK	$0.00	$1,796.43	$0.00	$1,796.43
110233	Temporary Fuel Oil Tank Rental- 2,000 to 2,999 GAL Double Wall	WK	$0.00	$2,485.69	$0.00	$2,485.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110234	Temporary Fuel Oil Tank Rental- 3,000 to 3,999 GAL Double Wall	WK	$0.00	$3,107.11	$0.00	$3,107.11
110235	Temporary Fuel Oil Tank Rental- 4,000 to 4,999 GAL Double Wall	WK	$0.00	$3,728.53	$0.00	$3,728.53
110236	Temporary Fuel Oil Tank Rental- 5,000 to 7,499 GAL Double Wall	WK	$0.00	$4,347.77	$0.00	$4,347.77
110237	Temporary Fuel Oil Tank Rental- 7,500 to 9,999 GAL	WK	$0.00	$4,969.19	$0.00	$4,969.19

23-05-93 Testing, Adjusting, and Balancing for HVAC

Includes TAB plan, test reports, schematic diagrams, systems & device readiness checks, test probe installation & removal, device marking, and recording measurements.

110238	Air Testing, Adjusting & Balancing (TAB) - Measure & Record Existing Airflow Per Register, Grille or Diffuser	EA	$31.29	$0.00	$0.00	$31.29
110239	Air Testing, Adjusting & Balancing (TAB) - Duct Pressure Test	EA	$178.80	$0.00	$0.00	$178.80
110240	Air Testing, Adjusting & Balancing (TAB) - Heat Recovery Coil	EA	$89.40	$0.00	$0.00	$89.40
110241	Air Testing, Adjusting & Balancing (TAB) - Air Handling Unit (AHU)	EA	$1,430.42	$0.00	$0.00	$1,430.42
110242	Air Testing, Adjusting & Balancing (TAB) - Variable Refrigerant Flow (VRF) Unit	EA	$44.70	$0.00	$0.00	$44.70
110243	Air Testing, Adjusting & Balancing (TAB) - Computer Room Air Conditioner (AC Unit)	EA	$89.40	$0.00	$0.00	$89.40
110244	Air Testing, Adjusting & Balancing (TAB) - Heat Pump	EA	$44.70	$0.00	$0.00	$44.70
110245	Air Testing, Adjusting & Balancing (TAB) - Fan Coil Unit (FCU)	EA	$44.70	$0.00	$0.00	$44.70
110246	Air Testing, Adjusting & Balancing (TAB) - Unit Ventilator	EA	$44.70	$0.00	$0.00	$44.70
110247	Air Testing, Adjusting & Balancing (TAB) - Cabinet or Unit Heater	EA	$44.70	$0.00	$0.00	$44.70
110248	Air Testing, Adjusting & Balancing (TAB) - Air Curtain	EA	$44.70	$0.00	$0.00	$44.70
110249	Air Testing, Adjusting & Balancing (TAB) - Fan	EA	$312.90	$0.00	$0.00	$312.90
110250	Air Testing, Adjusting & Balancing (TAB) - Induction Unit	EA	$44.70	$0.00	$0.00	$44.70
110251	Air Testing, Adjusting & Balancing (TAB) - Variable or Constant Air Volume (VAV/CV) Air Terminal Unit Includes Supply and Return Boxes.	EA	$134.10	$0.00	$0.00	$134.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110252	Air Testing, Adjusting & Balancing (TAB) - Variable or Constant Air Volume (VAV/CV) Venturi Valve Includes Supply and Return Valves.	EA	$156.45	$0.00	$0.00	$156.45
110253	Air Testing, Adjusting & Balancing (TAB) - Variable or Constant Air Volume (VAV/CV) Fume Hood Air Terminal Unit or Venturi Valve	EA	$447.00	$0.00	$0.00	$447.00
110254	Air Testing, Adjusting & Balancing (TAB) - Chilled Beam	EA	$44.70	$0.00	$0.00	$44.70
110255	Air Testing, Adjusting & Balancing (TAB) - Register, Grille or Diffuser	EA	$89.40	$0.00	$0.00	$89.40
110256	Water Testing, Adjusting & Balancing (TAB) - Hydronic Pump	EA	$402.30	$0.00	$0.00	$402.30
110257	Water Testing, Adjusting & Balancing (TAB) - Reheat Coil	EA	$134.10	$0.00	$0.00	$134.10
110258	Water Testing, Adjusting & Balancing (TAB) - Chilled Beam	EA	$84.93	$0.00	$0.00	$84.93
110259	Water Testing, Adjusting & Balancing (TAB) - Heating or Cooling Coil	EA	$160.92	$0.00	$0.00	$160.92
110260	Water Testing, Adjusting & Balancing (TAB) - Boiler	EA	$178.80	$0.00	$0.00	$178.80
110261	Water Testing, Adjusting & Balancing (TAB) - Heat Exchanger (HX)	EA	$156.45	$0.00	$0.00	$156.45
110262	Water Testing, Adjusting & Balancing (TAB) - Air Cooled Chiller	EA	$447.00	$0.00	$0.00	$447.00
110263	Water Testing, Adjusting & Balancing (TAB) - Water Cooled Chiller	EA	$625.81	$0.00	$0.00	$625.81
110264	Water Testing, Adjusting & Balancing (TAB) - Cooling Tower	EA	$357.60	$0.00	$0.00	$357.60
110265	Water Testing, Adjusting & Balancing (TAB) - Fluid Cooler	EA	$178.80	$0.00	$0.00	$178.80
110266	Water Testing, Adjusting & Balancing (TAB) - Air Handling Unit (AHU) Includes Hot Water (HW) and Chilled Water (CW) Coils	EA	$447.00	$0.00	$0.00	$447.00
110267	Water Testing, Adjusting & Balancing (TAB) - Packaged Terminal Air Conditioner (PTAC Unit)	EA	$44.70	$0.00	$0.00	$44.70
110268	Water Testing, Adjusting & Balancing (TAB) - Heat Pump	EA	$89.40	$0.00	$0.00	$89.40
110269	Water Testing, Adjusting & Balancing (TAB) - 2-Pipe Valance System	EA	$71.52	$0.00	$0.00	$71.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110270	Water Testing, Adjusting & Balancing (TAB) - 4-Pipe Valance System	EA	$134.10	$0.00	$0.00	$134.10
110271	Water Testing, Adjusting & Balancing (TAB) - 2-Pipe Fan Coil Unit (FCU)	EA	$89.40	$0.00	$0.00	$89.40
110272	Water Testing, Adjusting & Balancing (TAB) - 4-Pipe Fan Coil Unit (FCU)	EA	$169.87	$0.00	$0.00	$169.87
110273	Water Testing, Adjusting & Balancing (TAB) - Unit Ventilator	EA	$89.40	$0.00	$0.00	$89.40
110274	Water Testing, Adjusting & Balancing (TAB) - Cabinet or Unit Heater	EA	$62.58	$0.00	$0.00	$62.58
110275	Water Testing, Adjusting & Balancing (TAB) - Convector	EA	$53.64	$0.00	$0.00	$53.64
110276	Water Testing, Adjusting & Balancing (TAB) - Air Curtain	EA	$53.64	$0.00	$0.00	$53.64
110277	Water Testing, Adjusting & Balancing (TAB) - Fin Tube Radiation	EA	$62.58	$0.00	$0.00	$62.58
110278	Water Testing, Adjusting & Balancing (TAB) - Radiant Ceiling Panel	EA	$71.52	$0.00	$0.00	$71.52
110279	Water Testing, Adjusting & Balancing (TAB) - Radiant Floor Heat	EA	$71.52	$0.00	$0.00	$71.52
110280	Water Testing, Adjusting & Balancing (TAB) - Induction Unit	EA	$84.93	$0.00	$0.00	$84.93

23-07-00 HVAC Insulation

- Piping and ductwork insulation includes factory applied all service jacket as required.
- Piping and ductwork insulation items include fittings.
- Sizes shown for piping insulation line items are based on nominal pipe sizes.

23-07-13 Duct Insulation

110281	2" Flexible Fiberglass Ductwork Insulation - 3/4# Density Foil Scrim Kraft (FSF) Jacket, Includes Fittings	SF	$2.12	$0.83	$0.00	$2.95
110282	2" Flexible Fiberglass Ductwork Insulation - 1-1/2# Density Foil Scrim Kraft (FSF) Jacket, Includes Fittings	SF	$2.12	$0.93	$0.00	$3.05
110283	1" Fiberglass Ductwork Liner w/ Coating Includes Fittings	SF	$1.41	$1.65	$0.00	$3.06
110284	1-1/2" Fiberglass Ductwork Liner w/ Coating Includes Fittings	SF	$1.62	$1.97	$0.00	$3.59
110285	2" Rigid Fiberglass Ductwork Insulation All Service Jacket, 6 Lbs/Ft3 Density, Includes Fittings	SF	$3.53	$3.15	$0.00	$6.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110286	3" Rigid Fiberglass Ductwork Insulation w/ All Weather Acrylic Jacket White Vinyl Acrylic Mastic & Glass Cloth Membrane Reinforcement, 6 Lbs/Ft3 Density, Includes Fittings	SF	$6.36	$6.55	$0.00	$12.91
110287	3" Rigid Fiberglass Ductwork Insulation w/ All Weather Alumaguard Jacket Polyguard Alumaguard 60 or Equal Laminated Jacket System, 6 Lbs/Ft3 Density, Includes Fittings	SF	$8.48	$10.24	$0.00	$18.72
110288	1-1/2" Fire Rated Ductwork Insulation - Air Duct Unifrax Fyrewrap Elite 1.5 Or Equal, 1 Layer, Includes Fittings	SF	$2.12	$6.55	$0.00	$8.67
110289	3" Fire Rated Ductwork Insulation - Grease Duct Unifrax Fyrewrap Elite 1.5 Or Equal, 2 Layers, Includes Fittings	SF	$3.70	$13.12	$0.00	$16.82
	23-07-19 HVAC Piping Insulation					
110290	Pipe Jacketing - PVC Cost Includes Fittings. SF of Jacketing = Total LF of Pipe * Outside Diameter of Pipe and Insulation (In Inches) * 0.262	SF	$4.52	$4.89	$0.00	$9.41
110291	Pipe Jacketing - Aluminum Cost Includes Fittings. SF of Jacketing = Total LF of Pipe * Outside Diameter of Pipe and Insulation (In Inches) * 0.262	SF	$5.65	$9.72	$0.00	$15.37
110292	1/2" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
110293	3/4" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
110294	1" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
110295	1-1/4" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
110296	1-1/2" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.12	$0.00	$18.19
110297	2" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.79	$0.00	$18.86
110298	2-1/2" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$13.42	$0.00	$20.48
110299	3" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$14.70	$0.00	$21.76
110300	4" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$17.21	$0.00	$24.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110301	5" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110302	6" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110303	8" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$38.90	$0.00	$50.98
110304	10" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$13.13	$48.14	$0.00	$61.27
110305	12" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$52.62	$0.00	$67.73
110306	14" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$61.85	$0.00	$76.96
110307	16" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$17.16	$78.11	$0.00	$95.27
110308	18" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$82.26	$0.00	$101.40
110309	20" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$95.01	$0.00	$114.15
110310	24" Hot Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$23.23	$119.24	$0.00	$142.47
110311	1/2" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$8.19	$20.87	$0.00	$29.06
110312	3/4" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$22.00	$0.00	$31.21
110313	1" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$22.41	$0.00	$31.62
110314	1-1/4" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$23.21	$0.00	$32.42
110315	1-1/2" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$39.95	$0.00	$49.16
110316	2" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$42.51	$0.00	$52.75
110317	2-1/2" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$46.16	$0.00	$56.40
110318	3" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$49.82	$0.00	$60.06
110319	4" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$57.50	$0.00	$67.74
110320	5" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$70.29	$0.00	$81.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110321	6" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$70.29	$0.00	$81.55
110322	8" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$81.98	$0.00	$93.24
110323	10" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$95.51	$0.00	$106.77
110324	12" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$13.31	$107.56	$0.00	$120.87
110325	14" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$13.31	$122.19	$0.00	$135.50
110326	16" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$15.35	$141.93	$0.00	$157.28
110327	18" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$17.40	$153.25	$0.00	$170.65
110328	20" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$17.40	$169.71	$0.00	$187.11
110329	24" Steam Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$20.47	$212.47	$0.00	$232.94
110330	1/2" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$5.42	$0.00	$9.44
110331	3/4" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$5.78	$0.00	$9.80
110332	1" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$6.10	$0.00	$11.11
110333	1-1/4" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$6.56	$0.00	$13.62
110334	1-1/2" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$17.38	$0.00	$24.44
110335	2" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$18.83	$0.00	$25.89
110336	2-1/2" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$9.11	$20.63	$0.00	$29.74
110337	3" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$9.11	$22.64	$0.00	$31.75
110338	4" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$25.31	$0.00	$35.41
110339	5" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$31.67	$0.00	$41.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110340	6" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$31.67	$0.00	$41.77
110341	8" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$53.88	$0.00	$65.96
110342	10" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$13.13	$68.23	$0.00	$81.36
110343	12" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$79.39	$0.00	$94.50
110344	14" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$85.12	$0.00	$100.23
110345	16" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$17.16	$104.58	$0.00	$121.74
110346	18" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$117.01	$0.00	$136.15
110347	20" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$133.91	$0.00	$153.05
110348	24" Steam Pipe Insulation - Fiberglass, Includes Fittings	LF	$23.23	$168.04	$0.00	$191.27
110349	1/2" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$8.19	$21.41	$0.00	$29.60
110350	3/4" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$22.58	$0.00	$31.79
110351	1" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$22.99	$0.00	$32.20
110352	1-1/4" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$23.81	$0.00	$33.02
110353	1-1/2" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$9.21	$40.98	$0.00	$50.19
110354	2" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$43.60	$0.00	$53.84
110355	2-1/2" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$47.36	$0.00	$57.60
110356	3" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$51.10	$0.00	$61.34
110357	4" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$10.24	$58.98	$0.00	$69.22
110358	5" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$72.10	$0.00	$83.36
110359	6" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$72.10	$0.00	$83.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110360	8" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$84.10	$0.00	$95.36
110361	10" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$11.26	$97.97	$0.00	$109.23
110362	12" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$13.31	$110.34	$0.00	$123.65
110363	14" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$13.31	$125.34	$0.00	$138.65
110364	16" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$15.35	$145.59	$0.00	$160.94
110365	18" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$17.40	$157.20	$0.00	$174.60
110366	20" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$17.40	$174.07	$0.00	$191.47
110367	24" Steam Condensate Pipe Insulation - Calcium Silicate, Includes Fittings	LF	$20.47	$217.95	$0.00	$238.42
110368	1/2" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$5.42	$0.00	$9.44
110369	3/4" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$5.78	$0.00	$9.80
110370	1" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$6.10	$0.00	$11.11
110371	1-1/4" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$6.56	$0.00	$13.62
110372	1-1/2" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$17.38	$0.00	$24.44
110373	2" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$18.83	$0.00	$25.89
110374	2-1/2" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$9.11	$20.63	$0.00	$29.74
110375	3" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$9.11	$22.64	$0.00	$31.75
110376	4" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$25.31	$0.00	$35.41
110377	5" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$31.67	$0.00	$41.77
110378	6" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$31.67	$0.00	$41.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110379	8" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$53.88	$0.00	$65.96
110380	10" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$13.13	$68.23	$0.00	$81.36
110381	12" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$79.39	$0.00	$94.50
110382	14" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$15.11	$85.12	$0.00	$100.23
110383	16" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$17.16	$104.58	$0.00	$121.74
110384	18" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$117.01	$0.00	$136.15
110385	20" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$19.14	$133.91	$0.00	$153.05
110386	24" Steam Condensate Pipe Insulation - Fiberglass, Includes Fittings	LF	$23.23	$168.04	$0.00	$191.27
110387	1/2" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$4.02	$5.35	$0.00	$9.37
110388	3/4" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$4.02	$5.91	$0.00	$9.93
110389	1" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$5.01	$6.63	$0.00	$11.64
110390	1-1/4" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$5.01	$23.92	$0.00	$28.93
110391	1-1/2" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$6.07	$25.20	$0.00	$31.27
110392	2" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$6.07	$26.57	$0.00	$32.64
110393	2-1/2" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$7.06	$27.90	$0.00	$34.96
110394	3" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$7.06	$30.55	$0.00	$37.61
110395	4" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$7.06	$35.80	$0.00	$42.86
110396	5" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$8.05	$45.14	$0.00	$53.19
110397	6" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$8.05	$45.14	$0.00	$53.19
110398	8" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$10.10	$53.10	$0.00	$63.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110399	10" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$10.10	$63.70	$0.00	$73.80
110400	12" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$12.08	$71.60	$0.00	$83.68
110401	14" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$14.12	$79.56	$0.00	$93.68
110402	16" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$16.17	$100.79	$0.00	$116.96
110403	18" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$18.15	$110.06	$0.00	$128.21
110404	20" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$18.15	$122.00	$0.00	$140.15
110405	24" Chilled Water Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$22.17	$168.42	$0.00	$190.59
110406	1/2" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
110407	3/4" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
110408	1" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29
110409	1-1/4" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
110410	1-1/2" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.12	$0.00	$18.19
110411	2" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.79	$0.00	$18.86
110412	2-1/2" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$13.42	$0.00	$20.48
110413	3" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$14.70	$0.00	$21.76
110414	4" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$17.21	$0.00	$24.27
110415	5" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110416	6" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110417	8" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$25.54	$0.00	$35.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110418	10" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$30.65	$0.00	$40.75
110419	12" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$34.44	$0.00	$46.52
110420	14" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$14.12	$38.25	$0.00	$52.37
110421	16" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$16.17	$48.46	$0.00	$64.63
110422	18" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$18.15	$52.92	$0.00	$71.07
110423	20" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$18.15	$58.67	$0.00	$76.82
110424	24" Chilled Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$22.17	$80.99	$0.00	$103.16
110425	3/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$3.67	$4.83	$0.00	$8.50
110426	5/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$3.67	$5.35	$0.00	$9.02
110427	7/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$4.59	$5.91	$0.00	$10.50
110428	1-1/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$4.59	$6.63	$0.00	$11.22
110429	1-3/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$5.51	$23.92	$0.00	$29.43
110430	1-5/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$5.51	$25.20	$0.00	$30.71
110431	2-1/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$6.43	$26.57	$0.00	$33.00
110432	2-5/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$6.43	$27.90	$0.00	$34.33
110433	3-1/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$6.43	$30.55	$0.00	$36.98
110434	4-1/8" Refrigerant Pipe Insulation - Flexible Unicellular, Includes Fittings	LF	$7.34	$35.80	$0.00	$43.14
110435	1/2" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.50	$0.00	$8.52
110436	3/4" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.02	$4.97	$0.00	$8.99
110437	1" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.28	$0.00	$10.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110438	1-1/4" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.01	$5.74	$0.00	$10.75
110439	1-1/2" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.12	$0.00	$18.19
110440	2" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.07	$12.79	$0.00	$18.86
110441	2-1/2" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$13.42	$0.00	$20.48
110442	3" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$14.70	$0.00	$21.76
110443	4" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$7.06	$17.21	$0.00	$24.27
110444	5" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110445	6" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$8.05	$21.71	$0.00	$29.76
110446	8" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$25.54	$0.00	$35.64
110447	10" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$10.10	$30.65	$0.00	$40.75
110448	12" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$12.08	$34.44	$0.00	$46.52
110449	14" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$14.12	$38.25	$0.00	$52.37
110450	16" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$16.17	$48.46	$0.00	$64.63
110451	18" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$18.15	$52.92	$0.00	$71.07
110452	20" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$18.15	$58.67	$0.00	$76.82
110453	24" Condenser Water Pipe Insulation - Fiberglass, Includes Fittings	LF	$22.17	$80.99	$0.00	$103.16
110454	1/2" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$3.67	$4.50	$0.00	$8.17
110455	3/4" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$3.67	$4.97	$0.00	$8.64
110456	1" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.59	$5.28	$0.00	$9.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110457	1-1/4" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$4.59	$5.74	$0.00	$10.33
110458	1-1/2" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.51	$12.12	$0.00	$17.63
110459	2" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$5.51	$12.79	$0.00	$18.30
110460	2-1/2" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.43	$13.42	$0.00	$19.85
110461	3" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.43	$14.70	$0.00	$21.13
110462	4" Condensate Drain Pipe Insulation - Fiberglass, Includes Fittings	LF	$6.43	$17.21	$0.00	$23.64

23-09-00 Instrumentation and Control for HVAC

Temperature Control items and each associated point includes all hardware, software, wiring, programming and startup as required for proper operation unless stated otherwise. This includes (but is not limited to) actuators, control valves, sensors, thermostats, controllers, transducers, etc. Temperature Control points include all digital, analog, input, and output points. Refer to contract documents for specific details.

23-09-13 Instrumentation and Control Devices for HVAC

110463	Temperature Control - Head-End Integration w/Existing System (Up to 19 Points Total) Includes software, hardware and/or programming required to tie-in and integrate new control devices with the existing controls system. Only applies on a once per project basis.	LS	$3,397.24	$2,536.74	$0.00	$5,933.98
110464	Temperature Control - Head-End Integration w/Existing System (20 to 49 Points Total) Includes software, hardware and/or programming required to tie-in and integrate new control devices with the existing controls system. Only applies on a once per project basis.	LS	$5,364.06	$4,348.20	$0.00	$9,712.26
110465	Temperature Control - Head-End Integration w/Existing System (50 to 99 Points Total) Includes software, hardware and/or programming required to tie-in and integrate new control devices with the existing controls system. Only applies on a once per project basis.	LS	$7,062.68	$5,296.56	$0.00	$12,359.24
110466	Temperature Control - Head-End Integration w/Existing System (100 Points Total & Up) Includes software, hardware and/or programming required to tie-in and integrate new control devices with the existing controls system. Only applies on a once per project basis.	LS	$8,493.10	$6,422.91	$0.00	$14,916.01
110467	Temperature Control - Head-End Computer System	EA	$357.60	$6,984.43	$0.00	$7,342.03
110468	Temperature Control - Head-End Software, Graphics & Training (Basic Control) Typical K-12, Municipal, Light Commercial or Equal	EA	$3,576.04	$14,467.75	$0.00	$18,043.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110469	Temperature Control - Head-End Software, Graphics & Training (Standard Control) Typical Higher Education, Corporate, or Equal	EA	$7,152.08	$24,386.44	$0.00	$31,538.52
110470	Temperature Control - Head-End Software, Graphics & Training (Advanced Control) Typical Hospital, Laboratory, or Equal	EA	$8,940.10	$33,182.61	$0.00	$42,122.71
110471	Temperature Control - Head-End Network Control Panel w/Enclosure Includes Wiring	EA	$3,433.00	$17,493.89	$0.00	$20,926.89
110472	Temperature Control - Head-End Riser Control Panel w/Enclosure Includes Wiring	EA	$3,003.87	$11,730.44	$0.00	$14,734.31
110473	Temperature Control - Head-End Floor Control Panel w/Enclosure Includes Wiring	EA	$2,574.75	$7,864.05	$0.00	$10,438.80
110474	Temperature Control - Lab Pressure Controller w/ Display Includes Wiring	EA	$1,349.95	$2,021.81	$0.00	$3,371.76
110475	Temperature Control - Zone Controller Includes Wiring	EA	$429.12	$690.56	$0.00	$1,119.68
110476	Temperature Control - Multi-Zone Controller Includes Wiring	EA	$858.24	$2,659.86	$0.00	$3,518.10
110477	Temperature Control - Mechanical Room Controller Includes Wiring	EA	$1,287.38	$3,332.05	$0.00	$4,619.43
110478	Temperature Control - Equipment Controller Includes Wiring	EA	$1,716.50	$4,975.75	$0.00	$6,692.25
110479	Temperature Control - Facility or Building Controller Includes Wiring	EA	$2,145.62	$9,476.25	$0.00	$11,621.87
110480	Temperature Control - Equipment LCD Display Panel Includes Wiring	EA	$858.24	$3,190.26	$0.00	$4,048.50
110481	Temperature Control - Equipment LCD Display Panel w/ Touchscreen Includes Wiring	EA	$858.24	$5,087.35	$0.00	$5,945.59
110482	Temperature Control - BTU Meter	EA	$3,084.33	$4,195.91	$0.00	$7,280.24
110483	Temperature Control - Turbine Flow Meter Insertion Type	EA	$378.15	$1,975.37	$0.00	$2,353.52
110484	Temperature Control - Electromagnetic Flow Meter Insertion Type	EA	$378.15	$3,824.76	$0.00	$4,202.91
110485	Temperature Control - Isolation Room Pressure Monitor Includes 3 Instrumentation and Control Points Each	EA	$2,628.39	$2,501.00	$0.00	$5,129.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110486	Temperature Control - Kitchen Hood Includes 3 Instrumentation and Control Points Each	EA	$2,261.84	$2,166.22	$0.00	$4,428.06
110487	Temperature Control - Kitchen Hood Variable Volume Controller Demand Control Ventilation	EA	$715.21	$3,657.17	$0.00	$4,372.38
110488	Temperature Control - Indoor Chiller Refrigerant Monitoring System Includes 10 Instrumentation and Control Points Each	EA	$6,669.31	$12,734.77	$0.00	$19,404.08
110489	Temperature Control - Indoor Chiller Room Ventilation Includes 8 Instrumentation and Control Points Each	EA	$6,034.57	$5,776.60	$0.00	$11,811.17
110490	Temperature Control - Emergency Generator Includes 3 Instrumentation and Control Points Each	EA	$2,628.39	$2,501.00	$0.00	$5,129.39
110491	Temperature Control - Boiler Room Gas Detection Includes 3 Instrumentation and Control Points Each	EA	$2,628.39	$2,501.00	$0.00	$5,129.39
110492	Temperature Control - MRI Includes 11 Instrumentation and Control Points Each	EA	$8,296.41	$7,942.82	$0.00	$16,239.23
110493	Temperature Control - Smoke Control System Includes 5 Instrumentation and Control Points Each	EA	$3,772.72	$3,610.37	$0.00	$7,383.09
110494	Temperature Control - LINAC Includes 6 Instrumentation and Control Points Each	EA	$4,523.69	$4,332.45	$0.00	$8,856.14
110495	Temperature Control - Thermostat (Relocate) Includes Wiring.	EA	$243.17	$45.30	$0.00	$288.47
110496	Temperature Control - Non-Programmable Thermostat (Replace) Excludes Wiring. Marley M601W Or Equal.	EA	$126.05	$29.84	$0.00	$155.89
110497	Temperature Control - Programmable Thermostat (Replace) Excludes Wiring.	EA	$161.82	$226.47	$0.00	$388.29
110498	Airflow Measuring Station Temperature Control w/ Controller - 24" x 24"	EA	$1,881.89	$2,495.29	$0.00	$4,377.18
110499	Airflow Measuring Station Temperature Control w/ Controller - 48" x 48"	EA	$2,315.49	$3,488.78	$0.00	$5,804.27
110500	Temperature Control - Programmable Thermostat (Replace & Relocate) Includes Wiring.	EA	$324.53	$264.69	$0.00	$589.22
110501	Temperature Control - Thermostat Guards Includes Wiring.	EA	$18.78	$27.24	$0.00	$46.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110502	[Modifier] Temperature Control - Additional Temperature Control Sensor or Point Applies to the Difference between Total Contract Required Points and Total Database Item Points. Not to be Applied to Individual Items. Includes Digital, Analog, Input, and Output Points. Include Description of Additional Points.	PT	$621.33	$613.79	$0.00	$1,235.12
110503	[Modifier] Temperature Control - Coordination with 3rd Party Commissioning Agent Input Total Number of HVAC Instrumentation and Control Points. Excludes Commissioning Agent Cost.	PT	$31.06	$0.00	$0.00	$31.06
110504	[Modifier] Temperature Control - Sole Source Input Total Number of HVAC Instrumentation and Control Points.	PT	$217.46	$214.82	$0.00	$432.28

23-09-14 Instrumentation and Control Devices for Facility Fuel Systems

110505	Temperature Control - Fuel Oil Day Tank Includes 5 Instrumentation and Control Points Each	EA	$2,395.94	$2,297.51	$0.00	$4,693.45
110506	Temperature Control - Fuel Oil Pump Includes 3 Instrumentation and Control Points Each	EA	$804.61	$1,220.96	$0.00	$2,025.57
110507	Temperature Control - Fuel Oil Storage Tank & Monitoring System Includes 6 Instrumentation and Control Points Each	EA	$4,523.69	$4,332.45	$0.00	$8,856.14
110508	Temperature Control - Fuel Oil Filtration System Includes 3 Instrumentation and Control Points Each	EA	$2,261.84	$2,166.22	$0.00	$4,428.06

23-09-15 Instrumentation and Control Devices for HVAC Piping and Pumps

110509	Temperature Control - Steam Pressure Reducing Valve or Station (PRV) Includes 4 Instrumentation and Control Points Each	EA	$3,504.52	$3,334.67	$0.00	$6,839.19
110510	Temperature Control - Steam Condensate Pump Includes 2 Instrumentation and Control Points Each	EA	$536.41	$813.98	$0.00	$1,350.39
110511	Temperature Control - Differential Pressure Sensor w/ Controller Includes 1 Instrumentation and Control Point Each	EA	$876.13	$833.66	$0.00	$1,709.79
110512	Temperature Control - Pump w/ Variable Frequency Drive (VFD) Includes 4 Instrumentation and Control Points Each	EA	$1,072.81	$1,627.95	$0.00	$2,700.76
110513	Temperature Control - Pump w/o Variable Frequency Drive (VFD) Includes 3 Instrumentation and Control Points Each	EA	$804.61	$1,220.96	$0.00	$2,025.57

23-09-16 Instrumentation and Control Devices for HVAC Air Distribution

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110514	Temperature Control - Supply, Return or Exhaust Fan (On/Off Only) Includes 1 Instrumentation and Control Point Each	EA	$750.97	$722.07	$0.00	$1,473.04
110515	Temperature Control - Supply, Return or Exhaust Fan w/o Variable Frequency Drive (VFD) Includes 2 Instrumentation and Control Points Each	EA	$1,510.88	$1,444.15	$0.00	$2,955.03
110516	Temperature Control - Supply, Return or Exhaust Fan w/Variable Frequency Drive (VFD) Includes 3 Instrumentation and Control Points Each	EA	$1,990.06	$1,752.68	$0.00	$3,742.74
110517	Temperature Control - Kitchen, Isolation, Laundry, Dryer, or Smoke Exhaust Fan Includes 5 Instrumentation and Control Points Each	EA	$2,395.94	$2,237.78	$0.00	$4,633.72
110518	Temperature Control - Laboratory Exhaust Fan Includes 9 Instrumentation and Control Points Each. Excludes Heat Recovery.	EA	$4,309.13	$4,135.52	$0.00	$8,444.65
110519	Temperature Control - Supply Air Variable or Constant Air Volume (VAV/CV) Box Includes 3 Instrumentation and Control Points Each	EA	$929.78	$1,220.96	$0.00	$2,150.74
110520	Temperature Control - Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Reheat Includes 4 Instrumentation and Control Points Each	EA	$1,233.73	$1,627.95	$0.00	$2,861.68
110521	Temperature Control - Fan Powered Supply Air Variable or Constant Air Volume (VAV/CV) Box Includes 5 Instrumentation and Control Points Each	EA	$1,546.64	$2,034.94	$0.00	$3,581.58
110522	Temperature Control - Fan Powered Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Reheat Includes 6 Instrumentation and Control Points Each	EA	$1,850.60	$2,441.93	$0.00	$4,292.53
110523	Temperature Control - Dual Duct Supply Air Variable or Constant Air Volume (VAV/CV) Box Includes 7 Instrumentation and Control Points Each	EA	$3,447.30	$2,848.91	$0.00	$6,296.21
110524	Temperature Control - Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box or Venturi Valve Includes 5 Instrumentation and Control Points Each	EA	$2,226.09	$4,693.48	$0.00	$6,919.57
110525	Temperature Control - Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box or Venturi Valve w/Reheat Includes 6 Instrumentation and Control Points Each	EA	$2,664.15	$5,632.18	$0.00	$8,296.33
110526	Temperature Control - 2-Pipe Chilled Beam Includes 4 Instrumentation and Control Points Each	EA	$1,233.73	$1,627.95	$0.00	$2,861.68
110527	Temperature Control - 4-Pipe Chilled Beam Includes 5 Instrumentation and Control Points Each	EA	$1,546.64	$2,034.94	$0.00	$3,581.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110528	Temperature Control - Digital or Electric Variable Air Volume (VAV) Diffuser Includes 1 Instrumentation and Control Point Each	EA	$268.20	$406.99	$0.00	$675.19
110529	Temperature Control - Exhaust Air Variable or Constant Air Volume (VAV/CV) Box Includes 2 Instrumentation and Control Points Each	EA	$804.61	$656.43	$0.00	$1,461.04
110530	Temperature Control - Laboratory Exhaust Air Variable or Constant Air Volume (VAV/CV) Box or Venturi Valve Includes 3 Instrumentation and Control Points Each	EA	$1,019.18	$2,166.22	$0.00	$3,185.40
110531	Temperature Control - Laboratory Fume Hood Exhaust Air Variable or Constant Air Volume (VAV/CV) Box or Venturi Valve Includes Fume Hood Controller and 5 Instrumentation and Control Points Each	EA	$3,182.67	$6,761.24	$0.00	$9,943.91
110532	Temperature Control - Return Air Variable or Constant Air Volume (VAV/CV) Box Includes 2 Instrumentation and Control Points Each	EA	$804.61	$656.43	$0.00	$1,461.04
110533	Temperature Control - Reheat Coil Includes 2 Instrumentation and Control Points Each	EA	$804.61	$656.43	$0.00	$1,461.04
110534	Temperature Control - Gravity Relief Vent Motorized Damper Includes 1 Instrumentation and Control Point Each	EA	$482.77	$459.50	$0.00	$942.27
110535	Temperature Control - Motorized Damper Includes 1 Instrumentation and Control Point Each	EA	$482.77	$459.50	$0.00	$942.27
110536	Temperature Control - Smoke/Fire Damper Includes 2 Instrumentation and Control Points Each	EA	$697.33	$656.43	$0.00	$1,353.76

23-09-17 Instrumentation and Control Devices for HVAC Air Cleaning Devices

110537	Temperature Control - In-Line Duct Air Filter Includes 1 Instrumentation and Control Point Each	EA	$482.77	$459.50	$0.00	$942.27
110538	Temperature Control - Ductless Air Purifier Includes 3 Instrumentation and Control Points Each	EA	$1,045.99	$984.65	$0.00	$2,030.64
110539	Temperature Control - Fan Filter Unit Includes 3 Instrumentation and Control Points Each	EA	$1,045.99	$959.05	$0.00	$2,005.04

23-09-18 Instrumentation and Control Devices for Central Heating Equipment

110540	Temperature Control - Hot Water Boiler Includes 5 Instrumentation and Control Points Each	EA	$3,075.40	$2,921.11	$0.00	$5,996.51
110541	Temperature Control - Steam Boiler Includes 9 Instrumentation and Control Points Each	EA	$7,903.05	$7,307.94	$0.00	$15,210.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110542	Temperature Control - Heat Exchanger (HX) Steam or Hydronic. Includes 6 Instrumentation and Control Points Each	EA	$3,692.26	$3,505.34	$0.00	$7,197.60
110543	Temperature Control - Clean Steam Generator Includes 5 Instrumentation and Control Points Each	EA	$2,395.94	$2,297.51	$0.00	$4,693.45
110544	Temperature Control - Hot Water System Includes 5 Instrumentation and Control Points Each. Supply Temperature, Return Temperature, Bypass and Alarms.	EA	$3,766.47	$3,610.37	$0.00	$7,376.84

23-09-19 Instrumentation and Control Devices for Central Cooling Equipment

110545	Temperature Control - Air Cooled Chiller Up to 500 Ton Includes 7 Instrumentation and Control Points Each	EA	$4,309.13	$4,089.57	$0.00	$8,398.70
110546	Temperature Control - Air Cooled Chiller 500 Ton & Up Includes 7 Instrumentation and Control Points Each	EA	$6,132.90	$5,835.67	$0.00	$11,968.57
110547	Temperature Control - Water Cooled Chiller Up to 500 Ton Includes 12 Instrumentation and Control Points Each	EA	$7,384.52	$7,010.69	$0.00	$14,395.21
110548	Temperature Control - Water Cooled Chiller 500 Ton & Up Includes 12 Instrumentation and Control Points Each	EA	$10,513.55	$10,004.02	$0.00	$20,517.57
110549	Temperature Control - Condensing Unit Includes 2 Instrumentation and Control Points Each	EA	$983.41	$1,667.34	$0.00	$2,650.75
110550	Temperature Control - Condenser Includes 2 Instrumentation and Control Points Each	EA	$1,752.26	$1,667.34	$0.00	$3,419.60
110551	Temperature Control - Refrigerant Compressor Includes 2 Instrumentation and Control Points Each	EA	$1,752.26	$1,667.34	$0.00	$3,419.60
110552	Temperature Control - Cooling Tower Under 500 Ton Includes 8 Instrumentation and Control Points Each	EA	$4,925.99	$4,673.79	$0.00	$9,599.78
110553	Temperature Control - Cooling Tower 500 Ton & Up Includes 8 Instrumentation and Control Points Each	EA	$8,412.63	$6,669.34	$0.00	$15,081.97
110554	Temperature Control - Fluid Cooler Under 500 Ton Includes 11 Instrumentation and Control Points Each	EA	$6,767.66	$6,426.46	$0.00	$13,194.12
110555	Temperature Control - Fluid Cooler 500 Ton & Up Includes 11 Instrumentation and Control Points Each	EA	$11,559.55	$8,931.94	$0.00	$20,491.49

23-09-20 Instrumentation and Control Devices for Central HVAC Equipment

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110556	Temperature Control - Air Handling Unit (AHU) 8 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$4,550.52	$4,358.71	$0.00	$8,909.23
110557	Temperature Control - Air Handling Unit (AHU) 13 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$7,402.40	$7,082.89	$0.00	$14,485.29
110558	Temperature Control - Air Handling Unit (AHU) 18 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$10,245.35	$9,807.09	$0.00	$20,052.44
110559	Temperature Control - Air Handling Unit (AHU) 23 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$13,052.55	$12,531.28	$0.00	$25,583.83
110560	Temperature Control - Air Handling Unit (AHU) 28 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$15,913.38	$15,255.47	$0.00	$31,168.85
110561	Temperature Control - Air Handling Unit (AHU) 35 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$19,936.42	$19,069.33	$0.00	$39,005.75
110562	Temperature Control - Air Handling Unit (AHU) 42 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$23,959.47	$22,883.20	$0.00	$46,842.67
110563	Temperature Control - Air Handling Unit (AHU) 50 Points Each (Up to 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$28,429.52	$27,241.91	$0.00	$55,671.43
110564	Temperature Control - Air Handling Unit (AHU) 23 Points Each (Over 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$17,343.79	$16,175.95	$0.00	$33,519.74
110565	Temperature Control - Air Handling Unit (AHU) 28 Points Each (Over 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$21,098.64	$19,692.46	$0.00	$40,791.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110566	Temperature Control - Air Handling Unit (AHU) 35 Points Each (Over 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$26,373.30	$24,615.57	$0.00	$50,988.87
110567	Temperature Control - Air Handling Unit (AHU) 42 Points Each (Over 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$31,737.36	$29,538.69	$0.00	$61,276.05
110568	Temperature Control - Air Handling Unit (AHU) 50 Points Each (Over 50K CFM Unit) Includes Rooftop Units (RTU), Make-Up Air Units (MAU), Dedicated Outdoor Air Units (DOAS), Energy Recovery Units (ERV), etc.	EA	$37,727.22	$35,165.10	$0.00	$72,892.32

23-09-21 Instrumentation and Control Devices for Decentralized HVAC Equipment

110569	Temperature Control - Radiant Floor Heat (Per Zone) Includes 3 Instrumentation and Control Points Each	EA	$2,261.84	$2,166.22	$0.00	$4,428.06
110570	Temperature Control - Variable Refrigerant Flow (VRF) Indoor Unit Includes 1 Instrumentation and Control Point Each	EA	$614.18	$584.22	$0.00	$1,198.40
110571	Temperature Control - Variable Refrigerant Flow (VRF) Condensing Unit (Stand Alone) Includes 3 Instrumentation and Control Points Each	EA	$1,752.26	$3,820.43	$0.00	$5,572.69
110572	Temperature Control - Variable Refrigerant Flow (VRF) Condensing Unit (w/ Bacnet Interface) Includes 5 Instrumentation and Control Points Each	EA	$3,334.66	$6,367.39	$0.00	$9,702.05
110573	Temperature Control - Water Cooled Computer Room Air Conditioner (CRAC) Unit Includes 5 Instrumentation and Control Points Each	EA	$1,734.38	$1,641.08	$0.00	$3,375.46
110574	Temperature Control - Air Cooled Computer Room Air Conditioner (CRAC) Unit Includes Both Indoor AC Unit and Outdoor Condenser. Includes 6 Instrumentation and Control Points Each	EA	$2,083.04	$1,969.29	$0.00	$4,052.33
110575	Temperature Control - Packaged Terminal Air Conditioner (PTAC) Unit Includes 1 Instrumentation and Control Point Each	EA	$482.77	$459.50	$0.00	$942.27
110576	Temperature Control - Split System Air Conditioner (AC) Unit Includes Both Indoor AC Unit and Outdoor Condenser. Includes 1 Instrumentation and Control Point Each	EA	$482.77	$459.50	$0.00	$942.27
110577	Temperature Control - Water Source Heat Pump Includes 5 Instrumentation and Control Points Each	EA	$1,341.02	$2,034.94	$0.00	$3,375.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110578	Temperature Control - 2-Pipe Valance System Includes 2 Instrumentation and Control Points Each	EA	$1,233.73	$1,168.45	$0.00	$2,402.18
110579	Temperature Control - 4-Pipe Valance System Includes 3 Instrumentation and Control Points Each	EA	$1,841.66	$1,752.68	$0.00	$3,594.34
110580	Temperature Control - 2-Pipe Fan Coil Unit (FCU) Includes 4 Instrumentation and Control Points Each	EA	$1,385.72	$1,312.86	$0.00	$2,698.58
110581	Temperature Control - 4-Pipe Fan Coil Unit (FCU) Includes 5 Instrumentation and Control Points Each	EA	$1,734.38	$1,641.08	$0.00	$3,375.46
110582	Temperature Control - 2-Pipe Unit Ventilator Includes 5 Instrumentation and Control Points Each	EA	$1,734.38	$1,641.08	$0.00	$3,375.46
110583	Temperature Control - 4-Pipe Unit Ventilator Includes 6 Instrumentation and Control Points Each	EA	$2,270.79	$1,969.29	$0.00	$4,240.08
110584	Temperature Control - Cabinet or Unit Heater Includes 3 Instrumentation and Control Points Each	EA	$804.61	$1,220.96	$0.00	$2,025.57
110585	Temperature Control - Convector Includes 2 Instrumentation and Control Points Each	EA	$697.33	$656.43	$0.00	$1,353.76
110586	Temperature Control - Air Curtain Includes 3 Instrumentation and Control Points Each	EA	$804.61	$1,220.96	$0.00	$2,025.57
110587	Temperature Control - Fin Tube w/o Controller Connect to Terminal Unit or Air Terminal Unit Controller. Includes 1 Instrumentation and Control Point Each	EA	$348.67	$328.22	$0.00	$676.89
110588	Temperature Control - Fin Tube w/ Controller Includes 3 Instrumentation and Control Points Each	EA	$697.33	$656.43	$0.00	$1,353.76
110589	Temperature Control - Radiant Ceiling Panel w/o Controller Connect to Terminal Unit or Air Terminal Unit Controller. Includes 1 Instrumentation and Control Point Each	EA	$348.67	$328.22	$0.00	$676.89
110590	Temperature Control - Radiant Ceiling Panel w/ Controller Includes 3 Instrumentation and Control Points Each	EA	$697.33	$639.37	$0.00	$1,336.70
110591	Temperature Control - Terminal Unit Stand-Alone Controls Stand-Alone Thermostat or On/Off Switch	EA	$216.35	$45.96	$0.00	$262.31
110592	Temperature Control - 2-Pipe Induction Unit Includes 4 Instrumentation and Control Points Each	EA	$1,233.73	$1,627.95	$0.00	$2,861.68
110593	Temperature Control - 4-Pipe Induction Unit Includes 5 Instrumentation and Control Points Each	EA	$1,546.64	$1,982.03	$0.00	$3,528.67
110594	Temperature Control - Humidifier Includes 4 Instrumentation and Control Points Each	EA	$1,072.81	$1,627.95	$0.00	$2,700.76

23-09-22 Instrumentation and Control Actuators and Control Valves

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

Temperature control items include required control valves and actuators. Items in this section to be used for individual replacements only.
• 2" and down valves include threaded or soldered connections unless stated otherwise.
• 2-1/2" and up valves include flanged, grooved, lug, or wafer connections unless stated otherwise.

		Units	Labor	Material	Equipment	Total
110595	45 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control	EA	$264.89	$302.34	$0.00	$567.23
110596	90 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control	EA	$331.11	$369.93	$0.00	$701.04
110597	180 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control	EA	$331.11	$539.87	$0.00	$870.98
110598	360 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control	EA	$397.32	$677.33	$0.00	$1,074.65
110599	35 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control w/Spring Return	EA	$264.89	$486.37	$0.00	$751.26
110600	90 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control w/Spring Return	EA	$264.89	$573.20	$0.00	$838.09
110601	180 IN-LB Temperature Control Damper Actuator - Proportional/Modulating Control w/Spring Return	EA	$331.11	$578.03	$0.00	$909.14
110602	30 IN-LB Temperature Control Damper Actuator - On/Off Fire and Smoke Rated	EA	$264.89	$560.37	$0.00	$825.26
110603	70 IN-LB Temperature Control Damper Actuator - On/Off Fire and Smoke Rated	EA	$264.89	$638.84	$0.00	$903.73
110604	180 IN-LB Temperature Control Damper Actuator - On/Off Fire and Smoke Rated	EA	$331.11	$771.44	$0.00	$1,102.55
110605	3/4" Temperature Control Valve w/Actuator - 2-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$103.62	$273.41	$0.00	$377.03
110606	1" Temperature Control Valve w/Actuator - 2-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$103.62	$340.59	$0.00	$444.21
110607	1-1/4" Temperature Control Valve w/Actuator - 2-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$139.05	$407.77	$0.00	$546.82
110608	1-1/2" Temperature Control Valve w/Actuator - 2-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$174.47	$474.95	$0.00	$649.42
110609	2" Temperature Control Valve w/Actuator - 2-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$174.47	$543.69	$0.00	$718.16
110610	2-1/2" Temperature Control Valve w/Actuator - 2-Way Butterfly Lever Operated, Iron Body, Class 150.	EA	$206.34	$2,238.44	$0.00	$2,444.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110611	4" Temperature Control Valve w/Actuator - 2-Way Butterfly Lever Operated, Iron Body, Class 150.	EA	$277.72	$2,299.08	$0.00	$2,576.80
110612	6" Temperature Control Valve w/Actuator - 2-Way Butterfly Lever Operated, Iron Body, Class 150.	EA	$342.21	$2,946.07	$0.00	$3,288.28
110613	8" Temperature Control Valve w/Actuator - 2-Way Butterfly Lever Operated, Iron Body, Class 150.	EA	$378.15	$3,226.23	$0.00	$3,604.38
110614	10" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$562.36	$3,962.75	$0.00	$4,525.11
110615	12" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$621.70	$4,528.85	$0.00	$5,150.55
110616	14" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$718.23	$6,435.13	$0.00	$7,153.36
110617	16" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$840.44	$9,459.17	$0.00	$10,299.61
110618	18" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$941.41	$11,824.69	$0.00	$12,766.10
110619	20" Temperature Control Valve w/Actuator - 2-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$1,120.31	$15,608.37	$0.00	$16,728.68
110620	3/4" Temperature Control Valve w/Actuator - 3-Way Ball Two Piece, Full Port, Brass, 600 PSI WOG	EA	$124.87	$433.24	$0.00	$558.11
110621	2-1/2" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$480.00	$3,114.58	$0.00	$3,594.58
110622	4" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$744.80	$3,269.65	$0.00	$4,014.45
110623	6" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$891.81	$4,034.95	$0.00	$4,926.76
110624	8" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$1,137.13	$6,080.77	$0.00	$7,217.90
110625	10" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$1,416.98	$6,954.46	$0.00	$8,371.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110626	12" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$1,521.48	$8,241.65	$0.00	$9,763.13
110627	14" Temperature Control Valve w/Actuator - 3-Way Butterfly Gear Operated, Iron Body, Class 150.	EA	$1,875.73	$15,332.83	$0.00	$17,208.56

23-10-00 Facility Fuel Systems

• Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

23-11-00 Facility Fuel Piping

23-11-13 Facility Fuel-Oil Piping

110628	1/2" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$17.71	$6.34	$0.00	$24.05
110629	3/4" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$7.73	$0.00	$26.33
110630	1" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$10.08	$0.00	$29.56
110631	1-1/4" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$21.25	$13.35	$0.00	$34.60
110632	1-1/2" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$15.55	$0.00	$34.15
110633	2" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$20.64	$0.00	$40.12
110634	1/2" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$47.83	$4.10	$0.00	$51.93
110635	3/4" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$65.54	$5.28	$0.00	$70.82
110636	1" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$80.59	$9.30	$0.00	$89.89
110637	1-1/4" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$92.99	$15.05	$0.00	$108.04
110638	1-1/2" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$100.96	$19.35	$0.00	$120.31
110639	2" Fuel Oil Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$123.98	$33.03	$0.00	$157.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110640	2-1/2" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
110641	3" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
110642	4" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
110643	5" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
110644	6" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
110645	8" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
110646	10" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
110647	12" Fuel Oil Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
110648	2-1/2" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
110649	3" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
110650	4" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
110651	5" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
110652	6" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
110653	8" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
110654	10" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
110655	12" Fuel Oil Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
110656	1" Fuel Oil Pipe - Flexible Plastic, Double-Containment, w/o Hangers (Includes Fittings) Nylon 12 Inner Layer, Braided Nylon 6 Intermediate Layer, Polyethylene Outer Layer	LF	$9.74	$29.35	$0.00	$39.09
110657	1-1/2" Fuel Oil Pipe - Flexible Plastic, Double-Containment, w/o Hangers (Includes Fittings) Nylon 12 Inner Layer, Braided Nylon 6 Intermediate Layer, Polyethylene Outer Layer	LF	$11.51	$37.51	$0.00	$49.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110658	2" Fuel Oil Pipe - Flexible Plastic, Double-Containment, w/o Hangers (Includes Fittings) Nylon 12 Inner Layer, Braided Nylon 6 Intermediate Layer, Polyethylene Outer Layer	LF	$13.28	$55.44	$0.00	$68.72
110659	2" and Down Generator Fuel Oil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,656.84	$981.58	$0.00	$3,638.42
	23-11-23 Facility Natural-Gas Piping					
110660	1/2" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$17.71	$6.34	$0.00	$24.05
110661	3/4" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$7.73	$0.00	$26.33
110662	1" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$10.08	$0.00	$29.56
110663	1-1/4" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$21.25	$13.35	$0.00	$34.60
110664	1-1/2" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$15.55	$0.00	$34.15
110665	2" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$20.64	$0.00	$40.12
110666	2-1/2" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
110667	3" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
110668	4" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
110669	5" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
110670	6" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
110671	8" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
110672	10" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
110673	12" Natural Gas Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
110674	1/2" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$47.83	$4.10	$0.00	$51.93
110675	3/4" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$65.54	$5.28	$0.00	$70.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110676	1" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$80.59	$9.30	$0.00	$89.89
110677	1-1/4" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$92.99	$15.05	$0.00	$108.04
110678	1-1/2" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$100.96	$19.35	$0.00	$120.31
110679	2" Natural Gas Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$123.98	$33.03	$0.00	$157.01
110680	2-1/2" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
110681	3" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
110682	4" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
110683	5" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
110684	6" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
110685	8" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
110686	10" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
110687	12" Natural Gas Fittings - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
110688	1" Natural Gas Meter Diaphragm Type. Up To 500 Cfh.	EA	$116.01	$2,184.20	$0.00	$2,300.21
110689	1-1/2" Natural Gas Meter Diaphragm Type. Up To 1,000 Cfh.	EA	$163.84	$3,181.27	$0.00	$3,345.11
110690	2" Natural Gas Meter Diaphragm Type. Up To 6,000 Cfh.	EA	$199.26	$6,165.81	$0.00	$6,365.07
110691	3" Natural Gas Meter Turbine Type. Up To 10,000 Cfh	EA	$292.25	$7,399.63	$0.00	$7,691.88
110692	4" Natural Gas Meter Turbine Type. Up To 18,000 Cfh	EA	$429.52	$9,132.00	$0.00	$9,561.52
110693	6" Natural Gas Meter Turbine Type. Up To 30,000 Cfh	EA	$610.19	$10,165.75	$0.00	$10,775.94
110694	1" Natural Gas Pressure Regulator Single Stage.	EA	$175.35	$130.06	$0.00	$305.41
110695	1-1/2" Natural Gas Pressure Regulator Single Stage.	EA	$203.69	$1,050.42	$0.00	$1,254.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110696	2" Natural Gas Pressure Regulator Single Stage.	EA	$315.28	$1,567.29	$0.00	$1,882.57
110697	3" Natural Gas Pressure Regulator Single Stage.	EA	$499.49	$2,629.38	$0.00	$3,128.87
110698	4" Natural Gas Pressure Regulator Single Stage.	EA	$775.80	$4,466.79	$0.00	$5,242.59
110699	6" Natural Gas Pressure Regulator Single Stage.	EA	$936.99	$4,972.00	$0.00	$5,908.99
	23-12-00 Facility Fuel Pumps					
	23-12-13 Facility Fuel-Oil Pumps					
110700	1/2 HP Duplex Fuel Oil Pump	EA	$1,594.11	$23,395.22	$0.00	$24,989.33
110701	3/4 HP Duplex Fuel Oil Pump	EA	$1,594.11	$35,040.31	$0.00	$36,634.42
110702	2" & Dn Fuel Oil Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,372.71	$1,735.31	$0.00	$3,108.02
	23-13-00 Facility Fuel-Storage Tanks					
	23-13-13 Facility Fuel-Oil, Storage Tanks					
110703	Fuel Oil - Initial Tank Fill Not to be used for construction or temporary equipment.	GAL	$0.06	$4.68	$0.00	$4.74
110704	250 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$850.20	$9,761.13	$0.00	$10,611.33
110705	500 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$850.20	$15,496.51	$0.00	$16,346.71
110706	1,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$1,842.08	$19,033.76	$0.00	$20,875.84
110707	2,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$1,842.08	$23,750.08	$0.00	$25,592.16
110708	4,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$1,842.08	$26,108.25	$0.00	$27,950.33
110709	6,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$3,259.07	$33,856.51	$0.00	$37,115.58
110710	8,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$3,259.07	$37,730.63	$0.00	$40,989.70
110711	10,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$3,259.07	$43,794.49	$0.00	$47,053.56
110712	15,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$3,259.07	$72,597.78	$0.00	$75,856.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110713	20,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$4,534.35	$89,273.37	$0.00	$93,807.72
110714	25,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$4,534.35	$122,961.43	$0.00	$127,495.78
110715	30,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$4,534.35	$147,385.28	$0.00	$151,919.63
110716	50,000 Gallon Double Wall Fuel Oil Tank Steel Or Fiberglass	EA	$6,801.53	$190,365.14	$0.00	$197,166.67
110717	Fuel Oil Tank Accessories- Under 1,000 Gallon (Per Tank) Overfill Assembly, Manholes, Spill Container & Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$1,053.88	$2,073.01	$0.00	$3,126.89
110718	Fuel Oil Tank Accessories- 1,001 to 2,500 Gallon (Per Tank) Overfill Assembly, Manholes, Spill Container & Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$1,673.81	$3,291.35	$0.00	$4,965.16
110719	Fuel Oil Tank Accessories- 2,501 to 7,500 Gallon (Per Tank) Overfill Assembly, Manholes, Spill Container & Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$2,656.84	$5,225.19	$0.00	$7,882.03
110720	Fuel Oil Tank Accessories- 7,501 to 15,000 Gallon (Per Tank) Overfill Assembly, Manholes, Spill Container & Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$4,250.95	$8,295.12	$0.00	$12,546.07
110721	Fuel Oil Tank Accessories- Over 15,000 Gallon (Per Tank) Overfill Assembly, Manholes, Spill Container & Service Station Hardware, Sidewalk/Street Box, Transition Sump, And Accessories.	EA	$5,667.94	$16,567.00	$0.00	$22,234.94
110722	Fuel Oil Tank Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,550.57	$5,577.73	$0.00	$8,128.30
110723	Fuel Oil Filtration System - Under 1,000 Gallon (Per System) Microprocessor Control, Pump & Motor Assembly, Strainer, Primary & Secondary Filters	EA	$531.37	$4,352.15	$0.00	$4,883.52
110724	Fuel Oil Filtration System - 1,001 to 2,500 Gallon (Per System) Microprocessor Control, Pump & Motor Assembly, Strainer, Primary & Secondary Filters	EA	$841.34	$6,905.66	$0.00	$7,747.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110725	Fuel Oil Filtration System - 2,501 to 7,500 Gallon (Per System) Microprocessor Control, Pump & Motor Assembly, Strainer, Primary & Secondary Filters	EA	$1,337.28	$10,962.41	$0.00	$12,299.69
110726	Fuel Oil Filtration System - 7,501 to 15,000 Gallon (Per System) Microprocessor Control, Pump & Motor Assembly, Strainer, Primary & Secondary Filters	EA	$2,125.48	$17,404.26	$0.00	$19,529.74
110727	Fuel Oil Filtration System - Over 15,000 Gallon (Per System) Microprocessor Control, Pump & Motor Assembly, Strainer, Primary & Secondary Filters	EA	$2,833.97	$40,188.74	$0.00	$43,022.71
110728	Fuel Oil Monitoring System - Under 1,000 Gallon (Per System) Includes (2) Tank Level Probes, (3) Leak Detection Sensors, (1) Brine Sensor, Overfill Alarm And Alarm Console.	EA	$1,062.74	$2,888.30	$0.00	$3,951.04
110729	Fuel Oil Monitoring System - 1,001 to 2,500 Gallon (Per System) Includes (2) Tank Level Probes, (3) Leak Detection Sensors, (1) Brine Sensor, Overfill Alarm And Alarm Console.	EA	$1,682.67	$4,595.02	$0.00	$6,277.69
110730	Fuel Oil Monitoring System - 2,501 to 7,500 Gallon (Per System) Includes (2) Tank Level Probes, (3) Leak Detection Sensors, (1) Brine Sensor, Overfill Alarm And Alarm Console.	EA	$2,656.84	$7,286.39	$0.00	$9,943.23
110731	Fuel Oil Monitoring System - 7,501 to 15,000 Gallon (Per System) Includes (2) Tank Level Probes, (3) Leak Detection Sensors, (1) Brine Sensor, Overfill Alarm And Alarm Console.	EA	$4,250.95	$11,566.66	$0.00	$15,817.61
110732	Fuel Oil Monitoring System - 15,000 Gallon & Up (Per System) Includes (2) Tank Level Probes, (3) Leak Detection Sensors, (1) Brine Sensor, Overfill Alarm And Alarm Console.	EA	$8,679.03	$24,497.76	$0.00	$33,176.79

23-20-00 HVAC Piping and Pumps

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections), unless stated otherwise. The contractor is responsible for adding these additional items as required.
• HVAC Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• Equipment costs exclude housekeeping pads and dunnage.

• Piping items include hangers and couplings (as required) unless stated otherwise.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.
• Pre-Insulated / Pre-Fabricated piping systems to be factory fabricated, assembled, and pressure tested. System includes insulated carrier piping, conduit, fittings, and inner pipe supports.

23-21-00 Hydronic Piping and Pumps

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	23-21-12 Hot Water Piping					
110733	1/2" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$19.48	$5.46	$0.00	$24.94
110734	3/4" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$7.40	$0.00	$27.77
110735	1" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$9.74	$0.00	$30.11
110736	1-1/4" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$14.90	$0.00	$36.15
110737	1-1/2" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$20.05	$0.00	$40.42
110738	2" Hot Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$28.35	$0.00	$49.60
110739	1/2" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$10.63	$6.46	$0.00	$17.09
110740	3/4" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$15.05	$10.96	$0.00	$26.01
110741	1" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$15.94	$21.15	$0.00	$37.09
110742	1-1/4" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$18.60	$39.93	$0.00	$58.53
110743	1-1/2" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$22.14	$75.80	$0.00	$97.94
110744	2" Hot Water Fitting - Copper, Wrot, Press Joint	EA	$25.68	$100.18	$0.00	$125.86
110745	1/2" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
110746	3/4" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
110747	1" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
110748	1-1/4" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
110749	1-1/2" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
110750	2" Hot Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
110751	1/2" Hot Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
110752	3/4" Hot Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110753	1" Hot Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
110754	1-1/4" Hot Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
110755	1-1/2" Hot Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$37.52	$0.00	$107.49
110756	2" Hot Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
110757	2-1/2" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
110758	3" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
110759	4" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
110760	5" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
110761	6" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
110762	8" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
110763	10" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
110764	12" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
110765	14" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$83.25	$177.58	$0.00	$260.83
110766	16" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$89.45	$199.95	$0.00	$289.40
110767	18" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$94.76	$322.08	$0.00	$416.84
110768	20" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$100.07	$352.63	$0.00	$452.70
110769	24" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$110.70	$428.59	$0.00	$539.29
110770	2-1/2" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
110771	3" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
110772	4" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110773	5" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
110774	6" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
110775	8" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
110776	10" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
110777	12" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
110778	14" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,451.52	$942.02	$0.00	$2,393.54
110779	16" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,672.93	$1,176.86	$0.00	$2,849.79
110780	18" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,906.73	$1,693.35	$0.00	$3,600.08
110781	20" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,133.45	$2,479.53	$0.00	$4,612.98
110782	24" Hot Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,585.11	$3,381.58	$0.00	$5,966.69
110783	2-1/2" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$26.56	$18.02	$0.00	$44.58
110784	3" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$29.22	$22.11	$0.00	$51.33
110785	4" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$33.65	$29.46	$0.00	$63.11
110786	5" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$37.19	$38.76	$0.00	$75.95
110787	6" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$41.62	$48.72	$0.00	$90.34
110788	8" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$47.83	$77.82	$0.00	$125.65
110789	10" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$56.68	$124.13	$0.00	$180.81
110790	12" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$62.88	$151.10	$0.00	$213.98
110791	14" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$65.54	$177.58	$0.00	$243.12
110792	16" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$68.20	$199.95	$0.00	$268.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110793	18" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$69.08	$322.08	$0.00	$391.16
110794	20" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$73.51	$352.63	$0.00	$426.14
110795	24" Hot Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$79.71	$428.59	$0.00	$508.30
110796	2-1/2" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$93.87	$71.60	$0.00	$165.47
110797	3" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$101.84	$93.72	$0.00	$195.56
110798	4" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$140.82	$125.95	$0.00	$266.77
110799	5" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$205.46	$240.97	$0.00	$446.43
110800	6" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$251.52	$282.52	$0.00	$534.04
110801	8" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$354.25	$541.64	$0.00	$895.89
110802	10" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$458.75	$871.06	$0.00	$1,329.81
110803	12" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$495.95	$1,011.38	$0.00	$1,507.33
110804	14" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$612.85	$1,224.08	$0.00	$1,836.93
110805	16" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$688.13	$1,547.57	$0.00	$2,235.70
110806	18" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$780.23	$1,891.38	$0.00	$2,671.61
110807	20" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$876.76	$2,738.35	$0.00	$3,615.11
110808	24" Hot Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$1,058.31	$3,574.71	$0.00	$4,633.02
110809	3" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$62.00	$73.65	$6.30	$141.95
110810	4" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$67.31	$88.94	$8.41	$164.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110811	5" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$80.59	$109.78	$12.62	$202.99
110812	6" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$85.02	$130.63	$16.82	$232.47
110813	8" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$110.70	$151.47	$34.28	$296.45
110814	10" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$133.73	$215.40	$51.53	$400.66
110815	12" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$151.44	$327.96	$69.00	$548.40
110816	14" Hot Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$167.38	$429.40	$86.32	$683.10
110817	3" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$123.98	$323.04	$36.01	$483.03
110818	4" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$134.62	$565.62	$48.08	$748.32
110819	5" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$161.18	$642.41	$72.23	$875.82
110820	6" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$170.04	$720.43	$96.17	$986.64
110821	8" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$221.41	$1,415.26	$129.59	$1,766.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110822	10" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$267.46	$1,778.52	$163.23	$2,209.21
110823	12" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$302.88	$2,919.50	$196.65	$3,419.03
110824	14" Hot Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$334.76	$3,541.20	$230.22	$4,106.18
110825	1/2" Pipe - PEX, Crimp Ring	LF	$19.48	$2.38	$0.00	$21.86
110826	3/4" Pipe - PEX, Crimp Ring	LF	$19.48	$2.67	$0.00	$22.15
110827	1" Pipe - PEX, Crimp Ring	LF	$15.05	$2.88	$0.00	$17.93
110828	1-1/4" Pipe - PEX, Crimp Ring	LF	$18.60	$4.25	$0.00	$22.85
110829	1-1/2" Pipe - PEX, Crimp Ring	LF	$18.60	$6.11	$0.00	$24.71
110830	2" Pipe - PEX, Crimp Ring	LF	$18.60	$7.09	$0.00	$25.69
110831	1/2" Fitting - PEX, Crimp Ring	EA	$7.97	$1.61	$0.00	$9.58
110832	3/4" Fitting - PEX, Crimp Ring	EA	$10.63	$2.15	$0.00	$12.78
110833	1" Fitting - PEX, Crimp Ring	EA	$12.40	$4.22	$0.00	$16.62
110834	1-1/4" Fitting - PEX, Crimp Ring	EA	$15.05	$10.12	$0.00	$25.17
110835	1-1/2" Fitting - PEX, Crimp Ring	EA	$18.60	$13.99	$0.00	$32.59
110836	2" Fitting - PEX, Crimp Ring	EA	$23.02	$38.52	$0.00	$61.54
	23-21-13 Chilled Water Piping					
110837	1/2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$19.48	$5.46	$0.00	$24.94
110838	3/4" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$7.40	$0.00	$27.77
110839	1" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$9.74	$0.00	$30.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110840	1-1/4" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$14.90	$0.00	$36.15
110841	1-1/2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$20.37	$20.05	$0.00	$40.42
110842	2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Press Joint	LF	$21.25	$28.35	$0.00	$49.60
110843	1/2" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$10.63	$6.46	$0.00	$17.09
110844	3/4" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$15.05	$10.96	$0.00	$26.01
110845	1" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$15.94	$21.15	$0.00	$37.09
110846	1-1/4" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$18.60	$39.93	$0.00	$58.53
110847	1-1/2" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$22.14	$75.80	$0.00	$97.94
110848	2" Chilled Water Fitting - Copper, Wrot, Press Joint	EA	$25.68	$100.70	$0.00	$126.38
110849	1/2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
110850	3/4" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
110851	1" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
110852	1-1/4" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
110853	1-1/2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
110854	2" Chilled Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
110855	1/2" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
110856	3/4" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70
110857	1" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
110858	1-1/4" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
110859	1-1/2" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
110860	2" Chilled Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110861	2-1/2" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
110862	3" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
110863	4" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
110864	5" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
110865	6" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
110866	8" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
110867	10" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
110868	12" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
110869	14" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$83.25	$177.58	$0.00	$260.83
110870	16" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$89.45	$199.95	$0.00	$289.40
110871	18" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$94.76	$322.08	$0.00	$416.84
110872	20" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$100.07	$352.63	$0.00	$452.70
110873	24" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$110.70	$428.59	$0.00	$539.29
110874	2-1/2" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
110875	3" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
110876	4" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
110877	5" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
110878	6" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
110879	8" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110880	10" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
110881	12" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
110882	14" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,451.52	$942.02	$0.00	$2,393.54
110883	16" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,672.93	$1,176.86	$0.00	$2,849.79
110884	18" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,906.73	$1,693.35	$0.00	$3,600.08
110885	20" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,133.45	$2,479.53	$0.00	$4,612.98
110886	24" Chilled Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,585.11	$3,381.58	$0.00	$5,966.69
110887	2-1/2" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$26.56	$18.02	$0.00	$44.58
110888	3" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$29.22	$22.11	$0.00	$51.33
110889	4" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$33.65	$29.46	$0.00	$63.11
110890	5" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$37.19	$38.76	$0.00	$75.95
110891	6" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$41.62	$48.72	$0.00	$90.34
110892	8" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$47.83	$77.82	$0.00	$125.65
110893	10" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$56.68	$124.13	$0.00	$180.81
110894	12" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$62.88	$151.10	$0.00	$213.98
110895	14" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$65.54	$177.58	$0.00	$243.12
110896	16" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$68.20	$199.95	$0.00	$268.15
110897	18" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$69.08	$322.08	$0.00	$391.16
110898	20" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$73.51	$352.63	$0.00	$426.14
110899	24" Chilled Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$79.71	$428.59	$0.00	$508.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110900	2-1/2" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$93.87	$71.60	$0.00	$165.47
110901	3" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$101.84	$93.72	$0.00	$195.56
110902	4" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$140.82	$125.95	$0.00	$266.77
110903	5" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$205.46	$240.97	$0.00	$446.43
110904	6" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$251.52	$282.52	$0.00	$534.04
110905	8" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$354.25	$541.64	$0.00	$895.89
110906	10" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$458.75	$871.06	$0.00	$1,329.81
110907	12" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$495.95	$1,011.38	$0.00	$1,507.33
110908	14" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$612.85	$1,224.08	$0.00	$1,836.93
110909	16" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$688.13	$1,547.57	$0.00	$2,235.70
110910	18" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$780.23	$1,891.38	$0.00	$2,671.61
110911	20" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$876.76	$2,738.35	$0.00	$3,615.11
110912	24" Chilled Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$1,058.31	$3,574.71	$0.00	$4,633.02
110913	3" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$62.00	$73.65	$6.30	$141.95
110914	4" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$67.31	$88.94	$8.41	$164.66
110915	5" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$80.59	$109.78	$12.62	$202.99
110916	6" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$85.02	$130.63	$16.82	$232.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110917	8" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$110.70	$151.47	$34.28	$296.45
110918	10" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$133.73	$215.40	$51.53	$400.66
110919	12" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$151.44	$327.96	$69.00	$548.40
110920	14" Chilled Water Pipe - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$167.38	$429.40	$86.32	$683.10
110921	3" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$123.98	$323.04	$36.01	$483.03
110922	4" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$134.62	$565.62	$48.08	$748.32
110923	5" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$161.18	$642.41	$72.23	$875.82
110924	6" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$170.04	$720.43	$96.17	$986.64
110925	8" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$221.41	$1,415.26	$129.59	$1,766.26
110926	10" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$267.46	$1,778.52	$163.23	$2,209.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110927	12" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$302.88	$2,919.50	$196.65	$3,419.03
110928	14" Chilled Water Fitting - Pre-Insulated, Standard Weight Steel Carrier, PVC Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$334.76	$3,541.20	$230.22	$4,106.18
110929	5" Chilled Water Pipe - Pre-Insulated, Plastic Carrier & Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$38.96	$109.78	$12.62	$161.36
	23-21-14 Condenser Water Piping					
110930	1/2" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
110931	3/4" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
110932	1" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
110933	1-1/4" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
110934	1-1/2" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
110935	2" Condenser Water Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
110936	1/2" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29
110937	3/4" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70
110938	1" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
110939	1-1/4" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
110940	1-1/2" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
110941	2" Condenser Water Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
110942	2-1/2" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
110943	3" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110944	4" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
110945	5" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
110946	6" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32
110947	8" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
110948	10" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
110949	12" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
110950	14" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$83.25	$177.58	$0.00	$260.83
110951	16" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$89.45	$199.95	$0.00	$289.40
110952	18" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$94.76	$322.08	$0.00	$416.84
110953	20" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$100.07	$352.63	$0.00	$452.70
110954	24" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$110.70	$428.59	$0.00	$539.29
110955	2-1/2" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
110956	3" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
110957	4" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
110958	5" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
110959	6" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
110960	8" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
110961	10" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
110962	12" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110963	14" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,451.52	$942.02	$0.00	$2,393.54
110964	16" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,672.93	$1,176.86	$0.00	$2,849.79
110965	18" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,906.73	$1,693.35	$0.00	$3,600.08
110966	20" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,133.45	$2,479.53	$0.00	$4,612.98
110967	24" Condenser Water Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,585.11	$3,381.58	$0.00	$5,966.69
110968	2-1/2" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$26.56	$18.02	$0.00	$44.58
110969	3" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$29.22	$22.11	$0.00	$51.33
110970	4" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$33.65	$29.46	$0.00	$63.11
110971	5" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$37.19	$38.76	$0.00	$75.95
110972	6" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$41.62	$48.72	$0.00	$90.34
110973	8" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$47.83	$77.82	$0.00	$125.65
110974	10" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$56.68	$124.13	$0.00	$180.81
110975	12" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$62.88	$151.10	$0.00	$213.98
110976	14" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$65.54	$177.58	$0.00	$243.12
110977	16" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$68.20	$199.95	$0.00	$268.15
110978	18" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$69.08	$322.08	$0.00	$391.16
110979	20" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$73.51	$352.63	$0.00	$426.14
110980	24" Condenser Water Pipe - Carbon Steel, Standard Weight, ERW, Grooved	LF	$79.71	$428.59	$0.00	$508.30
110981	2-1/2" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$93.87	$71.60	$0.00	$165.47
110982	3" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$101.84	$93.72	$0.00	$195.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
110983	4" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$140.82	$125.95	$0.00	$266.77
110984	5" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$205.46	$240.97	$0.00	$446.43
110985	6" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$251.52	$282.52	$0.00	$534.04
110986	8" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$354.25	$541.64	$0.00	$895.89
110987	10" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$458.75	$871.06	$0.00	$1,329.81
110988	12" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$495.95	$1,011.38	$0.00	$1,507.33
110989	14" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$612.85	$1,224.08	$0.00	$1,836.93
110990	16" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$688.13	$1,547.57	$0.00	$2,235.70
110991	18" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$780.23	$1,891.38	$0.00	$2,671.61
110992	20" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$876.76	$2,738.35	$0.00	$3,615.11
110993	24" Condenser Water Fitting - Carbon Steel, Standard Weight, Grooved	EA	$1,058.31	$3,574.71	$0.00	$4,633.02
110994	1" Geothermal Water Pipe - HDPE Polyethylene, DR -11, Butt Fusion	LF	$4.43	$1.05	$0.00	$5.48
110995	1-1/4" Geothermal Water Pipe - HDPE Polyethylene, DR-11, Butt Fusion	LF	$4.43	$1.72	$0.00	$6.15
110996	1-1/2" Geothermal Water Pipe - HDPE Polyethylene, DR-11, Butt Fusion	LF	$4.43	$2.26	$0.00	$6.69
110997	2" Geothermal Water Pipe - HDPE Polyethylene, DR -11, Butt Fusion	LF	$4.43	$3.02	$0.00	$7.45
110998	3" Geothermal Water Pipe - HDPE Polyethylene, DR -11, Butt Fusion	LF	$5.31	$4.68	$0.00	$9.99
110999	4" Geothermal Water Pipe - HDPE Polyethylene, DR -11, Butt Fusion	LF	$6.20	$6.86	$0.00	$13.06
111000	6" Geothermal Water Pipe - HDPE Polyethylene, DR -11, Butt Fusion	LF	$8.86	$13.46	$0.00	$22.32
111001	1" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$59.34	$7.91	$0.00	$67.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111002	1-1/4" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$63.77	$9.63	$0.00	$73.40
111003	1-1/2" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$71.74	$13.02	$0.00	$84.76
111004	2" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$74.39	$14.74	$0.00	$89.13
111005	3" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$87.68	$25.36	$0.00	$113.04
111006	4" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$107.16	$35.42	$0.00	$142.58
111007	6" Geothermal Water Fitting - HDPE Polyethylene, DR-11, Butt Fusion	EA	$161.18	$98.89	$0.00	$260.07
	23-21-15 Condensate Drain Piping					
111008	80 GPH Condensate Removal Pump Little Giant Vcma-15 Or 20.	EA	$150.56	$73.52	$0.00	$224.08
111009	270 GPH Condensate Removal Pump Little Giant Vcl-14 Or 24.	EA	$177.12	$153.61	$0.00	$330.73
111010	450 GPH Condensate Removal Pump Little Giant Vcl-45.	EA	$239.12	$340.03	$0.00	$579.15
111011	1/2" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$19.48	$5.46	$0.00	$24.94
111012	3/4" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$7.40	$0.00	$27.77
111013	1" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$20.37	$9.74	$0.00	$30.11
111014	1-1/4" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$14.90	$0.00	$37.04
111015	1-1/2" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$21.25	$20.05	$0.00	$41.30
111016	2" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$22.14	$28.35	$0.00	$50.49
111017	2-1/2" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$23.02	$38.40	$0.00	$61.42
111018	3" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$25.68	$52.61	$0.00	$78.29
111019	4" Condensate Drain Pipe - Copper, Type L, Hard Drawn, Soldered	LF	$28.34	$84.29	$0.00	$112.63
111020	1/2" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$38.08	$2.21	$0.00	$40.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111021	3/4" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$50.48	$6.22	$0.00	$56.70
111022	1" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$59.34	$16.88	$0.00	$76.22
111023	1-1/4" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$66.42	$24.09	$0.00	$90.51
111024	1-1/2" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$69.97	$36.95	$0.00	$106.92
111025	2" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$80.59	$62.99	$0.00	$143.58
111026	2-1/2" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$130.18	$115.35	$0.00	$245.53
111027	3" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$155.87	$164.81	$0.00	$320.68
111028	4" Condensate Drain Fitting - Copper, Wrot, Soldered	EA	$209.00	$372.87	$0.00	$581.87
	23-21-16 Hydronic Piping Specialties					
111029	Expansion Tank, Air Separator & Make-Up Water Hook-Up (1) Each Includes Hook-Ups for All Three Items. Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,831.31	$2,653.48	$0.00	$5,484.79
111030	2" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$63.77	$3,724.46	$0.00	$3,788.23
111031	2-1/2" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$141.70	$4,013.29	$0.00	$4,154.99
111032	3" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$177.12	$5,428.56	$0.00	$5,605.68
111033	4" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$221.41	$5,991.78	$0.00	$6,213.19
111034	5" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$283.39	$9,385.26	$0.00	$9,668.65
111035	6" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$354.25	$12,235.49	$0.00	$12,589.74
111036	8" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$487.09	$19,557.33	$0.00	$20,044.42
111037	10" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$619.93	$25,423.33	$0.00	$26,043.26
111038	12" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$752.78	$29,526.29	$0.00	$30,279.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111039	14" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$965.32	$35,158.47	$0.00	$36,123.79
111040	16" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$1,062.74	$52,396.36	$0.00	$53,459.10
111041	18" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$1,195.57	$68,951.56	$0.00	$70,147.13
111042	20" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$1,328.42	$80,045.26	$0.00	$81,373.68
111043	24" Air & Dirt Separator W/Strainer Spirotherm Spirovent Vdn Or Equal.	EA	$1,771.23	$131,299.43	$0.00	$133,070.66
111044	250 Gallon Steel Chilled Water Buffer Tank	EA	$425.10	$13,638.62	$0.00	$14,063.72
111045	500 Gallon Steel Chilled Water Buffer Tank	EA	$708.49	$17,487.83	$0.00	$18,196.32
111046	750 Gallon Steel Chilled Water Buffer Tank	EA	$708.49	$24,105.47	$0.00	$24,813.96
111047	50 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$318.83	$5,319.30	$0.00	$5,638.13
111048	100 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$318.83	$5,842.08	$0.00	$6,160.91
111049	150 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$336.54	$8,070.50	$0.00	$8,407.04
111050	200 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$425.10	$9,335.27	$0.00	$9,760.37
111051	250 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$425.10	$10,327.83	$0.00	$10,752.93
111052	300 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$637.64	$12,226.20	$0.00	$12,863.84
111053	350 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$637.64	$14,695.53	$0.00	$15,333.17
111054	400 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$637.64	$18,068.27	$0.00	$18,705.91
111055	450 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$708.49	$19,031.92	$0.00	$19,740.41
111056	500 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$708.49	$19,754.65	$0.00	$20,463.14
111057	750 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$708.49	$28,258.78	$0.00	$28,967.27
111058	1,000 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$1,062.74	$36,767.73	$0.00	$37,830.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111059	1,500 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$1,062.74	$55,168.48	$0.00	$56,231.22
111060	2,000 Gallon Expansion Tank - Steel Bladder Type Bell & Gossett Series B Or Equal.	EA	$1,594.11	$73,535.48	$0.00	$75,129.59
111061	6" Duplex Basket Strainer	EA	$707.61	$3,154.53	$0.00	$3,862.14
111062	8" Duplex Basket Strainer	EA	$887.39	$5,198.95	$0.00	$6,086.34
111063	10" Duplex Basket Strainer	EA	$975.95	$9,563.58	$0.00	$10,539.53
111064	12" Duplex Basket Strainer	EA	$1,113.22	$12,731.91	$0.00	$13,845.13
111065	1" & Dn Wye Type Strainer Cast Iron, Threaded	EA	$93.52	$29.46	$0.00	$122.98
111066	1-1/4" to 2" Wye Type Strainer Cast Iron, Threaded	EA	$139.05	$58.91	$0.00	$197.96
111067	2-1/2" Wye Type Strainer Cast Iron, Flanged	EA	$164.73	$246.53	$0.00	$411.26
111068	3" Wye Type Strainer Cast Iron, Flanged	EA	$164.73	$293.05	$0.00	$457.78
111069	4" Wye Type Strainer Cast Iron, Flanged	EA	$272.77	$448.09	$0.00	$720.86
111070	6" Wye Type Strainer Cast Iron, Flanged	EA	$399.42	$1,238.85	$0.00	$1,638.27
111071	8" Wye Type Strainer Cast Iron, Flanged	EA	$440.15	$1,921.06	$0.00	$2,361.21
111072	10" Wye Type Strainer Cast Iron, Flanged	EA	$589.82	$2,915.70	$0.00	$3,505.52
111073	12" Wye Type Strainer Cast Iron, Flanged	EA	$712.03	$4,109.94	$0.00	$4,821.97
111074	14" Wye Type Strainer Cast Iron, Flanged	EA	$929.00	$8,888.59	$0.00	$9,817.59
111075	1/2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$61.11	$32.04	$0.00	$93.15
111076	3/4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$89.45	$32.10	$0.00	$121.55
111077	1" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$107.16	$32.35	$0.00	$139.51
111078	1-1/4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$124.87	$33.02	$0.00	$157.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111079	1-1/2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$143.47	$33.19	$0.00	$176.66
111080	2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$183.32	$38.14	$0.00	$221.46
111081	2-1/2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$211.66	$40.13	$0.00	$251.79
111082	3" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$220.51	$43.76	$0.00	$264.27
111083	4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$301.99	$65.74	$0.00	$367.73
111084	5" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$349.82	$104.01	$0.00	$453.83
111085	6" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$374.61	$102.99	$0.00	$477.60
111086	8" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$459.63	$141.48	$0.00	$601.11
111087	10" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$606.65	$275.02	$0.00	$881.67
111088	12" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$727.09	$339.47	$0.00	$1,066.56
111089	2" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$23.02	$217.99	$0.00	$241.01
111090	2-1/2" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$30.11	$265.55	$0.00	$295.66
111091	3" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$35.42	$283.94	$0.00	$319.36
111092	4" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$58.45	$391.26	$0.00	$449.71
111093	5" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$67.31	$470.69	$0.00	$538.00
111094	6" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$80.59	$509.21	$0.00	$589.80
111095	8" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$97.42	$572.11	$0.00	$669.53
111096	10" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$134.62	$952.51	$0.00	$1,087.13
111097	12" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$141.70	$1,206.74	$0.00	$1,348.44

23-21-23 Hydronic Pumps

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111098	Pump Enclosure - Fiberglass 7' x 6' x 4' Includes single-door access on one side & double-door access on the other, venting, lifting eyes, cutouts for pipe inlet/outlet.	EA	$2,125.48	$32,882.52	$0.00	$35,008.00
111099	5 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,062.74	$9,792.31	$0.00	$10,855.05
111100	7-1/2 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,062.74	$11,812.82	$0.00	$12,875.56
111101	10 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$13,833.31	$0.00	$15,108.59
111102	15 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$17,271.69	$0.00	$18,546.97
111103	20 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$18,990.89	$0.00	$20,266.17
111104	25 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$20,710.09	$0.00	$21,985.37
111105	30 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$22,429.28	$0.00	$23,704.56
111106	40 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$25,867.67	$0.00	$27,142.95
111107	50 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$29,306.05	$0.00	$30,581.33
111108	60 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$2,550.57	$32,744.45	$0.00	$35,295.02
111109	75 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$37,902.03	$0.00	$41,302.79
111110	100 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$46,498.00	$0.00	$49,898.76
111111	125 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$55,093.97	$0.00	$58,494.73
111112	150 HP End Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$63,689.93	$0.00	$67,090.69
111113	2-1/2" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,930.64	$2,599.29	$0.00	$4,529.93
111114	4" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,833.97	$4,109.69	$0.00	$6,943.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111115	6" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,631.02	$6,814.36	$0.00	$10,445.38
111116	8" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,162.39	$9,922.96	$0.00	$14,085.35
111117	10" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,048.01	$15,358.64	$0.00	$20,406.65
111118	12" End Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,022.18	$20,372.82	$0.00	$26,395.00
111119	1/2 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$3,456.11	$0.00	$4,093.75
111120	1 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$3,757.41	$0.00	$4,395.05
111121	2 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$4,439.77	$0.00	$5,077.41
111122	3 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$5,237.34	$0.00	$5,874.98
111123	5 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$7,302.14	$0.00	$7,939.78
111124	7-1/2 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$12,317.93	$0.00	$12,955.57
111125	10 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$15,694.30	$0.00	$16,331.94
111126	15 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$20,453.09	$0.00	$21,090.73
111127	20 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$637.64	$23,829.45	$0.00	$24,467.09
111128	25 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$850.20	$26,443.68	$0.00	$27,293.88
111129	30 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$850.20	$28,588.24	$0.00	$29,438.44
111130	40 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$850.20	$31,964.61	$0.00	$32,814.81
111131	50 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$850.20	$34,578.84	$0.00	$35,429.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111132	60 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,062.74	$36,723.40	$0.00	$37,786.14
111133	75 HP In-Line Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,062.74	$39,337.64	$0.00	$40,400.38
111134	2" & Dn In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$805.91	$1,763.93	$0.00	$2,569.84
111135	2-1/2" In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,487.84	$1,299.65	$0.00	$2,787.49
111136	4" In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,081.20	$2,054.84	$0.00	$4,136.04
111137	6" In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,479.72	$3,407.18	$0.00	$5,886.90
111138	8" In-Line Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,949.09	$4,961.49	$0.00	$7,910.58
111139	5 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$7,027.43	$0.00	$8,302.71
111140	10 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$11,493.79	$0.00	$12,769.07
111141	15 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$15,330.96	$0.00	$16,606.24
111142	20 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$18,804.79	$0.00	$20,080.07
111143	25 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$22,039.36	$0.00	$23,314.64
111144	30 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$25,087.82	$0.00	$26,363.10
111145	40 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$30,777.12	$0.00	$32,052.40
111146	50 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$1,275.28	$36,058.76	$0.00	$37,334.04
111147	60 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$2,550.57	$41,047.97	$0.00	$43,598.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111148	75 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$48,093.12	$0.00	$51,493.88
111149	100 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$58,993.18	$0.00	$62,393.94
111150	125 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$3,400.76	$69,131.10	$0.00	$72,531.86
111151	150 HP Double-Suction Centrifugal Pump Includes Suction Diffuser & Triple Duty Valve.	EA	$4,250.95	$78,684.15	$0.00	$82,935.10
111152	2-1/2" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,568.28	$2,757.35	$0.00	$5,325.63
111153	4" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,719.58	$4,355.57	$0.00	$8,075.15
111154	6" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,782.32	$7,218.30	$0.00	$12,000.62
111155	8" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,756.50	$10,537.67	$0.00	$16,294.17
111156	10" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,730.67	$16,280.70	$0.00	$23,011.37
111157	12" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,970.54	$21,602.22	$0.00	$29,572.76
111158	14" Double-Suction Centrifugal Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,121.83	$27,749.19	$0.00	$36,871.02
	23-22-00 Steam and Condensate Piping and Pumps					
	23-22-13 Steam and Condensate Heating Piping					
111159	1/2" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$18.60	$7.05	$0.00	$25.65
111160	3/4" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$19.48	$8.45	$0.00	$27.93
111161	1" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$20.37	$10.78	$0.00	$31.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111162	1-1/4" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$25.68	$15.13	$0.00	$40.81
111163	1-1/2" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$22.14	$18.14	$0.00	$40.28
111164	2" Steam Pipe - Carbon Steel, Standard Weight, ERW, Threaded	LF	$23.02	$22.97	$0.00	$45.99
111165	1/2" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$18.60	$12.43	$0.00	$31.03
111166	3/4" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$19.48	$15.21	$0.00	$34.69
111167	1" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$20.37	$19.88	$0.00	$40.25
111168	1-1/4" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$25.68	$27.49	$0.00	$53.17
111169	1-1/2" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$22.14	$32.94	$0.00	$55.08
111170	2" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Threaded	LF	$23.02	$42.91	$0.00	$65.93
111171	1/2" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$47.83	$4.10	$0.00	$51.93
111172	3/4" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$65.54	$5.28	$0.00	$70.82
111173	1" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$80.59	$9.30	$0.00	$89.89
111174	1-1/4" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$92.99	$15.05	$0.00	$108.04
111175	1-1/2" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$100.96	$19.35	$0.00	$120.31
111176	2" Steam Fitting - Cast Iron 125 PSI or Malleable Iron 150 PSI, Threaded	EA	$123.98	$33.03	$0.00	$157.01
111177	2-1/2" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$32.76	$18.02	$0.00	$50.78
111178	3" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$34.53	$22.11	$0.00	$56.64
111179	4" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$39.85	$29.46	$0.00	$69.31
111180	5" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$46.06	$38.76	$0.00	$84.82
111181	6" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$49.60	$48.72	$0.00	$98.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111182	8" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$58.45	$77.82	$0.00	$136.27
111183	10" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$68.20	$124.13	$0.00	$192.33
111184	12" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$77.05	$151.10	$0.00	$228.15
111185	14" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$83.25	$177.58	$0.00	$260.83
111186	16" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$89.45	$199.95	$0.00	$289.40
111187	18" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$94.76	$322.08	$0.00	$416.84
111188	20" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$100.07	$352.63	$0.00	$452.70
111189	24" Steam Pipe - Carbon Steel, Standard Weight, ERW, Butt Weld	LF	$110.70	$428.59	$0.00	$539.29
111190	2-1/2" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$32.76	$31.26	$0.00	$64.02
111191	3" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$34.53	$39.43	$0.00	$73.96
111192	4" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$39.85	$54.12	$0.00	$93.97
111193	5" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$46.06	$72.19	$0.00	$118.25
111194	6" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$49.60	$92.08	$0.00	$141.68
111195	8" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$58.45	$149.58	$0.00	$208.03
111196	10" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$68.20	$239.53	$0.00	$307.73
111197	12" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$77.05	$292.39	$0.00	$369.44
111198	14" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$83.25	$340.89	$0.00	$424.14
111199	16" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$89.45	$378.35	$0.00	$467.80
111200	18" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$94.76	$622.62	$0.00	$717.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111201	20" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$100.07	$676.75	$0.00	$776.82
111202	24" Steam Pipe - Carbon Steel, Standard Weight, Seamless, Butt Weld	LF	$110.70	$817.23	$0.00	$927.93
111203	2-1/2" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$350.70	$33.53	$0.00	$384.23
111204	3" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$369.30	$38.86	$0.00	$408.16
111205	4" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$458.75	$58.76	$0.00	$517.51
111206	5" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$534.91	$111.34	$0.00	$646.25
111207	6" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$570.33	$114.79	$0.00	$685.12
111208	8" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$766.95	$209.28	$0.00	$976.23
111209	10" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$983.92	$414.22	$0.00	$1,398.14
111210	12" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,215.07	$598.94	$0.00	$1,814.01
111211	14" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,451.52	$942.02	$0.00	$2,393.54
111212	16" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,672.93	$1,176.86	$0.00	$2,849.79
111213	18" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$1,906.73	$1,693.35	$0.00	$3,600.08
111214	20" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,133.45	$2,479.53	$0.00	$4,612.98
111215	24" Steam Fitting - Carbon Steel, Standard Weight, Butt Weld	EA	$2,585.11	$3,381.58	$0.00	$5,966.69
111216	1/2" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$18.60	$6.86	$0.00	$25.46
111217	3/4" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$19.48	$8.37	$0.00	$27.85
111218	1" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$21.25	$10.81	$0.00	$32.06
111219	1-1/4" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$25.68	$15.08	$0.00	$40.76
111220	1-1/2" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$23.02	$17.91	$0.00	$40.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111221	2" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Threaded	LF	$23.02	$22.11	$0.00	$45.13
111222	1/2" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$55.80	$8.25	$0.00	$64.05
111223	3/4" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$78.82	$9.41	$0.00	$88.23
111224	1" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$95.65	$12.57	$0.00	$108.22
111225	1-1/4" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$110.70	$20.06	$0.00	$130.76
111226	1-1/2" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$120.44	$24.23	$0.00	$144.67
111227	2" Clean Steam Fitting - Stainless Steel, Type 304, 150 PSI, Threaded	EA	$147.90	$32.89	$0.00	$180.79
111228	2-1/2" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$38.96	$35.14	$0.00	$74.10
111229	3" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$41.62	$44.20	$0.00	$85.82
111230	4" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$49.60	$60.02	$0.00	$109.62
111231	5" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$55.80	$83.16	$0.00	$138.96
111232	6" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$60.23	$102.65	$0.00	$162.88
111233	8" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$71.74	$158.59	$0.00	$230.33
111234	10" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$86.79	$280.10	$0.00	$366.89
111235	12" Clean Steam Pipe - Stainless Steel, Type 304, Standard Weight, ERW, Butt Weld	LF	$100.07	$341.36	$0.00	$441.43
111236	2-1/2" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$691.67	$56.94	$0.00	$748.61
111237	3" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$726.20	$49.27	$0.00	$775.47
111238	4" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$900.67	$77.30	$0.00	$977.97
111239	5" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$1,043.26	$269.12	$0.00	$1,312.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111240	6" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$1,151.30	$209.34	$0.00	$1,360.64
111241	8" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$1,458.60	$442.55	$0.00	$1,901.15
111242	10" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$1,852.71	$695.26	$0.00	$2,547.97
111243	12" Clean Steam Fitting - Stainless Steel, Type 304, Standard Weight, Butt Weld	EA	$2,263.64	$979.92	$0.00	$3,243.56
111244	2-1/2" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$92.10	$87.16	$6.30	$185.56
111245	3" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$97.42	$100.57	$8.41	$206.40
111246	4" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$103.62	$157.56	$12.62	$273.80
111247	6" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$124.87	$214.54	$16.82	$356.23
111248	8" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$152.33	$289.23	$34.28	$475.84
111249	10" Steam Pipe - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$174.47	$361.87	$51.53	$587.87
111250	12" Steam Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$196.60	$424.66	$69.00	$690.26
111251	14" Steam Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$213.43	$494.02	$86.32	$793.77
111252	2-1/2" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$184.21	$880.35	$36.01	$1,100.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111253	3" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$194.83	$926.68	$48.08	$1,169.59
111254	4" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$207.23	$1,617.28	$72.23	$1,896.74
111255	6" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$249.75	$2,197.56	$96.17	$2,543.48
111256	8" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$304.65	$2,720.48	$129.59	$3,154.72
111257	10" Steam Fitting - Pre-Insulated, Standard Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$348.93	$3,322.82	$163.23	$3,834.98
111258	12" Steam Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$393.21	$4,053.18	$196.65	$4,643.04
111259	14" Steam Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$426.87	$4,776.04	$230.22	$5,433.13
111260	1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$20.37	$7.64	$0.00	$28.01
111261	3/4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$21.25	$8.96	$0.00	$30.21
111262	1" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$22.14	$10.85	$0.00	$32.99
111263	1-1/4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$27.45	$15.48	$0.00	$42.93
111264	1-1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$24.79	$18.59	$0.00	$43.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111265	2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Threaded	LF	$25.68	$21.76	$0.00	$47.44
111266	1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$20.37	$7.64	$0.00	$28.01
111267	3/4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$21.25	$8.96	$0.00	$30.21
111268	1" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$22.14	$10.85	$0.00	$32.99
111269	1-1/4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$27.45	$15.48	$0.00	$42.93
111270	1-1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$24.79	$18.59	$0.00	$43.38
111271	2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Threaded	LF	$25.68	$21.76	$0.00	$47.44
111272	1/2" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$53.14	$4.10	$0.00	$57.24
111273	3/4" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$72.62	$5.28	$0.00	$77.90
111274	1" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$89.45	$9.30	$0.00	$98.75
111275	1-1/4" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$103.62	$15.05	$0.00	$118.67
111276	1-1/2" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$112.47	$19.35	$0.00	$131.82
111277	2" Steam Condensate Fitting - Cast Iron 250 PSI or Malleable Iron 300 PSI, Threaded	EA	$137.28	$33.03	$0.00	$170.31
111278	2-1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$38.08	$23.88	$0.00	$61.96
111279	3" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$40.73	$28.54	$0.00	$69.27
111280	4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$46.06	$36.84	$0.00	$82.90
111281	5" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$54.03	$47.82	$0.00	$101.85
111282	6" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$58.45	$59.10	$0.00	$117.55
111283	8" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$68.20	$92.57	$0.00	$160.77
111284	10" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$79.71	$146.97	$0.00	$226.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111285	12" Steam Condensate Pipe - Carbon Steel, Extra Heavy, ERW, Butt Weld	LF	$90.33	$178.32	$0.00	$268.65
111286	2-1/2" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$38.08	$23.88	$0.00	$61.96
111287	3" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$40.73	$28.54	$0.00	$69.27
111288	4" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$46.06	$36.84	$0.00	$82.90
111289	5" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$54.03	$47.82	$0.00	$101.85
111290	6" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$58.45	$59.10	$0.00	$117.55
111291	8" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$68.20	$92.57	$0.00	$160.77
111292	10" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$79.71	$146.97	$0.00	$226.68
111293	12" Steam Condensate Pipe - Carbon Steel, Extra Heavy, Seamless, Butt Weld	LF	$90.33	$178.32	$0.00	$268.65
111294	2-1/2" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$389.67	$33.53	$0.00	$423.20
111295	3" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$410.04	$38.86	$0.00	$448.90
111296	4" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$509.23	$58.76	$0.00	$567.99
111297	5" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$593.37	$111.34	$0.00	$704.71
111298	6" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$633.21	$114.79	$0.00	$748.00
111299	8" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$851.97	$209.28	$0.00	$1,061.25
111300	10" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$1,091.96	$414.22	$0.00	$1,506.18
111301	12" Steam Condensate Fitting - Carbon Steel, Extra Heavy, Butt Weld	EA	$1,348.79	$598.94	$0.00	$1,947.73
111302	1/2" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$20.37	$10.35	$0.00	$30.72
111303	3/4" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$22.14	$12.63	$0.00	$34.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111304	1" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$23.91	$16.30	$0.00	$40.21
111305	1-1/4" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$28.34	$22.75	$0.00	$51.09
111306	1-1/2" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$26.56	$27.01	$0.00	$53.57
111307	2" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Threaded	LF	$26.56	$33.35	$0.00	$59.91
111308	1/2" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$62.88	$12.45	$0.00	$75.33
111309	3/4" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$88.56	$14.19	$0.00	$102.75
111310	1" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$108.04	$18.96	$0.00	$127.00
111311	1-1/4" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$125.75	$30.26	$0.00	$156.01
111312	1-1/2" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$135.50	$36.55	$0.00	$172.05
111313	2" Clean Steam Condensate Fitting - Stainless Steel, Type 304, 2000 PSI, Threaded	EA	$166.50	$49.60	$0.00	$216.10
111314	2-1/2" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$43.39	$53.00	$0.00	$96.39
111315	3" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$46.94	$66.65	$0.00	$113.59
111316	4" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$56.68	$90.51	$0.00	$147.19
111317	5" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$62.88	$125.40	$0.00	$188.28
111318	6" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$68.20	$154.80	$0.00	$223.00
111319	8" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$80.59	$239.16	$0.00	$319.75
111320	10" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$97.42	$422.38	$0.00	$519.80
111321	12" Clean Steam Condensate Pipe - Stainless Steel, Type 304, Extra Heavy, ERW, Butt Weld	LF	$112.47	$514.77	$0.00	$627.24
111322	2-1/2" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$781.11	$85.85	$0.00	$866.96
111323	3" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$820.96	$74.30	$0.00	$895.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111324	4" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$1,017.57	$116.56	$0.00	$1,134.13
111325	5" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$1,178.75	$405.83	$0.00	$1,584.58
111326	6" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$1,300.09	$315.68	$0.00	$1,615.77
111327	8" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$1,648.13	$667.37	$0.00	$2,315.50
111328	10" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$2,093.60	$1,048.44	$0.00	$3,142.04
111329	12" Clean Steam Condensate Fitting - Stainless Steel, Type 304, Extra Heavy, Butt Weld	EA	$2,558.54	$1,477.72	$0.00	$4,036.26
111330	2-1/2" Steam Condensate Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$92.10	$127.41	$8.99	$228.50
111331	3" Steam Condensate Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$97.42	$147.01	$11.99	$256.42
111332	4" Steam Condensate Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$103.62	$230.32	$18.00	$351.94
111333	6" Steam Condensate Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$131.07	$313.62	$24.00	$468.69
111334	8" Steam Condensate Pipe - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Pipe Cost Includes Ends/Seals, Flanges, Bolts, and Gaskets.	LF	$162.96	$422.81	$48.91	$634.68
111335	2-1/2" Steam Condensate Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$184.21	$1,278.73	$51.37	$1,514.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111336	3" Steam Condensate Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$194.83	$1,345.78	$68.60	$1,609.21
111337	4" Steam Condensate Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$207.23	$2,349.01	$103.05	$2,659.29
111338	6" Steam Condensate Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$262.14	$3,192.56	$137.21	$3,591.91
111339	8" Steam Condensate Fitting - Pre-Insulated, Extra Heavy Weight Steel Carrier, Epoxy Coated Steel Conduit Casing Pre-Engineered System. Fittings Include Elbows, Tees, Couplers, Reducers, Transitions, Termination Fittings, Etc.	EA	$326.70	$3,952.00	$184.89	$4,463.59
	23-22-16 Steam and Condensate Heating Piping Specialties					
111340	Steam Regulator Temperature Pilot w/ T-2 Bulb Includes 15 LF of Capillary Tubing, Cast Iron Body. Spirax Sarco 63659 25T Series or Equal.	EA	$722.66	$2,407.52	$0.00	$3,130.18
111341	2" Steam Safety Relief Valve Slow Opening Hand Wheel Type.	EA	$569.45	$1,220.22	$0.00	$1,789.67
111342	6" Steam Safety Relief Valve Kunkle 6252KQP01-LS0060 or Equal.	EA	$722.66	$12,485.00	$0.00	$13,207.66
111343	Steam Pressure Reducing Valve (PRV) / Station - 1/3 & 2/3 Arrangement, 2" Inlet & 2-1/2" Outlet	EA	$8,324.78	$16,625.06	$0.00	$24,949.84
111344	Steam Pressure Reducing Valve (PRV) / Station - 1/3 & 2/3 Arrangement, 2-1/2" Inlet & 4" Outlet	EA	$11,867.24	$23,699.55	$0.00	$35,566.79
111345	Steam Pressure Reducing Valve (PRV) / Station - 1/3 & 2/3 Arrangement, 4" Inlet & 6" Outlet	EA	$15,675.39	$31,304.64	$0.00	$46,980.03
111346	Steam Pressure Reducing Valve (PRV) / Station - 1/3 & 2/3 Arrangement, 6" Inlet & 8" Outlet	EA	$18,775.04	$37,494.82	$0.00	$56,269.86
111347	Under 1" Float & Thermostatic Steam Trap 30 Psi Max Pressure.	EA	$120.44	$275.70	$0.00	$396.14
111348	1" Float & Thermostatic Steam Trap 30 Psi Max Pressure.	EA	$134.62	$292.77	$0.00	$427.39
111349	1-1/4" Float & Thermostatic Steam Trap 30 Psi Max Pressure.	EA	$153.21	$357.09	$0.00	$510.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111350	1-1/2" Float & Thermostatic Steam Trap 30 Psi Max Pressure.	EA	$188.63	$523.83	$0.00	$712.46
111351	2" Float & Thermostatic Steam Trap 30 Psi Max Pressure.	EA	$227.61	$930.82	$0.00	$1,158.43
111352	Under 1" Inverted Bucket Steam Trap w/Strainer	EA	$116.01	$217.93	$0.00	$333.94
111353	1" Inverted Bucket Steam Trap w/Strainer	EA	$152.33	$626.24	$0.00	$778.57
111354	1-1/4" Inverted Bucket Steam Trap w/Strainer	EA	$181.55	$1,022.72	$0.00	$1,204.27
111355	1-1/2" Inverted Bucket Steam Trap w/Strainer	EA	$217.86	$1,101.49	$0.00	$1,319.35
111356	2" Inverted Bucket Steam Trap w/Strainer	EA	$289.59	$1,902.33	$0.00	$2,191.92
111357	Under 1" Float & Thermostatic Steam Trap - Stainless Steel 30 Psi Max Pressure.	EA	$120.44	$630.22	$0.00	$750.66
111358	1/2" Flange, Carbon Steel, 150 lb	EA	$61.11	$32.04	$0.00	$93.15
111359	3/4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$89.45	$32.10	$0.00	$121.55
111360	1" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$107.16	$32.35	$0.00	$139.51
111361	1-1/4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$124.87	$33.02	$0.00	$157.89
111362	1-1/2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$143.47	$33.19	$0.00	$176.66
111363	2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$183.32	$38.14	$0.00	$221.46
111364	2-1/2" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$211.66	$40.13	$0.00	$251.79
111365	3" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$220.51	$43.76	$0.00	$264.27
111366	4" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$301.99	$65.74	$0.00	$367.73
111367	5" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$349.82	$104.01	$0.00	$453.83
111368	6" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$374.61	$102.99	$0.00	$477.60
111369	8" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$459.63	$141.48	$0.00	$601.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111370	10" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$606.65	$275.02	$0.00	$881.67
111371	12" Flange, Carbon Steel, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$727.09	$339.47	$0.00	$1,066.56
111372	2" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$23.02	$217.99	$0.00	$241.01
111373	2-1/2" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$30.11	$265.55	$0.00	$295.66
111374	3" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$35.42	$283.94	$0.00	$319.36
111375	4" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$58.45	$391.26	$0.00	$449.71
111376	5" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$67.31	$470.69	$0.00	$538.00
111377	6" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$80.59	$509.21	$0.00	$589.80
111378	8" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$97.42	$572.11	$0.00	$669.53
111379	10" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$134.62	$952.51	$0.00	$1,087.13
111380	12" Flange, Ductile Iron, Grooved, 150 lb Includes Gaskets, Bolts and Nuts.	EA	$141.70	$1,206.74	$0.00	$1,348.44
	23-22-23 Steam Condensate Pumps					
111381	23 Gallon Condensate Pump & Receiver- Duplex	EA	$850.20	$42,308.32	$0.00	$43,158.52
111382	75 Gallon Condensate Pump & Receiver- Duplex	EA	$1,700.38	$67,087.30	$0.00	$68,787.68
111383	120 Gallon Condensate Pump & Receiver- Duplex	EA	$1,983.77	$79,063.23	$0.00	$81,047.00
111384	250 Gallon Condensate Pump & Receiver- Duplex	EA	$1,983.77	$93,772.55	$0.00	$95,756.32
111385	500 Gallon Condensate Pump & Receiver- Duplex	EA	$2,550.57	$119,507.30	$0.00	$122,057.87
111386	2" & Dn Condensate Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,302.60	$2,846.08	$0.00	$5,148.68
111387	2-1/2" to 6" Condensate Pump Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,638.41	$5,348.24	$0.00	$9,986.65
	23-23-00 Refrigerant Piping					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	23-23-13 Refrigerant Piping					
111388	1/4" & 3/8" Pre-Insulated Refrigerant Line Set - ACR Soft Copper Includes 1/2" Insulation, 14-4 Control Wire and Hangers.	LF	$19.48	$14.21	$0.00	$33.69
111389	3/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$19.48	$4.86	$0.00	$24.34
111390	5/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$19.48	$5.58	$0.00	$25.06
111391	7/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$20.37	$7.85	$0.00	$28.22
111392	1-1/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$20.37	$10.98	$0.00	$31.35
111393	1-3/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$18.60	$15.63	$0.00	$34.23
111394	1-5/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$17.71	$19.04	$0.00	$36.75
111395	2-1/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$18.60	$29.77	$0.00	$48.37
111396	2-5/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$19.48	$41.88	$0.00	$61.36
111397	3-1/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$20.37	$57.29	$0.00	$77.66
111398	4-1/8" Refrigerant Pipe - Copper, ACR, Hard Drawn, Brazed	LF	$26.56	$96.31	$0.00	$122.87
111399	3/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$39.85	$3.57	$0.00	$43.42
111400	5/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$39.85	$3.17	$0.00	$43.02
111401	7/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$54.03	$7.27	$0.00	$61.30
111402	1-1/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$64.65	$19.75	$0.00	$84.40
111403	1-3/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$69.97	$28.18	$0.00	$98.15
111404	1-5/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$74.39	$43.23	$0.00	$117.62
111405	2-1/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$85.90	$73.70	$0.00	$159.60
111406	2-5/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$136.39	$134.96	$0.00	$271.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111407	3-1/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$163.84	$192.82	$0.00	$356.66
111408	4-1/8" Refrigerant Fitting - Copper, ACR, Wrot, Brazed	EA	$218.74	$436.26	$0.00	$655.00
111409	3/8" Refrigerant Pipe - Copper, ACR, Soft, Brazed	LF	$19.48	$2.77	$0.00	$22.25
111410	5/8" Refrigerant Pipe - Copper, ACR, Soft, Brazed	LF	$19.48	$4.19	$0.00	$23.67
111411	7/8" Refrigerant Pipe - Copper, ACR, Soft, Brazed	LF	$20.37	$6.52	$0.00	$26.89
	23-23-23 Refrigerants					
111412	Refrigerant - R22 Charge Equipment or System	LB	$17.71	$35.77	$0.00	$53.48
111413	Refrigerant - R404A Charge Equipment or System	LB	$17.71	$21.25	$0.00	$38.96
111414	Refrigerant - R134A, R407C, or R410A Charge Equipment or System	LB	$17.71	$14.30	$0.00	$32.01
111415	Refrigerant - R-448A Charge Equipment or System	LB	$17.71	$18.04	$0.00	$35.75
	23-25-00 HVAC Water Treatment					
	23-25-13 Water Treatment for Closed-Loop Hydronic Systems					
111416	250 Ton Side Stream Filter & Pump Package	EA	$708.49	$11,094.57	$0.00	$11,803.06
111417	500 Ton Side Stream Filter & Pump Package	EA	$708.49	$17,821.33	$0.00	$18,529.82
111418	750 Ton Side Stream Filter & Pump Package	EA	$1,062.74	$25,134.17	$0.00	$26,196.91
111419	1,000 Ton Side Stream Filter & Pump Package	EA	$1,062.74	$32,447.01	$0.00	$33,509.75
111420	1,400 Ton Side Stream Filter & Pump Package	EA	$1,416.98	$47,072.70	$0.00	$48,489.68
111421	2,200 Ton Side Stream Filter & Pump Package	EA	$2,833.97	$73,970.44	$0.00	$76,804.41
111422	Sand Separator System Includes separator, purge/isolation kit, valve, and actuator.	EA	$648.27	$6,611.86	$0.00	$7,260.13
111423	Chemical Treatment Bypass Feeder - Chilled Water System Up to 10 Gallon, Manual, Closed Loop System	EA	$669.53	$1,719.85	$0.00	$2,389.38
111424	Chemical Treatment Bypass Feeder - Hot Water System Up to 5 Gallon, Manual, Closed Loop System	EA	$669.53	$1,071.29	$0.00	$1,740.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	23-25-16 Water Treatment for Open Hydronic Systems					
111425	Chemical Treatment Assembly - Condenser Water System Automatic, Open Loop, Includes - Controller w/ Conductivity, Flow Sensor, Double Wall Containment Tanks, Chemical Feed Pumps, Degassing Pump, Level Transmitter, System Piping, Sulfuric Acid. Walchem Iwaki or Equal.	EA	$2,479.72	$27,678.15	$0.00	$30,157.87
	23-30-00 HVAC Air Distribution					
	23-31-00 HVAC Ducts and Casings					
	• Ductwork costs include hangers and fittings.					
	23-31-13 Metal Ducts					
111426	Ductwork / Sheetmetal - Galvanized, Mechanically Fastened Includes Fittings, Volume Dampers, Hangers, and Waste	LB	$7.45	$2.38	$0.00	$9.83
111427	Ductwork / Sheetmetal - Black Iron, Welded Includes Fittings, Volume Dampers, Hangers, and Waste	LB	$10.76	$1.90	$0.00	$12.66
111428	Ductwork / Sheetmetal - Aluminum, Mechanically Fastened Includes Fittings, Volume Dampers, Hangers, and Waste	LB	$9.94	$3.85	$0.00	$13.79
111429	Ductwork / Sheetmetal - Stainless Steel, Mechanically Fastened Type 304 - Includes Fittings, Volume Dampers, Hangers, and Waste	LB	$9.11	$6.24	$0.00	$15.35
111430	Ductwork / Sheetmetal - Stainless Steel, Welded Type 304 - Includes Fittings, Volume Dampers, Hangers, and Waste	LB	$12.42	$6.24	$0.00	$18.66
111431	Double Wall Insulated Plenum - (Per SF) 18 Gauge Wall, 2" Insulation & 26 Gauge Liner	SF	$19.87	$8.45	$0.00	$28.32
111432	8" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$24.00	$80.23	$0.00	$104.23
111433	12" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$41.39	$101.87	$0.00	$143.26
111434	18" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$53.81	$158.52	$0.00	$212.33
111435	24" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$68.70	$228.77	$0.00	$297.47
111436	30" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$86.09	$279.87	$0.00	$365.96
111437	36" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$104.29	$332.58	$0.00	$436.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111438	42" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$143.21	$388.01	$0.00	$531.22
111439	50" Double Wall Galvanized Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint.	LF	$181.29	$461.59	$0.00	$642.88
111440	8" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$24.00	$165.60	$0.00	$189.60
111441	12" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$41.39	$210.91	$0.00	$252.30
111442	18" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$53.81	$328.08	$0.00	$381.89
111443	24" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$68.70	$470.25	$0.00	$538.95
111444	30" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$86.09	$582.74	$0.00	$668.83
111445	36" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$104.29	$695.23	$0.00	$799.52
111446	42" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$143.21	$811.35	$0.00	$954.56
111447	50" Double Wall Stainless Steel Duct - Includes Fittings Prefabricated, Gasketed Slip-Joint. 304 Stainless Steel Interior & Exterior. B-Vent Boiler Flue.	LF	$181.29	$963.86	$0.00	$1,145.15
111448	8" Chimney Liner - Flexible Stainless Steel	LF	$32.28	$70.17	$0.00	$102.45
111449	12" x 12" Chimney Cap - Stainless Steel w/ Mesh 18 Gauge Hip and Ridge w/ Removable Top & Screened Sides	EA	$195.35	$360.82	$0.00	$556.17
111450	24" x 24" Chimney Cap - Stainless Steel w/ Mesh 18 Gauge Hip and Ridge w/ Removable Top & Screened Sides	EA	$218.53	$993.48	$0.00	$1,212.01
111451	36" x 36" Chimney Cap - Stainless Steel w/ Mesh 18 Gauge Hip and Ridge w/ Removable Top & Screened Sides	EA	$231.77	$1,773.64	$0.00	$2,005.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111452	48" x 48" Chimney Cap - Stainless Steel w/ Mesh 18 Gauge Hip and Ridge w/ Removable Top & Screened Sides	EA	$253.30	$2,346.58	$0.00	$2,599.88
111453	Galvanized Ductwork - 8" x 4" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$21.85	$7.79	$0.00	$29.64
111454	Galvanized Ductwork - 8" x 6" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$25.58	$9.09	$0.00	$34.67
111455	Galvanized Ductwork - 10" x 6" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$29.22	$10.40	$0.00	$39.62
111456	Galvanized Ductwork - 12" x 6" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$32.87	$11.69	$0.00	$44.56
111457	Galvanized Ductwork - 12" x 8" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$36.50	$12.97	$0.00	$49.47
111458	Galvanized Ductwork - 14" x 8" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$40.23	$14.30	$0.00	$54.53
111459	Galvanized Ductwork - 16" x 8" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$43.87	$15.58	$0.00	$59.45
111460	Galvanized Ductwork - 16" x 10" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$47.43	$16.88	$0.00	$64.31
111461	Galvanized Ductwork - 18" x 10" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$51.07	$18.19	$0.00	$69.26
111462	Galvanized Ductwork - 18" x 12" Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$54.88	$19.49	$0.00	$74.37
111463	Galvanized Ductwork - 8" ø Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$22.93	$8.17	$0.00	$31.10
111464	Galvanized Ductwork - 10" ø Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$28.73	$10.22	$0.00	$38.95
111465	Galvanized Ductwork - 12" ø Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$34.43	$12.25	$0.00	$46.68
111466	Galvanized Ductwork - 14" ø Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$40.15	$14.26	$0.00	$54.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111467	Galvanized Ductwork - 16" ø Includes Fittings, Volume Dampers, Hangers, and Waste	LF	$45.94	$16.32	$0.00	$62.26
111468	Ductwork Tap or Tie-Ins - 18" x 18" & Dn Includes Duct Tap, Tie-In, or Branch Connection to Existing Duct Main. Not to be Used for Connection to Existing Open-Ended Duct.	EA	$148.99	$47.53	$0.00	$196.52
111469	Ductwork Tap or Tie-Ins - 36" x 36" Includes Duct Tap, Tie-In, or Branch Connection to Existing Duct Main. Not to be Used for Connection to Existing Open-Ended Duct.	EA	$454.45	$144.41	$0.00	$598.86
111470	Ductwork Tap or Tie-Ins - 54" x 54" & Up (Per SF) Includes Duct Tap, Tie-In, or Branch Connection to Existing Duct Main. Not to be Used for Connection to Existing Open-Ended Duct.	SF	$33.11	$10.57	$0.00	$43.68
	23-31-16 Nonmetal Ducts					
111471	5-3/4" Wide Flexible Vinyl Duct Connector w/Galvanized Metal Strips Vibration Dampening	LF	$18.71	$3.27	$0.00	$21.98
111472	8" Fabric Duct Sox - Includes Fittings	LF	$6.62	$8.05	$0.00	$14.67
111473	16" Fabric Duct Sox - Includes Fittings	LF	$22.34	$21.08	$0.00	$43.42
111474	24" Fabric Duct Sox - Includes Fittings	LF	$35.59	$30.21	$0.00	$65.80
111475	30" Fabric Duct Sox - Includes Fittings	LF	$48.84	$39.34	$0.00	$88.18
111476	44" Fabric Duct Sox - Includes Fittings	LF	$77.81	$59.00	$0.00	$136.81
	23-33-00 Air Duct Accessories					
	23-33-13 Dampers					
111477	Fire Damper - 12" x 12" Static Type "A" Spring Loaded Curtain w/12" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$109.26	$90.69	$0.00	$199.95
111478	Fire Damper - 24" x 24" Static Type "A" Spring Loaded Curtain w/12" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$178.80	$171.94	$0.00	$350.74
111479	Fire Damper - 36" x 36" Static Type "A" Spring Loaded Curtain w/12" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$258.27	$296.74	$0.00	$555.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111480	Fire Damper - 48" x 48" Static Type "A" Spring Loaded Curtain w/12" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$347.67	$392.51	$0.00	$740.18
111481	Fire Damper - 54" x 54" & Up (Per SF) Static Type "A" Spring Loaded Curtain w/12" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	SF	$21.72	$29.67	$0.00	$51.39
111482	Combination Fire & Smoke Damper - 12" x 12" Motorized Power Open, Spring Close w/Actuator, 16" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$130.79	$783.93	$0.00	$914.72
111483	Combination Fire & Smoke Damper - 24" x 24" Motorized Power Open, Spring Close w/Actuator, 16" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$214.39	$1,088.45	$0.00	$1,302.84
111484	Combination Fire & Smoke Damper - 36" x 36" Motorized Power Open, Spring Close w/Actuator, 16" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$309.59	$1,686.63	$0.00	$1,996.22
111485	Combination Fire & Smoke Damper - 48" x 48" Motorized Power Open, Spring Close w/Actuator, 16" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	EA	$417.20	$2,089.04	$0.00	$2,506.24
111486	Combination Fire & Smoke Damper - 54" x 54" & Up (Per SF) Motorized Power Open, Spring Close w/Actuator, 16" 22 Gauge Sleeve and 16 Gauge 1-1/2" x 1-1/2" Mounting Angles	SF	$26.07	$130.57	$0.00	$156.64
111487	Motorized Control Damper - 12" x 12" 14-1/2" Deep 14 Gauge Aluminum Frame, 16 Gauge Galvanized Steel Blades w/Flange, Motor and Actuator	EA	$130.79	$376.67	$0.00	$507.46
111488	Motorized Control Damper - 24" x 24" 14-1/2" Deep 14 Gauge Aluminum Frame, 16 Gauge Galvanized Steel Blades w/Flange, Motor and Actuator	EA	$214.39	$526.61	$0.00	$741.00
111489	Motorized Control Damper - 36" x 36" 14-1/2" Deep 14 Gauge Aluminum Frame, 16 Gauge Galvanized Steel Blades w/Flange, Motor and Actuator	EA	$309.59	$785.04	$0.00	$1,094.63
111490	Motorized Control Damper - 48" x 48" 14-1/2" Deep 14 Gauge Aluminum Frame, 16 Gauge Galvanized Steel Blades w/Flange, Motor and Actuator	EA	$417.20	$1,025.18	$0.00	$1,442.38
111491	Motorized Control Damper - 54" x 54" & Up (Per SF) 14-1/2" Deep 14 Gauge Aluminum Frame, 16 Gauge Galvanized Steel Blades w/Flange, Motor and Actuator	SF	$26.07	$64.07	$0.00	$90.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111492	Manual Volume or Air Control Damper - 12" x 12" 5" Deep 16 Gauge Galvanized Steel Frame and Blades, Parallel or Opposed Blade, Cable or Lever Operated	EA	$91.06	$202.35	$0.00	$293.41
111493	Manual Volume or Air Control Damper - 24" x 24" 5" Deep 16 Gauge Galvanized Steel Frame and Blades, Parallel or Opposed Blade, Cable or Lever Operated	EA	$148.99	$376.67	$0.00	$525.66
111494	Manual Volume or Air Control Damper - 36" x 36" 5" Deep 16 Gauge Galvanized Steel Frame and Blades, Parallel or Opposed Blade, Cable or Lever Operated	EA	$215.22	$642.41	$0.00	$857.63
111495	Manual Volume or Air Control Damper - 48" x 48" 5" Deep 16 Gauge Galvanized Steel Frame and Blades, Parallel or Opposed Blade, Cable or Lever Operated	EA	$289.72	$848.42	$0.00	$1,138.14
111496	Manual Volume or Air Control Damper - 54" x 54" & Up (Per SF) 5" Deep 16 Gauge Galvanized Steel Frame and Blades, Parallel or Opposed Blade, Cable or Lever Operated	SF	$18.11	$53.06	$0.00	$71.17
111497	Gravity Backdraft Damper - 12" x 12" 2" Deep 16 Gauge Aluminum Channel Frame and Blades w/Flange and Counter Balance	EA	$91.06	$182.85	$0.00	$273.91
111498	Gravity Backdraft Damper - 24" x 24" 2" Deep 16 Gauge Aluminum Channel Frame and Blades w/Flange and Counter Balance	EA	$148.99	$408.36	$0.00	$557.35
111499	Gravity Backdraft Damper - 36" x 36" 2" Deep 16 Gauge Aluminum Channel Frame and Blades w/Flange and Counter Balance	EA	$215.22	$814.29	$0.00	$1,029.51
111500	Gravity Backdraft Damper - 48" x 48" 2" Deep 16 Gauge Aluminum Channel Frame and Blades w/Flange and Counter Balance	EA	$289.72	$1,464.02	$0.00	$1,753.74
111501	Gravity Backdraft Damper - 54" x 54" & Up (Per SF) 2" Deep 16 Gauge Aluminum Channel Frame and Blades w/Flange and Counter Balance	SF	$18.11	$91.50	$0.00	$109.61
111502	Wire Mesh Bird or Insect Screen - 12" x 12"	EA	$74.50	$39.39	$0.00	$113.89
111503	Wire Mesh Bird or Insect Screen - 24" x 24"	EA	$107.61	$278.32	$0.00	$385.93
111504	Wire Mesh Bird or Insect Screen - 36" x 36" & Up (Per SF)	SF	$15.64	$31.51	$0.00	$47.15
111505	Louvered Penthouse Gravity Ventilator w/Motorized Damper & Actuator - 12" x 12" x 12" Includes Roof Curb	EA	$496.66	$1,655.52	$0.00	$2,152.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111506	Louvered Penthouse Gravity Ventilator w/Motorized Damper & Actuator - 24" x 24" x 24" Includes Roof Curb	EA	$703.60	$6,669.34	$0.00	$7,372.94
111507	Louvered Penthouse Gravity Ventilator w/Motorized Damper & Actuator - 36" x 36" x 36" & Up (Per CF) Includes Roof Curb	CF	$42.92	$437.10	$0.00	$480.02
	23-33-19 Duct Silencers					
111508	Sound Attenuator- Under 10,000 CFM	EA	$198.66	$2,583.72	$0.00	$2,782.38
111509	Sound Attenuator- 10,000 to 20,000 CFM	EA	$364.22	$3,875.57	$0.00	$4,239.79
111510	Sound Attenuator- Over 20,000 CFM (Per CFM)	CFM	$0.02	$0.26	$0.00	$0.28
111511	Flexible Duct Connector 6” Wide Vibration Dampening Vinyl Duct Connector W/ Galvanized Metal Strips.	LF	$20.70	$3.23	$0.00	$23.93
	23-33-33 Duct-Mounting Access Doors					
111512	6" x 6" Duct Access Door - Galvanized Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$33.11	$22.82	$0.00	$55.93
111513	12" x 12" Duct Access Door - Galvanized Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$41.39	$28.06	$0.00	$69.45
111514	18" x 18" Duct Access Door - Galvanized Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$57.95	$46.97	$0.00	$104.92
111515	24" x 24" Duct Access Door - Galvanized Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$66.22	$66.74	$0.00	$132.96
111516	6" x 6" Duct Access Door - Stainless Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$33.11	$134.69	$0.00	$167.80
111517	12" x 12" Duct Access Door - Stainless Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$41.39	$183.69	$0.00	$225.08
111518	18" x 18" Duct Access Door - Stainless Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$57.95	$326.23	$0.00	$384.18
111519	24" x 24" Duct Access Door - Stainless Steel Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$66.22	$498.38	$0.00	$564.60
111520	6" x 6" Duct Access Door - Steel Fire-Rated Grease Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$49.67	$192.82	$0.00	$242.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111521	12" x 12" Duct Access Door - Steel Fire-Rated Grease Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$62.08	$233.27	$0.00	$295.35
111522	18" x 18" Duct Access Door - Steel Fire-Rated Grease Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$86.92	$284.99	$0.00	$371.91
111523	24" x 24" Duct Access Door - Steel Fire-Rated Grease Reach Thru; Flat or Curved; Single Cam, Double Cam, Knobs, or Thumbscrews	EA	$99.34	$310.87	$0.00	$410.21
111524	18" x 36" Duct Access Door - Galvanized Steel Walk Through Includes frame, continuous hinge, handles, insulation, gaskets, and hardware. 22 gauge, 2" thick.	EA	$248.33	$593.65	$0.00	$841.98
111525	24" x 48" Duct Access Door - Galvanized Steel Walk Through Includes frame, continuous hinge, handles, insulation, gaskets, and hardware. 22 gauge, 2" thick.	EA	$306.28	$711.90	$0.00	$1,018.18
111526	30" x 60" Duct Access Door - Galvanized Steel Walk Through Includes frame, continuous hinge, handles, insulation, gaskets, and hardware. 22 gauge, 2" thick.	EA	$380.78	$1,023.96	$0.00	$1,404.74
111527	36" x 72" Duct Access Door - Galvanized Steel Walk Through Includes frame, continuous hinge, handles, insulation, gaskets, and hardware. 22 gauge, 2" thick.	EA	$455.27	$1,354.31	$0.00	$1,809.58
	23-33-46 Flexible Ducts					
111528	Flex Duct Insulated - 4" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$3.31	$6.98	$0.00	$10.29
111529	Flex Duct Insulated - 6" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$4.97	$9.33	$0.00	$14.30
111530	Flex Duct Insulated - 8" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$8.28	$10.47	$0.00	$18.75
111531	Flex Duct Insulated - 10" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$11.59	$10.47	$0.00	$22.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111532	Flex Duct Insulated - 12" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$13.25	$10.50	$0.00	$23.75
111533	Flex Duct Insulated - 14" Black Polyester Inner Core W/Corrosion Resistant Galvanized Steel Helix, R6 Fiberglass Insulation & Vapor Barrier	LF	$16.56	$11.02	$0.00	$27.58
111534	Flex Duct Uninsulated - 4"	LF	$3.31	$1.67	$0.00	$4.98
111535	Flex Duct Uninsulated - 6"	LF	$4.97	$1.58	$0.00	$6.55
111536	Flex Duct Uninsulated - 8"	LF	$8.28	$2.19	$0.00	$10.47
111537	Flex Duct Uninsulated - 10"	LF	$11.59	$2.43	$0.00	$14.02
111538	Flex Duct Uninsulated - 12"	LF	$13.25	$3.23	$0.00	$16.48
111539	Flex Duct Uninsulated - 14"	LF	$16.56	$3.91	$0.00	$20.47
	23-36-16 Air Terminal Units					
111540	Exhaust Air Variable or Constant Air Volume (VAV/CV) Box - Under 1,000 CFM	EA	$273.16	$802.16	$0.00	$1,075.32
111541	Exhaust Air Variable or Constant Air Volume (VAV/CV) Box - 1,000 to 2,499 CFM	EA	$372.50	$1,024.03	$0.00	$1,396.53
111542	Exhaust Air Variable or Constant Air Volume (VAV/CV) Box - 2,500 to 5,000 CFM	EA	$455.27	$1,303.67	$0.00	$1,758.94
111543	Laboratory Exhaust Air Variable or Constant Air Volume (VAV/CV) Box - Up to 1,500 CFM	EA	$372.50	$1,522.92	$0.00	$1,895.42
111544	Laboratory Exhaust Air Variable or Constant Air Volume (VAV/CV) Box - Up to 3,000 CFM (Double)	EA	$455.27	$2,008.68	$0.00	$2,463.95
111545	Laboratory Exhaust Venturi Valve- Up to 1,500 CFM	EA	$372.50	$4,398.09	$0.00	$4,770.59
111546	Laboratory Exhaust Venturi Valve- Double- Up to 3,000 CFM	EA	$455.27	$6,465.86	$0.00	$6,921.13
111547	Laboratory Exhaust Venturi Valve- Triple- Up to 4,500 CFM	EA	$744.99	$9,268.81	$0.00	$10,013.80
111548	Laboratory Fume Hood Exhaust Variable or Constant Air Volume (VAV/CV) Box - Up to 1,500 CFM	EA	$355.94	$2,271.25	$0.00	$2,627.19
111549	Laboratory Fume Hood Exhaust Venturi Valve- Up to 1,500 CFM	EA	$355.94	$5,776.60	$0.00	$6,132.54
111550	Air Terminal Unit Sound Attenuator - Exhaust	EA	$67.87	$254.98	$0.00	$322.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111551	Return Air Variable or Constant Air Volume (VAV/CV) Box - Under 1,000 CFM	EA	$273.16	$802.16	$0.00	$1,075.32
111552	Return Air Variable or Constant Air Volume (VAV/CV) Box - 1,000 to 2,499 CFM	EA	$372.50	$1,024.03	$0.00	$1,396.53
111553	Return Air Variable or Constant Air Volume (VAV/CV) Box - 2,500 to 5,000 CFM	EA	$455.27	$1,303.67	$0.00	$1,758.94
111554	Supply Air Variable or Constant Air Volume (VAV/CV) Box - Under 1,000 CFM	EA	$273.16	$802.16	$0.00	$1,075.32
111555	Supply Air Variable or Constant Air Volume (VAV/CV) Box - 1,000 to 2,499 CFM	EA	$372.50	$1,024.03	$0.00	$1,396.53
111556	Supply Air Variable or Constant Air Volume (VAV/CV) Box - 2,500 to 5,000 CFM	EA	$455.27	$1,303.67	$0.00	$1,758.94
111557	Supply Air Variable or Constant Air Volume (VAV/CV) Box - Fan Powered Under 1,000 CFM	EA	$314.55	$2,600.79	$0.00	$2,915.34
111558	Supply Air Variable or Constant Air Volume (VAV/CV) Box - Fan Powered 1,000 to 2,499 CFM	EA	$430.44	$3,119.36	$0.00	$3,549.80
111559	Supply Air Variable or Constant Air Volume (VAV/CV) Box - Fan Powered 2,500 to 5,000 CFM	EA	$521.49	$3,812.56	$0.00	$4,334.05
111560	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - Under 1,000 CFM	EA	$298.00	$1,507.17	$0.00	$1,805.17
111561	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - 1,000 to 2,499 CFM	EA	$405.60	$2,040.19	$0.00	$2,445.79
111562	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - 2,500 to 5,000 CFM	EA	$496.66	$2,860.72	$0.00	$3,357.38
111563	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Electric Reheat - Up to 1,500 CFM	EA	$298.00	$1,667.34	$0.00	$1,965.34
111564	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - Fan Powered Under 1,000 CFM	EA	$339.39	$4,279.93	$0.00	$4,619.32
111565	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - Fan Powered 1,000 to 2,499 CFM	EA	$455.27	$5,742.47	$0.00	$6,197.74
111566	Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - Fan Powered 2,500 to 5,000 CFM	EA	$554.61	$7,018.56	$0.00	$7,573.17
111567	Supply Air Dual Duct Terminal Unit - Up to 1,500 CFM	EA	$455.27	$2,126.84	$0.00	$2,582.11
111568	Supply Air Dual Duct Terminal Unit - 1,500 CFM & Up	EA	$554.61	$2,999.90	$0.00	$3,554.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111569	Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box - Up to 1,500 CFM	EA	$372.50	$1,522.92	$0.00	$1,895.42
111570	Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box - 1,501 to 3,000 CFM (Double)	EA	$455.27	$2,008.68	$0.00	$2,463.95
111571	Laboratory Supply Venturi Valve- Up to 1,500 CFM	EA	$372.50	$4,398.09	$0.00	$4,770.59
111572	Laboratory Supply Venturi Valve- Double- 1,501 to 3,000 CFM	EA	$455.27	$6,465.86	$0.00	$6,921.13
111573	Laboratory Supply Venturi Valve- Triple- 3,001 to 4,500 CFM	EA	$744.99	$9,268.81	$0.00	$10,013.80
111574	Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - Up to 1,500 CFM	EA	$405.60	$2,133.41	$0.00	$2,539.01
111575	Laboratory Supply Air Variable or Constant Air Volume (VAV/CV) Box w/Hot Water Reheat - 1,501 to 3,000 CFM (Double)	EA	$496.66	$3,052.41	$0.00	$3,549.07
111576	Laboratory Supply Venturi Valve W/Reheat- Up to 1,500 CFM	EA	$405.60	$5,093.91	$0.00	$5,499.51
111577	Laboratory Supply Venturi Valve W/Reheat- Double- 1,501 to 3,000 CFM	EA	$496.66	$7,430.80	$0.00	$7,927.46
111578	Laboratory Supply Venturi Valve W/Reheat- Triple- 3,001 to 4,500 CFM	EA	$811.21	$10,726.09	$0.00	$11,537.30
111579	Air Terminal Unit Sound Attenuator - Supply	EA	$107.61	$254.98	$0.00	$362.59
111580	Reheat Coil- Up to 1,500 CFM Up To 12" X 12"	EA	$159.41	$664.31	$0.00	$823.72
111581	Reheat Coil- 1,501 to 3,000 CFM Up To 24" X 24"	EA	$230.26	$1,903.65	$0.00	$2,133.91
111582	Reheat Coil- Over 3,000 CFM Over 24" X 24"	CFM	$0.05	$0.39	$0.00	$0.44
111583	Steam Reheat Coil- Up to 1,500 CFM Up To 12" X 12"	EA	$159.41	$892.75	$0.00	$1,052.16
111584	Steam Reheat Coil- 1,501 to 3,000 CFM Up To 24" X 24"	EA	$230.26	$3,160.06	$0.00	$3,390.32
111585	Steam Reheat Coil- Over 3,000 CFM Over 24" X 24"	CFM	$0.05	$0.37	$0.00	$0.42
111586	Electric Reheat Coil or Duct Heater w/ SCR Controller- 2 kW Up To 480V, 3 Phase. Includes Control Panel.	EA	$123.98	$3,226.69	$0.00	$3,350.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111587	Electric Reheat Coil or Duct Heater w/ SCR Controller- 5 Kw Up To 480V, 3 Phase. Includes Control Panel.	EA	$123.98	$3,352.25	$0.00	$3,476.23
111588	Electric Reheat Coil or Duct Heater w/ SCR Controller- 10 Kw Up To 480V, 3 Phase. Includes Control Panel.	EA	$150.56	$3,925.18	$0.00	$4,075.74
111589	Electric Reheat Coil or Duct Heater w/ SCR Controller- 15 Kw Up To 480V, 3 Phase. Includes Control Panel.	EA	$150.56	$4,389.62	$0.00	$4,540.18
111590	Electric Reheat Coil or Duct Heater w/ SCR Controller- 25 Kw Up To 480V, 3 Phase. Includes Control Panel.	EA	$168.27	$5,547.67	$0.00	$5,715.94
111591	Electric Reheat Coil or Duct Heater w/ SCR Controller- 50 Kw Up To 480V, 3 Phase. Includes Control Panel.	EA	$212.54	$9,339.98	$0.00	$9,552.52
111592	Chilled Water Coil- Up to 1,500 CFM Up To 12" X 12"	EA	$159.41	$1,024.03	$0.00	$1,183.44
111593	Chilled Water Coil- Up to 5,000 CFM Up To 24" X 24"	EA	$230.26	$2,557.46	$0.00	$2,787.72
111594	Chilled Water Coil- Over 5,000 CFM Over 24" X 24"	CFM	$0.05	$0.59	$0.00	$0.64
111595	24" X 24" Chilled Beam- 2-Pipe	EA	$230.26	$1,375.56	$0.00	$1,605.82
111596	24" X 48" Chilled Beam- 2-Pipe	EA	$442.81	$2,225.89	$0.00	$2,668.70
111597	24" X 24" Chilled Beam- 4-Pipe	EA	$230.26	$1,525.62	$0.00	$1,755.88
111598	24" X 48" Chilled Beam- 4-Pipe	EA	$442.81	$2,259.25	$0.00	$2,702.06
	23-41-13 Panel Air Filters					
111599	Air Filter & Housing- Under 5,000 CFM	EA	$206.94	$2,331.64	$0.00	$2,538.58
111600	Air Filter & Housing- 5,000 To 10,000 CFM	EA	$496.66	$4,663.28	$0.00	$5,159.94
111601	Air Filter & Housing- Over 10,000 CFM (Per CFM)	CFM	$0.06	$0.46	$0.00	$0.52
111602	HEPA Filter & Housing- Under 5,000 CFM Stainless Steel Housing.	EA	$331.11	$7,577.84	$0.00	$7,908.95
111603	HEPA Filter & Housing- 5,000 To 10,000 CFM Stainless Steel Housing.	EA	$662.22	$15,155.69	$0.00	$15,817.91
111604	HEPA Filter & Housing- Over 10,000 CFM (Per CFM) Stainless Steel Housing.	CFM	$0.05	$1.38	$0.00	$1.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111605	1,000 CFM Ductless Air Purifier w/ Fan and HEPA Filter Includes Pre-Filter, UVC Sterilization and Ionization System. ISO-Aire RSH-1000 or Equal.	EA	$413.88	$9,846.47	$0.00	$10,260.35
111606	Air Scrubber, Air Purifier, or Negative Air Machine w/ HEPA Filtration - Under 1,000 CFM	EA	$331.11	$3,276.90	$0.00	$3,608.01
111607	Air Scrubber, Air Purifier, or Negative Air Machine w/ HEPA Filtration - 1,000 to 2,499 CFM	EA	$413.88	$4,826.08	$0.00	$5,239.96
111608	Air Scrubber, Air Purifier, or Negative Air Machine w/ HEPA Filtration - 2,500 to 5,000 CFM	EA	$496.66	$5,935.46	$0.00	$6,432.12

23-34-00 HVAC Fans

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Exhaust Fan costs include roof curbs as required.

23-34-13 In-Line HVAC Fans

111609	250 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$248.33	$1,203.90	$0.00	$1,452.23
111610	500 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$248.33	$1,903.65	$0.00	$2,151.98
111611	1,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$248.33	$2,002.11	$0.00	$2,250.44
111612	1,500 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$579.44	$2,166.22	$0.00	$2,745.66
111613	2,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$579.44	$2,652.04	$0.00	$3,231.48
111614	2,500 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$579.44	$3,400.32	$0.00	$3,979.76
111615	3,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$579.44	$3,977.97	$0.00	$4,557.41
111616	4,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$827.77	$5,304.10	$0.00	$6,131.87
111617	5,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$993.32	$7,956.14	$0.00	$8,949.46
111618	7,500 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$1,158.88	$10,608.20	$0.00	$11,767.08
111619	10,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$1,324.43	$11,479.02	$0.00	$12,803.45
111620	15,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$1,821.09	$12,270.67	$0.00	$14,091.76
111621	20,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$2,152.20	$13,458.16	$0.00	$15,610.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111622	25,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$2,483.31	$14,051.90	$0.00	$16,535.21
111623	30,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$2,979.97	$18,999.75	$0.00	$21,979.72
111624	35,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$3,807.74	$21,706.31	$0.00	$25,514.05
111625	40,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$3,807.74	$29,885.03	$0.00	$33,692.77
111626	45,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$4,635.51	$29,967.01	$0.00	$34,602.52
111627	50,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$4,635.51	$37,603.68	$0.00	$42,239.19
111628	75,000 CFM Inline HVAC Fan Centrifugal, Axial Or Mixed Flow	EA	$5,297.73	$56,405.52	$0.00	$61,703.25
111629	202,500 CFM Custom Fan Wall Assembly - (36) Plenum Fans and Backdraft Dampers w/ 2" Galvanized Foam Injected Double Wall Housing 195" L x 87" W x 214" H. All components to be shipped on skids to the jobsite. Excludes VFD's.	EA	$13,244.32	$381,455.58	$0.00	$394,699.90
	23-34-16 Utility HVAC Fans					
111630	Attic/Gable Exhaust Fan - Solar Powered Residential 10-Watt w/Thermal Switch.	EA	$206.94	$604.62	$0.00	$811.56
111631	250 CFM Utility HVAC Fan Blower	EA	$165.55	$1,549.18	$0.00	$1,714.73
111632	500 CFM Utility HVAC Fan Blower	EA	$165.55	$1,660.77	$0.00	$1,826.32
111633	1,000 CFM Utility HVAC Fan Blower	EA	$331.11	$2,290.95	$0.00	$2,622.06
111634	1,500 CFM Utility HVAC Fan Blower	EA	$413.88	$2,546.95	$0.00	$2,960.83
111635	2,000 CFM Utility HVAC Fan Blower	EA	$413.88	$3,026.16	$0.00	$3,440.04
111636	2,500 CFM Utility HVAC Fan Blower	EA	$579.44	$3,472.52	$0.00	$4,051.96
111637	3,000 CFM Utility HVAC Fan Blower	EA	$579.44	$3,472.52	$0.00	$4,051.96
111638	4,000 CFM Utility HVAC Fan Blower	EA	$579.44	$3,800.73	$0.00	$4,380.17
111639	5,000 CFM Utility HVAC Fan Blower	EA	$744.99	$4,286.50	$0.00	$5,031.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111640	7,500 CFM Utility HVAC Fan Blower	EA	$827.77	$6,866.27	$0.00	$7,694.04
111641	10,000 CFM Utility HVAC Fan Blower	EA	$993.32	$8,343.25	$0.00	$9,336.57
111642	15,000 CFM Utility HVAC Fan Blower	EA	$1,489.99	$10,200.95	$0.00	$11,690.94
111643	20,000 CFM Utility HVAC Fan Blower	EA	$1,821.09	$12,734.77	$0.00	$14,555.86
111644	25,000 CFM Utility HVAC Fan Blower	EA	$1,986.65	$13,502.79	$0.00	$15,489.44
111645	30,000 CFM Utility HVAC Fan Blower	EA	$2,152.20	$15,248.90	$0.00	$17,401.10
111646	35,000 CFM Utility HVAC Fan Blower	EA	$2,483.31	$18,636.08	$0.00	$21,119.39
111647	40,000 CFM Utility HVAC Fan Blower	EA	$2,483.31	$22,016.71	$0.00	$24,500.02
111648	45,000 CFM Utility HVAC Fan Blower	EA	$2,979.97	$25,174.14	$0.00	$28,154.11
111649	50,000 CFM Utility HVAC Fan Blower	EA	$2,979.97	$28,331.58	$0.00	$31,311.55
111650	Bathroom Exhaust Fan - Residential	EA	$124.17	$175.93	$0.00	$300.10
111651	Bathroom Exhaust Fan - Commercial Speed Controllable	EA	$129.88	$824.23	$0.00	$954.11
	23-34-19 Laboratory Exhaust HVAC Fans					
111652	1,000 CFM & Down High Plume Laboratory Exhaust Fan W/Plenum	EA	$331.11	$16,266.37	$0.00	$16,597.48
111653	2,500 CFM High Plume Laboratory Exhaust Fan W/Plenum	EA	$579.44	$20,874.52	$0.00	$21,453.96
111654	5,000 CFM High Plume Laboratory Exhaust Fan W/Plenum	EA	$827.77	$26,073.46	$0.00	$26,901.23
111655	7,500 CFM High Plume Laboratory Exhaust Fan W/Plenum Up To 11,700 Cfm Or 15 Hp - Strobic Ts-1 Or Equal	EA	$1,158.88	$27,570.12	$0.00	$28,729.00
111656	15,000 CFM High Plume Laboratory Exhaust Fan W/Plenum Up To 18,500 Cfm Or 15 Hp - Strobic Ts-2 Or Equal	EA	$1,738.32	$55,140.25	$0.00	$56,878.57
111657	25,000 CFM High Plume Laboratory Exhaust Fan W/Plenum Up To 32,200 Cfm Or 30 Hp - Strobic Ts-3 Or Equal	EA	$2,483.31	$84,679.66	$0.00	$87,162.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111658	45,000 CFM High Plume Laboratory Exhaust Fan W/Plenum Up To 53,800 Cfm Or 60 Hp - Strobic Ts-4 Or Equal	EA	$4,138.85	$130,564.23	$0.00	$134,703.08
111659	70,000 CFM High Plume Laboratory Exhaust Fan W/Plenum Up To 82,000 Cfm Or 100 Hp - Strobic Ts-5 Or Equal	EA	$5,794.39	$173,691.77	$0.00	$179,486.16
111660	7,500 CFM High Plume Laboratory Exhaust Fan W/Heat Recovery Coil & Plenum Up To 11,700 Cfm Or 15 Hp - Strobic Ts-1 Or Equal	EA	$1,821.09	$55,435.63	$0.00	$57,256.72
111661	15,000 CFM High Plume Laboratory Exhaust Fan W/Heat Recovery Coil & Plenum Up To 18,500 Cfm Or 15 Hp - Strobic Ts-2 Or Equal	EA	$2,566.09	$110,871.28	$0.00	$113,437.37
111662	25,000 CFM High Plume Laboratory Exhaust Fan W/Heat Recovery Coil & Plenum Up To 32,200 Cfm Or 30 Hp - Strobic Ts-3 Or Equal	EA	$4,304.40	$158,528.21	$0.00	$162,832.61
111663	45,000 CFM High Plume Laboratory Exhaust Fan W/Heat Recovery Coil & Plenum Up To 53,800 Cfm Or 60 Hp - Strobic Ts-4 Or Equal	EA	$5,959.94	$248,131.11	$0.00	$254,091.05
111664	70,000 CFM High Plume Laboratory Exhaust Fan W/Heat Recovery Coil & Plenum Up To 82,000 Cfm Or 100 Hp - Strobic Ts-5 Or Equal	EA	$7,449.93	$367,601.64	$0.00	$375,051.57
	23-34-23 Roof Mounted HVAC Fans					
111665	250 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$248.33	$1,240.65	$0.00	$1,488.98
111666	500 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$248.33	$1,613.50	$0.00	$1,861.83
111667	1,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$248.33	$1,920.72	$0.00	$2,169.05
111668	1,500 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$248.33	$2,611.28	$0.00	$2,859.61
111669	2,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$331.11	$3,077.35	$0.00	$3,408.46
111670	2,500 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$413.88	$3,208.64	$0.00	$3,622.52
111671	3,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$413.88	$3,450.21	$0.00	$3,864.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111672	4,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$413.88	$4,104.01	$0.00	$4,517.89
111673	5,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$496.66	$4,851.02	$0.00	$5,347.68
111674	7,500 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$496.66	$6,623.40	$0.00	$7,120.06
111675	10,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$579.44	$6,992.31	$0.00	$7,571.75
111676	15,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$662.22	$9,358.09	$0.00	$10,020.31
111677	20,000 CFM Roof Mounted HVAC Fan w/Motorized Damper Upblast, Downblast or Hooded. Includes Roof Curb	EA	$744.99	$13,907.16	$0.00	$14,652.15
	23-34-26 Wall Mounted HVAC Fans					
111678	250 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$165.55	$351.52	$0.00	$517.07
111679	500 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$165.55	$523.90	$0.00	$689.45
111680	1,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$165.55	$721.78	$0.00	$887.33
111681	1,500 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$165.55	$754.60	$0.00	$920.15
111682	2,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$248.33	$898.33	$0.00	$1,146.66
111683	2,500 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$331.11	$1,148.30	$0.00	$1,479.41
111684	3,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$331.11	$1,445.14	$0.00	$1,776.25
111685	4,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$331.11	$1,757.59	$0.00	$2,088.70
111686	5,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$413.88	$2,063.28	$0.00	$2,477.16
111687	7,500 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$496.66	$2,146.61	$0.00	$2,643.27
111688	10,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$579.44	$2,349.71	$0.00	$2,929.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111689	15,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$827.77	$3,441.76	$0.00	$4,269.53
111690	20,000 CFM Propeller/Sidewall HVAC Fan Wall Mounted	EA	$993.32	$4,311.97	$0.00	$5,305.29

23-34-39 High-Volume, Low-Speed HVAC Fans

111691	4' High Volume Low Velocity Destratification Fan Includes integrated LED light and wired wall control.	EA	$248.33	$1,384.61	$0.00	$1,632.94
111692	7' High Volume Low Velocity Destratification Fan	EA	$794.66	$3,574.11	$0.00	$4,368.77
111693	10' High Volume Low Velocity Destratification Fan	EA	$794.66	$8,000.92	$0.00	$8,795.58
111694	16' High Volume Low Velocity Destratification Fan	EA	$1,026.43	$9,558.98	$0.00	$10,585.41
111695	24' High Volume Low Velocity Destratification Fan	EA	$1,324.43	$14,300.59	$0.00	$15,625.02

23-35-00 Special Exhaust Systems

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Exhaust Fan costs include roof curbs as required.

23-35-13 Dust Collection Systems

111696	Duct Magnet - Flanged Magnetic Products RSPLM-14-REN-S or Equal.	EA	$2,441.92	$16,568.65	$0.00	$19,010.57

23-35-33 Listed Kitchen Ventilation Exhaust System

111697	Kitchen Hood - Wall Mounted	LF	$165.55	$1,681.53	$0.00	$1,847.08
111698	Kitchen Hood - Island Type	LF	$165.55	$2,857.96	$0.00	$3,023.51

23-36-00 Air Terminal Units

• Terminal Unit costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Terminal Unit hook-ups (connections) include all required pipe, fittings, valves, and specialties within 5 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.

23-36-16 Air Terminal Units

111699	Cooling Coil Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
111700	Cooling Coil Hook-Up- 1-1/4" To 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
111701	Reheat Coil Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111702	Reheat Coil Hook-Up- 1-1/4" To 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
111703	Steam Reheat Coil Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$672.19	$1,223.74	$0.00	$1,895.93
111704	Steam Reheat Coil Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,365.61	$1,223.74	$0.00	$2,589.35
	23-37-00 Air Outlets and Inlets					
	23-37-13 Diffusers, Registers, and Grilles					
111705	Ceiling Diffuser w/ Damper - 12" x 12" Steel, Aluminum, Perforated, or Louvered. Opposed Blade Damper, Insulated, All Directional Patterns.	EA	$82.78	$71.71	$0.00	$154.49
111706	Ceiling Diffuser w/ Damper - 24" x 24" Steel, Aluminum, Perforated, or Louvered. Opposed Blade Damper, Insulated, All Directional Patterns.	EA	$103.48	$160.99	$0.00	$264.47
111707	Ceiling Diffuser w/ Damper - 24" x 48" Steel, Aluminum, Perforated, or Louvered. Opposed Blade Damper, Insulated, All Directional Patterns.	EA	$136.59	$358.82	$0.00	$495.41
111708	Ceiling Diffuser w/o Damper - 12" x 12" Steel, Aluminum, Perforated, or Louvered. All Directional Patterns.	EA	$82.78	$50.49	$0.00	$133.27
111709	Ceiling Diffuser w/o Damper - 24" x 24" Steel, Aluminum, Perforated, or Louvered. All Directional Patterns.	EA	$103.48	$109.94	$0.00	$213.42
111710	Ceiling Diffuser w/o Damper - 24" x 48" Steel, Aluminum, Perforated, or Louvered. All Directional Patterns.	EA	$136.59	$245.17	$0.00	$381.76
111711	Linear Diffuser w/ Plenum - 6" Steel Or Aluminum, Perforated Or Louvered, Ceiling Or Sidewall	LF	$36.42	$108.97	$0.00	$145.39
111712	Linear Diffuser w/o Plenum - 6" Steel Or Aluminum, Perforated Or Louvered, Ceiling Or Sidewall	LF	$30.62	$110.21	$0.00	$140.83
111713	Register w/ Damper - 6" x 6" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$57.95	$64.13	$0.00	$122.08
111714	Register w/ Damper - 12" x 12" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$74.50	$103.04	$0.00	$177.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111715	Register w/ Damper - 18" x 18" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$91.06	$194.50	$0.00	$285.56
111716	Register w/ Damper - 24" x 24" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$107.61	$334.34	$0.00	$441.95
111717	Register w/ Damper - 30" x 30" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$124.17	$553.04	$0.00	$677.21
111718	Register w/ Damper - 36" x 36" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$140.73	$930.47	$0.00	$1,071.20
111719	Register w/ Damper - 42" x 42" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$173.83	$1,204.88	$0.00	$1,378.71
111720	Register w/ Damper - 48" x 48" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	EA	$215.22	$1,483.51	$0.00	$1,698.73
111721	Register w/ Damper - Over 50" x 50" Steel, Aluminum, Ceiling or Sidewall. Adjustable Blades, Double Deflection w/ Opposed Blade Damper.	SF	$13.46	$92.72	$0.00	$106.18
111722	Grille w/o Damper - 6" x 6" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$57.95	$25.23	$0.00	$83.18
111723	Grille w/o Damper - 12" x 12" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$74.50	$39.95	$0.00	$114.45
111724	Grille w/o Damper - 18" x 18" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$91.06	$75.70	$0.00	$166.76
111725	Grille w/o Damper - 24" x 24" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$107.61	$129.32	$0.00	$236.93
111726	Grille w/o Damper - 30" x 30" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$107.61	$214.48	$0.00	$322.09
111727	Grille w/o Damper - 36" x 36" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$140.73	$360.63	$0.00	$501.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111728	Grille w/o Damper - 42" x 42" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$173.83	$510.98	$0.00	$684.81
111729	Grille w/o Damper - 48" x 48" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	EA	$215.22	$646.61	$0.00	$861.83
111730	Grille w/o Damper - Over 50" x 50" Steel, Aluminum, Ceiling or Sidewall. Fixed Blades, Single Deflection.	SF	$13.46	$40.41	$0.00	$53.87
111731	Register or Grille - Minimum Security 6" x 6" Ligature Resistant w/ Sleeve. Correctional Facilities, Prisons, Psychiatric Hospitals, or Behavioral Health.	EA	$82.78	$271.84	$0.00	$354.62
111732	Register or Grille - Minimum Security 12" x 12" Ligature Resistant w/ Sleeve. Correctional Facilities, Prisons, Psychiatric Hospitals, or Behavioral Health.	EA	$124.17	$404.71	$0.00	$528.88
111733	Register or Grille - Minimum Security 18" x 18" Ligature Resistant w/ Sleeve. Correctional Facilities, Prisons, Psychiatric Hospitals, or Behavioral Health.	EA	$152.31	$728.96	$0.00	$881.27
111734	Register or Grille - Minimum Security 24" x 24" Ligature Resistant w/ Sleeve. Correctional Facilities, Prisons, Psychiatric Hospitals, or Behavioral Health.	EA	$179.63	$925.22	$0.00	$1,104.85
111735	Register or Grille - Medium Security 6" x 6" Includes Sleeve. Correctional Facilities or Prisons.	EA	$91.06	$348.63	$0.00	$439.69
111736	Register or Grille - Medium Security 12" x 12" Includes Sleeve. Correctional Facilities or Prisons.	EA	$136.59	$518.08	$0.00	$654.67
111737	Register or Grille - Medium Security 18" x 18" Includes Sleeve. Correctional Facilities or Prisons.	EA	$167.21	$933.75	$0.00	$1,100.96
111738	Register or Grille - Medium Security 24" x 24" Includes Sleeve. Correctional Facilities or Prisons.	EA	$197.83	$1,184.87	$0.00	$1,382.70
111739	Register or Grille - Maximum Security 6" x 6" Includes Sleeve. Correctional Facilities or Prisons. Titus SG-PR or Equal	EA	$99.34	$425.43	$0.00	$524.77
111740	Register or Grille - Maximum Security 12" x 12" Includes Sleeve. Correctional Facilities or Prisons. Titus SG-PR or Equal	EA	$148.99	$632.66	$0.00	$781.65
111741	Register or Grille - Maximum Security 18" x 18" Includes Sleeve. Correctional Facilities or Prisons. Titus SG-PR or Equal	EA	$182.11	$1,139.76	$0.00	$1,321.87
111742	Register or Grille - Maximum Security 24" x 24" Includes Sleeve. Correctional Facilities or Prisons. Titus SG-PR or Equal	EA	$215.22	$1,446.95	$0.00	$1,662.17
111743	Duct Barrier Security Bar Grille - 12" x 12" All Welded Construction	EA	$132.45	$533.92	$0.00	$666.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111744	Duct Barrier Security Bar Grille - 18" x 18" All Welded Construction	EA	$159.76	$961.79	$0.00	$1,121.55
111745	Duct Barrier Security Bar Grille - 24" x 24" All Welded Construction	EA	$188.73	$1,529.84	$0.00	$1,718.57
111746	Duct Barrier Security Bar Grille - 30" x 30" All Welded Construction	EA	$231.77	$2,004.04	$0.00	$2,235.81
111747	Duct Barrier Security Bar Grille - 36" x 36" All Welded Construction	EA	$246.68	$2,501.39	$0.00	$2,748.07
111748	24" x 24" Laminar Diffuser w/o HEPA Filter Steel Or Aluminum	EA	$186.25	$560.92	$0.00	$747.17
111749	24" x 24" Laminar Diffuser w/ HEPA Filter Steel Or Aluminum	EA	$269.03	$1,293.04	$0.00	$1,562.07
111750	24" x 48" Laminar Diffuser w/o HEPA Filter Steel Or Aluminum	EA	$289.72	$805.50	$0.00	$1,095.22
111751	24" x 48" Laminar Diffuser w/ HEPA Filter Steel Or Aluminum	EA	$413.88	$2,034.96	$0.00	$2,448.84
111752	24" x 48" Laminar Diffuser w/o HEPA Filter - Stainless Steel Titus Tlf-Ss Or Equal	EA	$289.72	$1,883.95	$0.00	$2,173.67
111753	Operating Room Laminar Flow Diffuser System - Under 1,500 CFM Includes Diffusers, Ceiling Panels, Hangers & Grid - Price LFDCSS or Equal	EA	$5,297.73	$23,007.92	$0.00	$28,305.65
111754	Operating Room Laminar Flow Diffuser System - 1,500 to 2,999 CFM Includes Diffusers, Ceiling Panels, Hangers & Grid - Price LFDCSS or Equal	EA	$7,946.59	$30,961.25	$0.00	$38,907.84
111755	Operating Room Laminar Flow Diffuser System - 3,000 CFM & Up Includes Diffusers, Ceiling Panels, Hangers & Grid - Price LFDCSS or Equal	EA	$10,595.46	$35,937.00	$0.00	$46,532.46
111756	Operating Room Laminar Flow Diffuser System w/Air Curtain - Under 1,500 CFM Includes Diffusers, Ceiling Panels, Hangers & Grid - Price HORD or Equal	EA	$13,244.32	$30,747.25	$0.00	$43,991.57
111757	Operating Room Laminar Flow Diffuser System w/Air Curtain - 1,500 to 2,999 CFM Includes Diffusers, Ceiling Panels, Hangers & Grid - Price HORD or Equal	EA	$13,244.32	$56,526.63	$0.00	$69,770.95
111758	Operating Room Laminar Flow Diffuser System w/Air Curtain - 3,000 CFM & Up Includes Diffusers, Ceiling Panels, Hangers & Grid - Price HORD or Equal	EA	$16,555.40	$80,268.44	$0.00	$96,823.84

23-37-23 HVAC Gravity Ventilators

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111759	Gravity Intake or Relief Vent w/Motorized Damper & Actuator - 12" x 12" Includes Roof Curb	EA	$206.94	$1,033.22	$0.00	$1,240.16
111760	Gravity Intake or Relief Vent w/Motorized Damper & Actuator - 24" x 24" Includes Roof Curb	EA	$508.25	$1,911.53	$0.00	$2,419.78
111761	Gravity Intake or Relief Vent w/Motorized Damper & Actuator - 36" x 36" & Up (Per SF) Includes Roof Curb	SF	$0.08	$365.69	$0.00	$365.77

23-50-00 Central Heating Equipment

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• HVAC Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• HVAC Equipment costs exclude housekeeping pads and dunnage.

23-52-00 Heating Boilers

Packaged, factory fabricated, assembled and tested with trim and accessories.

23-52-13 Electric Boilers

111762	100 MBH Electric Boiler- Hot Water	EA	$1,275.28	$11,824.04	$0.00	$13,099.32
111763	250 MBH Electric Boiler- Hot Water	EA	$1,275.28	$20,534.16	$0.00	$21,809.44
111764	500 MBH Electric Boiler- Hot Water	EA	$1,275.28	$32,042.39	$0.00	$33,317.67
111765	750 MBH Electric Boiler- Hot Water	EA	$1,275.28	$46,709.69	$0.00	$47,984.97
111766	1,000 MBH Electric Boiler- Hot Water	EA	$1,275.28	$61,376.35	$0.00	$62,651.63
111767	1,250 MBH Electric Boiler- Hot Water	EA	$1,275.28	$74,725.85	$0.00	$76,001.13
111768	1,500 MBH Electric Boiler- Hot Water	EA	$1,275.28	$89,356.73	$0.00	$90,632.01
111769	1,750 MBH Electric Boiler- Hot Water	EA	$1,275.28	$101,539.24	$0.00	$102,814.52
111770	2,000 MBH Electric Boiler- Hot Water	EA	$2,125.48	$115,531.94	$0.00	$117,657.42
111771	2,500 MBH Electric Boiler- Hot Water	EA	$2,125.48	$137,647.13	$0.00	$139,772.61
111772	3,000 MBH Electric Boiler- Hot Water	EA	$2,125.48	$159,760.98	$0.00	$161,886.46
111773	3,500 MBH Electric Boiler- Hot Water	EA	$2,125.48	$180,069.67	$0.00	$182,195.15
111774	4,000 MBH Electric Boiler- Hot Water	EA	$2,125.48	$194,960.16	$0.00	$197,085.64
111775	4,500 MBH Electric Boiler- Hot Water	EA	$2,125.48	$211,206.84	$0.00	$213,332.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111776	5,000 MBH Electric Boiler- Hot Water	EA	$4,250.95	$225,648.33	$0.00	$229,899.28
111777	5,500 MBH Electric Boiler- Hot Water	EA	$6,376.43	$238,284.63	$0.00	$244,661.06
111778	6,000 MBH Electric Boiler- Hot Water	EA	$4,250.95	$254,535.26	$0.00	$258,786.21
111779	6,500 MBH Electric Boiler- Hot Water	EA	$4,250.95	$269,875.40	$0.00	$274,126.35
111780	7,000 MBH Electric Boiler- Hot Water	EA	$4,250.95	$284,321.49	$0.00	$288,572.44
111781	7,500 MBH Electric Boiler- Hot Water	EA	$4,250.95	$297,855.80	$0.00	$302,106.75
	23-52-16 Condensing Boilers					
111782	100 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$1,416.98	$5,973.10	$0.00	$7,390.08
111783	250 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$1,594.11	$9,447.25	$0.00	$11,041.36
111784	500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$1,594.11	$18,894.50	$0.00	$20,488.61
111785	750 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$2,125.48	$27,427.50	$0.00	$29,552.98
111786	1,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$2,656.84	$36,570.00	$0.00	$39,226.84
111787	1,250 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$3,188.21	$45,712.50	$0.00	$48,900.71
111788	1,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$3,188.21	$53,026.50	$0.00	$56,214.71
111789	1,750 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$3,719.58	$59,731.00	$0.00	$63,450.58
111790	2,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,250.95	$68,264.00	$0.00	$72,514.95
111791	2,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,250.95	$85,330.00	$0.00	$89,580.95
111792	3,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,782.32	$102,396.00	$0.00	$107,178.32
111793	3,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,782.32	$119,462.00	$0.00	$124,244.32
111794	4,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,782.32	$136,528.00	$0.00	$141,310.32
111795	4,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,782.32	$148,108.50	$0.00	$152,890.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111796	5,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$4,782.32	$164,565.00	$0.00	$169,347.32
111797	5,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$5,667.94	$181,021.50	$0.00	$186,689.44
111798	6,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$5,667.94	$190,164.00	$0.00	$195,831.94
111799	6,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$6,376.43	$206,011.00	$0.00	$212,387.43
111800	7,000 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$6,376.43	$221,858.00	$0.00	$228,234.43
111801	7,500 MBH Boiler, Packaged Fire-Tube, Condensing - Hot Water	EA	$6,376.43	$237,705.00	$0.00	$244,081.43
	23-52-23 Cast-Iron Boilers					
111802	100 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$2,656.84	$5,241.70	$0.00	$7,898.54
111803	250 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$2,656.84	$9,752.00	$0.00	$12,408.84
111804	500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$3,188.21	$15,847.00	$0.00	$19,035.21
111805	750 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$3,188.21	$21,942.00	$0.00	$25,130.21
111806	1,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$3,985.27	$28,037.00	$0.00	$32,022.27
111807	1,250 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$3,985.27	$33,522.50	$0.00	$37,507.77
111808	1,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$5,180.85	$40,227.00	$0.00	$45,407.85
111809	1,750 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$5,180.85	$44,798.25	$0.00	$49,979.10
111810	2,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$5,180.85	$48,760.00	$0.00	$53,940.85
111811	2,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$6,376.43	$60,950.00	$0.00	$67,326.43
111812	3,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$6,376.43	$69,483.00	$0.00	$75,859.43
111813	3,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$7,970.54	$81,063.50	$0.00	$89,034.04
111814	4,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$7,970.54	$92,644.00	$0.00	$100,614.54
111815	4,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$8,767.59	$104,224.50	$0.00	$112,992.09
111816	5,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$10,361.70	$109,710.00	$0.00	$120,071.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111817	5,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$10,361.70	$120,681.00	$0.00	$131,042.70
111818	6,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$10,361.70	$131,652.00	$0.00	$142,013.70
111819	6,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$11,557.28	$134,699.50	$0.00	$146,256.78
111820	7,000 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$11,557.28	$145,061.00	$0.00	$156,618.28
111821	7,500 MBH Boiler, Cast Iron Sectional - Hot Water	EA	$11,557.28	$155,422.50	$0.00	$166,979.78
	23-52-33 Water-Tube Boilers					
111822	100 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$1,416.98	$4,266.50	$0.00	$5,683.48
111823	250 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$1,594.11	$6,704.50	$0.00	$8,298.61
111824	500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$1,594.11	$13,409.00	$0.00	$15,003.11
111825	750 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$2,125.48	$19,199.25	$0.00	$21,324.73
111826	1,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$2,656.84	$25,599.00	$0.00	$28,255.84
111827	1,250 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$3,188.21	$31,998.75	$0.00	$35,186.96
111828	1,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$3,188.21	$36,570.00	$0.00	$39,758.21
111829	1,750 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$3,719.58	$42,665.00	$0.00	$46,384.58
111830	2,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,250.95	$48,760.00	$0.00	$53,010.95
111831	2,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,250.95	$60,950.00	$0.00	$65,200.95
111832	3,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,782.32	$73,140.00	$0.00	$77,922.32
111833	3,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,782.32	$85,330.00	$0.00	$90,112.32
111834	4,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,782.32	$97,520.00	$0.00	$102,302.32
111835	4,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,782.32	$104,224.50	$0.00	$109,006.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111836	5,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$4,782.32	$115,805.00	$0.00	$120,587.32
111837	5,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$5,667.94	$127,385.50	$0.00	$133,053.44
111838	6,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$5,667.94	$131,652.00	$0.00	$137,319.94
111839	6,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$6,376.43	$142,623.00	$0.00	$148,999.43
111840	7,000 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$6,376.43	$153,594.00	$0.00	$159,970.43
111841	7,500 MBH Boiler, Packaged Water-Tube, Non-Condensing - Hot Water	EA	$6,376.43	$164,565.00	$0.00	$170,941.43
	23-52-39 Fire-Tube Boilers					
111842	30 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$6,376.43	$94,131.18	$0.00	$100,507.61
111843	50 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$6,376.43	$124,703.70	$0.00	$131,080.13
111844	60 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$6,376.43	$132,749.10	$0.00	$139,125.53
111845	70 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$6,376.43	$154,873.95	$0.00	$161,250.38
111846	80 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$8,501.90	$160,908.00	$0.00	$169,409.90
111847	100 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$8,501.90	$176,998.80	$0.00	$185,500.70
111848	125 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$8,501.90	$221,248.50	$0.00	$229,750.40
111849	150 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$8,501.90	$241,362.00	$0.00	$249,863.90
111850	175 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$12,752.86	$260,469.82	$0.00	$273,222.68
111851	200 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$12,752.86	$273,543.60	$0.00	$286,296.46
111852	250 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$19,129.28	$291,645.75	$0.00	$310,775.03
111853	300 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$19,129.28	$349,974.90	$0.00	$369,104.18
111854	350 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$19,129.28	$380,145.15	$0.00	$399,274.43
111855	400 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$19,129.28	$402,270.00	$0.00	$421,399.28
111856	450 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$23,911.60	$452,553.75	$0.00	$476,465.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111857	500 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$23,911.60	$472,667.25	$0.00	$496,578.85
111858	550 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$23,911.60	$486,746.70	$0.00	$510,658.30
111859	600 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$23,911.60	$530,996.40	$0.00	$554,908.00
111860	650 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$28,693.93	$575,246.10	$0.00	$603,940.03
111861	700 HP Scotch Marine Fire-Tube Boiler - Hot Water	EA	$28,693.93	$619,495.80	$0.00	$648,189.73
111862	100 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$1,275.28	$21,373.41	$0.00	$22,648.69
111863	200 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$1,275.28	$25,691.41	$0.00	$26,966.69
111864	300 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$1,275.28	$30,807.64	$0.00	$32,082.92
111865	400 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$1,594.11	$39,326.81	$0.00	$40,920.92
111866	500 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$1,594.11	$49,158.84	$0.00	$50,752.95
111867	750 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$2,550.57	$66,791.91	$0.00	$69,342.48
111868	1,000 #/Hr Clean Steam Generator - Gas Fired Dristeem Model Lx Or Equal.	EA	$2,550.57	$89,019.99	$0.00	$91,570.56
111869	2" & Down Clean Steam Generator Hook-Up - Gas Fired Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,425.84	$1,449.51	$0.00	$2,875.35
111870	2-1/2" To 4" Clean Steam Generator Hook-Up - Gas Fired Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,365.34	$3,618.37	$0.00	$6,983.71
	23-52-49 Boiler Hook-Ups & Modifiers					
111871	2-1/2" Hot Water Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,505.55	$2,880.29	$0.00	$4,385.84
111872	4" Hot Water Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,125.48	$4,935.15	$0.00	$7,060.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111873	6" Hot Water Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,745.41	$7,183.18	$0.00	$9,928.59
111874	8" Hot Water Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,542.46	$9,606.84	$0.00	$13,149.30
111875	6" Steam Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,450.26	$9,308.27	$0.00	$19,758.53
111876	8" Steam Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$12,044.36	$12,012.94	$0.00	$24,057.30
111877	10" Steam Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$13,992.72	$16,368.51	$0.00	$30,361.23
111878	12" Steam Boiler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$17,092.37	$20,724.07	$0.00	$37,816.44
111879	2" & Down Boiler Natural Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$823.62	$558.30	$0.00	$1,381.92
111880	2-1/2" to 4" Boiler Natural Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,325.77	$1,139.76	$0.00	$2,465.53
111881	1-1/4" Boiler Fuel Oil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$789.08	$955.26	$0.00	$1,744.34
111882	[Modifier] Boiler - Hot Water to Low Pressure Steam	MBH	$0.00	$5.25	$0.00	$5.25
111883	[Modifier] Boiler - Hot Water to High Pressure Steam	MBH	$0.00	$9.19	$0.00	$9.19
111884	[Modifier] Boiler - Dual Fuel	MBH	$0.00	$3.94	$0.00	$3.94
111885	[Modifier] Boiler - Additional Distribution & Assembly Labor Item to be applied to installations within existing mechanical spaces with limited accessibility.	MBH	$4.20	$0.00	$0.00	$4.20

23-53-00 Heating Boiler Feedwater Equipment

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	23-53-13 Boiler Feedwater Pumps					
111886	35 Gallon Duplex Feedwater System Each Pump Rated at 6 GPM @ 30 PSIG, ½ H.P	EA	$1,576.40	$11,838.93	$0.00	$13,415.33
	23-54-00 Furnaces					
	23-54-16 Fuel-Fired Furnaces					
111887	60,000 Btu Gas-Fired Furnace - Residential Standard Efficiency	EA	$397.32	$1,413.95	$0.00	$1,811.27
111888	80,000 Btu Gas-Fired Furnace - Residential Standard Efficiency	EA	$446.99	$1,735.60	$0.00	$2,182.59
111889	100,000 Btu Gas-Fired Furnace - Residential Standard Efficiency	EA	$496.66	$2,461.62	$0.00	$2,958.28
111890	60,000 Btu Gas-Fired Furnace - Residential High Efficiency	EA	$397.32	$2,230.55	$0.00	$2,627.87
111891	80,000 Btu Gas-Fired Furnace - Residential High Efficiency	EA	$446.99	$2,676.92	$0.00	$3,123.91
111892	100,000 Btu Gas-Fired Furnace - Residential High Efficiency	EA	$496.66	$3,748.23	$0.00	$4,244.89
111893	Gas-Fired Furnace Natural Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$206.34	$153.72	$0.00	$360.06
	23-57-00 Heat Exchangers for HVAC					
	Shell and tube include U-bend removable tube bundle and mounting legs.					
	23-57-13 Steam-to-Steam Heat Exchangers					
111894	100 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$1,700.38	$39,612.53	$0.00	$41,312.91
111895	200 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$1,700.38	$58,096.59	$0.00	$59,796.97
111896	300 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$1,700.38	$76,580.64	$0.00	$78,281.02
111897	400 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$2,125.48	$93,876.76	$0.00	$96,002.24
111898	500 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$2,125.48	$111,174.15	$0.00	$113,299.63
111899	750 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$3,400.76	$168,218.34	$0.00	$171,619.10
111900	1,000 #/HR Unfired Steam to Clean Steam Generator Cemline USG Series or Equal	EA	$3,400.76	$225,262.53	$0.00	$228,663.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111901	2" & Down Unfired Steam to Clean Steam Generator Hook	EA	$3,507.04	$1,330.61	$0.00	$4,837.65
111902	2-1/2" To 4" Unfired Steam to Clean Steam Generator Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,394.14	$5,422.16	$0.00	$11,816.30
	23-57-16 Steam-to-Water Heat Exchangers					
111903	375 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$637.64	$4,523.22	$0.00	$5,160.86
111904	750 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$637.64	$9,046.44	$0.00	$9,684.08
111905	1,125 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$13,569.66	$0.00	$14,419.86
111906	1,500 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$15,508.19	$0.00	$16,358.39
111907	2,250 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$18,092.90	$0.00	$18,943.10
111908	3,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$20,677.59	$0.00	$21,527.79
111909	3,750 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$25,846.99	$0.00	$26,697.19
111910	4,500 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$31,016.39	$0.00	$31,866.59
111911	5,250 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$36,185.78	$0.00	$37,035.98
111912	6,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$41,355.18	$0.00	$42,630.46
111913	6,750 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$46,524.59	$0.00	$47,799.87
111914	7,500 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$51,693.99	$0.00	$52,969.27
111915	9,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$62,032.78	$0.00	$63,308.06
111916	10,500 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$72,371.58	$0.00	$73,646.86
111917	12,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$82,710.37	$0.00	$83,985.65
111918	15,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,700.38	$103,387.96	$0.00	$105,088.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111919	21,000 MBH Steam To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,700.38	$144,743.15	$0.00	$146,443.53
111920	2" & DN Steam To Water Heat Exchanger (HX) Hook -Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,631.02	$3,860.29	$0.00	$7,491.31
111921	2-1/2" Steam To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,262.04	$7,604.68	$0.00	$14,866.72
111922	4" Steam To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,741.76	$9,975.66	$0.00	$19,717.42
111923	6" Steam To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$11,867.24	$16,017.26	$0.00	$27,884.50
111924	8" Steam To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$14,169.84	$22,480.36	$0.00	$36,650.20

23-57-19 Liquid-to-Liquid Heat Exchangers

Freestanding assembly consisting of frame support, top and bottom carrying and guide bars, fixed and movable end plates, tie rods, individually removable plates, and one-piece gaskets.

111925	375 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$637.64	$9,046.44	$0.00	$9,684.08
111926	750 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$637.64	$18,092.90	$0.00	$18,730.54
111927	1,125 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$27,139.34	$0.00	$27,989.54
111928	1,500 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$31,016.39	$0.00	$31,866.59
111929	2,250 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$37,478.13	$0.00	$38,328.33
111930	3,000 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$39,632.05	$0.00	$40,482.25
111931	3,750 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$49,540.06	$0.00	$50,390.26
111932	4,500 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$59,448.08	$0.00	$60,298.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111933	5,250 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$850.20	$69,356.09	$0.00	$70,206.29
111934	6,000 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$79,264.11	$0.00	$80,539.39
111935	6,750 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$89,172.12	$0.00	$90,447.40
111936	7,500 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$99,080.12	$0.00	$100,355.40
111937	9,000 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$118,896.15	$0.00	$120,171.43
111938	10,500 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$138,712.18	$0.00	$139,987.46
111939	12,000 MBH Water To Water Heat Exchanger (HX) - Shell & Tube	EA	$1,275.28	$158,528.21	$0.00	$159,803.49
111940	125 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$1,275.28	$11,079.91	$0.00	$12,355.19
111941	300 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$1,275.28	$26,279.21	$0.00	$27,554.49
111942	500 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$2,550.57	$48,374.54	$0.00	$50,925.11
111943	1,000 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$2,550.57	$89,306.85	$0.00	$91,857.42
111944	1,500 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$3,400.76	$122,533.22	$0.00	$125,933.98
111945	2,000 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$3,400.76	$163,729.23	$0.00	$167,129.99
111946	3,000 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$3,825.85	$223,267.13	$0.00	$227,092.98
111947	4,000 GPM Water to Water Heat Exchanger (HX) - Plate & Frame	EA	$3,825.85	$297,689.50	$0.00	$301,515.35
111948	2" & Dn Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,029.55	$2,252.04	$0.00	$6,281.59
111949	2-1/2" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,951.33	$4,504.06	$0.00	$10,455.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111950	4" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,669.43	$5,778.60	$0.00	$13,448.03
111951	6" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,450.26	$9,407.77	$0.00	$19,858.03
111952	8" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$12,752.86	$13,285.37	$0.00	$26,038.23
111953	10" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$16,118.19	$17,281.78	$0.00	$33,399.97
111954	12" Water To Water Heat Exchanger (HX) Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$18,420.79	$21,602.22	$0.00	$40,023.01

23-57-33 Direct Geoexchange Heat Exchangers

111955	Geothermal Field or Well - Conductivity Testing Includes documentation and reporting.	EA	$3,498.17	$0.00	$2,864.65	$6,362.82
111956	6" Geothermal Field or Well - 1-1/4" Closed Loop w/o Horizontal Piping Per Foot of Depth. Includes drilling, casing, grout, and piping.	LF	$11.16	$3.69	$9.66	$24.51
111957	6" Geothermal Field or Well - 1-1/2" Closed Loop w/ Horizontal Piping Per Foot of Depth. Wells 20' on center. Includes drilling, casing, grout, and piping.	LF	$16.56	$6.63	$9.66	$32.85

23-60-00 Central Cooling Equipment

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• HVAC Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.
• HVAC Equipment costs exclude housekeeping pads and dunnage.

23-62-00 Packaged Compressor and Condenser Units

23-62-13 Packaged Air-Cooled Refrigerant Compressor and Condenser Units

Packaged factory assembled and tested with condenser coil and casing, fan, motors and refrigerant reservoir. Condensing units include compressor.

111958	1 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$2,359.22	$0.00	$3,209.42
111959	2 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$2,648.05	$0.00	$3,498.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111960	3 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$2,938.19	$0.00	$3,788.39
111961	4 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$3,803.37	$0.00	$4,653.57
111962	5 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$4,668.54	$0.00	$5,518.74
111963	7-1/2 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$850.20	$7,529.28	$0.00	$8,379.48
111964	10 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,275.28	$10,390.00	$0.00	$11,665.28
111965	15 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,275.28	$17,054.09	$0.00	$18,329.37
111966	20 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,275.28	$24,771.10	$0.00	$26,046.38
111967	25 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,594.11	$32,538.00	$0.00	$34,132.11
111968	30 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,594.11	$40,445.37	$0.00	$42,039.48
111969	40 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,594.11	$48,352.74	$0.00	$49,946.85
111970	50 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,912.93	$56,260.12	$0.00	$58,173.05
111971	60 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,912.93	$65,181.03	$0.00	$67,093.96
111972	70 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$1,912.93	$69,642.13	$0.00	$71,555.06
111973	80 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$2,391.16	$74,103.24	$0.00	$76,494.40
111974	90 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$2,391.16	$87,368.41	$0.00	$89,759.57
111975	100 Ton Refrigerant Condensing Unit - Packaged Air Cooled	EA	$2,391.16	$100,973.61	$0.00	$103,364.77
111976	5/8" Refrigerant Condensing Unit Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$632.33	$632.42	$0.00	$1,264.75
111977	1-1/8" Refrigerant Condensing Unit Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$940.53	$941.21	$0.00	$1,881.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111978	1-5/8" Refrigerant Condensing Unit Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,182.29	$1,181.24	$0.00	$2,363.53
111979	2-1/8" 4-Pipe Refrigerant Condensing Unit Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,398.24	$2,406.21	$0.00	$4,804.45
111980	1 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$1,052.19	$0.00	$1,618.98
111981	2 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$1,293.18	$0.00	$1,859.97
111982	3 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$1,536.05	$0.00	$2,102.84
111983	4 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$2,168.84	$0.00	$2,735.63
111984	5 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$2,803.29	$0.00	$3,370.08
111985	7-1/2 Ton Refrigerant Condenser - Air Cooled	EA	$566.79	$3,686.52	$0.00	$4,253.31
111986	10 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$4,646.55	$0.00	$5,496.75
111987	15 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$5,836.99	$0.00	$6,687.19
111988	20 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$7,449.85	$0.00	$8,300.05
111989	25 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$8,294.67	$0.00	$9,144.87
111990	30 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$10,636.81	$0.00	$11,487.01
111991	40 Ton Refrigerant Condenser - Air Cooled	EA	$850.20	$12,978.96	$0.00	$13,829.16
111992	50 Ton Refrigerant Condenser - Air Cooled	EA	$1,700.38	$15,322.10	$0.00	$17,022.48
111993	60 Ton Refrigerant Condenser - Air Cooled	EA	$1,700.38	$19,020.76	$0.00	$20,721.14
111994	70 Ton Refrigerant Condenser - Air Cooled	EA	$1,700.38	$22,720.40	$0.00	$24,420.78
111995	80 Ton Refrigerant Condenser - Air Cooled	EA	$1,700.38	$26,420.06	$0.00	$28,120.44
111996	90 Ton Refrigerant Condenser - Air Cooled	EA	$1,700.38	$32,257.04	$0.00	$33,957.42
111997	100 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$38,094.03	$0.00	$40,644.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
111998	125 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$45,236.66	$0.00	$47,787.23
111999	150 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$52,379.30	$0.00	$54,929.87
112000	175 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$55,144.18	$0.00	$57,694.75
112001	200 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$63,054.84	$0.00	$65,605.41
112002	250 Ton Refrigerant Condenser - Air Cooled	EA	$2,550.57	$73,730.39	$0.00	$76,280.96
112003	300 Ton Refrigerant Condenser - Air Cooled	EA	$3,188.21	$88,476.46	$0.00	$91,664.67
112004	350 Ton Refrigerant Condenser - Air Cooled	EA	$3,188.21	$103,222.54	$0.00	$106,410.75
112005	400 Ton Refrigerant Condenser - Air Cooled	EA	$3,188.21	$117,968.62	$0.00	$121,156.83
112006	450 Ton Refrigerant Condenser - Air Cooled	EA	$3,188.21	$132,714.70	$0.00	$135,902.91
112007	500 Ton Refrigerant Condenser - Air Cooled	EA	$3,188.21	$147,460.77	$0.00	$150,648.98
112008	5/8" Refrigerant Condenser Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$615.50	$714.68	$0.00	$1,330.18
112009	1-3/8" Refrigerant Condenser Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,080.45	$1,254.05	$0.00	$2,334.50
112010	2-1/8" Refrigerant Condenser Hook-Up - Air Cooled Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,361.19	$1,580.37	$0.00	$2,941.56
112011	2 Ton Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$495.95	$3,159.65	$0.00	$3,655.60
112012	3 Ton Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$557.93	$3,716.73	$0.00	$4,274.66
112013	4 Ton Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$619.93	$4,531.02	$0.00	$5,150.95
112014	2 Ton Heat Pump Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$495.95	$4,044.64	$0.00	$4,540.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112015	3 Ton Heat Pump Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$557.93	$4,698.03	$0.00	$5,255.96
112016	4 Ton Heat Pump Refrigerant Condensing Unit & DX Evaporator Cooling Coil - Residential 14.3 SEER2	EA	$619.93	$5,351.41	$0.00	$5,971.34
112017	DX Cooling Coil & Condensing Unit Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$210.77	$149.68	$0.00	$360.45

23-64-00 Packaged Water Chillers

Factory assembled and run-tested complete with base and frame, condenser casing, compressors, evaporator, condenser coils, condenser fans, motors, controllers and accessories.

23-64-16 Water Cooled Chillers

112018	100 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$119,093.08	$0.00	$120,864.31
112019	125 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$141,604.59	$0.00	$143,375.82
112020	150 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$164,116.08	$0.00	$165,887.31
112021	175 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$182,996.69	$0.00	$184,767.92
112022	200 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$203,329.66	$0.00	$208,855.89
112023	250 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$239,638.53	$0.00	$245,164.76
112024	300 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$273,042.69	$0.00	$278,568.92
112025	350 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$304,994.48	$0.00	$310,520.71
112026	400 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$333,073.34	$0.00	$339,874.87
112027	450 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$361,636.32	$0.00	$368,437.85
112028	500 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$387,294.58	$0.00	$394,096.11
112029	550 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$415,373.45	$0.00	$422,174.98
112030	600 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$10,202.28	$435,706.41	$0.00	$445,908.69
112031	650 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$10,202.28	$459,428.20	$0.00	$469,630.48
112032	700 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$10,202.28	$481,213.52	$0.00	$491,415.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112033	750 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$10,202.28	$501,062.37	$0.00	$511,264.65
112034	800 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$12,327.76	$526,720.64	$0.00	$539,048.40
112035	850 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$12,327.76	$543,180.66	$0.00	$555,508.42
112036	900 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$12,327.76	$566,418.33	$0.00	$578,746.09
112037	950 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$12,327.76	$579,489.52	$0.00	$591,817.28
112038	1,000 Ton Water Cooled Water Chiller- Basic Efficiency	EA	$12,327.76	$600,306.61	$0.00	$612,634.37
112039	100 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$139,426.05	$0.00	$141,197.28
112040	125 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$167,020.79	$0.00	$168,792.02
112041	150 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$194,615.53	$0.00	$196,386.76
112042	175 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$218,579.38	$0.00	$220,350.61
112043	200 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$243,995.59	$0.00	$249,521.82
112044	250 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$290,470.94	$0.00	$295,997.17
112045	300 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$334,041.58	$0.00	$339,567.81
112046	350 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$376,159.86	$0.00	$381,686.09
112047	400 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$414,405.21	$0.00	$421,206.74
112048	450 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$453,134.66	$0.00	$459,936.19
112049	500 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$488,959.42	$0.00	$495,760.95
112050	550 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$527,204.75	$0.00	$534,006.28
112051	600 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$10,202.28	$557,704.20	$0.00	$567,906.48
112052	650 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$10,202.28	$591,592.48	$0.00	$601,794.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112053	700 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$10,202.28	$623,544.28	$0.00	$633,746.56
112054	750 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$10,202.28	$653,559.61	$0.00	$663,761.89
112055	800 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$12,327.76	$689,384.36	$0.00	$701,712.12
112056	850 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$12,327.76	$716,010.87	$0.00	$728,338.63
112057	900 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$12,327.76	$749,415.03	$0.00	$761,742.79
112058	950 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$12,327.76	$772,652.70	$0.00	$784,980.46
112059	1,000 Ton Water Cooled Water Chiller- Standard Efficiency	EA	$12,327.76	$803,636.27	$0.00	$815,964.03
112060	100 Ton Water Cooled Water Chiller- High Efficiency	EA	$1,771.23	$159,759.02	$0.00	$161,530.25
112061	125 Ton Water Cooled Water Chiller- High Efficiency	EA	$1,771.23	$192,437.00	$0.00	$194,208.23
112062	150 Ton Water Cooled Water Chiller- High Efficiency	EA	$1,771.23	$225,114.97	$0.00	$226,886.20
112063	175 Ton Water Cooled Water Chiller- High Efficiency	EA	$1,771.23	$254,162.07	$0.00	$255,933.30
112064	200 Ton Water Cooled Water Chiller- High Efficiency	EA	$5,526.23	$284,661.53	$0.00	$290,187.76
112065	250 Ton Water Cooled Water Chiller- High Efficiency	EA	$5,526.23	$341,303.35	$0.00	$346,829.58
112066	300 Ton Water Cooled Water Chiller- High Efficiency	EA	$5,526.23	$395,040.48	$0.00	$400,566.71
112067	350 Ton Water Cooled Water Chiller- High Efficiency	EA	$5,526.23	$447,325.25	$0.00	$452,851.48
112068	400 Ton Water Cooled Water Chiller- High Efficiency	EA	$6,801.53	$495,737.07	$0.00	$502,538.60
112069	450 Ton Water Cooled Water Chiller- High Efficiency	EA	$6,801.53	$544,633.01	$0.00	$551,434.54
112070	500 Ton Water Cooled Water Chiller- High Efficiency	EA	$6,801.53	$590,624.25	$0.00	$597,425.78
112071	550 Ton Water Cooled Water Chiller- High Efficiency	EA	$6,801.53	$639,036.07	$0.00	$645,837.60
112072	600 Ton Water Cooled Water Chiller- High Efficiency	EA	$10,202.28	$679,701.99	$0.00	$689,904.27
112073	650 Ton Water Cooled Water Chiller- High Efficiency	EA	$10,202.28	$723,756.76	$0.00	$733,959.04
112074	700 Ton Water Cooled Water Chiller- High Efficiency	EA	$10,202.28	$765,875.04	$0.00	$776,077.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112075	750 Ton Water Cooled Water Chiller- High Efficiency	EA	$10,202.28	$806,056.85	$0.00	$816,259.13
112076	800 Ton Water Cooled Water Chiller- High Efficiency	EA	$12,327.76	$852,048.09	$0.00	$864,375.85
112077	850 Ton Water Cooled Water Chiller- High Efficiency	EA	$12,327.76	$888,841.08	$0.00	$901,168.84
112078	900 Ton Water Cooled Water Chiller- High Efficiency	EA	$12,327.76	$932,411.71	$0.00	$944,739.47
112079	950 Ton Water Cooled Water Chiller- High Efficiency	EA	$12,327.76	$965,815.87	$0.00	$978,143.63
112080	1,000 Ton Water Cooled Water Chiller- High Efficiency	EA	$12,327.76	$1,006,965.92	$0.00	$1,019,293.68
112081	10 Ton Water Cooled Water Chiller- Modular	EA	$1,133.59	$13,748.95	$0.00	$14,882.54
112082	20 Ton Water Cooled Water Chiller- Modular	EA	$1,133.59	$27,497.91	$0.00	$28,631.50
112083	30 Ton Water Cooled Water Chiller- Modular	EA	$1,133.59	$41,246.88	$0.00	$42,380.47
112084	40 Ton Water Cooled Water Chiller- Modular	EA	$1,416.98	$54,995.83	$0.00	$56,412.81
112085	50 Ton Water Cooled Water Chiller- Modular	EA	$1,416.98	$68,744.79	$0.00	$70,161.77
112086	70 Ton Water Cooled Water Chiller- Modular	EA	$1,416.98	$96,242.71	$0.00	$97,659.69
112087	85 Ton Water Cooled Water Chiller- Modular	EA	$1,416.98	$116,866.14	$0.00	$118,283.12
112088	2-1/2" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,667.94	$3,407.18	$0.00	$9,075.12
112089	4" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,907.80	$4,987.83	$0.00	$11,895.63
112090	6" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,413.34	$8,324.76	$0.00	$16,738.10
112091	8" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,096.01	$12,645.20	$0.00	$22,741.21
112092	10" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$12,929.98	$23,358.49	$0.00	$36,288.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112093	12" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$15,409.70	$27,046.67	$0.00	$42,456.37
112094	14" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$17,889.42	$37,901.43	$0.00	$55,790.85
112095	16" Water Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$19,660.65	$41,588.66	$0.00	$61,249.31
112096	[Modifier] Water Cooled Water Chiller- Additional Distribution & Assembly Labor Item to be applied to installations within existing mechanical spaces with limited accessibility.	TON	$47.64	$0.00	$0.00	$47.64
	23-64-19 Air Cooled Chillers					
112097	5 Ton Air Cooled Packaged Water Chiller w/ Integral Pumps & Buffer Tank	EA	$3,985.27	$33,796.78	$0.00	$37,782.05
112098	25 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$48,411.83	$0.00	$50,183.06
112099	50 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$1,771.23	$83,752.46	$0.00	$85,523.69
112100	75 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$2,125.48	$114,009.84	$0.00	$116,135.32
112101	100 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$2,125.48	$141,362.53	$0.00	$143,488.01
112102	125 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$2,125.48	$165,810.49	$0.00	$167,935.97
112103	150 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$4,162.39	$188,806.11	$0.00	$192,968.50
112104	175 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$4,162.39	$210,107.32	$0.00	$214,269.71
112105	200 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$230,440.28	$0.00	$235,966.51
112106	250 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$266,265.02	$0.00	$271,791.25
112107	300 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$299,185.07	$0.00	$304,711.30
112108	350 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$5,526.23	$328,716.28	$0.00	$334,242.51
112109	400 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$352,438.07	$0.00	$359,239.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112110	450 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$379,064.58	$0.00	$385,866.11
112111	500 Ton Air Cooled Water Chiller- Basic Efficiency	EA	$6,801.53	$401,818.13	$0.00	$408,619.66
112112	25 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$53,253.00	$0.00	$55,024.23
112113	50 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$1,771.23	$93,434.81	$0.00	$95,206.04
112114	75 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$2,125.48	$128,533.40	$0.00	$130,658.88
112115	100 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$2,125.48	$160,727.26	$0.00	$162,852.74
112116	125 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$2,125.48	$190,016.40	$0.00	$192,141.88
112117	150 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$4,162.39	$217,853.21	$0.00	$222,015.60
112118	175 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$4,162.39	$243,995.59	$0.00	$248,157.98
112119	200 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$269,169.74	$0.00	$274,695.97
112120	250 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$314,676.85	$0.00	$320,203.08
112121	300 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$357,279.26	$0.00	$362,805.49
112122	350 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$5,526.23	$396,492.83	$0.00	$402,019.06
112123	400 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$429,896.99	$0.00	$436,698.52
112124	450 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$466,205.86	$0.00	$473,007.39
112125	500 Ton Air Cooled Water Chiller- Standard Efficiency	EA	$6,801.53	$498,641.78	$0.00	$505,443.31
112126	25 Ton Air Cooled Water Chiller- High Efficiency	EA	$1,771.23	$58,820.37	$0.00	$60,591.60
112127	50 Ton Air Cooled Water Chiller- High Efficiency	EA	$1,771.23	$104,569.54	$0.00	$106,340.77
112128	75 Ton Air Cooled Water Chiller- High Efficiency	EA	$2,125.48	$145,235.48	$0.00	$147,360.96
112129	100 Ton Air Cooled Water Chiller- High Efficiency	EA	$2,125.48	$182,996.69	$0.00	$185,122.17
112130	125 Ton Air Cooled Water Chiller- High Efficiency	EA	$2,125.48	$217,853.21	$0.00	$219,978.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112131	150 Ton Air Cooled Water Chiller- High Efficiency	EA	$4,162.39	$251,257.37	$0.00	$255,419.76
112132	175 Ton Air Cooled Water Chiller- High Efficiency	EA	$4,162.39	$282,967.10	$0.00	$287,129.49
112133	200 Ton Air Cooled Water Chiller- High Efficiency	EA	$5,526.23	$313,708.61	$0.00	$319,234.84
112134	250 Ton Air Cooled Water Chiller- High Efficiency	EA	$5,526.23	$370,350.45	$0.00	$375,876.68
112135	300 Ton Air Cooled Water Chiller- High Efficiency	EA	$5,526.23	$424,087.56	$0.00	$429,613.79
112136	350 Ton Air Cooled Water Chiller- High Efficiency	EA	$5,526.23	$474,435.87	$0.00	$479,962.10
112137	400 Ton Air Cooled Water Chiller- High Efficiency	EA	$6,801.53	$518,974.74	$0.00	$525,776.27
112138	450 Ton Air Cooled Water Chiller- High Efficiency	EA	$6,801.53	$566,418.33	$0.00	$573,219.86
112139	500 Ton Air Cooled Water Chiller- High Efficiency	EA	$6,801.53	$609,988.98	$0.00	$616,790.51
112140	100 Ton Air Cooled Water Chiller- Heat Recovery	EA	$2,125.48	$246,900.29	$0.00	$249,025.77
112141	125 Ton Air Cooled Water Chiller- Heat Recovery	EA	$2,125.48	$308,625.37	$0.00	$310,750.85
112142	150 Ton Air Cooled Water Chiller- Heat Recovery	EA	$4,162.39	$370,350.45	$0.00	$374,512.84
112143	175 Ton Air Cooled Water Chiller- Heat Recovery	EA	$4,162.39	$432,075.53	$0.00	$436,237.92
112144	200 Ton Air Cooled Water Chiller- Heat Recovery	EA	$5,526.23	$493,800.60	$0.00	$499,326.83
112145	250 Ton Air Cooled Water Chiller- Heat Recovery	EA	$5,526.23	$617,250.74	$0.00	$622,776.97
112146	300 Ton Air Cooled Water Chiller- Heat Recovery	EA	$5,526.23	$740,700.90	$0.00	$746,227.13
112147	2-1/2" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,782.32	$2,051.33	$0.00	$6,833.65
112148	4" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,376.43	$3,073.49	$0.00	$9,449.92
112149	6" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,704.85	$4,914.07	$0.00	$12,618.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112150	8" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,387.52	$8,510.92	$0.00	$17,898.44
112151	10" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$11,955.80	$10,537.67	$0.00	$22,493.47
112152	12" Air Cooled Water Chiller Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$14,081.28	$18,282.85	$0.00	$32,364.13
	23-65-00 Cooling Towers					
	23-65-13 Forced-Draft Cooling Towers					
112153	400 GPM Cooling Tower Basin Sweeper Piping System Includes controller, software, programming, and distribution piping for rotation of 2 tower cells, adjustable/directional flow sweeper jets, anchoring, and control valves.	EA	$9,918.89	$55,230.45	$0.00	$65,149.34
112154	50 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$1,700.38	$27,241.91	$0.00	$28,942.29
112155	100 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$52,514.52	$0.00	$55,490.19
112156	150 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$75,817.84	$0.00	$78,793.51
112157	200 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$97,151.86	$0.00	$101,827.91
112158	250 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$114,875.51	$0.00	$119,551.56
112159	300 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$131,942.73	$0.00	$136,618.78
112160	350 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$147,040.66	$0.00	$151,716.71
112161	400 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$160,169.29	$0.00	$164,845.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112162	450 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$171,328.62	$0.00	$176,004.67
112163	500 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$180,518.66	$0.00	$185,194.71
112164	550 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$187,739.41	$0.00	$192,415.46
112165	600 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$192,990.86	$0.00	$197,666.91
112166	650 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$196,273.02	$0.00	$205,625.12
112167	700 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$197,585.88	$0.00	$206,937.98
112168	750 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$196,929.45	$0.00	$206,281.55
112169	800 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$194,303.72	$0.00	$203,655.82
112170	850 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$184,129.04	$0.00	$193,481.14
112171	900 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$177,236.50	$0.00	$191,477.19
112172	950 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$168,374.68	$0.00	$182,615.37
112173	1,000 Ton Open-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$157,543.56	$0.00	$171,784.25
112174	50 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$1,700.38	$30,524.06	$0.00	$32,224.44
112175	100 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$59,078.84	$0.00	$62,054.51
112176	150 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$85,664.31	$0.00	$88,639.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112177	200 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$110,280.49	$0.00	$114,956.54
112178	250 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$131,286.30	$0.00	$135,962.35
112179	300 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$151,635.68	$0.00	$156,311.73
112180	350 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$170,015.76	$0.00	$174,691.81
112181	400 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$186,426.55	$0.00	$191,102.60
112182	450 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$200,868.04	$0.00	$205,544.09
112183	500 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$213,340.24	$0.00	$218,016.29
112184	550 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$223,843.14	$0.00	$228,519.19
112185	600 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$232,376.75	$0.00	$237,052.80
112186	650 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$238,941.07	$0.00	$248,293.17
112187	700 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$243,536.09	$0.00	$252,888.19
112188	750 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$246,161.81	$0.00	$255,513.91
112189	800 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$246,818.24	$0.00	$256,170.34
112190	850 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$239,925.71	$0.00	$249,277.81
112191	900 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$236,315.34	$0.00	$250,556.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112192	950 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$230,735.67	$0.00	$244,976.36
112193	1,000 Ton Open-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$223,186.71	$0.00	$237,427.40
112194	50 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$1,700.38	$41,207.49	$0.00	$42,907.87
112195	100 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$79,756.43	$0.00	$82,732.10
112196	150 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,975.67	$115,646.82	$0.00	$118,622.49
112197	200 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$148,878.66	$0.00	$153,554.71
112198	250 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$177,236.50	$0.00	$181,912.55
112199	300 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$204,708.17	$0.00	$209,384.22
112200	350 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$229,521.28	$0.00	$234,197.33
112201	400 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$251,675.84	$0.00	$256,351.89
112202	450 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$271,171.85	$0.00	$275,847.90
112203	500 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$288,009.33	$0.00	$292,685.38
112204	550 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$302,188.23	$0.00	$306,864.28
112205	600 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$4,676.05	$313,708.61	$0.00	$318,384.66
112206	650 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$322,570.44	$0.00	$331,922.54

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112207	700 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$328,773.72	$0.00	$338,125.82
112208	750 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$332,318.45	$0.00	$341,670.55
112209	800 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$333,204.63	$0.00	$342,556.73
112210	850 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$9,352.10	$323,899.71	$0.00	$333,251.81
112211	900 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$319,025.71	$0.00	$333,266.40
112212	950 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$311,493.15	$0.00	$325,733.84
112213	1,000 Ton Open-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$14,240.69	$301,302.06	$0.00	$315,542.75
112214	4" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,684.16	$1,533.76	$0.00	$5,217.92
112215	6" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,490.07	$2,559.86	$0.00	$7,049.93
112216	8" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,481.96	$3,888.52	$0.00	$9,370.48
112217	10" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,005.21	$7,182.74	$0.00	$14,187.95
112218	12" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,262.78	$8,316.86	$0.00	$16,579.64
112219	14" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,476.08	$10,204.88	$0.00	$19,680.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112220	16" Cooling Tower Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,742.51	$14,943.09	$0.00	$25,685.60
	23-65-33 Liquid Coolers					
112221	50 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,125.48	$65,643.15	$0.00	$67,768.63
112222	100 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$111,593.36	$0.00	$115,312.94
112223	150 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$137,850.62	$0.00	$141,570.20
112224	200 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$170,672.19	$0.00	$176,517.25
112225	250 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$213,340.24	$0.00	$219,185.30
112226	300 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$256,008.28	$0.00	$261,853.34
112227	350 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$298,676.33	$0.00	$304,521.39
112228	400 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$341,344.38	$0.00	$347,189.44
112229	450 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$384,012.43	$0.00	$389,857.49
112230	500 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$426,680.48	$0.00	$432,525.54
112231	550 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$469,348.52	$0.00	$475,193.58
112232	600 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$512,016.57	$0.00	$517,861.63
112233	650 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$554,684.62	$0.00	$566,374.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112234	700 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$597,352.66	$0.00	$609,042.78
112235	750 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$640,020.71	$0.00	$651,710.83
112236	800 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$682,688.76	$0.00	$694,378.88
112237	850 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$725,356.81	$0.00	$737,046.93
112238	900 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$768,024.86	$0.00	$785,825.72
112239	950 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$810,692.90	$0.00	$828,493.76
112240	1,000 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$853,360.95	$0.00	$871,161.81
112241	50 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,125.48	$73,848.54	$0.00	$75,974.02
112242	100 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$128,004.14	$0.00	$131,723.72
112243	150 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$162,466.80	$0.00	$166,186.38
112244	200 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$203,493.76	$0.00	$209,338.82
112245	250 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$254,367.21	$0.00	$260,212.27
112246	300 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$305,240.65	$0.00	$311,085.71
112247	350 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$356,114.09	$0.00	$361,959.15
112248	400 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$406,987.53	$0.00	$412,832.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112249	450 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$457,860.97	$0.00	$463,706.03
112250	500 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$508,734.41	$0.00	$514,579.47
112251	550 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$559,607.85	$0.00	$565,452.91
112252	600 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$610,481.30	$0.00	$616,326.36
112253	650 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$661,354.74	$0.00	$673,044.86
112254	700 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$712,228.18	$0.00	$723,918.30
112255	750 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$763,101.62	$0.00	$774,791.74
112256	800 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$813,975.06	$0.00	$825,665.18
112257	850 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$864,848.50	$0.00	$876,538.62
112258	900 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$915,721.94	$0.00	$933,522.80
112259	950 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$966,595.38	$0.00	$984,396.24
112260	1,000 Ton Closed-Circuit Cooling Tower- Galvanized Structure & Stainless Steel Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$1,017,468.82	$0.00	$1,035,269.68
112261	50 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$2,125.48	$73,848.54	$0.00	$75,974.02
112262	100 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$172,641.48	$0.00	$176,361.06
112263	150 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$3,719.58	$219,576.34	$0.00	$223,295.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112264	200 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$275,701.23	$0.00	$281,546.29
112265	250 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$344,626.54	$0.00	$350,471.60
112266	300 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$413,551.84	$0.00	$419,396.90
112267	350 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$482,477.15	$0.00	$488,322.21
112268	400 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$551,402.46	$0.00	$557,247.52
112269	450 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$620,327.77	$0.00	$626,172.83
112270	500 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$689,253.08	$0.00	$695,098.14
112271	550 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$758,178.38	$0.00	$764,023.44
112272	600 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$5,845.06	$827,103.69	$0.00	$832,948.75
112273	650 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$896,029.00	$0.00	$907,719.12
112274	700 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$964,954.30	$0.00	$976,644.42
112275	750 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$1,033,879.61	$0.00	$1,045,569.73
112276	800 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$1,102,804.92	$0.00	$1,114,495.04
112277	850 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$11,690.12	$1,171,730.23	$0.00	$1,183,420.35
112278	900 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$1,240,655.54	$0.00	$1,258,456.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112279	950 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$1,309,580.84	$0.00	$1,327,381.70
112280	1,000 Ton Closed-Circuit Cooling Tower- Stainless Steel Structure & Basin Forced, Induced Draft, Counterflow Or Crossflow	EA	$17,800.86	$1,378,506.15	$0.00	$1,396,307.01
112281	4" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,684.16	$1,533.76	$0.00	$5,217.92
112282	6" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,490.07	$2,559.86	$0.00	$7,049.93
112283	8" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,481.96	$3,888.40	$0.00	$9,370.36
112284	10" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,005.21	$718,273.81	$0.00	$725,279.02
112285	12" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,262.78	$8,316.86	$0.00	$16,579.64
112286	14" Fluid Cooler Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,476.08	$10,204.88	$0.00	$19,680.96

23-70-00 Central HVAC Equipment

• HVAC Equipment costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• HVAC Equipment Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Air Handling Unit and Packaged DX Rooftop Unit costs include variable frequency drives and roof curbs as required.
• HVAC Equipment costs exclude housekeeping pads and dunnage.

23-73-00 Central-Station Air-Handling Units

Air Handling Units (AHUs) to be double wall galvanized construction and include fans, motor and variable frequency drive (VFD) assemblies, coils, dampers, plenums, filters, condensate pans, mixing dampers, access sections, and accessories.

23-73-13 Modular Central-Station Air-Handling Units

Standard factory-made cataloged units with typical components. Flexible due to adjustable modular construction.

112287	500 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$794.66	$12,688.81	$0.00	$13,483.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112288	1,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$794.66	$21,471.87	$0.00	$22,266.53
112289	1,500 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,191.99	$26,362.29	$0.00	$27,554.28
112290	2,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,191.99	$31,587.48	$0.00	$32,779.47
112291	2,500 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$37,272.18	$0.00	$38,861.50
112292	3,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$41,237.03	$0.00	$42,826.35
112293	3,500 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$43,678.95	$0.00	$45,268.27
112294	4,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$44,847.40	$0.00	$46,436.72
112295	4,500 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$48,004.83	$0.00	$49,594.15
112296	5,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$48,214.89	$0.00	$49,804.21
112297	6,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$54,155.60	$0.00	$55,744.92
112298	7,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,589.32	$58,862.21	$0.00	$60,451.53
112299	8,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,383.97	$67,271.10	$0.00	$69,655.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112300	9,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,383.97	$75,679.99	$0.00	$78,063.96
112301	10,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,383.97	$84,088.88	$0.00	$86,472.85
112302	11,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,178.63	$92,497.77	$0.00	$95,676.40
112303	12,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,178.63	$100,906.65	$0.00	$104,085.28
112304	13,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,178.63	$109,315.53	$0.00	$112,494.16
112305	14,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,178.63	$117,724.43	$0.00	$120,903.06
112306	15,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$121,603.94	$0.00	$126,371.90
112307	16,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$124,774.50	$0.00	$129,542.46
112308	17,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$132,572.91	$0.00	$137,340.87
112309	18,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$140,371.31	$0.00	$145,139.27
112310	19,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$148,169.72	$0.00	$152,937.68
112311	20,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$155,968.12	$0.00	$160,736.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112312	21,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$163,766.53	$0.00	$168,534.49
112313	22,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$171,564.94	$0.00	$176,332.90
112314	23,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$175,890.81	$0.00	$180,658.77
112315	24,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$179,757.20	$0.00	$184,525.16
112316	25,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$183,472.60	$0.00	$188,240.56
112317	26,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$186,715.38	$0.00	$191,483.34
112318	27,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$193,896.74	$0.00	$198,664.70
112319	28,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$201,078.10	$0.00	$205,846.06
112320	29,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$208,259.46	$0.00	$213,027.42
112321	30,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$215,440.82	$0.00	$220,208.78
112322	31,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$217,941.82	$0.00	$222,709.78
112323	32,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$219,930.81	$0.00	$224,698.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112324	33,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$220,954.84	$0.00	$225,722.80
112325	34,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$223,186.71	$0.00	$227,954.67
112326	35,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$229,751.02	$0.00	$234,518.98
112327	36,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,767.96	$236,315.34	$0.00	$241,083.30
112328	37,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$242,879.66	$0.00	$248,839.60
112329	38,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$249,443.97	$0.00	$255,403.91
112330	39,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$256,008.28	$0.00	$261,968.22
112331	40,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$262,572.60	$0.00	$268,532.54
112332	41,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$269,136.92	$0.00	$275,096.86
112333	42,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$275,701.23	$0.00	$281,661.17
112334	43,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$282,265.54	$0.00	$288,225.48
112335	44,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$288,829.86	$0.00	$294,789.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112336	45,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$295,394.18	$0.00	$301,354.12
112337	46,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$301,958.49	$0.00	$307,918.43
112338	47,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$308,522.80	$0.00	$314,482.74
112339	48,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$315,087.12	$0.00	$321,047.06
112340	49,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$321,651.44	$0.00	$327,611.38
112341	50,000 CFM Modular Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$328,215.75	$0.00	$334,175.69
112342	500 CFM Air-to-Air Heat Exchanger (HX)	EA	$794.66	$5,349.92	$0.00	$6,144.58
112343	1,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$794.66	$10,699.83	$0.00	$11,494.49
112344	1,500 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,191.99	$16,049.74	$0.00	$17,241.73
112345	2,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,191.99	$18,773.94	$0.00	$19,965.93
112346	2,500 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$21,334.02	$0.00	$22,923.34
112347	3,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$23,040.75	$0.00	$24,630.07
112348	3,500 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$22,515.60	$0.00	$24,104.92
112349	4,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$22,318.67	$0.00	$23,907.99
112350	4,500 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$21,268.38	$0.00	$22,857.70
112351	5,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$19,692.94	$0.00	$21,282.26
112352	6,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$23,631.53	$0.00	$25,220.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112353	7,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$1,589.32	$27,570.12	$0.00	$29,159.44
112354	8,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$2,383.97	$31,508.71	$0.00	$33,892.68
112355	9,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$2,383.97	$35,447.30	$0.00	$37,831.27
112356	10,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$2,383.97	$39,385.89	$0.00	$41,769.86
112357	11,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$3,178.63	$43,324.48	$0.00	$46,503.11
112358	12,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$3,178.63	$47,263.07	$0.00	$50,441.70
112359	13,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$3,178.63	$51,201.66	$0.00	$54,380.29
112360	14,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$3,178.63	$55,140.25	$0.00	$58,318.88
112361	15,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$59,078.84	$0.00	$63,846.80
112362	16,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$63,017.42	$0.00	$67,785.38
112363	17,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$66,956.01	$0.00	$71,723.97
112364	18,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$70,894.60	$0.00	$75,662.56
112365	19,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$74,833.19	$0.00	$79,601.15
112366	20,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$78,771.78	$0.00	$83,539.74
112367	21,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$82,710.37	$0.00	$87,478.33
112368	22,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$86,648.96	$0.00	$91,416.92
112369	23,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$90,587.55	$0.00	$95,355.51
112370	24,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$94,526.14	$0.00	$99,294.10
112371	25,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$98,464.72	$0.00	$103,232.68
112372	26,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$102,403.31	$0.00	$107,171.27
112373	27,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$106,341.90	$0.00	$111,109.86
112374	28,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$110,280.49	$0.00	$115,048.45
112375	29,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$114,219.08	$0.00	$118,987.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112376	30,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$118,157.67	$0.00	$122,925.63
112377	31,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$122,096.26	$0.00	$126,864.22
112378	32,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$126,034.85	$0.00	$130,802.81
112379	33,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$129,973.44	$0.00	$134,741.40
112380	34,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$133,912.03	$0.00	$138,679.99
112381	35,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$137,850.62	$0.00	$142,618.58
112382	36,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$4,767.96	$141,789.20	$0.00	$146,557.16
112383	37,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$145,727.79	$0.00	$151,687.73
112384	38,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$149,666.38	$0.00	$155,626.32
112385	39,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$153,604.97	$0.00	$159,564.91
112386	40,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$157,543.56	$0.00	$163,503.50
112387	41,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$161,482.15	$0.00	$167,442.09
112388	42,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$165,420.74	$0.00	$171,380.68
112389	43,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$169,359.33	$0.00	$175,319.27
112390	44,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$173,297.92	$0.00	$179,257.86
112391	45,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$177,236.50	$0.00	$183,196.44
112392	46,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$181,175.09	$0.00	$187,135.03
112393	47,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$185,113.68	$0.00	$191,073.62
112394	48,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$189,052.27	$0.00	$195,012.21
112395	49,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$192,990.86	$0.00	$198,950.80
112396	50,000 CFM Air-to-Air Heat Exchanger (HX)	EA	$5,959.94	$196,929.45	$0.00	$202,889.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112397	[Modifier] Modular Air Handling Unit (AHU) - Add Heat or Energy Recovery Heat recovery rotary wheel, flat plate heat exchanger or heat pipe technologies.	CFM	$0.36	$2.62	$0.00	$2.98
112398	[Modifier] Modular Air Handling Unit (AHU) - Remove Return or Exhaust Fan	CFM	$0.30	$1.05	$0.00	$1.35
112399	[Modifier] Modular Air Handling Unit (AHU) - Add or Remove Coil Heating, Cooling, Heat Recovery or Humidification	CFM	$0.24	$0.79	$0.00	$1.03

23-73-16 Semi-Custom Central-Station Air-Handling Units

Highly flexible, but cataloged, AHUs that can be modified to meet specific job requirements. Typically use building-block or modular construction methodology to allow for a wide range of standard and custom engineered modules. Standard and optional components available.

112400	500 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$993.32	$19,033.23	$0.00	$20,026.55
112401	1,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$993.32	$32,207.81	$0.00	$33,201.13
112402	1,500 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,489.99	$39,543.43	$0.00	$41,033.42
112403	2,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,489.99	$47,381.23	$0.00	$48,871.22
112404	2,500 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$55,908.28	$0.00	$57,894.93
112405	3,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$61,855.55	$0.00	$63,842.20
112406	3,500 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$65,518.43	$0.00	$67,505.08
112407	4,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$67,271.10	$0.00	$69,257.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112408	4,500 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$72,007.26	$0.00	$73,993.91
112409	5,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$72,322.34	$0.00	$74,308.99
112410	6,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$81,233.40	$0.00	$83,220.05
112411	7,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,986.65	$88,293.32	$0.00	$90,279.97
112412	8,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$100,906.65	$0.00	$103,886.62
112413	9,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$113,519.98	$0.00	$116,499.95
112414	10,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$126,133.32	$0.00	$129,113.29
112415	11,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,973.30	$138,746.64	$0.00	$142,719.94
112416	12,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,973.30	$151,359.98	$0.00	$155,333.28
112417	13,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,973.30	$163,973.31	$0.00	$167,946.61
112418	14,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$3,973.30	$176,586.64	$0.00	$180,559.94
112419	15,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$182,405.91	$0.00	$188,365.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112420	16,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$187,161.75	$0.00	$193,121.69
112421	17,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$198,859.36	$0.00	$204,819.30
112422	18,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$210,556.97	$0.00	$216,516.91
112423	19,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$222,254.58	$0.00	$228,214.52
112424	20,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$233,952.19	$0.00	$239,912.13
112425	21,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$245,649.80	$0.00	$251,609.74
112426	22,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$257,347.41	$0.00	$263,307.35
112427	23,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$263,836.23	$0.00	$269,796.17
112428	24,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$269,635.80	$0.00	$275,595.74
112429	25,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$275,208.91	$0.00	$281,168.85
112430	26,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$280,073.06	$0.00	$286,033.00
112431	27,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$290,845.11	$0.00	$296,805.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112432	28,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$301,617.15	$0.00	$307,577.09
112433	29,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$312,389.19	$0.00	$318,349.13
112434	30,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$323,161.23	$0.00	$329,121.17
112435	31,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$326,912.74	$0.00	$332,872.68
112436	32,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$329,896.21	$0.00	$335,856.15
112437	33,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$331,432.26	$0.00	$337,392.20
112438	34,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$334,780.06	$0.00	$340,740.00
112439	35,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$344,626.54	$0.00	$350,586.48
112440	36,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$354,473.01	$0.00	$360,432.95
112441	37,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$364,319.48	$0.00	$371,769.41
112442	38,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$374,165.96	$0.00	$381,615.89
112443	39,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$384,012.43	$0.00	$391,462.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112444	40,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$393,858.90	$0.00	$401,308.83
112445	41,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$403,705.37	$0.00	$411,155.30
112446	42,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$413,551.84	$0.00	$421,001.77
112447	43,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$423,398.32	$0.00	$430,848.25
112448	44,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$433,244.79	$0.00	$440,694.72
112449	45,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$443,091.26	$0.00	$450,541.19
112450	46,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$452,937.74	$0.00	$460,387.67
112451	47,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$462,784.21	$0.00	$470,234.14
112452	48,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$472,630.68	$0.00	$480,080.61
112453	49,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$482,477.15	$0.00	$489,927.08
112454	50,000 CFM Semi-Custom Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$7,449.93	$492,323.62	$0.00	$499,773.55
112455	[Modifier] Semi-Custom Air Handling Unit (AHU) - Add Heat or Energy Recovery Heat recovery rotary wheel, flat plate heat exchanger or heat pipe technologies.	CFM	$0.36	$3.28	$0.00	$3.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112456	[Modifier] Semi-Custom Air Handling Unit (AHU) - Remove Return or Exhaust Fan	CFM	$0.30	$1.32	$0.00	$1.62
112457	[Modifier] Semi-Custom Air Handling Unit (AHU) - Add or Remove Coil Heating, Cooling, Heat Recovery or Humidification	CFM	$0.24	$0.99	$0.00	$1.23
112458	[Modifier] Semi-Custom Air Handling Unit (AHU) - Add 6' Service Corridor	CFM	$0.12	$4.60	$0.00	$4.72
112459	[Modifier] Semi-Custom Air Handling Unit (AHU) - Add Knocked-Down Assembly / Installation	CFM	$0.76	$0.00	$0.00	$0.76

23-73-23 Custom Central-Station Air-Handling Units

Engineered and designed to meet special application or capacity requirements beyond standard manufactured equipment. Size, material type, thickness of construction, insulation, and internal components can all be altered to meet specified performance requirements.

112460	500 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,489.99	$31,722.05	$0.00	$33,212.04
112461	1,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$1,489.99	$53,679.69	$0.00	$55,169.68
112462	1,500 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,234.98	$65,905.72	$0.00	$68,140.70
112463	2,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,234.98	$78,968.71	$0.00	$81,203.69
112464	2,500 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$93,180.45	$0.00	$96,160.42
112465	3,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$103,092.57	$0.00	$106,072.54
112466	3,500 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$109,197.39	$0.00	$112,177.36
112467	4,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$112,118.50	$0.00	$115,098.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112468	4,500 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$120,012.09	$0.00	$122,992.06
112469	5,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$120,537.23	$0.00	$123,517.20
112470	6,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$135,389.00	$0.00	$138,368.97
112471	7,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$2,979.97	$147,155.53	$0.00	$150,135.50
112472	8,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,469.96	$168,177.75	$0.00	$172,647.71
112473	9,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,469.96	$189,199.97	$0.00	$193,669.93
112474	10,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$4,469.96	$210,222.19	$0.00	$214,692.15
112475	11,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$231,244.41	$0.00	$237,204.35
112476	12,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$252,266.63	$0.00	$258,226.57
112477	13,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$5,959.94	$273,288.84	$0.00	$279,248.78
112478	14,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$294,311.07	$0.00	$303,250.99
112479	15,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$304,009.84	$0.00	$312,949.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112480	16,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$311,936.25	$0.00	$320,876.17
112481	17,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$331,432.26	$0.00	$340,372.18
112482	18,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$350,928.28	$0.00	$359,868.20
112483	19,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$370,424.30	$0.00	$379,364.22
112484	20,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$389,920.31	$0.00	$398,860.23
112485	21,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$409,416.33	$0.00	$418,356.25
112486	22,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$428,912.34	$0.00	$437,852.26
112487	23,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$439,727.05	$0.00	$448,666.97
112488	24,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$449,393.00	$0.00	$458,332.92
112489	25,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$458,681.52	$0.00	$467,621.44
112490	26,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$466,788.44	$0.00	$475,728.36
112491	27,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$484,741.85	$0.00	$493,681.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112492	28,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$502,695.24	$0.00	$511,635.16
112493	29,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$520,648.65	$0.00	$529,588.57
112494	30,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$538,602.05	$0.00	$547,541.97
112495	31,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$544,854.55	$0.00	$553,794.47
112496	32,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$549,827.02	$0.00	$558,766.94
112497	33,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$552,387.11	$0.00	$561,327.03
112498	34,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$557,966.78	$0.00	$566,906.70
112499	35,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$574,377.56	$0.00	$583,317.48
112500	36,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$590,788.35	$0.00	$599,728.27
112501	37,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$8,939.92	$607,199.14	$0.00	$616,139.06
112502	38,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$623,609.92	$0.00	$634,784.82
112503	39,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$640,020.71	$0.00	$651,195.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112504	40,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$656,431.50	$0.00	$667,606.40
112505	41,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$672,842.29	$0.00	$684,017.19
112506	42,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$689,253.08	$0.00	$700,427.98
112507	43,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$705,663.86	$0.00	$716,838.76
112508	44,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$722,074.65	$0.00	$733,249.55
112509	45,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$738,485.44	$0.00	$749,660.34
112510	46,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$754,896.22	$0.00	$766,071.12
112511	47,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$771,307.01	$0.00	$782,481.91
112512	48,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$787,717.80	$0.00	$798,892.70
112513	49,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$804,128.59	$0.00	$815,303.49
112514	50,000 CFM Custom Built Air Handling Unit (AHU) Includes 7 Sections - Supply Fan, Return Or Exhaust Fan, Pre-Filters, Final Filters, Heating Coil, Cooling Coil & Mixing Box	EA	$11,174.90	$820,539.38	$0.00	$831,714.28
112515	[Modifier] Custom Air Handling Unit (AHU) - Add Heat or Energy Recovery Heat recovery rotary wheel, flat plate heat exchanger or heat pipe technologies.	CFM	$0.36	$3.94	$0.00	$4.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112516	[Modifier] Custom Air Handling Unit (AHU) - Remove Return or Exhaust Fan	CFM	$0.30	$1.57	$0.00	$1.87
112517	[Modifier] Custom Air Handling Unit (AHU) - Add or Remove Coil Heating, Cooling, Heat Recovery or Humidification	CFM	$0.24	$1.18	$0.00	$1.42
112518	[Modifier] Custom Air Handling Unit (AHU) - Add 6' Wide Service Corridor	CFM	$0.18	$6.24	$0.00	$6.42
112519	[Modifier] Custom Air Handling Unit (AHU) - Add Knocked-Down Assembly / Installation	CFM	$0.76	$0.00	$0.00	$0.76

23-73-39 Direct Gas-Fired Heating and Ventilating Units

Factory assembled, prewired, self-contained unit consisting of cabinet, supply fan, filters and gas furnace.

112520	500 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$794.66	$3,446.27	$0.00	$4,240.93
112521	1,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$794.66	$5,907.88	$0.00	$6,702.54
112522	1,500 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,191.99	$8,861.83	$0.00	$10,053.82
112523	2,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,191.99	$11,159.34	$0.00	$12,351.33
112524	2,500 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$13,949.18	$0.00	$15,538.50
112525	3,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$16,739.00	$0.00	$18,328.32
112526	3,500 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$18,380.08	$0.00	$19,969.40
112527	4,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$21,005.81	$0.00	$22,595.13
112528	4,500 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$23,631.53	$0.00	$25,220.85
112529	5,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$24,616.18	$0.00	$26,205.50
112530	6,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,589.32	$29,539.42	$0.00	$31,128.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112531	8,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$39,385.89	$0.00	$41,372.54
112532	10,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$49,232.36	$0.00	$51,219.01
112533	12,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$59,078.84	$0.00	$61,065.49
112534	14,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$68,925.31	$0.00	$70,911.96
112535	16,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$78,771.78	$0.00	$80,758.43
112536	18,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$88,618.25	$0.00	$90,604.90
112537	20,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$98,464.72	$0.00	$100,451.37
112538	22,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$108,311.20	$0.00	$110,297.85
112539	24,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$118,157.67	$0.00	$120,144.32
112540	26,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$128,004.14	$0.00	$129,990.79
112541	28,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$1,986.65	$137,850.62	$0.00	$139,837.27
112542	30,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$147,697.09	$0.00	$150,081.06
112543	32,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$157,543.56	$0.00	$159,927.53
112544	34,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$167,390.03	$0.00	$169,774.00
112545	36,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$177,236.50	$0.00	$179,620.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112546	38,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$187,082.98	$0.00	$189,466.95
112547	40,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,383.97	$196,929.45	$0.00	$199,313.42
112548	42,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,979.97	$206,775.92	$0.00	$209,755.89
112549	44,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,979.97	$216,622.40	$0.00	$219,602.37
112550	46,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,979.97	$226,468.87	$0.00	$229,448.84
112551	48,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,979.97	$236,315.34	$0.00	$239,295.31
112552	50,000 CFM Heating & Ventilating Make-Up Air Unit (HV/MAU) Gas Fired	EA	$2,979.97	$246,161.81	$0.00	$249,141.78
	23-74-13 Packaged, Outdoor, Central-Station Air-Handling Units					
112553	1 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$931.25	$6,165.53	$0.00	$7,096.78
112554	2 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$931.25	$10,775.46	$0.00	$11,706.71
112555	3 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$931.25	$13,810.79	$0.00	$14,742.04
112556	4 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$931.25	$15,271.55	$0.00	$16,202.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112557	5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$16,789.23	$0.00	$18,378.55
112558	7.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$22,897.84	$0.00	$24,487.16
112559	10 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$27,792.32	$0.00	$29,381.64
112560	12.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$31,358.85	$0.00	$32,948.17
112561	15 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$35,570.38	$0.00	$37,159.70
112562	20 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$47,427.18	$0.00	$49,413.83
112563	25 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$59,283.97	$0.00	$61,270.62
112564	30 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$71,140.77	$0.00	$73,127.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112565	35 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$82,997.55	$0.00	$84,984.20
112566	40 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$84,989.50	$0.00	$86,976.15
112567	45 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$95,613.19	$0.00	$97,599.84
112568	50 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$106,236.87	$0.00	$108,223.52
112569	55 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$113,730.37	$0.00	$115,717.02
112570	60 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$120,654.73	$0.00	$123,038.70
112571	65 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$123,310.66	$0.00	$125,694.63
112572	70 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$132,796.09	$0.00	$135,180.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112573	75 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$142,281.53	$0.00	$144,665.50
112574	80 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$151,766.96	$0.00	$154,150.93
112575	85 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$161,252.39	$0.00	$164,232.36
112576	90 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$170,737.83	$0.00	$173,717.80
112577	95 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$180,223.27	$0.00	$183,203.24
112578	100 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU)- Light Commercial Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$189,708.70	$0.00	$192,688.67
112579	1 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$9,856.32	$0.00	$11,445.64
112580	2 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$17,225.81	$0.00	$18,815.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112581	3 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$22,078.15	$0.00	$23,667.47
112582	4 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$24,413.34	$0.00	$26,002.66
112583	5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$26,839.52	$0.00	$28,428.84
112584	7.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$36,604.85	$0.00	$38,194.17
112585	10 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$44,429.26	$0.00	$46,018.58
112586	12.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$44,429.26	$0.00	$46,018.58
112587	15 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$56,863.38	$0.00	$58,452.70
112588	20 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$75,817.84	$0.00	$77,804.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112589	25 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$94,772.30	$0.00	$96,758.95
112590	30 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$113,726.76	$0.00	$115,713.41
112591	35 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$132,681.21	$0.00	$134,667.86
112592	40 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$135,865.57	$0.00	$137,852.22
112593	45 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$152,848.76	$0.00	$154,835.41
112594	50 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$169,831.96	$0.00	$171,818.61
112595	55 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$186,815.15	$0.00	$188,801.80
112596	60 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$181,962.81	$0.00	$184,346.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112597	65 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$197,126.38	$0.00	$199,510.35
112598	70 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$212,289.95	$0.00	$214,673.92
112599	75 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$227,453.51	$0.00	$229,837.48
112600	80 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$242,617.08	$0.00	$245,001.05
112601	85 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$257,780.65	$0.00	$260,760.62
112602	90 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$272,944.22	$0.00	$275,924.19
112603	95 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$288,107.79	$0.00	$291,087.76
112604	100 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Modular Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$303,271.35	$0.00	$306,251.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112605	1 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$14,293.80	$0.00	$15,883.12
112606	2 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$24,981.16	$0.00	$26,570.48
112607	3 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$32,018.11	$0.00	$33,607.43
112608	4 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$35,404.64	$0.00	$36,993.96
112609	5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$38,923.11	$0.00	$40,512.43
112610	7.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$53,084.96	$0.00	$54,674.28
112611	10 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$64,432.04	$0.00	$66,021.36
112612	12.5 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$73,448.11	$0.00	$75,037.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112613	15 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,589.32	$82,464.20	$0.00	$84,053.52
112614	20 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$109,952.28	$0.00	$111,938.93
112615	25 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$137,440.35	$0.00	$139,427.00
112616	30 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$164,928.42	$0.00	$166,915.07
112617	35 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$192,416.48	$0.00	$194,403.13
112618	40 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$197,034.48	$0.00	$199,021.13
112619	45 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$221,663.79	$0.00	$223,650.44
112620	50 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$246,293.10	$0.00	$248,279.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112621	55 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$1,986.65	$270,922.41	$0.00	$272,909.06
112622	60 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$263,885.46	$0.00	$266,269.43
112623	65 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$285,875.92	$0.00	$288,259.89
112624	70 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$307,866.37	$0.00	$310,250.34
112625	75 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$329,856.83	$0.00	$332,240.80
112626	80 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,383.97	$351,847.28	$0.00	$354,231.25
112627	85 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$373,837.74	$0.00	$376,817.71
112628	90 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$395,828.19	$0.00	$398,808.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112629	95 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$417,818.65	$0.00	$420,798.62
112630	100 Ton Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Semi-Custom Includes Supply Fan, Return Or Exhaust Fan, Compressor, Condenser, Dx Cooling Coil, Hot Water Heating Coil, Roof Curb, Standard Factory Controls & Control Panel	EA	$2,979.97	$439,809.10	$0.00	$442,789.07
112631	[Modifier] Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Add Seismic / Vibration Isolation Roof Curb	TON	$6.62	$98.47	$0.00	$105.09
112632	[Modifier] Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Add Heat Pump	TON	$0.00	$262.57	$0.00	$262.57
112633	[Modifier] Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Add Gas Fired or Electric Heating	TON	$0.00	$577.66	$0.00	$577.66
112634	[Modifier] Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Add Remote Condensing Uint	TON	$35.76	$695.82	$0.00	$731.58
112635	[Modifier] Packaged DX Rooftop Air Handling Unit (RTU/AHU) - Add Heat or Energy Recovery	TON	$9.94	$840.23	$0.00	$850.17

23-74-00 Packaged Outdoor HVAC Equipment

Packaged factory assembled, piped, internally wired, and fully charged with refrigerant and ready to operate.

23-74-49 Air Handling Unit Coil Hook-Ups

112636	2 1/2" CS Energy Recovery Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$3,861.29	$2,339.36	$0.00	$6,200.65
112637	4" CS Energy Recovery Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,535.10	$3,304.34	$0.00	$8,839.44
112638	6" CS Energy Recovery Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,819.24	$5,283.06	$0.00	$12,102.30
112639	2" & Dn Air Handling Unit (AHU) Chilled Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,195.57	$1,468.25	$0.00	$2,663.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112640	2 1/2" Air Handling Unit (AHU) Chilled Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,782.32	$4,548.76	$0.00	$9,331.08
112641	4" Air Handling Unit (AHU) Chilled Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,907.80	$5,953.78	$0.00	$12,861.58
112642	6" Air Handling Unit (AHU) Chilled Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,501.90	$9,519.02	$0.00	$18,020.92
112643	2" & Dn Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,328.42	$2,139.15	$0.00	$3,467.57
112644	2 1/2" Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,225.13	$7,112.93	$0.00	$12,338.06
112645	4" Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,793.41	$10,994.30	$0.00	$18,787.71
112646	6" Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,653.20	$15,174.23	$0.00	$24,827.43
112647	4" Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Three High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$10,893.06	$15,028.00	$0.00	$25,921.06
112648	6" Air Handling Unit (AHU) Chilled Water Coil Hook-Up- Three High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$13,461.35	$20,741.52	$0.00	$34,202.87
112649	Air Handling Unit (AHU) DX Cooling Coil Hook-Up - 2 -Pipe Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,494.92	$1,467.82	$0.00	$2,962.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112650	Air Handling Unit (AHU) DX Cooling Coil Hook-Up - 4 -Pipe Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,988.95	$2,937.35	$0.00	$5,926.30
112651	2" & Dn Air Handling Unit (AHU) Hot Water Coil Hook -Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,195.57	$1,468.25	$0.00	$2,663.82
112652	2 1/2" Air Handling Unit (AHU) Hot Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,782.32	$4,548.76	$0.00	$9,331.08
112653	4" Air Handling Unit (AHU) Hot Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,907.80	$5,953.78	$0.00	$12,861.58
112654	6" Air Handling Unit (AHU) Hot Water Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$8,501.90	$9,519.02	$0.00	$18,020.92
112655	2" & Dn Air Handling Unit (AHU) Hot Water Coil Hook -Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,328.42	$2,139.15	$0.00	$3,467.57
112656	2 1/2" Air Handling Unit (AHU) Hot Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,225.13	$7,112.93	$0.00	$12,338.06
112657	4" Air Handling Unit (AHU) Hot Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$7,793.41	$10,994.30	$0.00	$18,787.71
112658	6" Air Handling Unit (AHU) Hot Water Coil Hook-Up- Two High Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$9,653.20	$15,174.23	$0.00	$24,827.43
112659	2" & Dn Air Handling Unit (AHU) Natural Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$823.62	$785.35	$0.00	$1,608.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112660	2-1/2" To 4" Air Handling Unit (AHU) Natural Gas Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,768.57	$1,689.02	$0.00	$3,457.59
112661	1" & Dn Air Handling Unit (AHU) Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$800.60	$755.38	$0.00	$1,555.98
112662	1-1/4" To 2" Air Handling Unit (AHU) Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,365.61	$1,290.52	$0.00	$2,656.13
112663	2-1/2" Air Handling Unit (AHU) Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,857.14	$3,056.72	$0.00	$4,913.86
112664	2" & Dn Air Handling Unit (AHU) Steam Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,658.62	$2,158.96	$0.00	$4,817.58
112665	2-1/2" Air Handling Unit (AHU) Steam Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,880.62	$5,504.36	$0.00	$10,384.98
112666	3" Air Handling Unit (AHU) Steam Coil Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$5,494.36	$6,651.91	$0.00	$12,146.27

23-80-00 Decentralized HVAC Equipment

• Terminal Unit costs exclude balancing, temperature controls, electrical, ductwork, and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Terminal Unit Hook-Ups (connections) include all required pipe, fittings, valves, and specialties within 5 LF of the point of connection for proper operation. Reference contract documents and applicable codes and standards for details.

23-81-00 Decentralized Unitary HVAC Equipment

23-81-13 Packaged Terminal Air-Conditioners

112667	Packaged Terminal Air Conditioner (PTAC) - Thru-Wall W/Electric Heat	EA	$637.64	$1,798.62	$0.00	$2,436.26
112668	Packaged Terminal Air Conditioner (PTAC) - Thru-Wall W/Hot Water Coil	EA	$637.64	$3,511.90	$0.00	$4,149.54
112669	Packaged Terminal Air Conditioner (PTAC) - Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	23-81-16 Room Air-Conditioners					
112670	6,000 Btu Room Air Conditioner (AC) - Portable/Window	EA	$117.78	$389.92	$0.00	$507.70
112671	12,000 Btu Room Air Conditioner (AC) - Portable/Window	EA	$177.12	$701.07	$0.00	$878.19
112672	6,000 Btu Room Air Conditioner (AC) - Thru-Wall	EA	$310.86	$1,115.93	$0.00	$1,426.79
112673	12,000 Btu Room Air Conditioner (AC) - Thru-Wall	EA	$402.96	$1,450.72	$0.00	$1,853.68
	23-81-19 Self-Contained Air-Conditioners					
	Factory assembled and tested, self-contained, packaged terminal air conditioner with room cabinet, electric refrigeration system. Fully charged with refrigerant and filled with oil.					
112674	2 Ton Packaged Air Conditioner (AC) - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$637.64	$6,371.71	$0.00	$7,009.35
112675	3 Ton Packaged Air Conditioner (AC) - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$637.64	$7,293.28	$0.00	$7,930.92
112676	4 Ton Packaged Air Conditioner (AC) - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$797.05	$9,286.34	$0.00	$10,083.39
112677	5 Ton Packaged Air Conditioner (AC) - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$797.05	$10,694.29	$0.00	$11,491.34
112678	2 Ton Packaged Heat Pump - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$637.64	$7,356.66	$0.00	$7,994.30
112679	3 Ton Packaged Heat Pump - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$637.64	$8,370.87	$0.00	$9,008.51
112680	4 Ton Packaged Heat Pump - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$797.05	$10,376.13	$0.00	$11,173.18
112681	[Modifier] Packaged Air Conditioner (AC) - Add 15 KW Heating Element	EA	$0.00	$863.05	$0.00	$863.05
112682	[Modifier] Packaged Air Conditioner (AC) - Add 3-Phase Power	EA	$0.00	$742.37	$0.00	$742.37
112683	[Modifier] Packaged Air Conditioner (AC) - Add Programmable Thermostat	EA	$0.00	$329.13	$0.00	$329.13
112684	[Modifier] Packaged Air Conditioner (AC) - Add Remote Temperature and Humidity Sensor	EA	$0.00	$492.48	$0.00	$492.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112685	5 Ton Packaged Heat Pump - Wall Mounted w/ Thermostat Single Phase. Bard or Equal	EA	$797.05	$11,208.70	$0.00	$12,005.75

23-81-23 Computer-Room Air-Conditioners

Packaged factory assembled, prewired, prepiped; consisting of cabinet, fans, filters and humidifier.

112686	3 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$1,842.08	$42,931.96	$0.00	$44,774.04
112687	5 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$1,842.08	$54,855.00	$0.00	$56,697.08
112688	10 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$2,125.48	$85,025.25	$0.00	$87,150.73
112689	15 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$2,125.48	$99,015.71	$0.00	$101,141.19
112690	20 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$2,125.48	$124,795.12	$0.00	$126,920.60
112691	30 Ton Computer Room Air Conditioner (AC) - Air Cooled Includes Both Indoor AC Unit and Outdoor Condenser	EA	$3,684.16	$148,108.50	$0.00	$151,792.66
112692	Computer Room Air Conditioner (AC) - Refrigerant Hook-Up- 1" & Dn Includes Both Indoor AC Unit and Outdoor Condenser. Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$518.97	$507.81	$0.00	$1,026.78
112693	Computer Room Air Conditioner (AC) - Refrigerant Hook-Up- 1-1/4" To 2" Includes Both Indoor AC Unit and Outdoor Condenser. Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,080.45	$1,549.78	$0.00	$2,630.23
112694	1-1/2 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$637.64	$10,218.88	$0.00	$10,856.52
112695	3 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$637.64	$24,514.09	$0.00	$25,151.73
112696	5 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$850.20	$29,960.58	$0.00	$30,810.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112697	10 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$850.20	$37,042.97	$0.00	$37,893.17
112698	15 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$1,062.74	$39,494.38	$0.00	$40,557.12
112699	20 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$1,275.28	$42,762.52	$0.00	$44,037.80
112700	30 Ton Computer Room Air Conditioner (AC) - Chilled Water Cooled	EA	$1,700.38	$49,026.96	$0.00	$50,727.34
112701	Computer Room Air Conditioner (AC) - Chilled Water Coil Hook-Up- 2-1/2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,782.32	$4,532.45	$0.00	$9,314.77

23-81-26 Split-System Air-Conditioners

Includes indoor console unit and outdoor packaged condensing unit.

112702	1 Ton Split System Air Conditioner (AC) - General Cooling Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$3,966.78	$0.00	$4,958.67
112703	2 Ton Split System Air Conditioner (AC) - General Cooling Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$6,079.87	$0.00	$7,071.76
112704	3 Ton Split System Air Conditioner (AC) - General Cooling Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$7,553.97	$0.00	$8,545.86
112705	5 Ton Split System Air Conditioner (AC) - General Cooling Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$10,919.73	$0.00	$11,911.62
112706	1 Ton Split System Air Conditioner (AC) - Precision Cooling w/ Humidity Control Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$7,920.92	$0.00	$8,912.81
112707	2 Ton Split System Air Conditioner (AC) - Precision Cooling w/ Humidity Control Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$10,736.26	$0.00	$11,728.15
112708	3 Ton Split System Air Conditioner (AC) - Precision Cooling w/ Humidity Control Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$13,836.30	$0.00	$14,828.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112709	5 Ton Split System Air Conditioner (AC) - Precision Cooling w/ Humidity Control Includes Both Indoor AC Unit and Outdoor Condenser	EA	$991.89	$18,059.48	$0.00	$19,051.37
112710	4 Ton Split System Heat Pump Air Conditioner (AC) - Condenser Excludes Indoor Unit	EA	$611.08	$5,444.05	$0.00	$6,055.13
112711	1 Ton Split System Heat Pump Air Conditioner (AC) - Indoor Unit Includes Thermostat. Excludes Outdoor Condenser.	EA	$622.59	$1,122.70	$0.00	$1,745.29
112712	Split System Air Conditioner (AC) Refrigerant Hook-Up- 1" & Dn Includes Both Indoor AC Unit and Outdoor Condenser. Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$518.97	$507.81	$0.00	$1,026.78
	23-81-29 Variable Refrigerant Flow HVAC Systems					
112713	6 Ton Variable Refrigerant Flow (VRF) Condenser	EA	$566.79	$19,069.74	$0.00	$19,636.53
112714	8 Ton Variable Refrigerant Flow (VRF) Condenser	EA	$566.79	$20,540.24	$0.00	$21,107.03
112715	10 Ton Variable Refrigerant Flow (VRF) Condenser	EA	$850.20	$23,153.23	$0.00	$24,003.43
112716	12 Ton Variable Refrigerant Flow (VRF) Condenser	EA	$850.20	$28,186.47	$0.00	$29,036.67
112717	14 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$850.20	$41,694.47	$0.00	$42,544.67
112718	16 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$850.20	$44,574.83	$0.00	$45,425.03
112719	18 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$850.20	$46,199.21	$0.00	$47,049.41
112720	20 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$850.20	$49,079.56	$0.00	$49,929.76
112721	22 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$850.20	$54,667.74	$0.00	$55,517.94
112722	24 Ton Variable Refrigerant Flow (VRF) Condenser (2 Units)	EA	$1,133.59	$60,196.85	$0.00	$61,330.44
112723	26 Ton Variable Refrigerant Flow (VRF) Condenser (3 Units)	EA	$1,133.59	$66,873.12	$0.00	$68,006.71
112724	28 Ton Variable Refrigerant Flow (VRF) Condenser (3 Units)	EA	$1,133.59	$68,497.50	$0.00	$69,631.09
112725	30 Ton Variable Refrigerant Flow (VRF) Condenser (3 Units)	EA	$1,133.59	$74,025.05	$0.00	$75,158.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112726	Variable Refrigerant Flow (VRF) Condenser Hook-Up - 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$518.97	$507.81	$0.00	$1,026.78
112727	Variable Refrigerant Flow (VRF) Condenser Hook-Up - 1-1/4" To 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$820.08	$1,785.73	$0.00	$2,605.81
112728	Variable Refrigerant Flow (VRF) Simultaneous Heating & Cooling Controller- 6 Branches	EA	$425.10	$9,682.15	$0.00	$10,107.25
112729	Variable Refrigerant Flow (VRF) Simultaneous Heating & Cooling Controller- 13 Branches	EA	$425.10	$13,721.73	$0.00	$14,146.83
112730	1 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ceiling Cassette	EA	$425.10	$3,181.92	$0.00	$3,607.02
112731	2 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ceiling Cassette	EA	$425.10	$3,729.08	$0.00	$4,154.18
112732	3 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ceiling Cassette	EA	$425.10	$4,913.56	$0.00	$5,338.66
112733	1 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Wall Mounted	EA	$425.10	$2,126.46	$0.00	$2,551.56
112734	2 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Wall Mounted	EA	$425.10	$2,473.10	$0.00	$2,898.20
112735	3 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Wall Mounted	EA	$425.10	$2,990.72	$0.00	$3,415.82
112736	1 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ducted	EA	$425.10	$3,107.30	$0.00	$3,532.40
112737	2 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ducted	EA	$425.10	$3,663.79	$0.00	$4,088.89
112738	3 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ducted	EA	$425.10	$4,464.32	$0.00	$4,889.42
112739	4.5 Ton Variable Refrigerant Flow (VRF) Indoor Unit-Ducted	EA	$425.10	$5,288.17	$0.00	$5,713.27
112740	Variable Refrigerant Flow (VRF) Indoor Unit Hook-Up - 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$327.68	$573.84	$0.00	$901.52

23-81-46 Water-Source Unitary Heat Pumps

Packaged water-source heat pump, factory assembled and tested.

112741	1-1/2 Ton Heat Pump - Water Source	EA	$460.52	$4,484.51	$0.00	$4,945.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112742	3 Ton Heat Pump - Water Source	EA	$566.79	$6,440.96	$0.00	$7,007.75
112743	5 Ton Heat Pump - Water Source	EA	$814.76	$9,258.01	$0.00	$10,072.77
112744	8 Ton Heat Pump – High Capacity Water Source Horizontal or Vertical	EA	$2,795.47	$18,040.12	$0.00	$20,835.59
112745	1" & Down Heat Pump Hook-Up - Water Source Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112746	1-1/4" to 2" Heat Pump Hook-Up - Water Source Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
	23-82-00 Convection Heating and Cooling Units					
	23-82-13 Valance Heating and Cooling Units					
112747	Radiant Ceiling Panel - Hot Water 12" Wide	LF	$46.06	$53.36	$0.00	$99.42
112748	Radiant Ceiling Panel - Hot Water 24" Wide	LF	$53.14	$70.03	$0.00	$123.17
112749	Radiant Ceiling Panel Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112750	Radiant Ceiling Panel Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
112751	Radiant Ceiling Panel - Electric 2' X 2'	EA	$198.38	$232.71	$0.00	$431.09
112752	Radiant Ceiling Panel - Electric 2' X 4'	EA	$177.12	$484.85	$0.00	$661.97
112753	Valance System - Hydronic 2-Pipe	LF	$19.93	$175.07	$0.00	$195.00
112754	Valance System - Hydronic 4-Pipe	LF	$24.89	$200.07	$0.00	$224.96
112755	Valance System Hot Water Hook-Up- 1" & Down Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112756	Valance System Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112757	Valance System Chilled Water Hook-Up- 1" & Down Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112758	Valance System Chilled Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$1,044.15	$0.00	$1,753.53
	23-82-19 Fan Coil Units					
112759	500 CFM Fan Coil Unit (FCU) - Hydronic 2-Pipe	EA	$292.25	$3,849.31	$0.00	$4,141.56
112760	1,000 CFM Fan Coil Unit (FCU) - Hydronic 2-Pipe	EA	$354.25	$4,776.20	$0.00	$5,130.45
112761	1,500 CFM Fan Coil Unit (FCU) - Hydronic 2-Pipe	EA	$354.25	$5,082.10	$0.00	$5,436.35
112762	2,000 CFM Fan Coil Unit (FCU) - Hydronic 2-Pipe	EA	$637.64	$5,708.33	$0.00	$6,345.97
112763	3,000 CFM Fan Coil Unit (FCU) - Hydronic 2-Pipe	EA	$637.64	$6,639.15	$0.00	$7,276.79
112764	500 CFM Fan Coil Unit (FCU) - Hydronic 4-Pipe	EA	$292.25	$4,999.39	$0.00	$5,291.64
112765	1,000 CFM Fan Coil Unit (FCU) - Hydronic 4-Pipe	EA	$354.25	$6,207.22	$0.00	$6,561.47
112766	1,500 CFM Fan Coil Unit (FCU) - Hydronic 4-Pipe	EA	$354.25	$6,601.08	$0.00	$6,955.33
112767	2,000 CFM Fan Coil Unit (FCU) - Hydronic 4-Pipe	EA	$531.37	$7,415.06	$0.00	$7,946.43
112768	3,000 CFM Fan Coil Unit (FCU) - Hydronic 4-Pipe	EA	$531.37	$8,622.89	$0.00	$9,154.26
112769	Fan Coil Unit (FCU) Hot Water Hook-Up - 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112770	Fan Coil Unit (FCU) Hot Water Hook-Up - 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
112771	Fan Coil Unit (FCU) Chilled Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112772	Fan Coil Unit (FCU) Chilled Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$1,044.15	$0.00	$1,753.53
	23-82-23 Unit Ventilators					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	Factory packaged and tested units including finished cabinet, filter, coils, drain pan, supply-air fan and motor.					
112773	Unit Ventilator - Hydronic 2-Pipe	EA	$743.91	$5,185.81	$0.00	$5,929.72
112774	Unit Ventilator - Hydronic 4-Pipe	EA	$743.91	$5,875.06	$0.00	$6,618.97
112775	Unit Ventilator w/DX Cooling & Condensing Unit	EA	$1,487.84	$16,935.93	$0.00	$18,423.77
112776	Unit Ventilator Chilled Water Coil	EA	$1,062.74	$1,641.08	$0.00	$2,703.82
112777	Unit Ventilator Shelving	LF	$44.29	$168.05	$0.00	$212.34
112778	Unit Ventilator Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112779	Unit Ventilator Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
112780	Unit Ventilator Chilled Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112781	Unit Ventilator Chilled Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$1,044.15	$0.00	$1,753.53
112782	Unit Ventilator Refrigerant Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$518.97	$507.81	$0.00	$1,026.78
	23-82-33 Convectors					
112783	5 MBH Convector - Hot Water Hot Water, Steam Or Electric.	EA	$332.11	$916.38	$0.00	$1,248.49
112784	10 MBH Convector - Hot Water Hot Water, Steam Or Electric.	EA	$332.11	$1,391.63	$0.00	$1,723.74
112785	Convector Cover	EA	$132.85	$458.51	$0.00	$591.36
112786	Convector Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112787	Convector Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112788	Convector Steam Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$672.19	$1,223.74	$0.00	$1,895.93
	23-82-36 Finned-Tube Radiation Heaters					
112789	Finned Tube Radiation - Hot Water Bare Element Bare Element Only.	LF	$34.01	$42.84	$0.00	$76.85
112790	Finned Tube Radiation - Hot Water 1-Tier w/Enclosure Includes Element & Enclosure.	LF	$42.50	$101.66	$0.00	$144.16
112791	Finned Tube Radiation - Hot Water 2-Tier w/Enclosure Includes Element & Enclosure.	LF	$58.10	$169.75	$0.00	$227.85
112792	Runtal Baseboard Radiation - Hot Water 2-Tier UF-2	LF	$68.72	$202.35	$0.00	$271.07
112793	Runtal Baseboard Radiation - Hot Water 3-Tier UF-3	LF	$81.30	$232.52	$0.00	$313.82
112794	Runtal Baseboard Radiation - Hot Water 4-Tier UF-4	LF	$93.87	$263.30	$0.00	$357.17
112795	Runtal Wall Panel Radiation - Hot Water 6-Tier UF-6	LF	$111.15	$347.11	$0.00	$458.26
112796	Runtal Wall Panel Radiation - Hot Water 8-Tier UF-8	LF	$128.41	$411.72	$0.00	$540.13
112797	Baseboard Radiation - Electric Includes Element & Enclosure.	LF	$35.42	$104.21	$0.00	$139.63
112798	Runtal Baseboard Radiation - Electric Wall Mounted 3-Tier EB3	LF	$35.42	$261.50	$0.00	$296.92
112799	Runtal Baseboard Radiation - Electric Base Mounted 3-Tier PED	LF	$35.42	$378.80	$0.00	$414.22
112800	Finned Tube Radiation- Enclosure Only	LF	$17.71	$30.48	$0.00	$48.19
112801	Finned Tube Radiation Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112802	Finned Tube Radiation Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112803	Finned Tube Radiation Steam Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$672.19	$1,223.74	$0.00	$1,895.93
	23-82-39 Unit Heaters					
112804	Unit Heater - Hot Water, Steam or Gas (Under 75 MBH)	EA	$265.68	$1,722.47	$0.00	$1,988.15
112805	Unit Heater - Hot Water, Steam or Gas (75 to 174 MBH)	EA	$265.68	$2,453.74	$0.00	$2,719.42
112806	Unit Heater - Hot Water, Steam or Gas (175 MBH & Up)	EA	$265.68	$4,757.82	$0.00	$5,023.50
112807	Unit Heater - Electric (15 kW & Down)	EA	$265.68	$2,766.20	$0.00	$3,031.88
112808	Unit Heater - Electric (Over 15 kW)	EA	$265.68	$6,426.46	$0.00	$6,692.14
112809	Cabinet Unit Heater - Hot Water Up To 50 MBH Hot Water, Steam Or Electric.	EA	$531.37	$2,780.65	$0.00	$3,312.02
112810	Cabinet Unit Heater - Hot Water 50 MBH & Up Hot Water, Steam Or Electric.	EA	$531.37	$4,088.26	$0.00	$4,619.63
112811	Unit Heater Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112812	Unit Heater Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
112813	Unit Heater Steam Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$672.19	$1,223.74	$0.00	$1,895.93
112814	Unit Heater Natural Gas Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$563.25	$538.43	$0.00	$1,101.68
	23-83-16 Radiant Heating and Cooling Hydronic Piping					
112815	Radiant Floor Heat - Hot Water	SF	$7.08	$10.90	$0.00	$17.98
112816	Radiant Floor Heat Hot Water Manifold	EA	$531.37	$1,243.28	$0.00	$1,774.65

23-83-00 Radiant Heating and Cooling Units

23-83-16 Radiant Heating and Cooling Hydronic Piping

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112817	Radiant Floor Heat Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112818	Radiant Floor Heat Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$903.33	$0.00	$1,612.71
	23-83-93 Miscellaneous Terminal Units					
112819	48" Air Curtain - Hot Water Hot Water, Steam Or Electric.	EA	$1,133.59	$2,809.53	$0.00	$3,943.12
112820	72" Air Curtain - Hot Water Hot Water, Steam Or Electric.	EA	$1,133.59	$4,094.82	$0.00	$5,228.41
112821	96" Air Curtain - Hot Water Hot Water, Steam Or Electric.	EA	$1,133.59	$5,483.83	$0.00	$6,617.42
112822	Air Curtain Hot Water Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$527.83	$309.44	$0.00	$837.27
112823	Air Curtain Hot Water Hook-Up- 1-1/4" to 2" Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$709.38	$937.85	$0.00	$1,647.23
112824	30' Gas Fired Infrared Unit Detroit Radiant Hl-30 Series, 2-Stage, 30', 75 Or 100 Mbh. Includes 2-Stage Tstat, 90 Degree Deflector, Hanging Chain, Roof Vent Kit And 2-Piece 18" B Vent.	EA	$425.10	$4,085.62	$0.00	$4,510.72
112825	60' Gas Fired Infrared Unit Detroit Radiant Hl-60 Series, 2-Stage, 60', 150 Mbh. Includes 2-Stage Tstat, 90 Degree Deflector, Hanging Chain, Roof Vent Kit And 2-Piece 18" B Vent.	EA	$850.20	$5,818.60	$0.00	$6,668.80
112826	Gas Fired Infrared Unit- 30 MBH Reznor Rihn 30	EA	$318.83	$829.72	$0.00	$1,148.55
112827	[Modifier] Terminal Unit Coil Coating - Single Coil Factory Applied	EA	$0.00	$1,641.08	$0.00	$1,641.08
112828	[Modifier] Terminal Unit Coil Coating - Single Coil Field Applied	EA	$318.83	$1,641.08	$0.00	$1,959.91
112829	[Modifier] Terminal Unit Coil Coating - Double Coil Factory Applied	EA	$0.00	$2,428.80	$0.00	$2,428.80
112830	[Modifier] Terminal Unit Coil Coating - Double Coil Field Applied	EA	$425.10	$2,428.80	$0.00	$2,853.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112831	Gas Fired Infrared Unit Hook-Up- 1" & Dn Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$344.51	$339.31	$0.00	$683.82
	23-84-00 Humidity Control Equipment					
	23-84-13 Humidifiers					
112832	200 #/Hr Steam to Clean Steam Humidifier Dristeem STS-200 Or Equal.	EA	$1,700.38	$23,540.95	$0.00	$25,241.33
112833	400 #/Hr Steam to Clean Steam Humidifier Dristeem STS-400 Or Equal.	EA	$2,125.48	$35,850.35	$0.00	$37,975.83
112834	750 #/Hr Steam to Clean Steam Humidifier Dristeem STS-800 Or Equal.	EA	$3,400.76	$59,078.84	$0.00	$62,479.60
112835	50 #/Hr Steam Humidifier Manifold	EA	$212.54	$4,398.09	$0.00	$4,610.63
112836	100 #/Hr Steam Humidifier Manifold	EA	$212.54	$7,916.56	$0.00	$8,129.10
112837	200 #/Hr Steam Humidifier Manifold	EA	$212.54	$12,314.65	$0.00	$12,527.19
112838	300 #/Hr Steam Humidifier Manifold	EA	$212.54	$12,754.47	$0.00	$12,967.01
112839	400 #/Hr Steam Humidifier Manifold	EA	$318.83	$13,194.27	$0.00	$13,513.10
112840	500 #/Hr Steam Humidifier Manifold	EA	$318.83	$16,492.84	$0.00	$16,811.67
112841	750 #/Hr Steam Humidifier Manifold	EA	$318.83	$14,847.96	$0.00	$15,166.79
112842	1,000 #/Hr Steam Humidifier Manifold	EA	$318.83	$19,791.40	$0.00	$20,110.23
112843	1" & Dn Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$800.60	$755.38	$0.00	$1,555.98
112844	1-1/4" To 2" Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,365.61	$1,290.52	$0.00	$2,656.13
112845	2-1/2" Steam Humidifier Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,857.14	$3,056.72	$0.00	$4,913.86
112846	25 #/Hr Electric Humidifier W/Manifold	EA	$553.51	$12,448.23	$0.00	$13,001.74
112847	50 #/Hr Electric Humidifier W/Manifold	EA	$553.51	$22,698.22	$0.00	$23,251.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112848	100 #/Hr Electric Humidifier W/Manifold	EA	$830.70	$29,167.68	$0.00	$29,998.38
112849	150 #/Hr Electric Humidifier W/Manifold	EA	$830.70	$35,637.14	$0.00	$36,467.84

26-00-00 Electrical

26-00-00 Electrical

26-05-00 Common Work Results for Electrical

26-05-05 Selective Demolition for Electrical

112850	Remove Light Fixture - Interior LED Includes Point Source, Pendant, Troffer, and Wall Mounted	EA	$44.70	$0.00	$0.00	$44.70
112851	Remove Light Fixture - Fluorescent Includes Lamp, Ballast, and Recycle Costs	EA	$141.96	$0.00	$0.00	$141.96
112852	Remove AC/DC Power Inverter - 50 KVA & Down	EA	$536.41	$0.00	$0.00	$536.41
112853	Remove Light Fixture - Outdoor Pole Mounted	EA	$715.21	$0.00	$0.00	$715.21
112854	Remove Lighting Control Panel	EA	$715.21	$0.00	$0.00	$715.21
112855	Remove Wiring Device - Outlets & Switches	EA	$89.40	$0.00	$0.00	$89.40
112856	Remove and Repull Fiber	LF	$0.90	$0.00	$0.00	$0.90
112857	Remove Auxiliary Fire Alarm Panel	EA	$357.60	$0.00	$0.00	$357.60
112858	Remove Junction Box (J-Box) - Steel Box Square or Octagon, 4" or 4-11/16", 1-1/2" or 2-1/8" Deep, Includes Cover	EA	$22.34	$0.00	$0.00	$22.34
112859	Remove Junction Box (J-Box) - NEMA 1, 3R or 4/4X 4" Deep Up to 16" x 16", Includes Cover	EA	$44.70	$0.00	$0.00	$44.70
112860	Remove Junction Box (J-Box) - NEMA 1, 3R or 4/4X 6" Deep 12" x 12" to 24" x 24", Includes Cover	EA	$67.04	$0.00	$0.00	$67.04
112861	Remove Junction Box (J-Box) - NEMA 1, 3R or 4/4X 8" Deep 24" x 18" to 30" x 30", Includes Cover	EA	$134.10	$0.00	$0.00	$134.10
112862	Remove Conduit - Rigid PVC - 2" & Down Includes fittings and hangers.	LF	$2.68	$0.00	$0.00	$2.68
112863	Remove Conduit - Rigid PVC - 2-1/2" & Up Includes fittings and hangers.	LF	$4.47	$0.00	$0.00	$4.47
112864	Remove Conduit - Rigid Metallic - 2" & Down Includes fittings and hangers.	LF	$3.31	$0.00	$0.00	$3.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112865	Remove Conduit - Rigid Metallic - 2-1/2" & Up Includes fittings and hangers.	LF	$8.94	$0.00	$0.00	$8.94
112866	Remove Conduit - Flexible Metallic or PVC - 2" & Down Includes fittings and hangers.	LF	$3.93	$0.00	$0.00	$3.93
112867	Remove Conduit - Flexible Metallic or PVC - 2-1/2" & Up Includes fittings and hangers.	LF	$18.78	$0.00	$0.00	$18.78
112868	Remove Branch Feeder - 20 AMP or 30 AMP 3, 4, or 7 Wire. Use only when re-using conduit	LF	$10.73	$0.00	$0.00	$10.73
112869	Remove Disconnect Safety Switch - Up to 200A	EA	$178.80	$0.00	$0.00	$178.80
112870	Remove Disconnect Safety Switch - 400A to 1,000A	EA	$357.60	$0.00	$0.00	$357.60
112871	Remove Disconnect Safety Switch - 1,200A to 2,500A	EA	$894.01	$0.00	$0.00	$894.01
112872	Remove Disconnect Safety Switch - 3,000A to 4,000A	EA	$1,430.42	$0.00	$0.00	$1,430.42
112873	Remove Distribution Switchboard - Under 1,000A Excludes Circuit Breakers	EA	$2,682.03	$0.00	$0.00	$2,682.03
112874	Remove Distribution Switchboard - 1,000A to 1,600A Excludes Circuit Breakers	EA	$4,470.05	$0.00	$0.00	$4,470.05
112875	Remove Distribution Switchboard - 2,000A to 4,000A Excludes Circuit Breakers	EA	$8,046.09	$0.00	$0.00	$8,046.09
112876	Remove Distribution Switchboard Circuit Breaker	EA	$357.60	$0.00	$0.00	$357.60
112877	Remove Panelboard - Under 225A Excludes Circuit Breakers	EA	$1,072.81	$0.00	$0.00	$1,072.81
112878	Remove Panelboard - 400A to 800A Excludes Circuit Breakers	EA	$1,788.02	$0.00	$0.00	$1,788.02
112879	Remove Panelboard - 1,000A to 1,200A Excludes Circuit Breakers	EA	$3,576.04	$0.00	$0.00	$3,576.04
112880	Remove Panelboard Circuit Breaker	EA	$89.40	$0.00	$0.00	$89.40
112881	Remove Motor Control Center - 400A & Down	EA	$2,145.62	$0.00	$0.00	$2,145.62
112882	Remove Motor Control Center - 600A to 1,600A	EA	$4,470.05	$0.00	$0.00	$4,470.05
112883	Remove Motor Control Center - 2,00A to 2,500A	EA	$7,152.08	$0.00	$0.00	$7,152.08
112884	Remove Electrical Connection - HVAC Cooling Tower	EA	$357.60	$0.00	$0.00	$357.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112885	Remove Electrical Connection - HVAC Chiller	EA	$1,072.81	$0.00	$0.00	$1,072.81
112886	Remove Electrical Connection - HVAC Rooftop Unit (RTU)	EA	$715.21	$0.00	$0.00	$715.21
112887	Remove Electrical Connection - HVAC Air Handling Unit (AHU)	EA	$1,430.42	$0.00	$0.00	$1,430.42
112888	Remove Electrical Connection - HVAC Terminal Unit	EA	$357.60	$0.00	$0.00	$357.60
112889	Remove Electrical Connection - HVAC Condensing Unit	EA	$357.60	$0.00	$0.00	$357.60
112890	Remove Electrical Connection - HVAC Pump	EA	$178.80	$0.00	$0.00	$178.80
112891	Remove Electrical Connection - HVAC Fan	EA	$44.70	$0.00	$0.00	$44.70
112892	Remove Electrical Connection - HVAC Compressor	EA	$715.21	$0.00	$0.00	$715.21
112893	Remove Electrical Connection - Fire Pump	EA	$1,430.42	$0.00	$0.00	$1,430.42
112894	Remove Generator - Under 350 KW	EA	$1,072.81	$0.00	$0.00	$1,072.81
112895	Remove Generator - 350 KW to 1,499 KW	EA	$2,145.62	$0.00	$0.00	$2,145.62
112896	Remove Generator - 1,500 KW & Up	EA	$4,291.25	$0.00	$0.00	$4,291.25
112897	Remove Variable Frequency Drive (VFD) - Under 25 HP	EA	$178.80	$0.00	$0.00	$178.80
112898	Remove Variable Frequency Drive (VFD) - 25 HP to 60 HP	EA	$357.60	$0.00	$0.00	$357.60
112899	Remove Variable Frequency Drive (VFD) - 75 HP to 150 HP	EA	$715.21	$0.00	$0.00	$715.21
112900	Remove Variable Frequency Drive (VFD) - 200 HP to 350 HP	EA	$1,251.61	$0.00	$0.00	$1,251.61
112901	Remove Low-Voltage Transformer	EA	$1,072.81	$0.00	$0.00	$1,072.81
112902	Remove Low-Voltage Switchgear - 600V	EA	$4,291.25	$0.00	$0.00	$4,291.25
112903	Remove Low-Voltage Manhole	EA	$2,860.83	$0.00	$0.00	$2,860.83
112904	Remove Low-Voltage Overhead Cable	LF	$0.90	$0.00	$0.00	$0.90
112905	Remove Medium-Voltage Transformer	EA	$5,364.06	$0.00	$0.00	$5,364.06
112906	Remove Medium-Voltage Switchgear - 5KV	EA	$8,940.10	$0.00	$0.00	$8,940.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112907	Remove Medium-Voltage Transformer Tapes	EA	$1,430.42	$0.00	$0.00	$1,430.42
112908	Remove Medium-Voltage Manhole	EA	$10,728.12	$0.00	$0.00	$10,728.12
112909	Remove Medium-Voltage Pole	EA	$2,145.62	$0.00	$0.00	$2,145.62
112910	Remove Medium-Voltage Overhead Cable	LF	$8.05	$0.00	$0.00	$8.05
112911	Remove Medium-Voltage Handhole	EA	$715.21	$0.00	$0.00	$715.21
112912	Remove Lightning Protection Cable	LF	$1.74	$0.00	$0.00	$1.74
112913	Remove Lightning Protection Air Terminal and Base	EA	$86.65	$0.00	$0.00	$86.65
112914	Removal Lightning Supression Bare Braded #2 Copper	LF	$0.06	$0.00	$0.00	$0.06
	26-05-11 Control-Voltage Cable					
112915	Belden 8719 - 16 AWG 2 Conductor Shielded Control Cable Tinned Copper, PE Insulation, Overall Beldfoil® Shield, PVC Outer Jacket, CM.	LF	$0.71	$3.82	$0.00	$4.53
112916	Belden 8762 - 20 AWG 2 Conductor Shielded Control Cable Tinned Copper, PE Insulation, Overall Beldfoil® Shield, PVC Outer Jacket, CM	LF	$0.71	$2.26	$0.00	$2.97
112917	Belden 8772 - 20 AWG 3 Conductor Shielded Control Cable Tinned Copper, PE Insulation, Overall Beldfoil® Shield, PVC Outer Jacket, CM	LF	$0.71	$1.77	$0.00	$2.48
112918	Belden 8471 - 16 AWG 2 Conductor Plenum Control Cable Tinned Copper, PVC Insulation, PVC Outer Jacket, CMG	LF	$0.71	$1.26	$0.00	$1.97
112919	Belden 29523C - 10 AWG 3 Conductor VFD Cable Shielded	LF	$1.78	$4.42	$0.00	$6.20
112920	Belden 29533 - 250MCM 3 Conductor VFD Cable Shielded	LF	$5.36	$127.00	$0.00	$132.36
	26-05-12 Low-Voltage Copper Cable					
112921	Copper #12 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$6.56	$0.00	$0.00	$6.56
112922	Copper #10 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$6.56	$0.00	$0.00	$6.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112923	Copper #8 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$8.94	$0.00	$0.00	$8.94
112924	Copper #6 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$9.53	$0.00	$0.00	$9.53
112925	Copper #4 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$10.12	$0.00	$0.00	$10.12
112926	Copper #3 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$11.32	$0.00	$0.00	$11.32
112927	Copper #2 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$11.32	$0.00	$0.00	$11.32
112928	Copper #1 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$11.91	$0.00	$0.00	$11.91
112929	Copper 1/0 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$13.10	$0.00	$0.00	$13.10
112930	Copper 2/0 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$13.10	$0.00	$0.00	$13.10
112931	Copper 3/0 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$13.70	$0.00	$0.00	$13.70
112932	Copper 4/0 Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$13.70	$0.00	$0.00	$13.70
112933	Copper 250 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$14.89	$0.00	$0.00	$14.89
112934	Copper 300 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$16.08	$0.00	$0.00	$16.08
112935	Copper 350 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$16.08	$0.00	$0.00	$16.08
112936	Copper 400 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$17.87	$0.00	$0.00	$17.87
112937	Copper 500 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$17.87	$0.00	$0.00	$17.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112938	Copper 600 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$19.06	$0.00	$0.00	$19.06
112939	Copper 750 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$20.25	$0.00	$0.00	$20.25
112940	Copper 1000 MCM Wire Termination To be used for terminations at owner supplied equipment only; wire is existing	EA	$21.44	$0.00	$0.00	$21.44
	26-05-17 Medium-Voltage Cable					
112941	MV Cable In-Line Termination on another Cable Single Cables-3M Cold Shrink QT-5620K (Splice)	EA	$232.05	$8.56	$0.00	$240.61
112942	MV Cable Termination on another Cable Single Cables-Compression Lugs	EA	$29.77	$254.38	$0.00	$284.15
	26-05-39 Conduit Bodies and Supports					
112943	1" PVC LB, LL, LR	EA	$38.71	$11.99	$0.00	$50.70
112944	1.5" PVC LB, LL, LR	EA	$46.46	$18.00	$0.00	$64.46
112945	2" PVC LB, LL, LR	EA	$58.06	$24.00	$0.00	$82.06
112946	4" PVC LB, LL, LR	EA	$77.43	$60.00	$0.00	$137.43
	26-05-41 Wiremold Raceway					
112947	Wiremold 40N 2 Channel Raceway	LF	$19.35	$4.39	$0.00	$23.74
112948	Wiremold 40N 4" Raceway Cover	LF	$19.35	$1.43	$0.00	$20.78
112949	Wiremold 40N End Cap	EA	$19.35	$11.28	$0.00	$30.63
112950	Wiremold 40N Flat Elbow	EA	$36.48	$29.99	$0.00	$66.47
	26-05-74 Junction Boxes - NEMA 4/4X					
112951	Outdoor Network Cabinet 3 Sections NEMA 4X Stainless Steel Junction Box Hinged Cover	EA	$1,276.90	$3,985.00	$0.00	$5,261.90
112952	36" X 30" X 16" NEMA 4X Stainless Steel Junction Box (J-Box) Hinged Cover with Back Plate	EA	$478.84	$4,338.99	$0.00	$4,817.83
112953	20" X 20" X 10" NEMA 4X Stainless Steel Junction Box (J-Box) Hinged Cover with Back Plate	EA	$319.23	$2,690.00	$0.00	$3,009.23
	26-05-75 Wireway Gutter Enclosure					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112954	12" x 12" x 48" Wireway Gutter w/End Caps - NEMA 3R	EA	$300.17	$800.01	$0.00	$1,100.18
	26-05-93 Electrical Support Items					
112955	Third Party Testing	DY	$715.21	$131.29	$0.00	$846.50
112956	Commissioning	HR	$79.81	$121.90	$0.00	$201.71
112957	Arc Flash Study	DY	$715.21	$0.00	$0.00	$715.21
112958	Short Circuit and Coordination Study	DY	$715.21	$0.00	$0.00	$715.21
	26-05-95 Temporary Electrical Items					
112959	2,500 Watt Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$72.00	$72.00
112960	3,600 Watt Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$72.00	$72.00
112961	5,000 Watt Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$93.00	$93.00
112962	6,500 Watt Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$93.00	$93.00
112963	7,500 Watt Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$93.00	$93.00
112964	10 KW Portable Generator Rental - Gasoline Excludes fuel.	DY	$0.00	$0.00	$110.00	$110.00
	26-09-00 Instrumentation and Control for Electrical Systems					
	26-09-13 Electrical Power Monitoring					
112965	100A Split Core CT	EA	$38.71	$60.00	$0.00	$98.71
112966	200A Split Core CT	EA	$38.71	$69.99	$0.00	$108.70
112967	400A Split Core CT	EA	$38.71	$95.00	$0.00	$133.71
112968	800A Split Core CT	EA	$58.06	$160.01	$0.00	$218.07
	26-09-23 Lighting Control Devices					
112969	Low Voltage Occupancy Sensor w/ Alux Contacts - Ceiling	EA	$134.10	$210.00	$0.00	$344.10
112970	Lutron Wireless Occupancy Sensor	EA	$134.10	$221.66	$0.00	$355.76
112971	Lutron LFR2 OCRB (Daylight Sensor-Ceiling)	EA	$134.10	$171.09	$0.00	$305.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112972	POE Lighting 24 Port PoE 60W Switch	EA	$320.41	$3,200.00	$0.00	$3,520.41
112973	nlight Relay Panel ARP-16	EA	$350.43	$2,680.00	$0.00	$3,030.43
112974	Lighting Control Panel nLIGHT or Equal	EA	$1,276.90	$3,619.00	$0.00	$4,895.90
112975	Lighting Sensor - Occupancy, Ceiling nLIGHT or Equal	EA	$119.72	$203.00	$0.00	$322.72
112976	Lighting Sensor - Occupancy, Wall nLIGHT or Equal	EA	$159.61	$203.00	$0.00	$362.61
112977	Lighting Sensor - Vacancy, Ceiling nLIGHT or Equal	EA	$119.72	$219.01	$0.00	$338.73
112978	Lighting Sensor - Daylight nLIGHT or Equal	EA	$119.72	$219.01	$0.00	$338.73
112979	Lighting System Commissioning	HR	$79.81	$2,045.54	$0.00	$2,125.35
112980	Lighting Controller - Room nLIGHT or Equal	EA	$199.51	$477.30	$0.00	$676.81
112981	Lighting Controller - Scene nLIGHT or Equal	EA	$159.61	$235.00	$0.00	$394.61
112982	Lighting Relay nLIGHT or Equal	EA	$119.72	$95.46	$0.00	$215.18
112983	Lighting Switch - Multi-Level nLIGHT or Equal	EA	$159.61	$204.56	$0.00	$364.17
112984	Lighting Switch - Momentary nLIGHT or Equal	EA	$159.61	$204.56	$0.00	$364.17
112985	Lighting Switch - Dimmer, Wall nLIGHT or Equal	EA	$159.61	$204.56	$0.00	$364.17
112986	Lighting Switch - Dimmer, Wall nLIGHT PODM-DX or Equal	EA	$159.61	$146.00	$0.00	$305.61
112987	Lighting NPOD Touch nLIGHT or Equal	EA	$638.46	$825.99	$0.00	$1,464.45
112988	12 Pole Contactors, NEMA 1 Enclosure Electrically held, NC with 120V coil. Square D 8903LG1200V02 or equal	EA	$245.65	$1,926.62	$0.00	$2,172.27
112989	Low Voltage Lighting Control Panel	EA	$1,430.42	$3,546.97	$0.00	$4,977.39
112990	Room Controller	EA	$178.80	$402.29	$0.00	$581.09
112991	Low Voltage Occupancy Sensor - Ceiling	EA	$134.10	$201.83	$0.00	$335.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
112992	Low Voltage Vacancy Sensor - Ceiling	EA	$134.10	$215.46	$0.00	$349.56
112993	Low Voltage Multi Level Scene Controller	EA	$134.10	$259.10	$0.00	$393.20
112994	Low Voltage Multi Level Switch	EA	$178.80	$282.28	$0.00	$461.08
112995	Low Voltage NPP16-D Power Pack	EA	$89.40	$167.73	$0.00	$257.13
112996	Low Voltage Daylight Dimmer	EA	$134.10	$234.56	$0.00	$368.66
112997	Low Voltage PODM-DX Dimmer Wall Switch	EA	$134.10	$143.18	$0.00	$277.28
112998	Low Voltage NPOD Touchscreen Wall Switch	EA	$715.21	$800.49	$0.00	$1,515.70
112999	Lutron Energy Saver Node	EA	$715.21	$882.19	$0.00	$1,597.40
113000	Lutron Lighting Relay Cabinet	EA	$715.21	$409.11	$0.00	$1,124.32
113001	Lutron Power Supply	EA	$134.10	$53.55	$0.00	$187.65
113002	Eco System Ballast Premium	EA	$22.34	$41.65	$0.00	$63.99
113003	Lutron Relay	EA	$89.40	$160.66	$0.00	$250.06
113004	Lutron Multi-Level Switch	EA	$134.10	$296.05	$0.00	$430.15
113005	Lutron GRX 346S Control Cable	LF	$2.68	$1.04	$0.00	$3.72
113006	Quantum Hub	EA	$1,430.42	$3,942.32	$0.00	$5,372.74
113007	Wireless Wall Switch	EA	$134.10	$266.29	$0.00	$400.39
113008	Lutron MSZ101 (DC)	EA	$134.10	$117.77	$0.00	$251.87
113009	Lutron MS-B102 (Occupancy Sensor-Wall)	EA	$134.10	$84.31	$0.00	$218.41
113010	Lutron DVSTV (Single Pole)	EA	$134.10	$91.74	$0.00	$225.84
113011	Lutron QSWE (SW)	EA	$134.10	$204.56	$0.00	$338.66
113012	CAT6a Cable	LF	$1.35	$0.56	$0.00	$1.91
	26-09-25 Line-Voltage Lighting Controls					
113013	LED Hy Bay Driver Includes Lift cost	EA	$155.48	$76.00	$0.00	$231.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113014	LED Driver	EA	$77.74	$44.46	$0.00	$122.20
	26-09-27 Low-Voltage Lighting Controls					
113015	Low Voltage LED Dimmer	EA	$159.61	$181.38	$0.00	$340.99
	26-05-00 Common Work Results for Electrical					
	26-05-00 Common Work Results for Electrical					
	26-05-05 Selective Demolition for Electrical					
113016	Remove Surveillance Camera	EA	$31.29	$0.00	$0.00	$31.29
113017	Remove Photovoltaic Panels	EA	$53.64	$0.00	$0.00	$53.64
113018	Remove Uninterruptible Power Supply (UPS)	EA	$1,430.42	$131.29	$0.00	$1,561.71
113019	Remove Automatic Transfer Switch (ATS)	EA	$1,430.42	$131.29	$0.00	$1,561.71
	26-05-10 Electrical Power Cables					
	26-05-11 Control-Voltage Cable					
113020	18 AWG 2 Pair 4C Twisted Plenum Control Cable Suitable for 0-10V Signal	LF	$2.68	$0.24	$0.00	$2.92
113021	West Penn 25294B 16/2 Shielded Plenum Speaker Cable	LF	$1.78	$0.49	$0.00	$2.27
113022	West Penn 25841 RG-6/U CATV Cable	LF	$1.78	$0.60	$0.00	$2.38
113023	Honeywell Shielded Cable CMP/CL2P 75W	LF	$1.78	$3.16	$0.00	$4.94
113024	Belden 1583A - Cat5E 4 Pair Plenum Control Cable	LF	$0.71	$0.46	$0.00	$1.17
113025	Belden 8489 - 18 AWG 4 Conductor Shielded Plenum Control Cable Suitable for 0-10V Signal	LF	$0.71	$1.55	$0.00	$2.26
113026	Area of Refuge West Penn Two Hour Fire Rated Cable	LF	$1.78	$1.23	$0.00	$3.01
113027	Cat-6A Shielded Plenum Cable	LF	$0.71	$0.80	$0.00	$1.51
113028	12C - 18 AWG Control Cable Suitable for 0-10V Signal	LF	$0.71	$2.94	$0.00	$3.65
113029	14 AWG 5 Conductor Control Cable Suitable for 0-10V Signal	LF	$2.68	$0.52	$0.00	$3.20
113030	PV Cable 1000-VDC-Twisted Shielded Cable	LF	$1.35	$2.58	$0.00	$3.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113031	16 AWG 2C Twisted Shielded Communication Cable Suitable for 0-10V Signal	LF	$1.35	$0.61	$0.00	$1.96
113032	10 AWG 3C SOOW Cable	LF	$3.24	$4.52	$0.00	$7.76
113033	12 AWG 3C SOOW Cable	LF	$2.98	$2.93	$0.00	$5.91
113034	14 AWG 3C SOOW Cable	LF	$1.35	$2.01	$0.00	$3.36
113035	6' Light Control MC Whip w/ 5C #18 wire Suitable for 0-10V signal	LF	$77.35	$32.78	$0.00	$110.13
113036	14 AWG 60 Conductor Control Cable	LF	$4.47	$9.42	$0.00	$13.89
113037	14 AWG 6 Conductor Control Cable Suitable for 0-10V Signal	LF	$1.78	$1.10	$0.00	$2.88
113038	3 Conductor #10 Cable	LF	$0.18	$7.61	$0.00	$7.79
113039	Belden 29528 - 1 AWG 3 Conductor VFD Cable	LF	$2.15	$46.88	$0.00	$49.03
113040	Belden 29529 - 1/0 AWG 3 Conductor VFD Cable	LF	$2.15	$57.32	$0.00	$59.47
	26-05-12 Low-Voltage Copper Cable					
113041	#16 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Solid or Stranded	LF	$0.54	$0.23	$0.00	$0.77
113042	#14 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Solid or Stranded	LF	$0.54	$0.33	$0.00	$0.87
113043	#12 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Solid or Stranded	LF	$0.54	$0.44	$0.00	$0.98
113044	#10 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Solid or Stranded	LF	$0.71	$0.69	$0.00	$1.40
113045	#8 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$0.90	$1.07	$0.00	$1.97
113046	#6 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$0.90	$1.65	$0.00	$2.55
113047	#4 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$1.07	$2.57	$0.00	$3.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113048	#3 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$3.25	$0.00	$4.41
113049	#2 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$4.07	$0.00	$5.23
113050	#1 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$5.12	$0.00	$6.28
113051	1/0 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$1.87	$6.25	$0.00	$8.12
113052	2/0 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$2.06	$7.72	$0.00	$9.78
113053	3/0 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$2.23	$9.35	$0.00	$11.58
113054	4/0 AWG Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$2.51	$12.17	$0.00	$14.68
113055	250 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$2.68	$11.25	$0.00	$13.93
113056	300 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$3.58	$15.94	$0.00	$19.52
113057	350 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$4.02	$20.20	$0.00	$24.22
113058	400 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$4.29	$13.56	$0.00	$17.85
113059	500 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$4.65	$29.05	$0.00	$33.70
113060	600 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$4.83	$36.11	$0.00	$40.94
113061	750 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$5.00	$62.34	$0.00	$67.34
113062	1000 MCM Copper THHN/THWN 600V Single Conductor Wire or Cable Stranded	LF	$5.19	$82.73	$0.00	$87.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113063	#12 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$0.54	$0.41	$0.00	$0.95
113064	#10 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$0.71	$0.61	$0.00	$1.32
113065	#8 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$0.90	$1.19	$0.00	$2.09
113066	#6 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$0.90	$1.84	$0.00	$2.74
113067	#4 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$1.07	$2.88	$0.00	$3.95
113068	#3 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$3.49	$0.00	$4.65
113069	#2 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$4.29	$0.00	$5.45
113070	#1 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$1.16	$5.61	$0.00	$6.77
113071	1/0 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$1.87	$6.88	$0.00	$8.75
113072	2/0 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$2.06	$7.31	$0.00	$9.37
113073	3/0 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$2.23	$9.15	$0.00	$11.38
113074	4/0 AWG Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$2.51	$10.85	$0.00	$13.36
113075	250 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$2.68	$12.85	$0.00	$15.53
113076	300 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$3.58	$15.94	$0.00	$19.52
113077	350 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$4.02	$18.07	$0.00	$22.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113078	400 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$4.29	$20.56	$0.00	$24.85
113079	500 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	LF	$4.65	$27.74	$0.00	$32.39
113080	1000 MCM Copper XHHW-2/XLPE 600V Single Conductor Wire or Cable Stranded	EA	$87.73	$0.00	$0.00	$87.73
113081	2 Port Clear Tap #14 - 2/0 AWG	EA	$56.22	$29.32	$0.00	$85.54
113082	2 Port Clear Tap #6 - #250MCM	EA	$88.35	$33.72	$0.00	$122.07
113083	Polaris Lug PVC Insulated Connector - 2-Way 3-Outlet #6 AWG to #500 MCM	EA	$143.04	$35.64	$0.00	$178.68
	26-05-13 Low-Voltage Aluminum Cable					
113084	#6 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$0.90	$0.41	$0.00	$1.31
113085	#4 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.07	$0.45	$0.00	$1.52
113086	#3 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.07	$0.48	$0.00	$1.55
113087	#2 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.16	$0.62	$0.00	$1.78
113088	#1 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.16	$0.80	$0.00	$1.96
113089	1/0 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.35	$1.08	$0.00	$2.43
113090	2/0 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.43	$1.11	$0.00	$2.54
113091	3/0 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.52	$4.62	$0.00	$6.14
113092	4/0 AWG Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.61	$1.37	$0.00	$2.98
113093	250 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$1.78	$1.66	$0.00	$3.44
113094	300 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$2.06	$2.29	$0.00	$4.35
113095	350 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$2.15	$2.33	$0.00	$4.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113096	400 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$2.51	$2.61	$0.00	$5.12
113097	500 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$2.32	$2.88	$0.00	$5.20
113098	600 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$2.68	$7.16	$0.00	$9.84
113099	750 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$4.65	$4.32	$0.00	$8.97
113100	1000 MCM Aluminum THHN/THWN 600V Stranded Single Conductor Wire or Cable	LF	$5.00	$6.34	$0.00	$11.34
	26-05-14 Low-Voltage Mineral Insulated Cable					
113101	Mineral Insulated #12 Cable	LF	$1.07	$8.23	$0.00	$9.30
113102	Mineral Insulated #10 Cable	LF	$1.43	$8.52	$0.00	$9.95
113103	Mineral Insulated #6 Cable	LF	$1.78	$10.32	$0.00	$12.10
113104	Mineral Insulated #4 Cable	LF	$2.23	$13.59	$0.00	$15.82
113105	Mineral Insulated #2 Cable	LF	$2.23	$17.42	$0.00	$19.65
113106	Mineral Insulated #1 Cable	LF	$2.23	$19.67	$0.00	$21.90
113107	Mineral Insulated 1/0 Cable	LF	$2.23	$22.28	$0.00	$24.51
113108	Mineral Insulated 2/0 Cable	LF	$4.47	$26.22	$0.00	$30.69
113109	Mineral Insulated 3/0 Cable	LF	$4.47	$30.56	$0.00	$35.03
113110	Mineral Insulated 4/0 Cable	LF	$14.75	$34.94	$0.00	$49.69
113111	Mineral Insulated 350kcmil Cable	LF	$4.47	$43.73	$0.00	$48.20
113112	Mineral Insulated 500kcmil Cable	LF	$8.94	$54.11	$0.00	$63.05
	26-05-15 Low-Voltage Metal Clad (MC) Cable					
113113	#12 AWG 2 Conductor (12/2) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.13	$1.63	$0.00	$4.76
113114	#12 AWG 3 Conductor (12/3) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.39	$2.35	$0.00	$5.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113115	#12 AWG 4 Conductor (12/4) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.67	$3.11	$0.00	$6.78
113116	#12 AWG 2 Conductor (12/2) Copper 600V Armored Metal Clad (MC) Wire or Cable - Hospital Grade Solid or Stranded	LF	$3.39	$2.34	$0.00	$5.73
113117	#12 AWG 3 Conductor (12/3) Copper 600V Armored Metal Clad (MC) Wire or Cable - Hospital Grade Solid or Stranded	LF	$3.67	$3.10	$0.00	$6.77
113118	#12 AWG 4 Conductor (12/4) Copper 600V Armored Metal Clad (MC) Wire or Cable - Hospital Grade Solid or Stranded	LF	$3.84	$3.85	$0.00	$7.69
113119	#10 AWG 2 Conductor (10/2) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.39	$1.71	$0.00	$5.10
113120	#10 AWG 3 Conductor (10/3) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.67	$2.41	$0.00	$6.08
113121	#10 AWG 4 Conductor (10/4) Copper 600V Armored Metal Clad (MC) Wire or Cable Solid or Stranded	LF	$3.84	$2.77	$0.00	$6.61
113122	#8 AWG 2 Conductor (8/2) Copper 600V Armored Metal Clad (MC) Wire or Cable - Hospital Grade Stranded	LF	$5.36	$3.02	$0.00	$8.38
113123	#8 AWG 3 Conductor (8/3) Copper 600V Armored Metal Clad (MC) Wire or Cable Stranded	LF	$5.53	$4.17	$0.00	$9.70
113124	Armored Metal Clad (MC) Wire or Cable - Straight Connector	EA	$22.34	$1.99	$0.00	$24.33
113125	Armored Metal Clad (MC) Wire or Cable - 90 Degree Connector	EA	$35.76	$2.75	$0.00	$38.51
113126	Metal Clad Cable 8/3	EA	$4.08	$3.40	$0.00	$7.48
113127	SOOW Cord #12/2C	LF	$1.94	$2.02	$0.00	$3.96
113128	SOOW Cord #12/3C	LF	$1.94	$2.34	$0.00	$4.28
113129	SOOW Cord #10/2C	LF	$1.94	$2.39	$0.00	$4.33
113130	SOOW Cord #10/3C	LF	$1.94	$2.79	$0.00	$4.73
113131	SOOW Cord #8/2C	LF	$203.68	$2.97	$0.00	$206.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113132	SOOW Cord #8/3C	LF	$2.56	$3.40	$0.00	$5.96
113133	SOOW Cord #8/4C	LF	$3.31	$4.29	$0.00	$7.60
	26-05-16 Low-Voltage Romex Cable					
113134	#14-2 NM-B w/ Ground	LF	$1.78	$0.29	$0.00	$2.07
113135	#14-3 NM-B w/ Ground	LF	$1.78	$0.44	$0.00	$2.22
113136	#12-2 NM-B w/ Ground	LF	$3.58	$0.80	$0.00	$4.38
113137	#12-3 NM-B w/ Ground	LF	$3.58	$1.05	$0.00	$4.63
113138	#10-2 NM-B w/ Ground	LF	$3.58	$0.94	$0.00	$4.52
113139	#10-3 NM-B w/ Ground	LF	$1.78	$1.18	$0.00	$2.96
113140	#6-3 NM-B w/ Ground	LF	$3.58	$3.93	$0.00	$7.51
113141	#14-2 UF-B w/ Ground	LF	$2.68	$0.29	$0.00	$2.97
113142	#14-3 UF-B w/ Ground	LF	$2.68	$0.41	$0.00	$3.09
113143	#12-2 UF-B w/ Ground	LF	$2.68	$0.43	$0.00	$3.11
113144	#12-3 UF-B w/ Ground	LF	$2.68	$0.59	$0.00	$3.27
113145	#10-2 UF-B w/ Ground	LF	$2.68	$0.67	$0.00	$3.35
113146	#10-3 UF-B w/ Ground	LF	$2.68	$0.89	$0.00	$3.57
	26-05-17 Medium-Voltage Cable					
113147	#2 AWG MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$6.22	$7.53	$0.00	$13.75
113148	1/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$7.24	$10.48	$0.00	$17.72
113149	2/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$10.73	$12.65	$0.00	$23.38
113150	3/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$10.73	$17.89	$0.00	$28.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113151	4/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$10.73	$28.44	$0.00	$39.17
113152	250 MCM MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$10.89	$20.44	$0.00	$31.33
113153	350 MCM MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$10.89	$25.95	$0.00	$36.84
113154	500 MCM MV-105, 133% Jacketed EPR Wire or Cable - 5KV 5KV Medium Voltage	LF	$11.66	$31.02	$0.00	$42.68
113155	MV Cable Termination on Load Break Elbow Single Cable	EA	$232.05	$311.45	$0.00	$543.50
113156	MV Cable Termination on Transformer Single Cable	EA	$386.76	$321.26	$0.00	$708.02
113157	600A Dead Break Elbow	EA	$424.89	$630.80	$0.00	$1,055.69
113158	#2 AWG MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$6.22	$9.04	$0.00	$15.26
113159	1/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$7.24	$11.48	$0.00	$18.72
113160	2/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$10.73	$13.41	$0.00	$24.14
113161	3/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$10.73	$18.68	$0.00	$29.41
113162	4/0 AWG MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$10.73	$29.10	$0.00	$39.83
113163	250 MCM MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$10.89	$20.33	$0.00	$31.22
113164	350 MCM MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$10.89	$25.99	$0.00	$36.88
113165	500 MCM MV-105, 133% Jacketed EPR Wire or Cable - 15KV 15KV Medium Voltage	LF	$11.66	$33.22	$0.00	$44.88

26-05-18 Feeder Assemblies

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113166	20A 3 Wire Branch Circuit 3-#12 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$11.12	$5.31	$0.00	$16.43
113167	20A 4 Wire Branch Circuit 4-#12 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$11.74	$6.38	$0.00	$18.12
113168	20A 7 Wire Branch Circuit 7-#12 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$12.36	$7.45	$0.00	$19.81
113169	30A 3 Wire Branch Circuit 3-#10 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$11.74	$6.38	$0.00	$18.12
113170	30A 4 Wire Branch Circuit 4-#10 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$11.74	$7.45	$0.00	$19.19
113171	30A 7 Wire Branch Circuit 7-#10 Wires, 3/4" Conduit, Connectors, couplings, and Supports	LF	$14.21	$9.57	$0.00	$23.78
113172	100A Panel Feeder 4-#2 Conductors, 1-#6 Ground 1.5" Conduit, Connectors, couplings, and Supports Add Elbows as needed	LF	$17.92	$24.45	$0.00	$42.37
113173	225A Panel Feeder 4-4/0 Conductors, 1-#4 Ground 3" Conduit, Connectors, couplings, and Supports Add Elbows as needed	LF	$34.60	$63.79	$0.00	$98.39
	26-05-20 Grounding and Bonding for Electrical Systems					
	26-05-21 Grounding Cable					
113174	#12 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$0.54	$0.45	$0.00	$0.99
113175	#10 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$0.71	$0.71	$0.00	$1.42
113176	#8 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$0.90	$1.07	$0.00	$1.97
113177	#6 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$0.90	$2.35	$0.00	$3.25
113178	#4 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$1.07	$2.57	$0.00	$3.64
113179	#2 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$4.02	$1.67	$0.00	$5.69
113180	1/0 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$0.43	$3.22	$0.00	$3.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113181	2/0 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$2.06	$6.62	$0.00	$8.68
113182	4/0 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$2.32	$11.63	$0.00	$13.95
113183	3/0 AWG Copper Stranded Single Conductor Bare Ground Wire	LF	$2.23	$9.35	$0.00	$11.58
113184	250 kcmil Copper Stranded Single Conductor Bare Ground Wire	LF	$2.68	$14.40	$0.00	$17.08
113185	400 kcmil Copper Stranded Single Conductor Bare Ground Wire	LF	$4.29	$22.99	$0.00	$27.28
113186	500 kcmil Copper Stranded Single Conductor Bare Ground Wire	LF	$4.65	$29.05	$0.00	$33.70
113187	1/4" X 2" X 12" Ground Bus Bar w/ Stand Offs	EA	$89.40	$136.69	$0.00	$226.09
113188	1/4" X 4" X 4' Ground Bus Bar w/ Stand Offs	EA	$178.80	$820.08	$0.00	$998.88
113189	4" X 25" X 10" Ground Bus Bar w/ Stand Offs	EA	$134.10	$234.08	$0.00	$368.18
113190	CadWeld Molds	EA	$102.15	$265.79	$0.00	$367.94
113191	CadWeld Shots	EA	$102.15	$26.57	$0.00	$128.72
	26-05-22 Grounding Rods and Clamps					
113192	1-1/4" to 2" Bronze Pipe Clamps - Ground	EA	$44.70	$18.37	$0.00	$63.07
113193	2-1/2" to 3" Bronze Pipe Clamps - Ground	EA	$44.70	$33.29	$0.00	$77.99
113194	4" to 6" Bronze Pipe Clamps - Ground	EA	$80.47	$74.68	$0.00	$155.15
113195	1/2" X 10' Copper Clad Ground Rod	EA	$178.80	$37.39	$0.00	$216.19
113196	5/8" X 10' Copper Clad Ground Rod	EA	$223.50	$61.84	$0.00	$285.34
113197	5/8" X 10' Solid Copper Ground Rod Erico LPC706	EA	$178.04	$555.00	$0.00	$733.04
113198	3/4" X 10' Copper Clad Ground Rod	EA	$223.50	$92.38	$0.00	$315.88
113199	1/2" Bronze Acorn Ground Rod Clamp	EA	$67.04	$4.53	$0.00	$71.57
113200	5/8" Bronze Acorn Ground Rod Clamp	EA	$67.04	$5.91	$0.00	$72.95
113201	3/4" Bronze Acorn Ground Rod Clamp	EA	$67.04	$6.58	$0.00	$73.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113202	4' Grounding Bushings	EA	$22.34	$30.62	$0.00	$52.96
113203	3' Grounding Bushings	EA	$22.34	$18.93	$0.00	$41.27
113204	2' Grounding Bushings	EA	$22.34	$15.79	$0.00	$38.13
	26-05-30 Conduit for Electrical Systems					
	26-05-31 Galvanized Steel Conduit					
113205	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$8.94	$12.21	$0.00	$21.15
113206	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$9.83	$15.15	$0.00	$24.98
113207	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$11.63	$19.65	$0.00	$31.28
113208	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$14.31	$22.98	$0.00	$37.29
113209	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$13.41	$26.38	$0.00	$39.79
113210	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$15.20	$30.58	$0.00	$45.78
113211	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$16.99	$36.67	$0.00	$53.66
113212	3-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$19.66	$42.45	$0.00	$62.11
113213	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$21.46	$51.69	$0.00	$73.15
113214	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$25.56	$80.87	$0.00	$106.43
113215	6" Galvanized Steel Rigid Metal Conduit (GRC/RMC) Heavy-Wall RMC - ANSI C80.1	LF	$31.29	$102.81	$0.00	$134.10
113216	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$5.36	$1.69	$0.00	$7.05
113217	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$7.15	$3.91	$0.00	$11.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113218	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$8.94	$3.07	$0.00	$12.01
113219	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$8.94	$3.90	$0.00	$12.84
113220	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$13.41	$5.14	$0.00	$18.55
113221	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$13.41	$6.27	$0.00	$19.68
113222	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$16.09	$11.26	$0.00	$27.35
113223	3-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$16.09	$12.49	$0.00	$28.58
113224	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$17.88	$13.71	$0.00	$31.59
113225	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$19.66	$23.11	$0.00	$42.77
113226	6" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Coupling FIP Female threaded coupling for use with Rigid or IMC Conduit	EA	$20.56	$39.86	$0.00	$60.42
113227	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 4" radius and MIP male threads for use with RMC or IMC Conduit	EA	$8.94	$4.51	$0.00	$13.45
113228	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 6" radius and MIP male threads for use with RMC or IMC Conduit	EA	$10.73	$6.72	$0.00	$17.45
113229	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 7" radius and MIP male threads for use with RMC or IMC Conduit	EA	$13.41	$9.69	$0.00	$23.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113230	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 8" radius and MIP male threads for use with RMC or IMC Conduit	EA	$14.31	$14.01	$0.00	$28.32
113231	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 9.5" radius and MIP male threads for use with RMC or IMC Conduit	EA	$17.88	$19.49	$0.00	$37.37
113232	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 10.5" radius and MIP male threads for use with RMC or IMC Conduit	EA	$22.34	$31.62	$0.00	$53.96
113233	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 13" radius and MIP male threads for use with RMC or IMC Conduit	EA	$23.24	$49.54	$0.00	$72.78
113234	3-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 15" radius and MIP male threads for use with RMC or IMC Conduit	EA	$26.82	$55.31	$0.00	$82.13
113235	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 16" radius and MIP male threads for use with RMC or IMC Conduit	EA	$27.72	$66.14	$0.00	$93.86
113236	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 24" radius and MIP male threads for use with RMC or IMC Conduit	EA	$35.76	$80.87	$0.00	$116.63
113237	6" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 45 Degree Elbow Rigid Sweep with 30" radius and MIP male threads for use with RMC or IMC Conduit	EA	$53.64	$90.99	$0.00	$144.63
113238	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 4" radius and MIP male threads for use with RMC or IMC Conduit	EA	$8.94	$8.81	$0.00	$17.75
113239	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 6" radius and MIP male threads for use with RMC or IMC Conduit	EA	$12.51	$15.38	$0.00	$27.89
113240	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 7" radius and MIP male threads for use with RMC or IMC Conduit	EA	$13.41	$18.43	$0.00	$31.84
113241	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 8" radius and MIP male threads for use with RMC or IMC Conduit	EA	$15.20	$28.31	$0.00	$43.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113242	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 9.5" radius and MIP male threads for use with RMC or IMC Conduit	EA	$31.29	$63.18	$0.00	$94.47
113243	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 10.5" radius and MIP male threads for use with RMC or IMC Conduit	EA	$33.07	$76.25	$0.00	$109.32
113244	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 13" radius and MIP male threads for use with RMC or IMC Conduit	EA	$37.55	$90.99	$0.00	$128.54
113245	3-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 15" radius and MIP male threads for use with RMC or IMC Conduit	EA	$44.70	$104.41	$0.00	$149.11
113246	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 16" radius and MIP male threads for use with RMC or IMC Conduit	EA	$67.04	$129.62	$0.00	$196.66
113247	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 24" radius and MIP male threads for use with RMC or IMC Conduit	EA	$89.40	$158.86	$0.00	$248.26
113248	6" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - 90 Degree Elbow Rigid Sweep with 30" radius and MIP male threads for use with RMC or IMC Conduit	EA	$134.10	$215.18	$0.00	$349.28
113249	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Support	EA	$26.82	$5.47	$0.00	$32.29
113250	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Support	EA	$26.82	$10.06	$0.00	$36.88
113251	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Support	EA	$26.82	$12.93	$0.00	$39.75
113252	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Support	EA	$35.76	$17.27	$0.00	$53.03
113253	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Support	EA	$35.76	$24.22	$0.00	$59.98
113254	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$62.58	$14.88	$0.00	$77.46
113255	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$71.52	$29.73	$0.00	$101.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113256	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$80.47	$48.55	$0.00	$129.02
113257	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$93.87	$115.09	$0.00	$208.96
113258	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$111.75	$255.75	$0.00	$367.50
113259	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$156.45	$396.41	$0.00	$552.86
113260	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$201.15	$539.37	$0.00	$740.52
113261	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Erickson 3-Piece Coupling For use with RMC or IMC conduit.	EA	$223.50	$755.83	$0.00	$979.33
113262	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$17.79	$11.00	$0.00	$28.79
113263	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$22.24	$26.03	$0.00	$48.27
113264	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$26.76	$37.42	$0.00	$64.18
113265	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$26.76	$43.54	$0.00	$70.30
113266	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$35.59	$83.95	$0.00	$119.54
113267	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Myers Hub Rain-Tight w/Insulated Throat Knockout Connection	EA	$35.65	$124.59	$0.00	$160.24
113268	3/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$62.58	$116.91	$0.00	$179.49
113269	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$89.40	$164.77	$0.00	$254.17
113270	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$134.10	$402.38	$0.00	$536.48
113271	2-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$156.45	$507.03	$0.00	$663.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113272	3" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$178.80	$5.64	$0.00	$184.44
113273	4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Expansion Coupling	EA	$268.20	$1,073.73	$0.00	$1,341.93
113274	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Weather Head Malleable Threaded Entrance Cap for RMC or IMC Conduit	EA	$89.40	$24.51	$0.00	$113.91
113275	5" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Weather Head Malleable Threaded Entrance Cap for RMC or IMC Conduit	EA	$89.40	$566.10	$0.00	$655.50
113276	1" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Chase Nipple Insulated Throat Chase Nipple for RMC or IMC Conduit	EA	$7.77	$7.06	$0.00	$14.83
113277	1-1/4" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Chase Nipple Insulated Throat Chase Nipple for RMC or IMC Conduit	EA	$7.77	$8.67	$0.00	$16.44
113278	1-1/2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Chase Nipple Insulated Throat Chase Nipple for RMC or IMC Conduit	EA	$7.77	$8.95	$0.00	$16.72
113279	2" Galvanized Steel Rigid Metal Conduit (GRC/RMC) - Chase Nipple Insulated Throat Chase Nipple for RMC or IMC Conduit	EA	$8.56	$12.67	$0.00	$21.23
113280	3/4" Conduit Locknut and Plastic Bushing Set Bridgeport locknut #102-S (2) and #322 plastic bushing or equal	EA	$30.70	$0.66	$0.00	$31.36
113281	1" Conduit Locknut and Plastic Bushing Set Bridgeport locknut #103-S (2) and #323 plastic bushing or equal	EA	$35.10	$1.11	$0.00	$36.21
113282	1-1/4" Conduit Locknut and Plastic Bushing Set Bridgeport locknut #103-S (2) and #323 plastic bushing or equal	EA	$43.90	$2.27	$0.00	$46.17
113283	2" Conduit Locknut and Plastic Bushing Set Bridgeport locknut #106-S (2) and #326 plastic bushing or equal	EA	$70.20	$3.83	$0.00	$74.03
113284	3" Conduit Locknut and Plastic Bushing Set Bridgeport locknut #108-S (2) and #328 plastic bushing or equal	EA	$105.28	$8.23	$0.00	$113.51

26-05-32 Intermediate Metal Conduit

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113285	3/4" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$8.94	$8.63	$0.00	$17.57
113286	1" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$8.94	$9.72	$0.00	$18.66
113287	1.25" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$11.63	$10.90	$0.00	$22.53
113288	1.5" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$14.31	$14.30	$0.00	$28.61
113289	2" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$16.99	$18.74	$0.00	$35.73
113290	2.5" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$18.78	$22.37	$0.00	$41.15
113291	3" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$20.56	$27.98	$0.00	$48.54
113292	3.5" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$22.34	$33.49	$0.00	$55.83
113293	4" Electroplated Steel Intermediate Metal Conduit (IMC) Medium-Wall IMC - ANSI C80.6, UL-1242	LF	$25.04	$40.36	$0.00	$65.40
113294	3/4" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$5.36	$3.12	$0.00	$8.48
113295	1" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$7.15	$3.91	$0.00	$11.06
113296	1.25" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$8.94	$4.52	$0.00	$13.46
113297	1.5" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$10.73	$5.34	$0.00	$16.07
113298	2" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$13.41	$6.58	$0.00	$19.99
113299	2.5" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$15.20	$9.15	$0.00	$24.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113300	3" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$17.88	$14.59	$0.00	$32.47
113301	3.5" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$18.78	$20.50	$0.00	$39.28
113302	4" Electroplated Steel Intermediate Metal Conduit (IMC) - Coupling FIP Female threaded coupling	EA	$22.34	$33.94	$0.00	$56.28
113303	1" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 6" radius and MIP male threads	EA	$8.94	$6.75	$0.00	$15.69
113304	1.25" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 7" radius and MIP male threads	EA	$10.73	$9.80	$0.00	$20.53
113305	1.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 8" radius and MIP male threads	EA	$13.41	$12.59	$0.00	$26.00
113306	2" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 9.5" radius and MIP male threads	EA	$15.20	$18.35	$0.00	$33.55
113307	2.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 10.5" radius and MIP male threads	EA	$16.99	$28.74	$0.00	$45.73
113308	3" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 13" radius and MIP male threads	EA	$22.34	$47.66	$0.00	$70.00
113309	3.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 15" radius and MIP male threads	EA	$25.04	$61.16	$0.00	$86.20
113310	4" Electroplated Steel Intermediate Metal Conduit (IMC) - 45 Degree Elbow Rigid Sweep with 16" radius and MIP male threads	EA	$26.82	$85.93	$0.00	$112.75
113311	1" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 6" radius and MIP male threads	EA	$9.83	$12.49	$0.00	$22.32
113312	1.25" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 7" radius and MIP male threads	EA	$10.73	$13.99	$0.00	$24.72
113313	1.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 8" radius and MIP male threads	EA	$12.51	$16.90	$0.00	$29.41
113314	2" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 9.5" radius and MIP male threads	EA	$17.88	$26.72	$0.00	$44.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113315	2.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 10.5" radius and MIP male threads	EA	$19.66	$32.78	$0.00	$52.44
113316	3" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 13" radius and MIP male threads	EA	$23.24	$52.42	$0.00	$75.66
113317	3.5" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 15" radius and MIP male threads	EA	$25.04	$75.82	$0.00	$100.86
113318	4" Electroplated Steel Intermediate Metal Conduit (IMC) - 90 Degree Elbow Rigid Sweep with 16" radius and MIP male threads	EA	$26.82	$115.24	$0.00	$142.06
	26-05-33 Electric Metallic Tubing Conduit					
113319	1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$3.31	$0.93	$0.00	$4.24
113320	3/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$4.92	$2.90	$0.00	$7.82
113321	1" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$5.81	$3.54	$0.00	$9.35
113322	1-1/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$6.70	$3.90	$0.00	$10.60
113323	1-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$7.15	$4.16	$0.00	$11.31
113324	2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$7.96	$6.85	$0.00	$14.81
113325	2-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$8.94	$4.90	$0.00	$13.84
113326	3" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$15.20	$8.37	$0.00	$23.57
113327	3-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$16.09	$9.08	$0.00	$25.17
113328	4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$17.88	$11.70	$0.00	$29.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113329	5" Galvanized Steel Electric Metallic Tubing (EMT) Conduit Thin-Wall EMT - ANSI C80.3	LF	$26.82	$13.97	$0.00	$40.79
113330	1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$4.47	$1.54	$0.00	$6.01
113331	3/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$6.70	$2.35	$0.00	$9.05
113332	1" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$6.70	$3.36	$0.00	$10.06
113333	1-1/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$9.83	$4.55	$0.00	$14.38
113334	1-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$8.05	$5.17	$0.00	$13.22
113335	2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$10.73	$7.66	$0.00	$18.39
113336	2-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$11.18	$10.69	$0.00	$21.87
113337	3" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$14.31	$12.57	$0.00	$26.88
113338	3-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$16.09	$12.49	$0.00	$28.58
113339	4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Connector Adapter - IP Thread x Set Screw or Comp, Insulated or Non-Insulated	EA	$17.88	$28.31	$0.00	$46.19
113340	5" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$8.94	$1.78	$0.00	$10.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113341	1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$4.47	$1.80	$0.00	$6.27
113342	3/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$8.94	$2.71	$0.00	$11.65
113343	1" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$10.73	$3.30	$0.00	$14.03
113344	1-1/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$10.73	$3.66	$0.00	$14.39
113345	1-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$11.63	$5.14	$0.00	$16.77
113346	2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$13.41	$5.19	$0.00	$18.60
113347	2-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$13.41	$6.17	$0.00	$19.58
113348	3" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$14.31	$8.08	$0.00	$22.39
113349	3-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$14.31	$9.39	$0.00	$23.70
113350	4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Coupling Compression or Set Screw	EA	$17.88	$26.28	$0.00	$44.16
113351	1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$17.88	$4.38	$0.00	$22.26
113352	3/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$19.66	$4.71	$0.00	$24.37
113353	3/4" Stainless Steel EMT Compression Coupler	EA	$11.18	$44.23	$0.00	$55.41
113354	1" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$22.34	$9.90	$0.00	$32.24
113355	2" 304 Stainless Steel Conduit	LF	$9.95	$55.45	$0.00	$65.40
113356	2" Stainless Steel Conduit Support	EA	$26.82	$24.49	$0.00	$51.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113357	2" Stainless Steel EMT Compression Connector	EA	$13.41	$146.54	$0.00	$159.95
113358	2" Stainless Steel EMT Compression Coupler	EA	$16.77	$149.05	$0.00	$165.82
113359	3/4" 304 Stainless Steel Conduit	LF	$6.15	$26.94	$0.00	$33.09
113360	3/4" Stainless Steel Conduit Supports	EA	$26.82	$12.10	$0.00	$38.92
113361	3/4" Stainless Steel EMT Compression Connector	EA	$8.40	$41.70	$0.00	$50.10
113362	1-1/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$28.61	$11.31	$0.00	$39.92
113363	1-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$35.76	$12.29	$0.00	$48.05
113364	2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbows Long Radius Bend	EA	$44.70	$17.66	$0.00	$62.36
113365	2-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$53.64	$34.67	$0.00	$88.31
113366	3" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$62.58	$53.27	$0.00	$115.85
113367	3-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$75.99	$68.48	$0.00	$144.47
113368	4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$89.40	$82.55	$0.00	$171.95
113369	5" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - 90 Degree Elbow Long Radius Bend	EA	$98.34	$91.71	$0.00	$190.05
113370	1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$2.68	$1.87	$0.00	$4.55
113371	3/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$5.36	$3.68	$0.00	$9.04
113372	1" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$7.15	$4.05	$0.00	$11.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113373	1-1/4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$8.94	$4.47	$0.00	$13.41
113374	1-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$9.83	$5.17	$0.00	$15.00
113375	2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$10.73	$5.66	$0.00	$16.39
113376	2-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$12.51	$6.07	$0.00	$18.58
113377	3" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$12.51	$7.01	$0.00	$19.52
113378	3-1/2" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$16.09	$9.17	$0.00	$25.26
113379	4" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$17.88	$18.63	$0.00	$36.51
113380	5" Galvanized Steel Electric Metallic Tubing (EMT) Conduit - Support Hanger w/Nut and Bolt	EA	$5.36	$31.62	$0.00	$36.98
	26-05-34 PVC Conduit					
113381	1" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$2.68	$1.35	$0.00	$4.03
113382	1.25" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$3.58	$1.99	$0.00	$5.57
113383	1.5" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$3.58	$2.49	$0.00	$6.07
113384	2" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.02	$3.12	$0.00	$7.14
113385	2.5" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.47	$5.30	$0.00	$9.77
113386	3" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.92	$6.73	$0.00	$11.65
113387	4" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$7.15	$8.89	$0.00	$16.04
113388	5" PVC Schedule 40 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$10.73	$9.76	$0.00	$20.49
113389	1" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$2.68	$2.19	$0.00	$4.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113390	1.25" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$3.58	$3.01	$0.00	$6.59
113391	1.5" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$3.58	$3.68	$0.00	$7.26
113392	2" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.02	$4.73	$0.00	$8.75
113393	2.5" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.47	$7.83	$0.00	$12.30
113394	3" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$4.92	$9.25	$0.00	$14.17
113395	4" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$7.15	$13.84	$0.00	$20.99
113396	5" PVC Schedule 80 Conduit Electrical PVC Conduit ANSI/ul 651	LF	$7.15	$17.92	$0.00	$25.07
113397	1" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$10.73	$1.01	$0.00	$11.74
113398	1.5" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$16.09	$0.82	$0.00	$16.91
113399	2" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$17.88	$1.28	$0.00	$19.16
113400	2.5" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$22.34	$2.79	$0.00	$25.13
113401	3" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$26.82	$4.39	$0.00	$31.21
113402	4" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$44.70	$6.33	$0.00	$51.03
113403	6" PVC Conduit - Coupling Rigid PVC connector w/ 2 solvent weld female ends and center stop	EA	$53.64	$20.08	$0.00	$73.72
113404	2" PVC Conduit - Expansion Coupling	EA	$66.16	$107.26	$0.00	$173.42
113405	2.5" PVC Conduit - Expansion Coupling	EA	$66.16	$152.81	$0.00	$218.97
113406	4" PVC Conduit - Expansion Coupling	EA	$103.71	$281.91	$0.00	$385.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113407	1" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$10.73	$3.40	$0.00	$14.13
113408	1.25" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$10.73	$4.00	$0.00	$14.73
113409	1.50" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$10.73	$4.99	$0.00	$15.72
113410	2" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$12.51	$6.59	$0.00	$19.10
113411	2.5" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$12.51	$7.08	$0.00	$19.59
113412	3" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$13.41	$8.56	$0.00	$21.97
113413	4" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$13.41	$10.72	$0.00	$24.13
113414	5" PVC Conduit - Male/Female Adaptor Rigid PVC connector w/ 1 solvent weld female end and FIP internal threads	EA	$13.41	$13.58	$0.00	$26.99
113415	1" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$10.73	$1.39	$0.00	$12.12
113416	1.5" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$16.09	$1.90	$0.00	$17.99
113417	2" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$17.88	$2.47	$0.00	$20.35
113418	2.5" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$22.34	$6.45	$0.00	$28.79
113419	3" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$26.82	$10.01	$0.00	$36.83
113420	4" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$44.70	$17.97	$0.00	$62.67
113421	5" PVC Conduit - 45 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$53.64	$44.38	$0.00	$98.02
113422	1" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$10.73	$3.73	$0.00	$14.46
113423	1.25" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$44.70	$21.14	$0.00	$65.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113424	1.5" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$26.82	$3.54	$0.00	$30.36
113425	2" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$26.82	$3.94	$0.00	$30.76
113426	2.5" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$22.34	$6.45	$0.00	$28.79
113427	3" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$26.82	$7.70	$0.00	$34.52
113428	4" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$89.40	$172.38	$0.00	$261.78
113429	5" PVC Conduit - 90 Degree Elbow Rigid PVC Sweep w/integral bell one end x spigot	EA	$53.64	$43.93	$0.00	$97.57
	26-05-35 Liquid Tight Flexible Metal Conduit					
113430	1/2" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$3.58	$2.07	$0.00	$5.65
113431	3/4" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$4.02	$2.40	$0.00	$6.42
113432	1" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$4.47	$3.51	$0.00	$7.98
113433	1 1/4" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$5.36	$3.77	$0.00	$9.13
113434	1 1/2" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$6.26	$5.70	$0.00	$11.96
113435	2" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$8.05	$9.98	$0.00	$18.03
113436	2.5" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$8.05	$13.63	$0.00	$21.68
113437	3" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$8.94	$16.99	$0.00	$25.93
113438	4" Liquid Tight Flexible Metal Conduit Sealtite or Equal	LF	$13.41	$36.79	$0.00	$50.20
113439	1/2" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$8.94	$5.51	$0.00	$14.45
113440	3/4" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$8.94	$8.12	$0.00	$17.06
113441	1" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$13.41	$12.07	$0.00	$25.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113442	1 1/4" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$17.88	$19.55	$0.00	$37.43
113443	1 1/2" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$17.88	$27.77	$0.00	$45.65
113444	2" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$22.34	$51.60	$0.00	$73.94
113445	2.5" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$22.34	$61.05	$0.00	$83.39
113446	3" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$22.34	$120.13	$0.00	$142.47
113447	4" Liquid Tight Flexible Metal Conduit - Straight Connector Sealtite or Equal	EA	$25.92	$157.51	$0.00	$183.43
113448	1/2" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$13.41	$10.47	$0.00	$23.88
113449	3/4" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$13.41	$15.77	$0.00	$29.18
113450	1" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$17.88	$16.15	$0.00	$34.03
113451	1 1/4" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$22.34	$45.69	$0.00	$68.03
113452	1 1/2" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$22.34	$55.93	$0.00	$78.27
113453	2" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$26.82	$83.70	$0.00	$110.52
113454	4" Liquid Tight Flexible Metal Conduit - 90 Degree Connector Sealtite or Equal	EA	$31.29	$208.74	$0.00	$240.03
	26-05-36 Flexible Metallic Conduit					
113455	1/2" Flexible Metallic Conduit	LF	$3.93	$4.22	$0.00	$8.15
113456	3/4" Flexible Metallic Conduit	LF	$15.20	$10.26	$0.00	$25.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113457	1" Flexible Metallic Conduit	LF	$16.99	$17.43	$0.00	$34.42
113458	1.5" Flexible Metallic Conduit	LF	$17.88	$23.92	$0.00	$41.80
113459	2" Flexible Metallic Conduit	LF	$18.78	$34.38	$0.00	$53.16
113460	3" Flexible Metallic Conduit	LF	$20.56	$50.41	$0.00	$70.97
113461	4" Flexible Metallic Conduit	LF	$25.04	$66.96	$0.00	$92.00
113462	1/2" Flexible Metallic Conduit - 90 Degree Connector	EA	$13.41	$6.86	$0.00	$20.27
113463	3/4" Flexible Metallic Conduit - 90 Degree Connector	EA	$13.41	$12.04	$0.00	$25.45
113464	1" Flexible Metallic Conduit - 90 Degree Connector	EA	$13.41	$17.03	$0.00	$30.44
113465	1 1/2" Flexible Metallic Conduit - 90 Degree Connector	EA	$16.09	$33.49	$0.00	$49.58
113466	2" Flexible Metallic Conduit - 90 Degree Connector	EA	$18.78	$82.77	$0.00	$101.55
113467	3" Flexible Metallic Conduit - 90 Degree Connector	EA	$44.70	$96.51	$0.00	$141.21
113468	4" Flexible Metallic Conduit - 90 Degree Connector	EA	$44.70	$103.74	$0.00	$148.44
113469	1/2" Flexible Metallic Conduit - Straight Connector	EA	$13.41	$4.36	$0.00	$17.77
113470	3/4" Flexible Metallic Conduit - Straight Connector	EA	$13.41	$5.72	$0.00	$19.13
113471	1" Flexible Metallic Conduit - Straight Connector	EA	$13.41	$14.26	$0.00	$27.67
113472	1 1/2" Flexible Metallic Conduit - Straight Connector	EA	$16.09	$20.70	$0.00	$36.79
113473	2" Flexible Metallic Conduit - Straight Connector	EA	$18.78	$39.20	$0.00	$57.98
113474	3" Flexible Metallic Conduit - Straight Connector	EA	$44.70	$54.66	$0.00	$99.36
113475	4" Flexible Metallic Conduit - Straight Connector	EA	$44.70	$60.44	$0.00	$105.14
	26-05-37 PVC Coated Galvanized Conduit					
113476	3/4" PVC Coated Galvanized Steel Pipe	LF	$9.83	$15.86	$0.00	$25.69
113477	1" PVC Coated Galvanized Steel Pipe	LF	$10.73	$19.70	$0.00	$30.43
113478	1.25" PVC Coated Galvanized Steel Pipe	LF	$12.51	$25.55	$0.00	$38.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113479	1.5" PVC Coated Galvanized Steel Pipe	LF	$15.20	$29.87	$0.00	$45.07
113480	2" PVC Coated Galvanized Steel Pipe	LF	$14.31	$35.16	$0.00	$49.47
113481	2.5" PVC Coated Galvanized Steel Pipe	LF	$16.09	$39.75	$0.00	$55.84
113482	3" PVC Coated Galvanized Steel Pipe	LF	$17.88	$47.66	$0.00	$65.54
113483	3.5" Coated Galvanized Steel Pipe	LF	$20.56	$55.18	$0.00	$75.74
113484	4" PVC Coated Galvanized Steel Pipe	LF	$22.34	$67.19	$0.00	$89.53
113485	5" PVC Coated Galvanized Steel Pipe	LF	$26.46	$105.14	$0.00	$131.60
113486	6" PVC Coated Galvanized Steel Pipe	LF	$32.19	$133.65	$0.00	$165.84
113487	3/4" PVC Coated Galvanized Coupling	EA	$6.26	$2.19	$0.00	$8.45
113488	1" PVC Coated Galvanized Coupling	EA	$8.05	$5.08	$0.00	$13.13
113489	1.25" PVC Coated Galvanized Coupling	EA	$9.83	$4.00	$0.00	$13.83
113490	1.5" PVC Coated Galvanized Coupling	EA	$9.83	$5.07	$0.00	$14.90
113491	2" PVC Coated Galvanized Coupling	EA	$14.31	$6.69	$0.00	$21.00
113492	2.5" PVC Coated Galvanized Coupling	EA	$13.41	$6.27	$0.00	$19.68
113493	3" PVC Coated Galvanized Coupling	EA	$16.99	$14.64	$0.00	$31.63
113494	3.5" PVC Coated Galvanized Coupling	EA	$16.99	$16.25	$0.00	$33.24
113495	4" PVC Coated Galvanized Coupling	EA	$18.78	$17.83	$0.00	$36.61
113496	5" PVC Coated Galvanized Coupling	EA	$20.56	$30.04	$0.00	$50.60
113497	6" PVC Coated Galvanized Coupling	EA	$21.46	$51.82	$0.00	$73.28
113498	3/4" PVC Coated Galvanized 45 Degree Elbow	EA	$9.83	$5.81	$0.00	$15.64
113499	1" PVC Coated Galvanized 45 Degree Elbow	EA	$11.63	$8.74	$0.00	$20.37
113500	1.25" PVC Coated Galvanized 45 Degree Elbow	EA	$14.31	$12.60	$0.00	$26.91
113501	1.5" PVC Coated Galvanized 45 Degree Elbow	EA	$15.20	$18.21	$0.00	$33.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113502	2" PVC Coated Galvanized 45 Degree Elbow	EA	$18.78	$25.34	$0.00	$44.12
113503	2.5" PVC Coated Galvanized 45 Degree Elbow	EA	$23.24	$41.12	$0.00	$64.36
113504	3" PVC Coated Galvanized 45 Degree Elbow	EA	$24.14	$64.40	$0.00	$88.54
113505	3.5" PVC Coated Galvanized 45 Degree Elbow	EA	$27.72	$71.91	$0.00	$99.63
113506	4" PVC Coated Galvanized 45 Degree Elbow	EA	$28.61	$85.99	$0.00	$114.60
113507	5" PVC Coated Galvanized 45 Degree Elbow	EA	$36.65	$105.14	$0.00	$141.79
113508	6" PVC Coated Galvanized 45 Degree Elbow	EA	$54.53	$118.28	$0.00	$172.81
113509	3/4" PVC Coated Galvanized 90 Degree Elbow	EA	$9.83	$11.45	$0.00	$21.28
113510	1" PVC Coated Galvanized 90 Degree Elbow	EA	$13.41	$20.00	$0.00	$33.41
113511	1.25" PVC Coated Galvanized 90 Degree Elbow	EA	$14.31	$23.95	$0.00	$38.26
113512	1.5" PVC Coated Galvanized 90 Degree Elbow	EA	$16.09	$36.80	$0.00	$52.89
113513	2" PVC Coated Galvanized 90 Degree Elbow	EA	$32.19	$89.66	$0.00	$121.85
113514	2.5" PVC Coated Galvanized 90 Degree Elbow	EA	$33.97	$97.76	$0.00	$131.73
113515	3" PVC Coated Galvanized 90 Degree Elbow	EA	$38.44	$118.28	$0.00	$156.72
113516	3.5" PVC Coated Galvanized 90 Degree Elbow	EA	$45.60	$135.74	$0.00	$181.34
113517	4" PVC Coated Galvanized 90 Degree Elbow	EA	$67.94	$168.49	$0.00	$236.43
113518	5" PVC Coated Galvanized 90 Degree Elbow	EA	$98.34	$206.51	$0.00	$304.85
113519	6" PVC Coated Galvanized 90 Degree Elbow	EA	$143.04	$279.74	$0.00	$422.78
	26-05-39 Conduit Bodies and Supports					
113520	3/4" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$44.70	$16.87	$0.00	$61.57
113521	1" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$53.64	$19.26	$0.00	$72.90
113522	1.25" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$39.70	$50.95	$0.00	$90.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113523	1.5" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$22.34	$32.90	$0.00	$55.24
113524	2" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$71.52	$54.31	$0.00	$125.83
113525	2.5" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$53.64	$110.44	$0.00	$164.08
113526	3" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$178.80	$599.54	$0.00	$778.34
113527	3.5" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$62.58	$248.87	$0.00	$311.45
113528	4" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$89.40	$442.80	$0.00	$532.20
113529	5" Galvanized Conduit Body w/Cover - LB, LL, or LR	EA	$357.60	$1,092.02	$0.00	$1,449.62
113530	3/4" Galvanized Conduit Body w/Cover - Tee	EA	$35.76	$26.22	$0.00	$61.98
113531	1.25" Galvanized Conduit Body w/Cover - Tee	EA	$26.82	$29.33	$0.00	$56.15
113532	1.5" Galvanized Conduit Body w/Cover - Tee	EA	$26.82	$39.15	$0.00	$65.97
113533	2" Galvanized Conduit Body w/Cover - Tee	EA	$35.76	$60.46	$0.00	$96.22
113534	2.5" Galvanized Conduit Body w/Cover - Tee	EA	$44.70	$118.84	$0.00	$163.54
113535	3" Galvanized Conduit Body w/Cover - Tee	EA	$62.58	$173.18	$0.00	$235.76
113536	3.5" Galvanized Conduit Body w/Cover - Tee	EA	$80.47	$297.86	$0.00	$378.33
113537	4" Galvanized Conduit Body w/Cover - Tee	EA	$111.75	$314.95	$0.00	$426.70
113538	3/4" PVC Conduit - Tee	EA	$48.25	$10.00	$0.00	$58.25
113539	3/4" PVC LB, LL, LR	EA	$39.48	$7.83	$0.00	$47.31
	26-05-40 Raceways and Supports for Electrical Systems					
	26-05-41 Wiremold Raceway					
113540	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Two Compartment Includes Cover. Wiremold 5400TB or Equal.	LF	$8.94	$16.19	$0.00	$25.13
113541	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Inside Elbow Includes Cover. Wiremold 5400TB or Equal.	EA	$26.82	$49.92	$0.00	$76.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113542	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - End Fitting Includes Cover. Wiremold 5400TB or Equal.	EA	$17.88	$6.78	$0.00	$24.66
113543	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Flat Tee Includes Cover. Wiremold 5400TB or Equal.	EA	$26.82	$34.49	$0.00	$61.31
113544	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Inline Data Plate Includes Cover. Wiremold 5400TB or Equal.	EA	$67.04	$20.87	$0.00	$87.91
113545	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Inline Outlet Plate Includes Cover. Wiremold 5400TB or Equal.	EA	$160.92	$20.87	$0.00	$181.79
113546	5-1/4" x 1-11/16" Non-Metallic Surface Raceway - Inline GFI Outlet w/ Plate Includes Cover. Wiremold 5400TB or Equal.	EA	$71.52	$30.89	$0.00	$102.41
113547	5" x 2" Aluminum Surface Raceway - Multi-Compartment Includes Cover. Wiremold AL5200 or Equal.	LF	$8.94	$36.75	$0.00	$45.69
113548	5" x 2" Aluminum Surface Raceway - Flat Elbow Includes Cover. Wiremold AL5200 or Equal.	EA	$17.88	$3.82	$0.00	$21.70
113549	5" x 2" Aluminum Surface Raceway - Ceiling Adapter Includes Cover. Wiremold AL5200 or Equal.	EA	$17.88	$5.01	$0.00	$22.89
113550	5" x 2" Aluminum Surface Raceway - Inside Elbow Includes Cover. Wiremold AL5200 or Equal.	EA	$17.88	$3.82	$0.00	$21.70
113551	5" x 2" Aluminum Surface Raceway - Outside Elbow Includes Cover. Wiremold AL5200 or Equal.	EA	$17.88	$3.05	$0.00	$20.93
113552	5" x 2" Aluminum Surface Raceway - Combo Duplex and CM Box Includes Cover. Wiremold AL5200 or Equal.	EA	$53.64	$14.80	$0.00	$68.44
113553	5" x 2" Aluminum Surface Raceway - Inline Data Plate Includes Cover. Wiremold AL5200 or Equal.	EA	$8.94	$3.30	$0.00	$12.24
113554	5" x 2" Aluminum Surface Raceway - Inline Outlet Plate Includes Cover. Wiremold AL5200 or Equal.	EA	$8.94	$3.36	$0.00	$12.30
113555	5" x 2" Aluminum Surface Raceway - Inline Twist Lock Plate Includes Cover. Wiremold AL5200 or Equal.	EA	$8.94	$16.85	$0.00	$25.79
113556	2-3/4" x 1-1/2" Steel Surface Raceway - Single Compartment Includes Cover. Wiremold G3000B or Equal.	LF	$5.36	$33.72	$0.00	$39.08
113557	2-3/4" x 1-1/2" Steel Surface Raceway - Flat Elbow Includes Cover. Wiremold G3000B or Equal.	EA	$17.88	$46.97	$0.00	$64.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113558	2-3/4" x 1-1/2" Steel Surface Raceway - Ceiling Adapter Includes Cover. Wiremold G3000B or Equal.	EA	$17.88	$7.24	$0.00	$25.12
113559	2-3/4" x 1-1/2" Steel Surface Raceway - End Fitting Includes Cover. Wiremold G3000B or Equal.	EA	$17.88	$7.12	$0.00	$25.00
113560	2-3/4" x 1-1/2" Steel Surface Raceway - Inline Data Box Includes Cover. Wiremold G3000B or Equal.	EA	$35.76	$8.70	$0.00	$44.46
113561	2-3/4" x 1-1/2" Steel Surface Raceway - Inline Outlet Box Includes Cover. Wiremold G3000B or Equal.	EA	$35.76	$8.70	$0.00	$44.46
113562	1-29/32" x 7/8" Steel Surface Raceway - Single Compartment Includes Cover. Wiremold V2400BC or Equal.	LF	$3.58	$4.49	$0.00	$8.07
113563	1-29/32" x 7/8" Steel Surface Raceway - 2-Gang Outlet Box Includes Cover. Wiremold V2400BC or Equal.	EA	$89.40	$30.48	$0.00	$119.88
113564	3/4" x 21/32" Steel Surface Raceway - Single Compartment Includes Cover. Wiremold V700 or V500.	LF	$4.47	$2.27	$0.00	$6.74
113565	3/4" x 21/32" Steel Surface Raceway - Outlet Box Includes Cover. Wiremold V700 or V500.	EA	$44.70	$146.91	$0.00	$191.61
113566	3/4" x 21/32" Steel Surface Raceway - Single Port Box and Plate Includes Cover. Wiremold V700 or V500.	EA	$44.70	$19.49	$0.00	$64.19
113567	3/4" x 21/32" Steel Surface Raceway - Double Port Plate Includes Cover. Wiremold V700 or V500.	LF	$31.29	$7.12	$0.00	$38.41
113568	3/4" x 21/32" Steel Surface Raceway - 90 Degree Elbow Includes Cover. Wiremold V700 or V500.	EA	$17.79	$6.34	$0.00	$24.13
113569	Plugmold Multioutlet Steel Surface Raceway - 2-Circuit Wiremold V2000 or Equal.	LF	$22.34	$12.53	$0.00	$34.87
113570	Plugmold Multioutlet Steel Surface Raceway Connection	EA	$134.10	$33.05	$0.00	$167.15
	26-05-42 Cable Basket Support					
113571	12" Wide Cable Basket Includes a trapeze support every seven feet	LF	$25.04	$32.25	$0.00	$57.29
113572	18" Wide Cable Basket Includes a trapeze support every seven feet	LF	$28.61	$45.21	$0.00	$73.82
113573	24" Wide X 6" Deep Cablofil Cable Basket	LF	$35.76	$60.75	$0.00	$96.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113574	8" Wide Cable Basket Includes a trapeze support every seven feet	LF	$20.56	$24.87	$0.00	$45.43
	26-05-43 Cable Tray Support					
113575	12" Wide Ladder Tray Includes a trapeze support every seven feet	LF	$16.09	$17.66	$0.00	$33.75
113576	12" Wide Ladder Tray - Tee	EA	$178.80	$98.90	$0.00	$277.70
113577	12" Wide Ladder Tray - Elbow	EA	$178.80	$70.64	$0.00	$249.44
113578	24" Wide Ladder Tray Includes a trapeze support every seven feet	LF	$39.34	$59.34	$0.00	$98.68
113579	24" Wide Ladder Tray - Tee	EA	$134.10	$254.31	$0.00	$388.41
113580	24" Wide Ladder Tray - Elbow	EA	$178.80	$89.01	$0.00	$267.81
113581	36" Wide Solid Bottom Tray Includes a trapeze support every seven feet	LF	$44.70	$69.23	$0.00	$113.93
113582	36" Wide Ladder Tray - Tee	EA	$268.20	$228.88	$0.00	$497.08
	26-05-44 In-Slab Duct Raceway					
113583	Floor Duct with Partitions 10' Section	EA	$178.80	$306.97	$0.00	$485.77
113584	Floor Duct Horizontal 90 Degree Elbow	EA	$17.88	$158.37	$0.00	$176.25
113585	Floor Duct Vertical 90 Degree Elbow	EA	$17.88	$160.93	$0.00	$178.81
113586	Floor Duct 9" X 11" Rectangular Box	EA	$22.34	$141.28	$0.00	$163.62
113587	Floor Duct 4" Round Slab Box	EA	$134.10	$80.53	$0.00	$214.63
113588	Floor Duct Offset Elbow 45 Degree	EA	$116.22	$290.79	$0.00	$407.01
113589	Floor Duct Tee	EA	$134.10	$351.93	$0.00	$486.03
	26-05-45 In-Wall Duct Raceway					
113590	Channel Duct with Partitions and Cover 5' Section	EA	$134.10	$201.89	$0.00	$335.99
113591	Channel Duct Flat 90 Degree Elbow	EA	$89.40	$107.80	$0.00	$197.20
113592	Channel Duct Flat Cross	EA	$89.40	$215.81	$0.00	$305.21
113593	Channel Duct Flat Tee	EA	$89.40	$219.42	$0.00	$308.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113594	Channel Duct End Cap	EA	$44.70	$32.15	$0.00	$76.85
113595	1 Gang PVC FSCC Box with 3-3/4" hubs	EA	$44.70	$33.79	$0.00	$78.49
113596	2 Gang PVC FSC Box with 3-3/4" hubs	EA	$44.70	$36.34	$0.00	$81.04
113597	3/4" PVC Schedule 40 Pipe	LF	$2.60	$1.17	$0.00	$3.77
	26-05-46 Raceway and Support Components					
	Boxes and covers are priced independently.					
113598	Box Cover or Wall Plate - Plastic or Nylon 1-Gang	EA	$8.94	$0.49	$0.00	$9.43
113599	Box Cover or Wall Plate - Plastic or Nylon 2-Gang	EA	$10.73	$0.98	$0.00	$11.71
113600	Box Cover or Wall Plate - Plastic or Nylon 3-Gang	EA	$12.51	$1.58	$0.00	$14.09
113601	Box Cover or Wall Plate - Plastic or Nylon 4-Gang	EA	$15.20	$3.11	$0.00	$18.31
113602	Box Cover or Wall Plate - Steel or Stainless Steel 1-Gang	EA	$8.94	$3.35	$0.00	$12.29
113603	Box Cover or Wall Plate - Steel or Stainless Steel 2-Gang	EA	$10.73	$7.40	$0.00	$18.13
113604	Box Cover or Wall Plate - Steel or Stainless Steel 3-Gang	EA	$12.51	$8.51	$0.00	$21.02
113605	Box Cover or Wall Plate - Steel or Stainless Steel 4-Gang	EA	$15.20	$11.28	$0.00	$26.48
113606	4" Steel Square Box - 1-1/2" Deep Knockout Type	EA	$44.70	$8.31	$0.00	$53.01
113607	4" Steel Square Box - 2-1/8" Deep Knockout Type	EA	$44.70	$10.67	$0.00	$55.37
113608	4" Steel Square Box Plaster or Mud Ring 1-Gang or 2-Gang	EA	$8.94	$3.38	$0.00	$12.32
113609	4" Steel Square Box Cover - Flat Exposed Work 1-Gang or 2-Gang	EA	$8.94	$1.54	$0.00	$10.48
113610	4" Steel Square Box Cover - Raised Square (RS) Exposed Work 1-Gang or 2-Gang	EA	$8.94	$5.22	$0.00	$14.16
113611	4-11/16" Steel Square Box - 1-1/2" Deep Knockout Type	EA	$44.70	$13.49	$0.00	$58.19
113612	4-11/16" Steel Square Box - 2-1/8" Deep Knockout Type	EA	$44.70	$17.44	$0.00	$62.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113613	4-11/16" Steel Square Box Plaster or Mud Ring 1-Gang or 2-Gang	EA	$8.94	$4.51	$0.00	$13.45
113614	4-11/16" Steel Square Box Cover - Flat Exposed Work 1-Gang or 2-Gang	EA	$8.94	$4.79	$0.00	$13.73
113615	Bond Jumper	EA	$4.47	$0.54	$0.00	$5.01
113616	Steel Cut-In/Remodel Box - 1-Gang	EA	$26.82	$4.94	$0.00	$31.76
113617	4" Steel Octagon Box - 2-1/8" Deep	EA	$44.70	$12.56	$0.00	$57.26
113618	3/4" Conduit Strut Strap	EA	$22.34	$2.51	$0.00	$24.85
113619	1" Conduit Strut Strap	EA	$22.34	$2.88	$0.00	$25.22
113620	1.5" Conduit Strut Strap	EA	$22.34	$4.27	$0.00	$26.61
113621	2" Conduit Strut Strap	EA	$73.77	$4.34	$0.00	$78.11
113622	2.5" Conduit Strut Strap	EA	$73.77	$6.69	$0.00	$80.46
113623	3" Conduit Strut Strap	EA	$73.77	$7.37	$0.00	$81.14
113624	3.5" Conduit Strut Strap	EA	$73.77	$7.97	$0.00	$81.74
113625	4" Conduit Strut Straps	EA	$77.23	$9.56	$0.00	$86.79
113626	Dura-Block B-Line Series Model BD20 Rubber Roof Block 5"H X 6"L x 20.2" D with Galvanized Channel	EA	$43.52	$178.01	$0.00	$221.53
113627	Bell Weatherproof Box - 1-Gang	EA	$44.70	$14.70	$0.00	$59.40
113628	Bell Weatherproof Box - 2-Gang	EA	$44.70	$23.66	$0.00	$68.36
113629	Bell Weatherproof Box Gasketed Cover - 2-Gang	EA	$8.94	$4.63	$0.00	$13.57
113630	Lighting Support (Ceiling Wires)	EA	$89.40	$23.10	$0.00	$112.50
113631	4" Knock Outs	EA	$67.06	$1.97	$0.00	$69.03
113632	3/4" Kellems Strain Relief Cable Grip	EA	$89.40	$89.01	$0.00	$178.41
113633	1" Kellems Strain Relief Cable Grip	EA	$89.40	$97.48	$0.00	$186.88
113634	1.5" Kellems Strain Relief Cable Grip	EA	$89.40	$173.78	$0.00	$263.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113635	2.5" Kellems Strain Relief Cable Grip	EA	$89.40	$505.80	$0.00	$595.20
113636	3" Kellems Strain Relief Cable Grip	EA	$89.40	$651.32	$0.00	$740.72
113637	2" Aluminum Service Entrance Cap and Weatherhead	EA	$178.80	$53.68	$0.00	$232.48
113638	3" Aluminum Service Entrance Cap and Weatherhead	EA	$178.80	$79.13	$0.00	$257.93
113639	4" Aluminum Service Entrance Cap and Weatherhead	EA	$178.80	$108.80	$0.00	$287.60
113640	5" Aluminum Service Entrance Cap and Weatherhead	EA	$178.80	$131.40	$0.00	$310.20
113641	1" Conduit Waterproof Link-Seal	EA	$134.10	$96.75	$0.00	$230.85
113642	2" Conduit Waterproof Link-Seal	EA	$134.10	$134.31	$0.00	$268.41
113643	3" Conduit Waterproof Link-Seal	EA	$134.10	$197.84	$0.00	$331.94
113644	4" Conduit Waterproof Link-Seal	EA	$178.80	$212.29	$0.00	$391.09
113645	1/2" Panduit Spiral Wiring Wrap - 4" Max Bundle Diameter	LF	$11.51	$2.62	$0.00	$14.13
113646	3/4" Panduit Spiral Wiring Wrap - 5" Max Bundle Diameter	LF	$11.51	$3.41	$0.00	$14.92
113647	Panduit Type F Slotted Wiring Duct - Up to 2" x 2"	LF	$11.51	$9.31	$0.00	$20.82
113648	Panduit Type F Slotted Wiring Duct - Over 2" x 2"	LF	$10.73	$12.06	$0.00	$22.79
113649	Din Rail Track	LF	$10.73	$1.84	$0.00	$12.57
113650	Din Rail Fuse Block	EA	$10.73	$35.67	$0.00	$46.40
113651	Little Fuse KLKR 30	EA	$10.73	$31.26	$0.00	$41.99
113652	Cable Ties 7.9" bag of 100	EA	$89.40	$10.62	$0.00	$100.02
	26-05-70 Junction Boxes for Electrical Equipment					
	26-05-71 Junction Boxes - NEMA 1					
113653	6" X 6" X 4" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$11.46	$0.00	$100.86
113654	6" X 6" X 8" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$24.27	$0.00	$113.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113655	6" X 6" X 6" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$18.61	$0.00	$108.01
113656	10" X 8" X 4" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$17.16	$0.00	$106.56
113657	12" X 10" X 4" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$20.63	$0.00	$110.03
113658	12" X 12" X 4" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$34.97	$0.00	$124.37
113659	10" X 10" X 6" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$46.76	$0.00	$136.16
113660	12" X 12" X 6" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$96.78	$0.00	$454.38
113661	18" X 18" X 10" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$94.96	$0.00	$452.56
113662	20" X 12" X 8" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$271.26	$0.00	$628.86
113663	24" X 24" X 6" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$536.41	$202.04	$0.00	$738.45
113664	18" X 18" X 8" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$82.93	$0.00	$440.53
113665	24" X 24" X 18" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$536.41	$253.89	$0.00	$790.30
113666	24" X 24" X 24" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$178.80	$208.96	$0.00	$387.76
113667	30" X 24" X 10" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$536.41	$628.72	$0.00	$1,165.13
113668	30" X 30" X 10" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$268.20	$450.70	$0.00	$718.90
113669	36" X 24" X 18" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$715.21	$471.89	$0.00	$1,187.10
113670	36" X 42" X 18" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$715.21	$895.75	$0.00	$1,610.96
113671	48" X 48" X 24" NEMA 1 Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$715.21	$1,037.04	$0.00	$1,752.25
	26-05-72 Junction Boxes - NEMA 3R					
113672	8" X 8" X 6" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$178.80	$74.88	$0.00	$253.68
113673	10" X 8" X 6" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$63.23	$0.00	$152.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113674	10" X 10" X 6" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$89.40	$108.44	$0.00	$197.84
113675	12" X 10" X 6" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$134.10	$125.39	$0.00	$259.49
113676	16" X 12" X 6" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$178.80	$163.19	$0.00	$341.99
113677	20" X 20" X 8" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$371.58	$0.00	$729.18
113678	12" X 12" X 8" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$268.20	$356.74	$0.00	$624.94
113679	24" X 24" X 10" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$357.60	$544.65	$0.00	$902.25
113680	36" X 24" X 12" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$536.41	$671.82	$0.00	$1,208.23
113681	48" X 48" X 24" NEMA 3R Junction Box (J-Box) Powder Coated Steel w/Screw Cover	EA	$715.21	$1,236.96	$0.00	$1,952.17
	26-05-74 Junction Boxes - NEMA 4/4X					
113682	10" X 8" X 4" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$178.80	$387.97	$0.00	$566.77
113683	12" X 12" X 6" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$178.80	$479.35	$0.00	$658.15
113684	14" X 14" X 12" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$268.20	$955.60	$0.00	$1,223.80
113685	16" X 16" X 8" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$357.60	$947.89	$0.00	$1,305.49
113686	24" X 16" X 8" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$357.60	$1,011.77	$0.00	$1,369.37
113687	24" X 24" X 10" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$357.60	$1,567.50	$0.00	$1,925.10
113688	24" X 24" X 12" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$357.60	$1,627.61	$0.00	$1,985.21
113689	36" X 24" X 16" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$536.41	$2,011.39	$0.00	$2,547.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113690	36" X 36" X 16" NEMA 4X Stainless Steel Junction Box (J-Box) Screw Cover	EA	$536.41	$2,210.22	$0.00	$2,746.63
	26-05-75 Wireway Gutter Enclosure					
113691	4" x 4" x 84" Wireway Gutter w/End Caps - NEMA 1	EA	$536.41	$192.93	$0.00	$729.34
113692	6" x 6" x 24" Wireway Gutter w/End Caps - NEMA 1	EA	$178.80	$131.40	$0.00	$310.20
113693	6" x 6" x 120" Wireway Gutter w/End Caps - NEMA 1	EA	$894.01	$294.58	$0.00	$1,188.59
113694	8" x 8" x 48" Wireway Gutter w/End Caps - NEMA 1	EA	$357.60	$338.52	$0.00	$696.12
113695	12" x 12" x 48" Wireway Gutter w/End Caps - NEMA 1	EA	$447.00	$550.31	$0.00	$997.31
113696	12" x 12" x 84" Wireway Gutter w/End Caps - NEMA 1	EA	$804.61	$695.83	$0.00	$1,500.44
113697	12" x 12" x 120" Wireway Gutter w/End Caps - NEMA 1	EA	$1,072.81	$743.91	$0.00	$1,816.72
113698	12" x 12" x 144" Wireway Gutter w/End Caps - NEMA 1	EA	$1,430.42	$913.91	$0.00	$2,344.33
113699	6" x 6" x 30" Wireway Gutter w/End Caps - NEMA 3R	EA	$89.40	$174.55	$0.00	$263.95
113700	6" x 6" x 36" Wireway Gutter w/End Caps - NEMA 3R	EA	$268.20	$200.73	$0.00	$468.93
113701	6" x 6" x 60" Wireway Gutter w/End Caps - NEMA 3R	EA	$447.00	$295.85	$0.00	$742.85
	26-05-76 Floor Boxes					
113702	Hubbell B2422 2 Gang Floor Box	EA	$178.80	$171.60	$0.00	$350.40
113703	Hubbell SB3084 2 Gang Brass Floor Box Cover	EA	$134.10	$210.13	$0.00	$344.23
113704	Round Brass 2 Gang Cover for 5" PVC Floor Box	EA	$89.40	$182.25	$0.00	$271.65
113705	Walker AF 3-YC Raised Floor Box	EA	$178.80	$546.77	$0.00	$725.57
113706	Round 2 Gang Cover for 5" PVC Floor Box	EA	$89.40	$171.85	$0.00	$261.25
113707	Walker 5251 Raised Floor Box	EA	$178.80	$98.32	$0.00	$277.12
113708	Walker AC8104 Raised Floor Box	EA	$178.80	$502.20	$0.00	$681.00
113709	Wiremold RFB2 Floor Box with Cover	EA	$178.80	$187.91	$0.00	$366.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113710	Wiremold RFB6 Floor Box with Cover	EA	$178.80	$257.14	$0.00	$435.94
113711	Wiremold RC4 Floor Box	EA	$178.80	$439.40	$0.00	$618.20
113712	FSR Ceiling box	EA	$223.50	$803.92	$0.00	$1,027.42
113713	FSR FL 500P w/cover	EA	$223.50	$662.62	$0.00	$886.12
113714	Cable Cubby Tilt Up Table	EA	$178.80	$516.39	$0.00	$695.19
113715	Cable Cubby Wall w/Hinged Cover	EA	$178.80	$278.33	$0.00	$457.13
113716	Chief Wall Box PAC526	EA	$178.80	$113.03	$0.00	$291.83
113717	5" PVC Floor Box (Power and Data)	EA	$178.80	$34.66	$0.00	$213.46
113718	Stainless Steel Pedestal Floor Box (Power or Data)	EA	$178.80	$89.39	$0.00	$268.19
113719	Steel Pedestal Floor Box (Power or Data)	EA	$178.80	$117.13	$0.00	$295.93
113720	Steel Pedestal Floor Box (Power and Data)	EA	$178.80	$66.28	$0.00	$245.08
113721	4" X 4" X 6" PVC Water proof J Box	EA	$178.80	$67.58	$0.00	$246.38
113722	Round PVC 5" Opening, 6" Deep	EA	$178.80	$64.98	$0.00	$243.78
113723	5" Multiservice Poke Thru Box	EA	$178.80	$642.85	$0.00	$821.65
113724	8" Multiservice Poke Thru Box	EA	$178.80	$925.42	$0.00	$1,104.22
	26-05-90 Miscellaneous Electrical Items and Systems					
	26-05-93 Electrical Support Items					
113725	Meggaring (Set of Three Cables)	EA	$715.21	$0.00	$0.00	$715.21
113726	Circuit Tracing One Single Phase circuit	EA	$155.48	$0.00	$0.00	$155.48
	26-05-95 Temporary Electrical Items					
113727	60A 208V 1Ph Load Center on Plywood Stand W/4Quads	EA	$715.21	$7,869.50	$0.00	$8,584.71
113728	100' (10 Fixture) Temporary Light String	EA	$178.80	$173.31	$0.00	$352.11
113729	60 KW Portable Generator Rental - Diesel Excludes fuel.	WK	$0.00	$0.00	$1,600.00	$1,600.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113730	100 KW Portable Generator Rental - Diesel Excludes fuel.	WK	$0.00	$0.00	$2,700.00	$2,700.00
113731	250 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$22,036.30	$22,036.30
113732	500 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$32,597.90	$32,597.90
113733	750 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$33,685.80	$33,685.80
113734	1,000 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$51,255.50	$51,255.50
113735	1,500 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$67,390.00	$67,390.00
113736	2,000 KW Portable Generator Rental - Diesel Excludes fuel.	MO	$0.00	$0.00	$71,866.95	$71,866.95
113737	Shutdown and Re-Energize Distribution Panel	EA	$1,075.17	$0.00	$0.00	$1,075.17
113738	Complete Building Shutdown and Re-Energize	HR	$89.60	$0.00	$0.00	$89.60
113739	Shutdown and Re-Energize Branch Panel	EA	$537.59	$0.00	$0.00	$537.59
	26-05-97 Electric Vehicle Charging Stations					
113740	40KW DC Cable	LF	$2.68	$8.31	$0.00	$10.99
113741	Bosch AC EV Level 2 Charging Station (Wall or Bollard Mount)	EA	$715.21	$4,037.71	$0.00	$4,752.92
113742	GEP-EVPN3R Level 2 Charging Station (Wall or Bollard Mount)	EA	$715.21	$3,326.66	$0.00	$4,041.87
113743	EVP 32-H81 NEME 4 Level 2 Charging Station (Wall or Bollard Mount)	EA	$715.21	$3,632.47	$0.00	$4,347.68
113744	Tesla Super 3R Level 3 Charging Station (Wall or Bollard Mount)	EA	$1,430.42	$19,027.99	$0.00	$20,458.41
113745	GE-EVDN3R Level 2 Charging Station (Wall or Bollard Mount)	EA	$1,430.42	$7,074.02	$0.00	$8,504.44
113746	Car Charging Station Rough In	LF	$6.70	$25.20	$0.00	$31.90
113747	Schneider EVlink DC Level 3 Fast Charging Station (Wall or Bollard Mount)	EA	$894.01	$7,891.88	$0.00	$8,785.89
113748	Schneider EVlink EVF2S7P44R Duel Port Level 2 Charging Station (Wall or Bollard Mount)	EA	$894.01	$6,420.95	$0.00	$7,314.96
113749	ChargePoint CT4023 Dual Port Level 2 Charging Station (Wall or Bollard Mount)	EA	$715.21	$16,179.98	$0.00	$16,895.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113750	ChargePoint CT4013 Single Port Level 2 Charging Station (Wall or Bollard Mount)	EA	$715.21	$12,463.18	$0.00	$13,178.39
113751	Enphase HCS-D40 Dual EV Charger with ProMountDuo Universal Pedestal (rugged)	EA	$715.33	$3,222.33	$0.00	$3,937.66
	26-05-98 Heat Trace and Snow Melt Systems					
113752	Heat Trace Panel	EA	$715.21	$13,911.62	$0.00	$14,626.83
113753	Heat Trace Snow Switch	EA	$178.80	$2,369.86	$0.00	$2,548.66
113754	Heat Trace Aerial Snow Sensor	EA	$178.80	$822.68	$0.00	$1,001.48
113755	Heat Trace Gutter De-Icing Sensor	EA	$223.50	$577.22	$0.00	$800.72
113756	Heat Trace Power and Connection Kit	EA	$178.80	$749.39	$0.00	$928.19
113757	Heat Trace Cable Clips	EA	$13.41	$5.39	$0.00	$18.80
	26-09-00 Instrumentation and Control for Electrical Systems					
	26-09-13 Electrical Power Monitoring					
113758	Marwell 2200 Series Meter	EA	$575.99	$478.37	$0.00	$1,054.36
	26-09-25 Line-Voltage Lighting Controls					
113759	3 Way Fluorescent Dimmer	EA	$178.80	$255.88	$0.00	$434.68
113760	Leviton D4106 6 Channel Dimmer	EA	$357.60	$1,223.61	$0.00	$1,581.21
113761	Digital Room Controller	EA	$134.10	$236.53	$0.00	$370.63
113762	Timeclock	EA	$357.60	$208.28	$0.00	$565.88
113763	Astronomical Clock Controller	EA	$178.80	$486.47	$0.00	$665.27
113764	Line Voltage Duel Tech Wall Mt OCC Sensor	EA	$134.10	$144.60	$0.00	$278.70
113765	Line Voltage Duel Tech Ceiling OCC Sensor	EA	$89.40	$127.93	$0.00	$217.33
113766	Intermatic ET 90215C Time Clock	EA	$357.60	$680.60	$0.00	$1,038.20
113767	Line Voltage Ceiling Mount Vacancy Sensor	EA	$134.10	$144.31	$0.00	$278.41
113768	Line Voltage Wall Mount Vacancy Sensor	EA	$134.10	$121.99	$0.00	$256.09
113769	Photoelectric Cell	EA	$134.10	$74.38	$0.00	$208.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113770	Daylight Sensor	EA	$134.10	$160.66	$0.00	$294.76
113771	Room Light Controller	EA	$178.80	$233.56	$0.00	$412.36
113772	1-Pole Switch	EA	$44.70	$10.25	$0.00	$54.95
113773	1-Pole Motor Rated Switch	EA	$134.10	$20.06	$0.00	$154.16
113774	3-Way Switch	EA	$44.70	$11.63	$0.00	$56.33
113775	4-Way Switch	EA	$44.70	$11.63	$0.00	$56.33
113776	Tamper Proof Switch (Keyed)	EA	$107.28	$34.27	$0.00	$141.55
113777	Lockable Cab Light Switch	EA	$223.50	$133.87	$0.00	$357.37
113778	Emergency Light Relay	EA	$89.40	$113.06	$0.00	$202.46
113779	Timers	EA	$134.10	$69.92	$0.00	$204.02
113780	Transfer Relay	EA	$89.40	$138.03	$0.00	$227.43
	26-09-27 Low-Voltage Lighting Controls					
113781	LV Corner Mount Occ Sensor Wall/ Ceiling	EA	$178.80	$201.83	$0.00	$380.63
113782	LV Occ Sensor Ceiling	EA	$134.10	$201.83	$0.00	$335.93
113783	LV Vacancy Sensor Ceiling	EA	$134.10	$215.46	$0.00	$349.56
113784	WG Occ Sensor Ceiling	EA	$178.80	$233.19	$0.00	$411.99
113785	LV Occ Sensor Wall	EA	$134.10	$201.83	$0.00	$335.93
113786	LV Vacancy Sensor Wall	EA	$134.10	$215.46	$0.00	$349.56
113787	LV Tunable White Controller	EA	$178.80	$276.96	$0.00	$455.76
113788	LV Scene Controller (SC)	EA	$178.80	$402.29	$0.00	$581.09
113789	LV Multi Level Scene Controller	EA	$134.10	$259.10	$0.00	$393.20
113790	LV Multi Level Switch	EA	$178.80	$282.28	$0.00	$461.08
113791	LV Power Pack	EA	$89.40	$173.18	$0.00	$262.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113792	LV Dimmings Controller (DC)	EA	$178.80	$358.53	$0.00	$537.33
113793	ALCR	EA	$89.40	$147.28	$0.00	$236.68
113794	18 AWG 2 Pair 4C Twisted Plenum Control Cable	LF	$1.78	$0.33	$0.00	$2.11
113795	DLM Room Controls	EA	$536.41	$838.67	$0.00	$1,375.08
113796	Low Voltage Dimmer Panel	EA	$1,430.42	$4,977.49	$0.00	$6,407.91
113797	LV System Daylight Sensor	EA	$89.40	$130.92	$0.00	$220.32
113798	Low Voltage Fluorescent Dimmer	EA	$178.80	$181.38	$0.00	$360.18
113799	Duel Technology Wall Mounted Occupancy Sensor	EA	$134.10	$130.92	$0.00	$265.02
113800	Low Voltage Room Controller Kit	EA	$536.41	$470.47	$0.00	$1,006.88
113801	L Multilevel switch	EA	$134.10	$148.64	$0.00	$282.74
113802	Low Voltage Momentary switch	EA	$134.10	$118.65	$0.00	$252.75
113803	LV System Vacancy Sensor Ceiling	EA	$134.10	$120.01	$0.00	$254.11
113804	Low Voltage Patient Controller	EA	$134.10	$248.19	$0.00	$382.29
113805	Low Voltage 3R Photo Cell	EA	$134.10	$117.28	$0.00	$251.38
113806	Low Voltage Addressable Relay	EA	$134.10	$174.55	$0.00	$308.65
113807	Low Voltage Lighting Control Panel	EA	$2,860.83	$3,906.99	$0.00	$6,767.82
113808	Low Voltage Room Interface	EA	$134.10	$212.74	$0.00	$346.84
113809	Low Voltage Room Relay	EA	$134.10	$212.74	$0.00	$346.84
113810	Low Voltage LED Dimming Control Station	EA	$178.80	$195.00	$0.00	$373.80
113811	Crestron TSC 50	EA	$357.60	$3,621.98	$0.00	$3,979.58

26-10-00 Medium-Voltage Electrical Distribution

26-12-00 Medium-Voltage Transformers

26-12-23 Medium-Voltage Transformers - 15 KV

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113812	500 KVA Power Transformer (XFMR) - Medium Voltage (MV), Liquid / Oil Filled, Pad Mount Outdoor. Eaton Cooper 72216 or equal	EA	$7,509.68	$160,165.19	$5,499.30	$173,174.17
113813	150 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$4,291.25	$16,200.00	$0.00	$20,491.25
113814	225 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$4,291.25	$24,300.00	$0.00	$28,591.25
113815	300 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$4,291.25	$32,400.00	$0.00	$36,691.25
113816	500 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$5,364.06	$43,609.60	$0.00	$48,973.66
113817	750 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$5,364.06	$81,000.00	$0.00	$86,364.06
113818	1000 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$5,364.06	$108,000.00	$0.00	$113,364.06
113819	1500 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$7,152.08	$162,000.00	$0.00	$169,152.08
113820	2000 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$7,152.08	$216,000.00	$0.00	$223,152.08
113821	2500 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$7,152.08	$270,000.00	$0.00	$277,152.08
113822	3000 KVA Wet Transformer (XFMR) - Medium Voltage (MV), FR3 Oil Filled, 5/15KV Primary to 480/277V Secondary Step Down, Outdoor Pad Mounted	EA	$7,152.08	$324,000.00	$0.00	$331,152.08
	26-13-00 Medium-Voltage Switchgear					
	26-13-21 Medium-Voltage Switches - 5 KV					
113823	5KV Pad-Mounted Medium-Voltage Switchgear - S&C PME9 or Equal	EA	$7,152.08	$49,402.96	$0.00	$56,555.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113824	5KV Pad-Mounted Medium-Voltage Switchgear - S&C PME6 or Equal	EA	$5,721.66	$41,964.62	$0.00	$47,686.28
113825	5KV Pad-Mounted Medium-Voltage Switchgear - S&C PME5 or Equal	EA	$4,291.25	$36,894.16	$0.00	$41,185.41
113826	15KV 200A Load Break Elbow Equipment Termination for MV Cable	EA	$155.48	$425.31	$0.00	$580.79

26-20-00 Low-Voltage Electrical Distribution

26-22-00 Low-Voltage Transformers

26-22-13 Low-Voltage Distribution Transformers

113827	15 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$1,430.42	$2,653.76	$0.00	$4,084.18
113828	45 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$2,145.62	$4,974.17	$0.00	$7,119.79
113829	75 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$3,576.04	$6,791.60	$0.00	$10,367.64
113830	112.5 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$2,860.83	$9,922.01	$0.00	$12,782.84
113831	300 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$3,576.04	$24,407.33	$0.00	$27,983.37
113832	500 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 208V Primary to 480/277V Secondary Step Up, Indoor Enclosure	EA	$4,291.25	$35,405.46	$0.00	$39,696.71
113833	9 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$1,201.48	$0.00	$2,631.90
113834	15 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$2,269.49	$0.00	$3,699.91
113835	30 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$3,556.15	$0.00	$4,986.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113836	45 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$4,474.12	$0.00	$6,619.74
113837	75 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$7,543.06	$0.00	$9,688.68
113838	112.5 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$8,829.23	$0.00	$12,405.27
113839	150 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$11,525.15	$0.00	$14,385.98
113840	225 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$15,363.80	$0.00	$18,939.84
113841	300 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$19,702.89	$0.00	$23,278.93
113842	500 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$4,291.25	$25,775.69	$0.00	$30,066.94
113843	750 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$47,685.77	$0.00	$51,261.81
113844	1000 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$55,314.27	$0.00	$58,890.31
113845	9 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$1,430.42	$1,599.60	$0.00	$3,030.02
113846	15 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$1,430.42	$2,998.15	$0.00	$4,428.57
113847	30 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$1,430.42	$4,190.43	$0.00	$5,620.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113848	45 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$2,145.62	$5,627.45	$0.00	$7,773.07
113849	75 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$2,145.62	$8,643.09	$0.00	$10,788.71
113850	112.5 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$3,576.04	$10,116.82	$0.00	$13,692.86
113851	150 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$2,860.83	$13,205.89	$0.00	$16,066.72
113852	225 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$3,576.04	$17,604.71	$0.00	$21,180.75
113853	500 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$7,152.08	$36,818.81	$0.00	$43,970.89
113854	1000 KVA Dry Transformer (XFMR) - NEMA TP1 Efficiency Type 3R Enclosure, 480V Primary to 208/120V Secondary Step Down, Outdoor Enclosure	EA	$3,576.04	$54,639.94	$0.00	$58,215.98
113855	15 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE -2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$5,102.32	$0.00	$6,532.74
113856	30 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE -2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$7,128.38	$0.00	$9,274.00
113857	45 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE -2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$8,580.24	$0.00	$10,725.86
113858	75 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE -2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$12,923.76	$0.00	$15,784.59
113859	112.5 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE-2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$17,217.00	$0.00	$20,077.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113860	150 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE-2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$22,473.69	$0.00	$25,334.52
113861	225 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE-2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$26,504.02	$0.00	$30,080.06
113862	300 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE-2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$33,987.50	$0.00	$37,563.54
113863	500 KVA Dry Transformer (XFMR) - NEMA CSL3/DOE-2016 Efficiency Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$7,152.08	$61,498.64	$0.00	$68,650.72
	26-22-16 Low-Voltage Buck-Boost Transformers					
113864	3 KVA Dry Transformer (XFMR) - Buck Boost, NEMA Type 3R Enclosure, 120V Primary to 277V Secondary Step Up, Outdoor Enclosure	EA	$357.60	$960.28	$0.00	$1,317.88
113865	15 KVA Dry Transformer (XFMR) - Buck Boost, NEMA Type 3R Enclosure, 208V Primary to 240V Secondary Step Up, Outdoor Enclosure	EA	$1,430.42	$2,082.58	$0.00	$3,513.00
113866	25 KVA Dry Transformer (XFMR) - Buck Boost, NEMA Type 3R Enclosure, 208V Primary to 240V Secondary Step Up, Outdoor Enclosure	EA	$1,430.42	$2,756.94	$0.00	$4,187.36
113867	37.5 KVA Dry Transformer (XFMR) - Buck Boost, NEMA Type 3R Enclosure, 208V Primary to 240V Secondary Step Up, Outdoor Enclosure	EA	$1,430.42	$3,458.77	$0.00	$4,889.19
113868	50 KVA Dry Transformer (XFMR) - Buck Boost, NEMA Type 3R Enclosure, 208V Primary to 240V Secondary Step Up, Outdoor Enclosure	EA	$1,430.42	$4,206.35	$0.00	$5,636.77
	26-22-17 Low-Voltage Transformers for Nonlinear Loads					
113869	15 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$4,236.23	$0.00	$5,666.65
113870	30 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$6,386.58	$0.00	$7,817.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113871	45 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$7,702.24	$0.00	$9,847.86
113872	75 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$11,523.61	$0.00	$13,669.23
113873	112.5 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$11,817.81	$0.00	$14,678.64
113874	150 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$20,065.51	$0.00	$23,641.55
113875	225 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$27,866.91	$0.00	$31,442.95
113876	300 KVA Dry Transformer (XFMR) - UL K4 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$38,889.72	$0.00	$41,035.34
113877	15 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$4,670.93	$0.00	$6,101.35
113878	30 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$1,430.42	$7,006.40	$0.00	$8,436.82
113879	45 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,145.62	$10,085.64	$0.00	$12,231.26
113880	75 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$2,860.83	$12,705.39	$0.00	$15,566.22
113881	112.5 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$18,577.95	$0.00	$22,153.99
113882	150 KVA Dry Transformer (XFMR) - UL K13 Rated, NEMA Type 1 Enclosure, 480V Primary to 208/120V Secondary Step Down, Indoor Enclosure	EA	$3,576.04	$22,134.86	$0.00	$25,710.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	26-24-00 Low-Voltage Switchboards and Panelboards					
	26-24-13 Low-Voltage Switchboards					
113883	600A Switchboard w/ Commercial Metering - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3-Phase Outdoor Enclosure. Eaton Commercial Metering or equal.	EA	$3,754.84	$52,771.55	$0.00	$56,526.39
113884	400A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3-Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$3,754.84	$26,601.13	$0.00	$30,355.97
113885	600A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3-Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$3,754.84	$43,606.09	$0.00	$47,360.93
113886	800A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3-Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$5,006.46	$54,360.62	$0.00	$59,367.08
113887	1000A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3 -Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$5,006.46	$65,115.14	$0.00	$70,121.60
113888	1200A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3 -Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$6,258.07	$75,869.67	$0.00	$82,127.74
113889	1600A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3 -Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$6,258.07	$89,127.60	$0.00	$95,385.67
113890	2000A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3 -Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$10,370.52	$102,385.54	$0.00	$112,756.06
113891	2500A Switchboard w/ Pre-Installed Breakers - AIC 65 kA Rating, NEMA Type 3R Enclosure, 480/277V 3 -Phase Outdoor Enclosure. Eaton Pow-R-Line Xpert or equal.	EA	$10,370.52	$115,646.41	$0.00	$126,016.93
113892	600A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$2,860.83	$17,179.03	$0.00	$20,039.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113893	800A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$5,364.06	$21,421.94	$0.00	$26,786.00
113894	1000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$7,152.08	$28,038.93	$0.00	$35,191.01
113895	1200A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$7,152.08	$39,415.12	$0.00	$46,567.20
113896	1600A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$10,728.12	$64,735.76	$0.00	$75,463.88
113897	2000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$14,304.16	$248,308.23	$0.00	$262,612.39
113898	3000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$17,880.20	$341,283.71	$0.00	$359,163.91
113899	4000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$17,880.20	$412,596.76	$0.00	$430,476.96
113900	600A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,145.62	$17,154.76	$0.00	$19,300.38
113901	800A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,860.83	$21,587.42	$0.00	$24,448.25
113902	1000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$3,576.04	$47,084.57	$0.00	$50,660.61
113903	1200A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$3,576.04	$38,272.21	$0.00	$41,848.25
113904	1600A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$4,291.25	$55,910.17	$0.00	$60,201.42
113905	2000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$10,728.12	$216,006.53	$0.00	$226,734.65
113906	2500A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$10,728.12	$255,214.26	$0.00	$265,942.38
113907	3000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$10,728.12	$287,471.82	$0.00	$298,199.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113908	4000A Switchboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$10,728.12	$412,596.76	$0.00	$423,324.88
113909	600A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$2,860.83	$11,479.02	$0.00	$14,339.85
113910	800A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$5,364.06	$13,886.13	$0.00	$19,250.19
113911	1000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$7,152.08	$19,013.28	$0.00	$26,165.36
113912	1200A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$7,152.08	$24,297.75	$0.00	$31,449.83
113913	1600A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$10,728.12	$41,172.90	$0.00	$51,901.02
113914	2000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$14,304.16	$166,687.62	$0.00	$180,991.78
113915	2500A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$17,880.20	$176,718.65	$0.00	$194,598.85
113916	3000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$16,092.18	$210,903.65	$0.00	$226,995.83
113917	4000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$16,986.19	$265,576.98	$0.00	$282,563.17
113918	600A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$2,145.62	$10,614.63	$0.00	$12,760.25
113919	800A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$2,860.83	$13,167.21	$0.00	$16,028.04
113920	1000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$3,576.04	$19,182.44	$0.00	$22,758.48
113921	1200A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$3,576.04	$25,620.56	$0.00	$29,196.60

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113922	1600A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$4,291.25	$37,789.74	$0.00	$42,080.99
113923	2000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$10,728.12	$148,689.28	$0.00	$159,417.40
113924	2500A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$10,728.12	$175,365.39	$0.00	$186,093.51
113925	3000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$10,728.12	$193,329.89	$0.00	$204,058.01
113926	4000A Switchboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$10,728.12	$253,735.97	$0.00	$264,464.09
	26-24-16 Low-Voltage Panelboards					
113927	100A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$2,145.62	$3,430.51	$0.00	$5,576.13
113928	125A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$2,145.62	$3,936.29	$0.00	$6,081.91
113929	150A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$2,145.62	$4,195.10	$0.00	$6,340.72
113930	225A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$2,860.83	$5,189.75	$0.00	$8,050.58
113931	225A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V, 2 Section Outdoor Enclosure	EA	$3,576.04	$5,969.56	$0.00	$9,545.60
113932	400A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$3,576.04	$6,833.96	$0.00	$10,410.00
113933	600A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$3,576.04	$7,459.84	$0.00	$11,035.88
113934	800A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$3,576.04	$10,005.65	$0.00	$13,581.69
113935	1000A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$7,152.08	$13,003.12	$0.00	$20,155.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113936	1200A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 480/277V Outdoor Enclosure	EA	$5,364.06	$18,015.26	$0.00	$23,379.32
113937	100A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$1,430.42	$2,855.37	$0.00	$4,285.79
113938	125A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,145.62	$3,246.12	$0.00	$5,391.74
113939	150A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,145.62	$3,716.39	$0.00	$5,862.01
113940	225A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,860.83	$4,447.14	$0.00	$7,307.97
113941	225A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V, 2 section Outdoor Enclosure	EA	$3,576.04	$5,952.65	$0.00	$9,528.69
113942	400A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$2,860.83	$6,724.00	$0.00	$9,584.83
113943	600A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$3,576.04	$9,049.92	$0.00	$12,625.96
113944	800A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$3,576.04	$11,671.85	$0.00	$15,247.89
113945	1000A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$5,364.06	$17,372.46	$0.00	$22,736.52
113946	1200A Panelboard - NEMA Type 3R Enclosure, Main Lug Only (MLO), 208/120V Outdoor Enclosure	EA	$4,291.25	$21,107.45	$0.00	$25,398.70
113947	100A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$2,145.62	$2,588.84	$0.00	$4,734.46
113948	100A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$2,145.62	$3,103.67	$0.00	$5,249.29
113949	125A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$2,145.62	$3,221.34	$0.00	$5,366.96
113950	150A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$2,145.62	$4,212.02	$0.00	$6,357.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113951	225A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$2,860.83	$4,499.58	$0.00	$7,360.41
113952	225A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V, 2 Section Indoor Enclosure	EA	$3,576.04	$5,969.56	$0.00	$9,545.60
113953	400A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$3,576.04	$6,833.96	$0.00	$10,410.00
113954	600A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$3,576.04	$7,459.84	$0.00	$11,035.88
113955	800A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$3,576.04	$10,005.65	$0.00	$13,581.69
113956	1000A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$7,152.08	$13,003.12	$0.00	$20,155.20
113957	1200A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 480/277V Indoor Enclosure	EA	$5,364.06	$18,015.26	$0.00	$23,379.32
113958	125A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$2,145.62	$2,927.16	$0.00	$5,072.78
113959	150A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$2,145.62	$3,353.72	$0.00	$5,499.34
113960	225A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$2,860.83	$4,195.10	$0.00	$7,055.93
113961	225A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V, 2 Section Indoor Enclosure	EA	$3,576.04	$5,358.91	$0.00	$8,934.95
113962	600A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$3,576.04	$6,444.89	$0.00	$10,020.93
113963	800A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$3,576.04	$8,796.18	$0.00	$12,372.22
113964	1000A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$5,364.06	$10,656.91	$0.00	$16,020.97
113965	1200A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 480/277V Indoor Enclosure	EA	$7,152.08	$14,801.27	$0.00	$21,953.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113966	100A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$1,430.42	$2,496.77	$0.00	$3,927.19
113967	125A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$2,145.62	$2,738.65	$0.00	$4,884.27
113968	150A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$2,145.62	$3,197.07	$0.00	$5,342.69
113969	225A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$2,860.83	$3,602.21	$0.00	$6,463.04
113970	225A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V, 2 section Indoor Enclosure	EA	$3,576.04	$5,106.85	$0.00	$8,682.89
113971	400A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$3,576.04	$5,903.59	$0.00	$9,479.63
113972	600A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$3,576.04	$7,882.74	$0.00	$11,458.78
113973	800A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$3,576.04	$10,487.75	$0.00	$14,063.79
113974	1000A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$5,364.06	$15,765.46	$0.00	$21,129.52
113975	1200A Panelboard - NEMA Type 1 Enclosure, Main Lug Only (MLO), 208/120V Indoor Enclosure	EA	$5,364.06	$18,015.26	$0.00	$23,379.32
113976	100A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$1,430.42	$2,855.37	$0.00	$4,285.79
113977	125A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$2,145.62	$3,246.12	$0.00	$5,391.74
113978	150A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$2,145.62	$3,716.39	$0.00	$5,862.01
113979	225A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$2,860.83	$4,447.14	$0.00	$7,307.97
113980	225A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V, 2 section Indoor Enclosure	EA	$3,576.04	$5,952.65	$0.00	$9,528.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113981	400A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$2,860.83	$6,724.00	$0.00	$9,584.83
113982	600A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$3,576.04	$9,049.92	$0.00	$12,625.96
113983	800A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$3,576.04	$11,671.85	$0.00	$15,247.89
113984	1000A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$5,364.06	$17,372.46	$0.00	$22,736.52
113985	1200A Panelboard - NEMA Type 1 Enclosure, Main Circuit Breaker (MCB), 208/120V Indoor Enclosure	EA	$4,291.25	$21,107.45	$0.00	$25,398.70
	26-24-17 Low-Voltage Panelboards - Isolation and Fused					
113986	5 KVA, 12 Circuit Isolation Panel	EA	$2,860.83	$12,855.95	$0.00	$15,716.78
113987	7.5 KVA, 16 Circuit Isolation Panel	EA	$2,860.83	$16,315.22	$0.00	$19,176.05
113988	10 KVA, 16 Circuit Isolation Panel	EA	$2,860.83	$19,453.09	$0.00	$22,313.92
113989	400A MLO Fused Panel, 480/277V	EA	$3,576.04	$8,079.36	$0.00	$11,655.40
113990	400A Main Fused Panel, 480/277V	EA	$3,576.04	$10,327.32	$0.00	$13,903.36
113991	100A MLO Fused Panel, 208/120V	EA	$2,145.62	$4,753.83	$0.00	$6,899.45
113992	100A Main Fused Panel, 208/120V	EA	$1,072.81	$5,902.07	$0.00	$6,974.88
113993	150A MLO Fused Panel, 208/120V	EA	$2,145.62	$5,956.30	$0.00	$8,101.92
113994	125A Main Fused Panel, 208/120V	EA	$2,145.62	$7,250.10	$0.00	$9,395.72
113995	250A Main Fused Panel, 208/120V	EA	$2,145.62	$10,582.49	$0.00	$12,728.11
113996	400A MLO Fused Panel, 208/120V	EA	$3,576.04	$6,967.61	$0.00	$10,543.65
113997	400A Main Fused Panel, 208/120V	EA	$3,576.04	$9,215.70	$0.00	$12,791.74
	26-24-19 Low-Voltage Motor Control Centers					
113998	400A 480V NEMA 3R Motor Control Center	EA	$2,860.83	$18,184.41	$0.00	$21,045.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
113999	600A, 480V NEMA 3R Motor Control Center	EA	$7,152.08	$32,774.23	$0.00	$39,926.31
114000	800A, 480V NEMA 3R Motor Control Center	EA	$7,152.08	$45,461.03	$0.00	$52,613.11
114001	1200A, 480V NEMA 3R Motor Control Center	EA	$10,728.12	$61,953.87	$0.00	$72,681.99
114002	1600A, 480V NEMA 3R Motor Control Center	EA	$10,728.12	$68,085.82	$0.00	$78,813.94
114003	2000A, 480V NEMA 3R Motor Control Center	EA	$14,304.16	$88,300.12	$0.00	$102,604.28
114004	2500A, 208V NEMA 3R Motor Control Center	EA	$14,304.16	$94,305.20	$0.00	$108,609.36
114005	400A 480V NEMA 1 Motor Control Center	EA	$2,860.83	$14,547.53	$0.00	$17,408.36
114006	600A, 480V NEMA 1 Motor Control Center	EA	$7,152.08	$29,161.25	$0.00	$36,313.33
114007	800A, 480V NEMA 1 Motor Control Center	EA	$7,152.08	$36,368.83	$0.00	$43,520.91
114008	1200A, 480V NEMA 1 Motor Control Center	EA	$10,728.12	$49,563.09	$0.00	$60,291.21
114009	1600A, 480V NEMA 1 Motor Control Center	EA	$10,728.12	$60,352.39	$0.00	$71,080.51
114010	2000A, 480V NEMA 1 Motor Control Center	EA	$14,304.16	$70,420.19	$0.00	$84,724.35
114011	2500A, 208V NEMA 1 Motor Control Center	EA	$14,304.16	$75,444.17	$0.00	$89,748.33
	26-25-00 Low-Voltage Enclosed Bus Assemblies					
	26-25-13 Low-Voltage Busways					
114012	60 Amp 2 pole 208V Busway	LF	$22.34	$31.88	$0.00	$54.22
114013	60 Amp, 2 Pole, 208V, Busway Connection	EA	$357.60	$374.89	$0.00	$732.49
114014	60 Amp 2 pole 480V Busway	LF	$22.34	$43.06	$0.00	$65.40
114015	60A, 2 Pole, 480V, Busway Connection	EA	$357.60	$447.53	$0.00	$805.13
114016	60 Amp 208V 1Ph Busway	LF	$22.34	$28.00	$0.00	$50.34
114017	20 Amp Circuit Breaker w/ L5-20 Cord Drop	EA	$17.88	$231.74	$0.00	$249.62
114018	30 Amp Circuit Breaker	EA	$17.88	$284.19	$0.00	$302.07
114019	40 Amp Circuit Breaker	EA	$17.88	$419.51	$0.00	$437.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114020	50 Amp Circuit Breaker	EA	$17.88	$495.63	$0.00	$513.51
114021	70 Amp Circuit Breaker	EA	$17.88	$580.21	$0.00	$598.09
114022	100 Amp 2 pole 208V Busway	LF	$22.34	$39.12	$0.00	$61.46
114023	100 Amp, 2 Pole, 208V, Busway Connection	EA	$357.60	$554.06	$0.00	$911.66
114024	100 Amp 2 pole 480V Busway	LF	$22.34	$48.63	$0.00	$70.97
114025	100 Amp, 2 Pole, 480V, Busway Connection	EA	$357.60	$608.26	$0.00	$965.86
	26-25-15 Low-Voltage Busways - Aluminum					
114026	800A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$35.76	$264.99	$0.00	$300.75
114027	1000A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$53.64	$398.98	$0.00	$452.62
114028	1200A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$62.58	$447.15	$0.00	$509.73
114029	1350A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$71.52	$477.28	$0.00	$548.80
114030	1600A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$80.47	$561.58	$0.00	$642.05
114031	2000A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$89.40	$685.04	$0.00	$774.44
114032	3000A, 3Ph, 4 Wire Aluminum Bus Duct	LF	$178.80	$763.34	$0.00	$942.14
	26-25-17 Low-Voltage Busways - Copper					
114033	400A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$223.50	$1,496.55	$0.00	$1,720.05
114034	800A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$223.50	$2,017.48	$0.00	$2,240.98
114035	1000A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$357.60	$2,333.65	$0.00	$2,691.25
114036	1200A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$357.60	$3,342.40	$0.00	$3,700.00
114037	1600A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$357.60	$4,050.03	$0.00	$4,407.63
114038	2000A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$357.60	$4,908.22	$0.00	$5,265.82
114039	2500A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$357.60	$5,540.56	$0.00	$5,898.16
114040	3000A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$536.41	$6,007.29	$0.00	$6,543.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114041	4000A, 3Ph, 4 Wire Copper Bus Duct 90	EA	$715.21	$7,949.50	$0.00	$8,664.71
114042	225A, 3Ph, 4 Wire Copper Bus Duct	LF	$31.29	$203.26	$0.00	$234.55
114043	400A, 3Ph, 4 Wire Copper Bus Duct	LF	$39.34	$296.59	$0.00	$335.93
114044	600A, 3Ph, 4 Wire Copper Bus Duct	LF	$39.34	$308.65	$0.00	$347.99
114045	800A, 3Ph, 4 Wire Copper Bus Duct	LF	$44.70	$406.51	$0.00	$451.21
114046	1000A, 3Ph, 4 Wire Copper Bus Duct	LF	$59.90	$466.73	$0.00	$526.63
114047	1200A, 3Ph, 4 Wire Copper Bus Duct	LF	$47.66	$737.74	$0.00	$785.40
114048	1350A, 3Ph, 4 Wire Copper Bus Duct	LF	$54.98	$707.63	$0.00	$762.61
114049	1600A, 3Ph, 4 Wire Copper Bus Duct	LF	$65.00	$969.47	$0.00	$1,034.47
114050	2000A, 3Ph, 4 Wire Copper Bus Duct	LF	$78.94	$1,264.69	$0.00	$1,343.63
114051	2500A, 3Ph, 4 Wire Copper Bus Duct	LF	$98.34	$1,189.41	$0.00	$1,287.75
114052	3000A, 3Ph, 4 Wire Copper Bus Duct	LF	$107.28	$1,475.48	$0.00	$1,582.76
114053	4000A, 3Ph, 4 Wire Copper Bus Duct	LF	$134.10	$2,533.90	$0.00	$2,668.00
114054	5000A, 3Ph, 4 Wire Copper Bus Duct	LF	$162.53	$3,041.28	$0.00	$3,203.81
114055	1000A, 3Ph, 4 Wire Weather proof Copper Bus Duct	LF	$53.64	$597.71	$0.00	$651.35
114056	1600A, 3Ph, 4 Wire Weather proof Copper Bus Duct	LF	$71.52	$948.52	$0.00	$1,020.04
114057	2000A, 3Ph, 4 Wire Weather proof Copper Bus Duct	LF	$80.47	$1,415.25	$0.00	$1,495.72
114058	3000A, 3Ph, 4 Wire Weather proof Copper Bus Duct	LF	$107.28	$1,746.49	$0.00	$1,853.77
114059	4000A, 3Ph, 4 Wire Weather proof Copper Bus Duct	LF	$134.10	$2,303.54	$0.00	$2,437.64
114060	225A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$357.60	$2,137.93	$0.00	$2,495.53
114061	400A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$536.41	$2,348.72	$0.00	$2,885.13
114062	600A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$715.21	$2,574.55	$0.00	$3,289.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114063	800A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$715.21	$2,740.17	$0.00	$3,455.38
114064	1000A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$894.01	$2,996.12	$0.00	$3,890.13
114065	1200A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$1,072.81	$3,206.90	$0.00	$4,279.71
114066	1350A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$1,072.81	$3,432.74	$0.00	$4,505.55
114067	1600A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$1,430.42	$3,944.64	$0.00	$5,375.06
114068	2000A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$1,430.42	$4,637.21	$0.00	$6,067.63
114069	2500A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$2,145.62	$5,630.89	$0.00	$7,776.51
114070	3000A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$2,145.62	$6,985.92	$0.00	$9,131.54
114071	4000A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$2,860.83	$6,985.92	$0.00	$9,846.75
114072	5000A, 3Ph, 4 Wire Busway Tap Box Connection	EA	$2,860.83	$7,889.27	$0.00	$10,750.10
	26-27-00 Low-Voltage Distribution Equipment					
	26-27-26 Wiring Devices					
114073	6" x 4" x 4" Impact Resistant Hinged Cover Box	EA	$287.96	$54.71	$0.00	$342.67
114074	Harmony Xb4BA42-Red Reset Switch	EA	$287.96	$50.55	$0.00	$338.51
114075	RJ 45 Panel Mounted Connector	EA	$287.96	$79.41	$0.00	$367.37
114076	Engraved SS Plate w/Tamper Proof Screws	EA	$26.82	$8.46	$0.00	$35.28
114077	Duplex Receptacle 125 V, 15 or 20 A	EA	$89.40	$11.93	$0.00	$101.33
114078	Duplex Receptacle - GFCI 125 V, 15 or 20 A	EA	$111.75	$20.53	$0.00	$132.28
114079	Duplex Receptacle - GFCI, Tamper Resistant 125 V, 15 or 20 A	EA	$178.80	$24.21	$0.00	$203.01
114080	Duplex Receptacle - w/Integrated USB 125 V, 15 or 20 A	EA	$134.10	$32.73	$0.00	$166.83
114081	Duplex Receptacle - Surge Protector Outlet 125 V, 15 or 20 A	EA	$134.10	$69.08	$0.00	$203.18
114082	Duplex Receptacle - Tamper Resistant, Isolated Ground (Orange) 125 V, 15 or 20 A	EA	$178.80	$24.14	$0.00	$202.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114083	Duplex Receptacle - Arc Fault 125 V, 15 or 20 A	EA	$107.28	$97.03	$0.00	$204.31
114084	Duplex Receptacle - Hospital Grade 125 V, 15 or 20 A	EA	$89.40	$21.14	$0.00	$110.54
114085	Duplex Receptacle - Hospital Grade, Tamper Resistant 125 V, 15 or 20 A	EA	$178.80	$23.58	$0.00	$202.38
114086	Duplex Receptacle - Hospital Grade, GFCI 125 V, 15 or 20 A	EA	$111.75	$33.41	$0.00	$145.16
114087	Duplex Receptacle - Hospital Grade, GFCI, Luminated and Tamper Resistant 125 V, 15 or 20 A	EA	$178.80	$37.59	$0.00	$216.39
114088	Quad Receptacle 125 V, 15 or 20 A	EA	$134.10	$40.01	$0.00	$174.11
114089	Quad Receptacle - Hospital Grade 125 V, 15 or 20 A	EA	$134.10	$65.23	$0.00	$199.33
114090	Ceiling Service Panel Connectors	EA	$134.10	$35.46	$0.00	$169.56
114091	Plug Load Relay	EA	$89.40	$76.04	$0.00	$165.44
114092	L5-20 Twist Lock Receptacle/Plug	EA	$178.80	$49.30	$0.00	$228.10
114093	L5-5P Twist Lock Receptacle/Plug	EA	$89.40	$17.09	$0.00	$106.49
114094	L5-30P Twist Lock Receptacle/Plug	EA	$134.10	$30.67	$0.00	$164.77
114095	Special Purpose Outlet	EA	$134.10	$43.64	$0.00	$177.74
114096	Device Plate Labeling .5" X 1.5" Label (Tape Style label maker)	EA	$11.60	$2.55	$0.00	$14.15
114097	Access Flooring Floor Box	EA	$134.10	$218.99	$0.00	$353.09
114098	Weather Resistant Receptacle in Water Tight Bell Box	EA	$178.80	$94.09	$0.00	$272.89
114099	Floor Cores	EA	$178.80	$194.95	$0.00	$373.75
114100	EPO Button w/enclosure	EA	$178.80	$391.38	$0.00	$570.18
114101	4P Ground Fault Module	EA	$134.10	$133.64	$0.00	$267.74
114102	Hammer Drill Floor	EA	$89.40	$7.22	$0.00	$96.62
114103	1 Pole 20A Motor rated Switch w/Cover	EA	$268.20	$100.91	$0.00	$369.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114104	Class 1 Division 1, Receptacle	EA	$178.80	$402.29	$0.00	$581.09
114105	Hubbell HBLPP Power Pole	EA	$357.60	$560.90	$0.00	$918.50
114106	Nelson LT-MP Power Connection Kit	EA	$89.40	$4.68	$0.00	$94.08
114107	Nelson End Caps	EA	$22.34	$3.17	$0.00	$25.51
114108	Nelson Self Regulating Heat Trace	LF	$4.47	$13.32	$0.00	$17.79
114109	50 Amp 250V 3Ph Twist Lock	EA	$134.10	$130.85	$0.00	$264.95
114110	10-20R Amp 250/125V 1Ph with Neutral Twist Lock Receptacle	EA	$134.10	$62.00	$0.00	$196.10
114111	L5-20 Amp 125V Explosion Proof Plug	EA	$134.10	$419.46	$0.00	$553.56
114112	L5-20R Amp 125V Explosion Proof Receptacle	EA	$134.10	$361.04	$0.00	$495.14
114113	L15-20R Amp 250V 3Ph 4W Twist Lock Receptacle/Plug	EA	$134.10	$68.07	$0.00	$202.17
114114	10-50R Amp 125/250V 3Ph 4W Twist Lock Receptacle/Plug	EA	$178.80	$158.12	$0.00	$336.92
114115	L16-50R Amp 250V 3Ph 4W Twist Lock Receptacle/Plug	EA	$178.80	$195.31	$0.00	$374.11
114116	L15-20R Amp 250V 3Ph Twist Lock Receptacle/Plug	EA	$89.40	$59.66	$0.00	$149.06
114117	L11-60 Amp 480V 3Ph Twist Lock Plug	EA	$134.10	$120.88	$0.00	$254.98
114118	L15-30R Amp 208V 3Ph Twist Lock Receptacle/Plug	EA	$134.10	$71.91	$0.00	$206.01
114119	L17-30 Amp 3Ph 480V Twist Lock Receptacle/Plug	EA	$89.40	$108.98	$0.00	$198.38
114120	L17-50 Amp 3Ph 480V Twist Lock Receptacle/Plug	EA	$89.40	$197.32	$0.00	$286.72
114121	5-20R Amp 125V 1Ph Twist Lock Receptacle/Plug	EA	$89.40	$19.77	$0.00	$109.17
114122	5-30R Amp 125V 1Ph Twist Lock Receptacle/Plug	EA	$98.34	$56.66	$0.00	$155.00
114123	L6-20R Amp 250V 1Ph Twist Lock Receptacle/Plug	EA	$134.10	$52.16	$0.00	$186.26
114124	L6-30R Amp 250V 1Ph Twist Lock Receptacle/Plug	EA	$134.10	$62.73	$0.00	$196.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114125	L6-40 40Amp 250V 1Ph Twist Lock Receptacle/Plug	EA	$134.10	$63.07	$0.00	$197.17
114126	L16-20R Amp 480V 3Ph 20A Twist Lock Receptacle/Plug	EA	$134.10	$82.71	$0.00	$216.81
114127	L16-30R Amp 480V 3Ph 30A Twist Lock Receptacle/Plug	EA	$134.10	$88.54	$0.00	$222.64
114128	L16-40R Amp 480V 3Ph 40A Twist Lock Receptacle/Plug	EA	$134.10	$99.48	$0.00	$233.58
	26-27-33 Power Distribution Units					
114129	5KVA Mini Power Zone	EA	$357.60	$2,396.30	$0.00	$2,753.90
114130	7.5KVA Mini Power Zone	EA	$357.60	$4,465.76	$0.00	$4,823.36
114131	10KVA Mini Power Zone	EA	$357.60	$5,300.65	$0.00	$5,658.25
114132	15KVA Mini Power Zone	EA	$357.60	$7,696.95	$0.00	$8,054.55
114133	5KVA 3R Mini Power Zone	EA	$536.41	$2,994.96	$0.00	$3,531.37
114134	7.5KVA 3R Mini Power Zone	EA	$536.41	$5,582.19	$0.00	$6,118.60
114135	10KVA 3R Mini Power Zone	EA	$536.41	$6,625.81	$0.00	$7,162.22
114136	15KVA 3R Mini Power Zone	EA	$536.41	$9,620.79	$0.00	$10,157.20
114137	Terminal Block (4 Position)	EA	$69.10	$4.67	$0.00	$73.77
114138	200A MCB Power Wall, 480/277V	EA	$2,860.83	$11,779.23	$0.00	$14,640.06
114139	400A MCB Power Wall, 480/277V	EA	$4,291.25	$17,151.09	$0.00	$21,442.34
114140	600A MCB Power Wall, 480/277V	EA	$5,721.66	$20,063.53	$0.00	$25,785.19
114141	800A MCB Power Wall, 480/277V	EA	$5,721.66	$22,490.56	$0.00	$28,212.22
114142	400A MCB Power Wall, 208/120V	EA	$4,291.25	$15,791.94	$0.00	$20,083.19
114143	600A MCB Power Wall, 208/120V	EA	$5,721.66	$19,400.14	$0.00	$25,121.80
114144	800A MCB Power Wall, 208/120V	EA	$5,721.66	$21,810.99	$0.00	$27,532.65

26-28-00 Low-Voltage Circuit Protective Devices

26-28-11 Low-Voltage Fuses

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114145	Little Fuse KLKR 30A	EA	$11.49	$24.58	$0.00	$36.07
114146	20A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$60.50	$0.00	$105.20
114147	30A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$63.73	$0.00	$108.43
114148	40A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$71.92	$0.00	$116.62
114149	50A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$100.88	$0.00	$145.58
114150	60A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$128.47	$0.00	$173.17
114151	70A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$131.71	$0.00	$176.41
114152	80A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$152.06	$0.00	$196.76
114153	100A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$226.44	$0.00	$271.14
114154	125A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$226.28	$0.00	$270.98
114155	800A, 600V, Set of 3 Motor Rated Fuses	EA	$178.80	$1,024.84	$0.00	$1,203.64
114156	600A, 600V, Set of 3 Current Limiting Fuses	EA	$44.70	$277.58	$0.00	$322.28
114157	400A, 600V, Set of 3 Motor Rated Fuses	EA	$44.70	$498.14	$0.00	$542.84
114158	250A, 600V, Set of 3 Motor Rated Fuses	EA	$89.40	$242.50	$0.00	$331.90
114159	350 A, 250V, Set of 3 Motor Rated Fuses	EA	$89.40	$215.82	$0.00	$305.22
114160	20A, 250V, Set of 2 Motor Rated Fuses	EA	$44.70	$45.31	$0.00	$90.01
114161	25A, 250V, Set of 2 Motor Rated Fuses	EA	$44.70	$45.31	$0.00	$90.01
114162	30A, 250V, Set of 3 Motor Rated Fuses	EA	$44.70	$82.51	$0.00	$127.21
114163	90A, 250V, Set of 3 Motor Rated Fuses	EA	$44.70	$98.70	$0.00	$143.40
114164	40A, 250V, Set of 3 Motor Rated Fuses	EA	$44.70	$77.66	$0.00	$122.36
114165	175A, 600V, Set of 3 Motor Rated Fuses	EA	$44.70	$281.54	$0.00	$326.24
114166	200A, 600V, Motor Rated Fuses Set of 3	EA	$44.70	$336.33	$0.00	$381.03

26-28-12 Low-Voltage Circuit Breakers- 10AIC

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114167	20A 120V, 1Ph 10AIC Arc Fault Circuit Interrupter Breaker	EA	$89.40	$69.35	$0.00	$158.75
114168	20A 120V, 1Ph 10AIC GFCI Breaker	EA	$89.40	$62.58	$0.00	$151.98
114169	20A 120V, 1Ph 10AIC Breaker	EA	$89.40	$50.73	$0.00	$140.13
114170	Single Pole Breaker Lock	EA	$23.94	$12.49	$0.00	$36.43
114171	30A 120V, 1Ph 10AIC Breaker	EA	$89.40	$87.96	$0.00	$177.36
114172	40A 120V, 1Ph 10AIC Breaker	EA	$89.40	$106.56	$0.00	$195.96
114173	50A 120V, 1Ph 10AIC Breaker	EA	$89.40	$130.25	$0.00	$219.65
114174	20A 277V, 1Ph 10AIC Breaker	EA	$89.40	$91.34	$0.00	$180.74
114175	30A 277V, 1Ph 10AIC Breaker	EA	$89.40	$131.94	$0.00	$221.34
114176	20A 208V, 1Ph 10AIC Breaker	EA	$178.80	$132.79	$0.00	$311.59
114177	30A 208V, 1Ph 10AIC Breaker	EA	$178.80	$164.08	$0.00	$342.88
114178	40A 208V, 1Ph 10AIC Breaker	EA	$178.80	$204.68	$0.00	$383.48
114179	50A 208V, 1Ph 10AIC Breaker	EA	$178.80	$223.28	$0.00	$402.08
114180	60A 208V, 1Ph 10AIC Breaker	EA	$178.80	$319.71	$0.00	$498.51
114181	80A 208V, 1Ph 10AIC Breaker	EA	$178.80	$383.98	$0.00	$562.78
114182	100A 208V, 1Ph 10AIC Breaker	EA	$178.80	$383.98	$0.00	$562.78
114183	400A 208V, 1Ph 10AIC Breaker	EA	$178.80	$1,919.94	$0.00	$2,098.74
114184	20A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$431.36	$0.00	$610.16
114185	30A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$456.72	$0.00	$635.52
114186	40A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$473.64	$0.00	$652.44
114187	60A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$477.02	$0.00	$655.82
114188	70A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$515.93	$0.00	$694.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114189	80A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$583.60	$0.00	$762.40
114190	100A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$666.48	$0.00	$845.28
114191	125A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$730.75	$0.00	$909.55
114192	150A 208V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$945.59	$0.00	$1,124.39
114193	20A 480V, 1Ph 10AIC Breaker	EA	$178.80	$165.77	$0.00	$344.57
114194	30A 480V, 1Ph 10AIC Breaker	EA	$178.80	$206.38	$0.00	$385.18
114195	40A 480V, 1Ph 10AIC Breaker	EA	$178.80	$251.63	$0.00	$430.43
114196	50A 480V, 1Ph 10AIC Breaker	EA	$178.80	$279.11	$0.00	$457.91
114197	60A 480V, 1Ph 10AIC Breaker	EA	$178.80	$319.71	$0.00	$498.51
114198	80A 480V, 1Ph 10AIC Breaker	EA	$178.80	$479.98	$0.00	$658.78
114199	15A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$417.82	$0.00	$596.62
114200	20A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$468.57	$0.00	$647.37
114201	30A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$551.45	$0.00	$730.25
114202	40A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$674.94	$0.00	$853.74
114203	50A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$702.00	$0.00	$880.80
114204	70A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$754.44	$0.00	$933.24
114205	80A 480V, 3Ph 10AIC Circuit Breaker	EA	$178.80	$818.72	$0.00	$997.52
	26-28-13 Low-Voltage Circuit Breakers- 25AIC					
114206	20A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$548.07	$0.00	$726.87
114207	30A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$558.22	$0.00	$737.02
114208	40A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$608.96	$0.00	$787.76
114209	60A 208V, 25AIC 3Ph Circuit Breaker	EA	$178.80	$572.43	$0.00	$751.23
114210	70A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$619.12	$0.00	$797.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114211	80A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$700.32	$0.00	$879.12
114212	100A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$799.77	$0.00	$978.57
114213	125A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$876.91	$0.00	$1,055.71
114214	150A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$1,134.71	$0.00	$1,313.51
114215	200A 208V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$1,333.63	$0.00	$1,512.43
114216	20A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$586.97	$0.00	$765.77
114217	30A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$690.16	$0.00	$868.96
114218	40A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$844.10	$0.00	$1,022.90
114219	50A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$877.92	$0.00	$1,056.72
114220	70A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$943.90	$0.00	$1,122.70
114221	80A 480V, 3Ph 25AIC Circuit Breaker	EA	$178.80	$1,023.40	$0.00	$1,202.20
114222	100A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,158.73	$0.00	$1,337.53
114223	125A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,172.26	$0.00	$1,351.06
114224	150A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,341.41	$0.00	$1,520.21
114225	175A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,387.09	$0.00	$1,565.89
114226	200A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,657.74	$0.00	$1,836.54
114227	225A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$178.80	$1,657.74	$0.00	$1,836.54
114228	300A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$357.60	$1,754.17	$0.00	$2,111.77
114229	350A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$357.60	$2,165.21	$0.00	$2,522.81
114230	400A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$357.60	$2,841.84	$0.00	$3,199.44
114231	500A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$357.60	$5,255.72	$0.00	$5,613.32
114232	600A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$715.21	$3,564.15	$0.00	$4,279.36
114233	800A 480V, 3Ph 25AIC Distribution Circuit Breaker	EA	$715.21	$6,375.54	$0.00	$7,090.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	26-28-14 Low-Voltage Circuit Breakers- 42AIC					
114234	100A Frame 40A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114235	100A Frame 50A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114236	100A Frame 60A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114237	100A Frame 80A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114238	100A Frame 100A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114239	250A Frame 150A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$5,104.32	$0.00	$5,283.12
114240	250A Frame 175A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$5,104.32	$0.00	$5,283.12
114241	250A Frame 200A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$5,104.32	$0.00	$5,283.12
114242	250A Frame 225A Trip 208V, 3Ph 42AIC Breaker	EA	$178.80	$5,104.32	$0.00	$5,283.12
114243	400A Frame 400A Trip 208V 3Ph 42AIC Breaker	EA	$178.80	$7,023.83	$0.00	$7,202.63
114244	600A Frame 600A Trip, 208V 3Ph 42AIC Breaker	EA	$536.41	$9,739.91	$0.00	$10,276.32
114245	800A Frame 800A Trip 208V, 3Ph 42AIC Breaker	EA	$357.60	$12,407.18	$0.00	$12,764.78
114246	1000A Frame 1000A Trip 208V, 3Ph 42AIC Breaker	EA	$715.21	$16,341.02	$0.00	$17,056.23
114247	100A Frame 40A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114248	100A Frame 50A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114249	100A Frame 60A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114250	100A Frame 80A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114251	100A Frame 100A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114252	250A Frame 150A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73
114253	250A Frame 175A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73
114254	250A Frame 200A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73
114255	250A Frame 225A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114256	250A Frame 250A Trip 480V, 3Ph 42AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73
114257	400A Frame 400A Trip, 480V 3Ph 42AIC Breaker	EA	$178.80	$8,263.33	$0.00	$8,442.13
114258	500A Frame 500A Trip, 480V 3Ph 42AIC Breaker	EA	$178.80	$9,435.60	$0.00	$9,614.40
114259	600A Frame 600A Trip, 480V 3Ph 42AIC Breaker	EA	$536.41	$11,458.72	$0.00	$11,995.13
114260	800A Frame 800A Trip 480V, 3Ph 42AIC Breaker	EA	$357.60	$15,193.71	$0.00	$15,551.31
114261	1000A Frame 1000A Trip 480V, 3Ph 42AIC Breaker	EA	$715.21	$19,224.73	$0.00	$19,939.94
	26-28-15 Low-Voltage Circuit Breakers- 65AIC					
114262	100A Frame 100A Trip 208V, 3Ph 65AIC Breaker	EA	$178.80	$2,124.62	$0.00	$2,303.42
114263	250A Frame 250A Trip 208V, 3Ph 65AIC Breaker	EA	$178.80	$5,273.48	$0.00	$5,452.28
114264	400A Frame 400A Trip, 208V 3Ph 65AIC Breaker	EA	$178.80	$7,023.83	$0.00	$7,202.63
114265	600A Frame 600A Trip, 208V 3Ph 65AIC Breaker	EA	$357.60	$9,739.91	$0.00	$10,097.51
114266	800A Frame 800A Trip 208V, 3Ph 65AIC Breaker	EA	$357.60	$12,407.18	$0.00	$12,764.78
114267	1000A Frame 1000A Trip 208V, 3Ph 65AIC Breaker	EA	$715.21	$16,341.02	$0.00	$17,056.23
114268	100A Frame 100A Trip 480V, 3Ph 65AIC Breaker	EA	$178.80	$2,655.77	$0.00	$2,834.57
114269	250A Frame 250A Trip 480V, 3Ph 65AIC Breaker	EA	$178.80	$6,005.93	$0.00	$6,184.73
114270	400A Frame 400A Trip, 480V 3Ph 65AIC Breaker	EA	$178.80	$8,263.33	$0.00	$8,442.13
114271	500A Frame 500A Trip, 480V 3Ph 65AIC Breaker	EA	$178.80	$9,435.60	$0.00	$9,614.40
114272	600A Frame 600A Trip, 480V 3Ph 65AIC Breaker	EA	$536.41	$11,458.72	$0.00	$11,995.13
114273	800A Frame 800A Trip 480V, 3Ph 65AIC Breaker	EA	$357.60	$15,193.71	$0.00	$15,551.31
114274	1000A Frame 1000A Trip 480V, 3Ph 65AIC Breaker	EA	$715.21	$19,224.73	$0.00	$19,939.94
114275	100A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,217.01	$0.00	$2,395.81
114276	125A 208V, 3Ph LSIG 65AIC Circuit Breaker	EA	$178.80	$2,555.96	$0.00	$2,734.76
114277	150A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,643.93	$0.00	$2,822.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114278	175A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,939.96	$0.00	$3,118.76
114279	200A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$4,766.85	$0.00	$4,945.65
114280	250A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$5,727.67	$0.00	$5,906.47
114281	400A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$7,684.82	$0.00	$7,863.62
114282	450A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$8,598.27	$0.00	$8,777.07
114283	800A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$11,223.59	$0.00	$11,402.39
114284	1200A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$15,112.52	$0.00	$15,291.32
114285	1600A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$17,785.99	$0.00	$17,964.79
114286	2000A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$24,424.63	$0.00	$24,782.23
114287	2500A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$29,837.66	$0.00	$30,195.26
114288	3000A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$36,603.95	$0.00	$36,961.55
114289	4000A 208V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$41,012.19	$0.00	$41,369.79
114290	100A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,463.36	$0.00	$2,642.16
114291	125A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,841.42	$0.00	$3,020.22
114292	150A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$2,938.27	$0.00	$3,117.07
114293	175A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$3,266.85	$0.00	$3,445.65
114294	200A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$5,296.31	$0.00	$5,475.11
114295	250A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$6,365.39	$0.00	$6,544.19
114296	400A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$8,538.22	$0.00	$8,717.02
114297	450A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$9,553.16	$0.00	$9,731.96
114298	800A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$12,471.54	$0.00	$12,650.34
114299	1200A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$15,854.69	$0.00	$16,033.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114300	1600A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$178.80	$19,762.22	$0.00	$19,941.02
114301	2000A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$26,116.20	$0.00	$26,473.80
114302	2500A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$31,529.23	$0.00	$31,886.83
114303	3000A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$38,295.52	$0.00	$38,653.12
114304	4000A 480V, 3Ph 65AIC LSIG Circuit Breaker	EA	$357.60	$42,703.76	$0.00	$43,061.36
	26-28-16 Low-Voltage Disconnects- 250V					
114305	30A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$134.10	$134.78	$0.00	$268.88
114306	60A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$178.80	$417.45	$0.00	$596.25
114307	100A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$268.20	$658.54	$0.00	$926.74
114308	200A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$357.60	$857.55	$0.00	$1,215.15
114309	400A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$536.41	$1,698.93	$0.00	$2,235.34
114310	600A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$715.21	$5,530.42	$0.00	$6,245.63
114311	1200A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$1,430.42	$15,694.86	$0.00	$17,125.28
114312	1600A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$1,430.42	$20,225.33	$0.00	$21,655.75
114313	2000A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$2,145.62	$24,268.78	$0.00	$26,414.40
114314	2500A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$2,145.62	$25,948.29	$0.00	$28,093.91
114315	3000A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$2,860.83	$24,344.54	$0.00	$27,205.37
114316	4000A Fused Disconnect Safety Switch - 250V NEMA 1	EA	$2,860.83	$27,647.21	$0.00	$30,508.04
114317	30A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$134.10	$252.41	$0.00	$386.51
114318	60A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$178.80	$516.15	$0.00	$694.95
114319	100A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$268.20	$771.80	$0.00	$1,040.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114320	200A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$357.60	$1,443.28	$0.00	$1,800.88
114321	400A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$536.41	$2,135.80	$0.00	$2,672.21
114322	600A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$715.21	$3,726.31	$0.00	$4,441.52
114323	800A Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$1,072.81	$4,303.95	$0.00	$5,376.76
114324	30A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$151.98	$100.32	$0.00	$252.30
114325	60A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$223.50	$113.59	$0.00	$337.09
114326	100A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$312.90	$422.31	$0.00	$735.21
114327	200A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$491.71	$483.78	$0.00	$975.49
114328	400A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$715.21	$1,197.34	$0.00	$1,912.55
114329	600A Non-Fused Disconnect Safety Switch - 250V NEMA 1	EA	$1,072.81	$2,297.60	$0.00	$3,370.41
114330	30A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$167.18	$207.75	$0.00	$374.93
114331	60A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$245.85	$241.08	$0.00	$486.93
114332	100A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$344.20	$446.58	$0.00	$790.78
114333	200A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$540.88	$796.07	$0.00	$1,336.95
114334	400A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$786.73	$1,605.08	$0.00	$2,391.81
114335	600A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$1,180.10	$2,863.91	$0.00	$4,044.01
114336	1000A Non-Fused Disconnect Safety Switch - 250V NEMA 3R	EA	$1,966.82	$17,426.14	$0.00	$19,392.96
114337	250A, 3Ph, 4 Wire Plug in 250V	EA	$268.20	$3,860.17	$0.00	$4,128.37
114338	100A, 3Ph, 4 Wire Plug in 250V	EA	$178.80	$2,160.14	$0.00	$2,338.94
114339	200A, 3Ph, 4 Wire Plug in 250V	EA	$268.20	$3,366.23	$0.00	$3,634.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114340	400A, 3Ph, 4 Wire Plug in 250V	EA	$357.60	$4,736.40	$0.00	$5,094.00
114341	800A, 3Ph, 4 Wire Plug in 250V	EA	$625.81	$9,422.07	$0.00	$10,047.88
	26-28-18 Low-Voltage Disconnects- 600V					
114342	100A 3-Phase 4-Wire Plug - 600V	EA	$178.80	$1,640.82	$0.00	$1,819.62
114343	250A 3-Phase 4-Wire Plug - 600V	EA	$44.70	$465.18	$0.00	$509.88
114344	300A 3-Phase 4-Wire Plug - 600V	EA	$44.70	$634.34	$0.00	$679.04
114345	400A 3-Phase 4-Wire Plug - 600V	EA	$44.70	$1,150.27	$0.00	$1,194.97
114346	500A 3-Phase 4-Wire Plug - 600V	EA	$89.40	$1,048.78	$0.00	$1,138.18
114347	600A 3-Phase 4-Wire Plug - 600V	EA	$178.80	$4,770.24	$0.00	$4,949.04
114348	800A 3-Phase 4-Wire Plug - 600V	EA	$268.20	$8,694.69	$0.00	$8,962.89
114349	30A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$357.60	$266.97	$0.00	$624.57
114350	60A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$357.60	$432.01	$0.00	$789.61
114351	100A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$357.60	$736.20	$0.00	$1,093.80
114352	200A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$357.60	$1,810.57	$0.00	$2,168.17
114353	400A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$715.21	$2,783.00	$0.00	$3,498.21
114354	600A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$1,430.42	$2,464.26	$0.00	$3,894.68
114355	1200A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$2,860.83	$12,620.61	$0.00	$15,481.44
114356	1600A Fused Disconnect Safety Switch - 600V NEMA 1	EA	$4,291.25	$13,481.40	$0.00	$17,772.65
114357	30A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$511.30	$0.00	$868.90
114358	60A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$606.76	$0.00	$964.36
114359	100A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$946.54	$0.00	$1,304.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114360	200A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$2,427.04	$0.00	$2,784.64
114361	400A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$536.41	$3,155.15	$0.00	$3,691.56
114362	600A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$1,430.42	$6,247.20	$0.00	$7,677.62
114363	800A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$1,430.42	$7,847.43	$0.00	$9,277.85
114364	1000A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$1,430.42	$13,235.45	$0.00	$14,665.87
114365	2000A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$2,860.83	$27,668.25	$0.00	$30,529.08
114366	2500A Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$2,860.83	$35,758.39	$0.00	$38,619.22
114367	30A Non-Fused Disconnect Safety Switch - 600V NEMA 1	EA	$178.80	$223.28	$0.00	$402.08
114368	60A Non-Fused Disconnect Safety Switch - 600V NEMA 1	EA	$245.85	$283.15	$0.00	$529.00
114369	800A Non-Fused Disconnect Safety Switch - 600V NEMA 1	EA	$536.41	$5,663.10	$0.00	$6,199.51
114370	1200A Non-Fused Disconnect Safety Switch - 600V NEMA 1	EA	$1,430.42	$7,716.37	$0.00	$9,146.79
114371	1600A Non-Fused Disconnect Safety Switch - 600V NEMA 1	EA	$1,430.42	$9,336.02	$0.00	$10,766.44
114372	60A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$516.15	$0.00	$873.75
114373	100A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$89.40	$703.84	$0.00	$793.24
114374	200A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$134.10	$857.55	$0.00	$991.65
114375	400A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$178.80	$2,184.34	$0.00	$2,363.14
114376	600A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$357.60	$4,384.85	$0.00	$4,742.45
114377	800A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$536.41	$7,459.10	$0.00	$7,995.51
114378	1200A Non-Fused Disconnect Safety Switch - 600V NEMA 3R	EA	$2,860.83	$10,242.11	$0.00	$13,102.94
114379	30A Non-Fused Disconnect Safety Switch - 600V NEMA 4X	EA	$357.60	$448.19	$0.00	$805.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114380	30A Non-Fused Disconnect Safety Switch - 600V NEMA 4X - Stainless Steel	EA	$357.60	$1,697.88	$0.00	$2,055.48
114381	60A Non-Fused Disconnect Safety Switch - 600V NEMA 4X - Stainless Steel	EA	$357.60	$2,013.52	$0.00	$2,371.12
114382	60A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$268.20	$974.35	$0.00	$1,242.55
114383	100A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$268.20	$1,361.72	$0.00	$1,629.92
114384	200A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$715.21	$5,159.30	$0.00	$5,874.51
114385	225A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$357.60	$3,002.54	$0.00	$3,360.14
114386	400A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$536.41	$5,497.62	$0.00	$6,034.03
114387	600A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$1,430.42	$8,085.72	$0.00	$9,516.14
114388	800A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$715.21	$10,386.26	$0.00	$11,101.47
114389	1000A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$2,145.62	$13,666.22	$0.00	$15,811.84
114390	1200A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$2,145.62	$16,695.83	$0.00	$18,841.45
114391	1600A, 600V, 3Ph, 4 Wire Plug in Circuit Breaker	EA	$178.80	$25,153.69	$0.00	$25,332.49
	26-29-11 Non-Fussed 250V					
114392	1P Manual Motor Starter, 120-240V Switch Includes 15.13 - 16.00 AMP full motor overload heater element	EA	$129.98	$211.40	$0.00	$341.38
114393	Combo Starter 7.5 HP, 208V, 120/60 Coil Includes red run/green stop pilot lights, start/stop PB, H-O-A SEI.SE with CPT, NEMA 1 enclosure FVNR combo starter	EA	$437.99	$3,682.17	$0.00	$4,120.16
	26-30-00 Facility Electrical Power Generating and Storing Equipment					
	26-31-00 Alternate Energy					
	26-31-13 Photovoltaic Collectors					
114394	Trina 295 W Photovoltaic Panel	EA	$154.85	$297.00	$0.00	$451.85
114395	Jinko Solar Mono XT354 Watt Photovoltaic Panel	EA	$159.61	$369.00	$0.00	$528.61
114396	Q Cell 415 Watt Photovoltaic Panel	EA	$159.61	$360.99	$0.00	$520.60
114397	12 String AC Photovoltaic Combiner Box	EA	$124.97	$249.01	$0.00	$373.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114398	6 String DC Photovoltaic Combiner Box	EA	$124.97	$229.00	$0.00	$353.97
114399	SMA America 50-us-42 Photovoltaic String Inverter	EA	$309.70	$7,479.00	$0.00	$7,788.70
114400	SMA America 150-us-20 3R Photovoltaic Inverter	EA	$638.46	$11,000.00	$0.00	$11,638.46
114401	Solectria 18KW Hybrbrid 3R Photovoltaic Inverter	EA	$309.70	$5,400.00	$0.00	$5,709.70
114402	Solectria PVI 60KW 480 VAC TL 3R Photovoltaic Inverter	EA	$309.70	$5,399.00	$0.00	$5,708.70
114403	Fronius Photovoltaic Rapid Shut Down	EA	$309.70	$61.00	$0.00	$370.70
114404	Photovoltaic Ground Racking System	SF	$8.15	$5.57	$0.00	$13.72
114405	Photovoltaic Self Ballasted Racking System	SF	$4.92	$3.60	$0.00	$8.52
114406	Enphase IQ6 PhotoVoltaic MircoInverter	EA	$309.70	$264.00	$0.00	$573.70
114407	Enphase IQ8P 3P PhotoVoltaic MircoInverter	EA	$159.61	$200.00	$0.00	$359.61
114408	#14 1000VDC Photovoltaic Cable	LF	$1.78	$0.52	$0.00	$2.30
114409	#12 2000VDC Photovoltaic Cable	LF	$1.78	$0.63	$0.00	$2.41

26-32-00 Packaged Generator Assemblies

26-32-11 Generators- Natural Gas or Propane

Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.

114410	20KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, or Equal.	EA	$2,860.83	$21,649.49	$0.00	$24,510.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114411	30KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, or Equal.	EA	$2,860.83	$27,478.38	$0.00	$30,339.21
114412	40KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$2,860.83	$39,187.31	$0.00	$42,048.14
114413	50KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$3,576.04	$43,896.47	$0.00	$47,472.51
114414	60KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$7,152.08	$52,098.74	$0.00	$59,250.82
114415	70KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$3,576.04	$80,440.99	$0.00	$84,017.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114416	80KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$99,193.36	$0.00	$104,557.42
114417	125KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$114,592.10	$0.00	$119,956.16
114418	130KW Natural Gas Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$130,614.63	$0.00	$135,978.69
114419	100KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler,or Equal.	EA	$5,364.06	$108,947.00	$0.00	$114,311.06
114420	150KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$134,284.04	$0.00	$139,648.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114421	175KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$177,733.53	$0.00	$183,097.59
114422	200KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$5,364.06	$213,142.15	$0.00	$218,506.21
114423	250KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$7,152.08	$259,148.27	$0.00	$266,300.35
114424	300KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$8,940.10	$357,288.12	$0.00	$366,228.22
114425	350KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$8,940.10	$360,222.87	$0.00	$369,162.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114426	400KW Natural Gas/Propane Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.	EA	$10,728.12	$425,294.00	$0.00	$436,022.12
114427	7.5KW Natural Gas Residential Generator	EA	$1,430.42	$3,008.50	$0.00	$4,438.92
114428	11KW Natural Gas Residential Generator	EA	$1,430.42	$4,363.01	$0.00	$5,793.43
114429	16KW Natural Gas Residential Generator	EA	$1,430.42	$6,018.51	$0.00	$7,448.93

26-32-12 Generators- Diesel

Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler, Onan or Equal.

114430	30KW Diesel Generator - 120/208V @ 60 Hz Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,509.68	$55,394.71	$5,499.30	$68,403.69
114431	50KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$2,860.83	$29,571.84	$0.00	$32,432.67
114432	60KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$3,576.04	$41,924.92	$0.00	$45,500.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114433	75KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$3,576.04	$44,937.94	$0.00	$48,513.98
114434	100KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$4,291.25	$73,502.92	$0.00	$77,794.17
114435	125KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB JObsite	EA	$4,291.25	$92,725.39	$0.00	$97,016.64
114436	150KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$5,364.06	$100,875.68	$0.00	$106,239.74
114437	200KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start UP, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$5,364.06	$119,264.10	$0.00	$124,628.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114438	250KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,152.08	$121,224.67	$0.00	$128,376.75
114439	300KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,509.68	$147,121.73	$0.00	$154,631.41
114440	350KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,152.08	$148,081.68	$0.00	$155,233.76
114441	400KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$8,940.10	$166,456.89	$0.00	$175,396.99
114442	450KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$10,370.52	$193,439.34	$0.00	$203,809.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114443	500KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$12,516.14	$258,770.23	$0.00	$271,286.37
114444	600KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$13,231.35	$326,304.36	$0.00	$339,535.71
114445	750KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$14,661.76	$353,949.74	$0.00	$368,611.50
114446	800KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$14,661.76	$403,888.54	$0.00	$418,550.30
114447	1000KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$14,304.16	$486,478.13	$0.00	$500,782.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114448	1250KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$14,304.16	$600,046.61	$0.00	$614,350.77
114449	1500KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$702,254.76	$0.00	$720,134.96
114450	1750KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$732,505.35	$0.00	$750,385.55
114451	2000KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$866,607.30	$0.00	$884,487.50
114452	2500KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$1,130,785.29	$0.00	$1,148,665.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114453	4000KW Diesel Generator Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$21,456.24	$1,733,212.67	$0.00	$1,754,668.91
114454	50KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$2,860.83	$41,401.18	$0.00	$44,262.01
114455	60KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$3,576.04	$58,693.68	$0.00	$62,269.72
114456	75KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$3,576.04	$62,918.22	$0.00	$66,494.26
114457	100KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler,or Equal. FOB Jobsite	EA	$4,291.25	$108,947.00	$0.00	$113,238.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114458	150KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$5,364.06	$102,859.55	$0.00	$108,223.61
114459	200KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$5,364.06	$124,829.61	$0.00	$130,193.67
114460	250KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,152.08	$144,846.16	$0.00	$151,998.24
114461	300KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and, Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$7,509.68	$184,900.36	$0.00	$192,410.04
114462	350KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$8,046.09	$176,267.66	$0.00	$184,313.75

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114463	400KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$8,940.10	$206,190.16	$0.00	$215,130.26
114464	450KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$10,370.52	$213,352.48	$0.00	$223,723.00
114465	500KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$12,516.14	$323,968.81	$0.00	$336,484.95
114466	600KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$13,231.35	$361,052.14	$0.00	$374,283.49
114467	750KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$14,661.76	$457,220.44	$0.00	$471,882.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114468	1000KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$8,940.10	$527,958.66	$0.00	$536,898.76
114469	1500KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$10,728.12	$983,156.36	$0.00	$993,884.48
114470	2000KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$1,213,250.51	$0.00	$1,231,130.71
114471	2500KW Diesel Generator - Tier 4 Low Emissions Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Day Tank, Double Wall Skid Base Fuel Tank, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. and Start Up, Caterpillar, Cummins, Kohler, or Equal. FOB Jobsite	EA	$17,880.20	$1,583,099.40	$0.00	$1,600,979.60

26-32-14 Generators- CoGen

Factory Packaged Brushless Generator Assembly with Water/Radiator Cooled Engine, Structural Steel Frame, Non-Walk-In Weatherproof Sound Attenuating Enclosure, Control & Monitoring System/Panel w/All Required Gauges & Alarms, Alarm Annunciator, Overcurrent & Fault Protection, Exciter, Voltage Regulator, Starting System, Batteries, Chargers, Muffler/Silencer, and Fuel & Intake Air Filters. Caterpillar, Cummins, Kohler or Equal.

114472	1 MW MV CoGen Turbine	EA	$21,456.24	$2,465,950.07	$0.00	$2,487,406.31
114473	1750 KW MV CoGen Turbine	EA	$21,456.24	$2,999,542.65	$0.00	$3,020,998.89
114474	2 MW MV CoGen Turbine	EA	$21,456.24	$3,441,090.92	$0.00	$3,462,547.16
114475	3 MW MV CoGen Turbine	EA	$21,456.24	$4,855,795.34	$0.00	$4,877,251.58

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114476	100 KW Tecogen CoGen Turbine	EA	$10,728.12	$711,456.77	$0.00	$722,184.89
114477	225 KW Tecogen CoGen Turbine	EA	$10,728.12	$1,600,777.73	$0.00	$1,611,505.85
114478	350 KW Tecogen CoGen Turbine	EA	$14,304.16	$2,490,098.69	$0.00	$2,504,402.85
	26-32-16 Generator Accessories					
114479	Emergency Power Off Button	EA	$178.80	$133.40	$0.00	$312.20
114480	Battery Charger	EA	$715.21	$5,363.30	$0.00	$6,078.51
114481	3R Sound Attenuation Enclosure (Factory)	EA	$715.21	$11,219.13	$0.00	$11,934.34
114482	Jacket Heater	EA	$357.60	$1,316.19	$0.00	$1,673.79
114483	Remote Annunciator and Control Package	EA	$2,145.62	$4,720.24	$0.00	$6,865.86
114484	Block Heater	EA	$357.60	$1,480.38	$0.00	$1,837.98
	26-32-17 Generator Support Items					
114485	200A Generator Roll Up Box	EA	$2,145.62	$3,777.35	$0.00	$5,922.97
114486	400A Generator Roll Up Box	EA	$2,860.83	$5,012.94	$0.00	$7,873.77
114487	600A Generator Roll Up Box	EA	$2,860.83	$5,789.59	$0.00	$8,650.42
114488	800A Generator Roll Up Box	EA	$2,860.83	$9,319.83	$0.00	$12,180.66
114489	1000A Generator Roll Up Box	EA	$3,576.04	$12,850.08	$0.00	$16,426.12
114490	1200A Generator Roll Up Box	EA	$3,576.04	$14,615.19	$0.00	$18,191.23
114491	1600A Generator Roll Up Box	EA	$4,291.25	$18,145.44	$0.00	$22,436.69
114492	2000A Generator Roll Up Box	EA	$4,827.65	$26,971.03	$0.00	$31,798.68
114493	3000A Generator Roll Up Box	EA	$5,364.06	$32,266.39	$0.00	$37,630.45
114494	4000A Generator Roll Up Box	EA	$5,364.06	$38.30	$0.00	$5,402.36
	26-32-18 Generator Load Banks					
114495	100KW Load Bank	EA	$715.21	$6,116.14	$0.00	$6,831.35
114496	250KW Load Bank	EA	$1,072.81	$14,301.88	$0.00	$15,374.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114497	250KW ASCO Avtron 4500 Stationary 3R Load Bank	EA	$2,145.62	$24,976.44	$0.00	$27,122.06
114498	350KW Load Bank	EA	$1,072.81	$17,390.84	$0.00	$18,463.65
114499	500KW Load Bank	EA	$1,430.42	$19,151.55	$0.00	$20,581.97
114500	750KW Load Bank	EA	$2,145.62	$27,592.14	$0.00	$29,737.76
114501	800KW Load Bank	EA	$2,145.62	$28,240.82	$0.00	$30,386.44
114502	1000KW Load Bank	EA	$2,145.62	$48,288.16	$0.00	$50,433.78
114503	1250KW Load Bank	EA	$4,291.25	$207,369.59	$0.00	$211,660.84
114504	1500KW Load Bank	EA	$2,145.62	$59,717.31	$0.00	$61,862.93
114505	2500KW Load Bank	EA	$2,860.83	$79,177.76	$0.00	$82,038.59
	26-32-19 Generator Paralleling and EDP					
114506	400A, 208/120V MCB 4 Section EDP	EA	$3,576.04	$16,133.20	$0.00	$19,709.24
114507	400A, 480/277V MCB 4 Section EDP	EA	$3,576.04	$12,955.98	$0.00	$16,532.02
114508	600A, 480/277V MCB 4 Section EDP	EA	$3,576.04	$16,486.22	$0.00	$20,062.26
114509	800A, 480/277V MCB 4 Section EDP	EA	$3,576.04	$28,842.05	$0.00	$32,418.09
114510	1000A, 480/277V MCB 4 Section EDP	EA	$4,291.25	$41,197.90	$0.00	$45,489.15
114511	1200A, 480/277V MCB 4 Section EDP	EA	$5,364.06	$50,058.80	$0.00	$55,422.86
114512	1600A, 480/277V MCB 4 Section EDP	EA	$5,364.06	$62,979.48	$0.00	$68,343.54
114513	2000A 480/277V MCB, 4 Section EDP	EA	$10,728.12	$202,406.28	$0.00	$213,134.40
114514	2400A 480/277V MCB, 4 Section EDP	EA	$10,728.12	$331,260.03	$0.00	$341,988.15
114515	3000A 480/277V MCB, 4 Section EDP	EA	$14,304.16	$378,918.26	$0.00	$393,222.42
114516	1000A Paralleling Gear, 480/ 277V	EA	$10,728.12	$114,909.30	$0.00	$125,637.42
114517	1600A Paralleling Gear, 480/ 277V	EA	$10,728.12	$167,862.89	$0.00	$178,591.01
114518	2000A Paralleling Gear, 480/ 277V	EA	$10,728.12	$185,514.09	$0.00	$196,242.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114519	2500A Paralleling Gear, 480/ 277V	EA	$17,880.20	$294,421.99	$0.00	$312,302.19
114520	3000A Paralleling Gear, 208/120V	EA	$10,728.12	$153,565.43	$0.00	$164,293.55
114521	4000A Paralleling Gear, 480/ 277V	EA	$16,092.18	$772,239.91	$0.00	$788,332.09
	26-32-21 Generator Transfer Switches					
114522	100A Dual Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, 277/480V 3-Phase ASCO Series 300 or Equal.	EA	$9,297.70	$13,722.45	$5,499.30	$28,519.45
114523	150A Dual Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, 277/480V 3-Phase ASCO Series 300 or Equal.	EA	$9,297.70	$17,325.43	$5,499.30	$32,122.43
114524	400A Dual Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, 277/480V 3-Phase ASCO Series 300 or Equal.	EA	$9,297.70	$26,118.96	$5,499.30	$40,915.96
114525	800A Dual Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, 277/480V 3-Phase ASCO Series 300 or Equal.	EA	$9,297.70	$38,258.23	$5,499.30	$53,055.23
114526	400A Automatic Transfer Switch (ATS) w/ Dual-Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, AIC 65 kA Rating, 277/480V 3-Phase TRYSTAR TATS-3 or Equal.	EA	$9,297.70	$44,307.29	$5,499.30	$59,104.29
114527	600A Automatic Transfer Switch (ATS) w/ Dual-Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, AIC 65 kA Rating, 277/480V 3-Phase TRYSTAR TATS-3 or Equal.	EA	$9,297.70	$57,809.23	$5,499.30	$72,606.23
114528	1200A Automatic Transfer Switch (ATS) w/ Dual-Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, AIC 65 kA Rating, 277/480V 3-Phase TRYSTAR TATS-3 or Equal.	EA	$11,622.13	$108,024.45	$5,499.30	$125,145.88
114529	2500A Automatic Transfer Switch (ATS) w/ Dual-Purpose Generator Docking Station & Load Bank Connection - NEMA Type 3R Enclosure, AIC 65 kA Rating, 277/480V 3-Phase TRYSTAR TATS-3 or Equal.	EA	$13,946.56	$225,359.89	$5,499.30	$244,805.75
114530	100A Automatic Transfer Switch (ATS) - NEMA Type 1 Enclosure, AIC 65 kA Rating, 208/120V 3-Phase Closed Transition, ATC-900 Rated. Eaton CTC9C5 or Equal.	EA	$3,218.44	$18,011.92	$0.00	$21,230.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114531	400A Automatic Transfer Switch (ATS) - NEMA Type 1 Enclosure, AIC 65 kA Rating, 208/120V 3-Phase Closed Transition, ATC-900 Rated. Eaton CTC9C5 or Equal.	EA	$3,754.84	$24,166.81	$0.00	$27,921.65
114532	600A Automatic Transfer Switch (ATS) - NEMA Type 1 Enclosure, AIC 65 kA Rating, 208/120V 3-Phase Closed Transition, ATC-900 Rated. Eaton CTC9C5 or Equal.	EA	$3,754.84	$31,984.27	$0.00	$35,739.11
114533	40 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$715.21	$1,419.01	$0.00	$2,134.22
114534	60 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$1,430.42	$1,868.82	$0.00	$3,299.24
114535	100 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$1,430.42	$3,559.66	$0.00	$4,990.08
114536	150 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$1,430.42	$4,816.87	$0.00	$6,247.29
114537	250 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$1,430.42	$6,418.71	$0.00	$7,849.13
114538	400 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$1,430.42	$7,792.42	$0.00	$9,222.84
114539	800 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$2,145.62	$12,646.49	$0.00	$14,792.11
114540	1000 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$2,145.62	$14,911.73	$0.00	$17,057.35
114541	1200 A ASCO Series 300 Automatic Transfer Switch Basic Automatic Transfer Switch	EA	$2,145.62	$24,249.36	$0.00	$26,394.98
114542	70 A 4000 ASCO Automatic Transfer Switch	EA	$715.21	$2,588.84	$0.00	$3,304.05
114543	100 A 4000 ASCO Automatic Transfer Switch	EA	$1,430.42	$3,624.38	$0.00	$5,054.80
114544	200 A 4000 ASCO Automatic Transfer Switch	EA	$2,860.83	$4,988.38	$0.00	$7,849.21
114545	150 A 4000 ASCO Automatic Transfer Switch	EA	$1,430.42	$4,983.52	$0.00	$6,413.94
114546	260 A 4000 ASCO Automatic Transfer Switch	EA	$1,430.42	$9,060.95	$0.00	$10,491.37
114547	400 A 4000 ASCO Automatic Transfer Switch	EA	$2,145.62	$10,674.12	$0.00	$12,819.74
114548	600 A 4000 ASCO Automatic Transfer Switch	EA	$2,860.83	$14,109.19	$0.00	$16,970.02
114549	800 A 4000 ASCO Automatic Transfer Switch	EA	$2,860.83	$16,062.15	$0.00	$18,922.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114550	1000 A 4000 ASCO Automatic Transfer Switch	EA	$2,145.62	$20,843.41	$0.00	$22,989.03
114551	1200A 4000 ASCO Automatic Transfer Switch	EA	$3,576.04	$23,755.86	$0.00	$27,331.90
114552	1600A 4000 ASCO Automatic Transfer Switch	EA	$4,291.25	$29,145.51	$0.00	$33,436.76
114553	2600 A 4000 ASCO Automatic Transfer Switch	EA	$4,291.25	$57,132.52	$0.00	$61,423.77
114554	3000 A 4000 ASCO Automatic Transfer Switch	EA	$5,364.06	$68,251.59	$0.00	$73,615.65
114555	4000 A 4000 ASCO Automatic Transfer Switch	EA	$7,152.08	$76,341.73	$0.00	$83,493.81
114556	70 A 7000 ASCO Automatic Transfer Switch	EA	$2,860.83	$11,295.44	$0.00	$14,156.27
114557	100 A 7000 ASCO Automatic Transfer Switch	EA	$2,860.83	$20,121.05	$0.00	$22,981.88
114558	150 A 7000 ASCO Automatic Transfer Switch	EA	$2,860.83	$27,475.71	$0.00	$30,336.54
114559	260 A 7000 ASCO Automatic Transfer Switch	EA	$2,145.62	$47,919.48	$0.00	$50,065.10
114560	400 A 7000 ASCO Automatic Transfer Switch	EA	$3,576.04	$48,922.65	$0.00	$52,498.69
114561	600 A 7000 ASCO Automatic Transfer Switch	EA	$4,291.25	$52,780.02	$0.00	$57,071.27
114562	800 A 7000 ASCO Automatic Transfer Switch	EA	$3,576.04	$55,653.64	$0.00	$59,229.68
114563	1000A 7000 ASCO Automatic Transfer Switch	EA	$3,576.04	$70,545.96	$0.00	$74,122.00
114564	1200A 7000 ASCO Automatic Transfer Switch	EA	$3,576.04	$84,460.99	$0.00	$88,037.03
114565	1600A 7000 ASCO Automatic Transfer Switch	EA	$3,576.04	$99,803.11	$0.00	$103,379.15
114566	2000 A 7000 ASCO Automatic Transfer Switch	EA	$4,291.25	$110,320.28	$0.00	$114,611.53
114567	400 A Fire Control Transfer Switch	EA	$3,576.04	$48,922.94	$0.00	$52,498.98
114568	200 A Enclosed 4 Pole MTS	EA	$2,145.62	$4,854.08	$0.00	$6,999.70
114569	400 A Enclosed 4 Pole MTS	EA	$2,860.83	$6,177.92	$0.00	$9,038.75
114570	600 A Enclosed 4 Pole MTS	EA	$2,860.83	$9,231.57	$0.00	$12,092.40
114571	800 A Enclosed 4 Pole MTS	EA	$2,860.83	$13,414.91	$0.00	$16,275.74
114572	1000 A Enclosed 4 Pole MTS	EA	$2,860.83	$16,915.73	$0.00	$19,776.56

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114573	1200 A Enclosed 4 Pole MTS	EA	$2,860.83	$18,680.85	$0.00	$21,541.68
114574	1600 A Enclosed 4 Pole MTS	EA	$2,860.83	$24,535.17	$0.00	$27,396.00
114575	2000 A Enclosed 4 Pole MTS	EA	$2,860.83	$29,106.83	$0.00	$31,967.66
	26-33-00 Battery Equipment					
	26-33-25 Inverters					
114576	400 VA 120V / 120V 1Ph Inverter 90 Minute Support Bodine ELI-S-400 or Equal	EA	$357.60	$3,570.84	$0.00	$3,928.44
114577	Bodine LED emergency lighting driver Bodine BSL 36	EA	$89.33	$276.01	$0.00	$365.34
114578	Meyers 1100VA 120V / 120V 1Ph Inverter 90 Minute Support	EA	$357.60	$2,799.99	$0.00	$3,157.59
114579	10 KVA 120V / 120V 1Ph Inverter 90 Minute Support	EA	$1,430.42	$54,211.25	$0.00	$55,641.67
114580	6 KVA 277V / 277V 1Ph Inverter 90 Minute Support CEPS-A-6000VA or Equal	EA	$1,430.42	$10,680.07	$0.00	$12,110.49
114581	10 KVA 277V / 277V 1Ph Inverter 90 Minute Support	EA	$1,430.42	$15,551.37	$0.00	$16,981.79
114582	15 KVA 277V / 277V 1Ph Inverter 90 Minute Support	EA	$2,145.62	$43,245.44	$0.00	$45,391.06
114583	50 KVA 277V / 277V 1Ph Inverter 90 Minute Support	EA	$2,145.62	$71,046.07	$0.00	$73,191.69
	26-33-53 Static Uninterruptible Power Supply					
114584	5 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$89.40	$754.59	$0.00	$843.99
114585	10 KVA 208/120V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$1,430.42	$13,498.75	$0.00	$14,929.17
114586	15 KVA 208/120V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$1,430.42	$20,781.34	$0.00	$22,211.76
114587	16 KW 208/120V 1-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$1,430.42	$20,959.33	$0.00	$22,389.75
114588	30 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$34,169.78	$0.00	$37,030.61
114589	40 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$40,263.85	$0.00	$43,124.68
114590	50 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$42,510.48	$0.00	$45,371.31
114591	60 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$43,411.65	$0.00	$46,272.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114592	75 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$59,678.70	$0.00	$62,539.53
114593	80 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$76,634.14	$0.00	$79,494.97
114594	100 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$2,860.83	$74,135.03	$0.00	$76,995.86
114595	125 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$3,576.04	$96,810.93	$0.00	$100,386.97
114596	150 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$3,576.04	$142,355.37	$0.00	$145,931.41
114597	160 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$3,576.04	$161,131.91	$0.00	$164,707.95
114598	225 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$3,576.04	$193,059.98	$0.00	$196,636.02
114599	375 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup	EA	$3,576.04	$387,201.09	$0.00	$390,777.13
114600	250 KVA 480/277V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$3,576.04	$245,108.95	$0.00	$248,684.99
114601	300 KVA 480V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$4,291.25	$339,244.26	$0.00	$343,535.51
114602	400 KVA 480V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$7,152.08	$366,041.72	$0.00	$373,193.80
114603	500 KVA 480V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$7,152.08	$495,723.60	$0.00	$502,875.68
114604	750 KW 480V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$14,304.16	$682,042.29	$0.00	$696,346.45
114605	1,500 VA 208V 1-Phase Uninterruptible Power Supply (UPS) Battery Backup - Rack Mount	EA	$178.80	$1,461.42	$0.00	$1,640.22
114606	1,000 KW 480V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup w/ Bypass	EA	$17,880.20	$1,256,627.03	$0.00	$1,274,507.23
114607	2,200 VA 208V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup - Rack Mount	EA	$178.80	$2,149.91	$0.00	$2,328.71
114608	5,000 VA 208V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup - Rack Mount	EA	$178.80	$5,842.76	$0.00	$6,021.56
114609	8,000 VA 208V 3-Phase Uninterruptible Power Supply (UPS) Battery Backup - Rack Mount	EA	$178.80	$9,123.24	$0.00	$9,302.04
114610	10,000 VA 208V 1-Phase Uninterruptible Power Supply (UPS) Battery Backup - Rack Mount	EA	$1,430.42	$11,710.25	$0.00	$13,140.67

26-33-55 Rotary Uninterruptible Power Supply

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114611	275 KVA 480V 3-Phase Rotary Uninterruptible Power Supply (UPS)	EA	$3,576.04	$319,861.77	$0.00	$323,437.81
114612	275 KVA 480V 3-Phase Hybrid Uninterruptible Power Supply (UPS)	EA	$5,364.06	$381,640.96	$0.00	$387,005.02
114613	300 KVA 480V 3-Phase Rotary Uninterruptible Power Supply (UPS)	EA	$5,364.06	$554,468.26	$0.00	$559,832.32
114614	600 KVA (N+1) 3-Phase Rotary Uninterruptible Power Supply (UPS)	EA	$7,152.08	$882,685.67	$0.00	$889,837.75
114615	500 KVA 480V 3-Phase Rotary Uninterruptible Power Supply (UPS)	EA	$7,152.08	$474,309.75	$0.00	$481,461.83

26-40-00 Electrical Protection

26-41-00 Facility Lightning Protection

26-41-13 Lightning Protection for Structures

114616	Lightning Protection - Ground Clamps	EA	$44.70	$21.37	$0.00	$66.07
114617	Lightning Protection - Clamps (T-Splicer)	EA	$70.20	$27.16	$0.00	$97.36
114618	Lightning Protection - Clamps (2" U-Pipe)	EA	$65.80	$32.67	$0.00	$98.47
114619	Lightning Protection - BI-Metal Parallel Splicer	EA	$65.80	$36.79	$0.00	$102.59
114620	Lightning Protection - Base Adhesive (case)	EA	$357.60	$224.03	$0.00	$581.63
114621	Lightning Protection - Bare Braded #2 Copper Wire or Cable	LF	$3.58	$3.69	$0.00	$7.27
114622	Lightning Protection - Bare Braded #2 Aluminum Wire or Cable	LF	$3.58	$2.28	$0.00	$5.86
114623	Lightning Protection - Bare Copper Down Lead Wire or Cable	LF	$3.58	$6.33	$0.00	$9.91
114624	Lightning Protection - Copper Air Terminals 1/2" X 12 w/Base	EA	$178.80	$109.58	$0.00	$288.38
114625	3/4" X 10' Lightning Protection Ground Rod	EA	$223.50	$69.75	$0.00	$293.25
114626	Lightning Protection - Tinned Copper Braded Cable	LF	$1.78	$4.06	$0.00	$5.84
114627	Lightning Protection System 1000	EA	$2,860.83	$5,341.56	$0.00	$8,202.39
114628	Lightning Protection - Eaton VeriSTAR Lightning Arrestors	EA	$715.21	$1,014.63	$0.00	$1,729.84
114629	Lightning Protection - Aluminum Vent Pipe Bonding Strap Up To 4" Diameter Pipe	EA	$65.80	$19.82	$0.00	$85.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114630	Lightning Protection - Aluminum Lightning Cable Fold Over Paste Down Fastener	EA	$43.87	$1.08	$0.00	$44.95
114631	Lightning Protection - Aluminum H.D. Bus Terminal	EA	$43.87	$24.31	$0.00	$68.18
114632	Lightning Protection - Aluminum Clamp Type T-Splicer	EA	$70.20	$22.58	$0.00	$92.78
114633	Lightning Protection - Aluminum Air Terminal 1/2" x 12" w/Base	EA	$173.32	$53.59	$0.00	$226.91
114634	Lightning Protection - Aluminum 2 Bolt All Purpose Clamp	EA	$65.80	$30.07	$0.00	$95.87

26-50-00 Lighting

26-51-00 Interior Lighting

26-51-11 LED Point Source Interior Lighting

114635	LED Spotlight Fixture - Surface Mounted, 19" Point Source	EA	$223.50	$581.45	$0.00	$804.95
114636	LED Spotlight Fixture - Surface Mounted, 16" Round Point Source	EA	$178.80	$237.41	$0.00	$416.21
114637	LED Spotlight Fixture - Surface Mounted, 4 Headed Flood Light Point Source	EA	$178.80	$234.57	$0.00	$413.37
114638	LED Spotlight Fixture - Surface Mounted, 18W Track Head Point Source	EA	$44.70	$144.29	$0.00	$188.99
114639	LED Spotlight Fixture - Surface Mounted, 8" Diameter X 12" High Cylinder w/ Dimming Point Source	EA	$178.80	$403.74	$0.00	$582.54
114640	LED Spotlight Fixture - Surface Mounted, Fiber Optic Point Source	EA	$178.80	$248.08	$0.00	$426.88
114641	LED Spotlight Fixture - Surface Mounted, Hornet High Power Point Source	EA	$178.80	$520.32	$0.00	$699.12
114642	LED Spotlight Fixture - Surface Mounted, Hi-Lite Old School H-93716 Point Source	EA	$178.80	$206.13	$0.00	$384.93
114643	LED Spotlight Fixture - Surface Mounted, Lightnet 970MM Diameter Point Source	EA	$223.50	$2,004.50	$0.00	$2,228.00
114644	LED Spotlight Fixture - Surface Mounted, Lightnet 1200MM Diameter Point Source	EA	$268.20	$3,305.28	$0.00	$3,573.48
114645	LED Downlight Fixture - Recessed, Fluxwerx TCI 9" Portal Point Source	EA	$178.80	$550.84	$0.00	$729.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114646	LED Downlight Fixture - Recessed, Fluxwerx TCI 5.5" Portal Point Source	EA	$223.50	$449.30	$0.00	$672.80
114647	LED Downlight Fixture - Recessed, Focal Point ID+ 3.5 X 3.5 Lense Point Source	EA	$178.80	$385.26	$0.00	$564.06
114648	LED Downlight Fixture - Recessed, Focal Point ID+ 2.5 X 2.5 Lense Point Source	EA	$178.80	$377.13	$0.00	$555.93
114649	LED Downlight Fixture - Recessed, Focal Point ID+ 3.5 Point Source	EA	$178.80	$190.49	$0.00	$369.29
114650	LED Downlight Fixture - Recessed, Gotham EV04 Point Source	EA	$178.80	$293.80	$0.00	$472.60
114651	LED Downlight Fixture - Recessed, Gotham IC04ADJ Point Source	EA	$178.80	$339.83	$0.00	$518.63
114652	LED Downlight Fixture - Recessed, Gotham Incito 2" Point Source	EA	$178.80	$293.80	$0.00	$472.60
114653	LED Downlight Fixture - Recessed, HE Williams 6DR Point Source	EA	$178.80	$294.28	$0.00	$473.08
114654	LED Downlight Fixture - Recessed, HE Williams 6DR Flush Lens Point Source	EA	$178.80	$180.55	$0.00	$359.35
114655	LED Downlight Fixture - Recessed, JSF 7" 10ML 35K Point Source	EA	$178.80	$126.12	$0.00	$304.92
114656	LED Downlight Fixture - Recessed, Lightheaded BRO 4" Point Source	EA	$178.80	$306.19	$0.00	$484.99
114657	LED Downlight Fixture - Recessed, Lightheaded BRO 4" Fixed Taper Point Source	EA	$178.80	$373.89	$0.00	$552.69
114658	LED Downlight Fixture - Recessed, Lightheaded Vela 2" Point Source	EA	$178.80	$301.39	$0.00	$480.19
114659	LED Downlight Fixture - Recessed, Lithonia LDN4 4" Point Source	EA	$178.80	$175.57	$0.00	$354.37
114660	LED Downlight Fixture - Recessed, Lithonia LDN4 Point Source	EA	$178.80	$191.92	$0.00	$370.72
114661	LED Downlight Fixture - Recessed, Luminpulse LCRS 4" Point Source	EA	$178.80	$280.07	$0.00	$458.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114662	LED Downlight Fixture - Recessed, Metalux 8" Point Source	EA	$178.80	$189.08	$0.00	$367.88
114663	LED Downlight Fixture - Recessed, Round 4" Point Source	EA	$178.80	$180.55	$0.00	$359.35
114664	LED Downlight Fixture - Recessed, Spectrum Lensed 6" Point Source	EA	$178.80	$200.45	$0.00	$379.25
114665	LED Downlight Fixture - Recessed, Spectrum SR2MO-XT20L Point Source	EA	$134.10	$345.45	$0.00	$479.55
114666	LED Downlight Fixture - Recessed, Square 4" Point Source	EA	$178.80	$302.81	$0.00	$481.61
114667	LED Downlight Fixture - Recessed, Square 6" Point Source	EA	$178.80	$238.84	$0.00	$417.64
114668	LED Downlight Fixture - Recessed, Square Lensed, 4" Point Source	EA	$178.80	$238.12	$0.00	$416.92
114669	LED Downlight Fixture - Recessed, Square Lensed 33W 4-1/2" Point Source	EA	$178.80	$314.89	$0.00	$493.69
114670	LED Downlight Fixture - Recessed, USAI Sliverled 2" Point Source	EA	$178.80	$240.25	$0.00	$419.05
114671	LED Downlight Fixture - Recessed, USAI Beveled Basic 4" Point Source	EA	$178.80	$265.84	$0.00	$444.64
114672	LED Downlight Fixture - Recessed, USAI Beveled Mini Basic Point Source	EA	$178.80	$437.32	$0.00	$616.12
114673	LED Downlight Fixture - Recessed, Visa SymmetryCM 1980 24" Disk Point Source	EA	$178.80	$574.34	$0.00	$753.14
114674	LED Downlight Fixture - Recessed, 3G Lighting RCG Point Source	EA	$268.20	$869.98	$0.00	$1,138.18
114675	LED Downlight Fixture - Recessed, 3.5" Adjustable Accent Light 13W LED Point Source	EA	$134.10	$184.46	$0.00	$318.56
114676	LED Downlight Fixture - Recessed, 3.5" Square Dim to Black Point Source	EA	$178.80	$326.34	$0.00	$505.14
114677	LED Downlight Fixture - Recessed, 3.5" Square Adjustable Accent Light Point Source	EA	$178.80	$326.34	$0.00	$505.14

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114678	LED Downlight Fixture - Recessed, 3.5" Square Shower Lens Point Source	EA	$178.80	$334.86	$0.00	$513.66
114679	LED Wall Washer Light Fixture - Recessed, Gotham EV04 Point Source	EA	$178.80	$320.88	$0.00	$499.68
114680	LED Wall Washer Light Fixture - Recessed, 6" Point Source	EA	$178.80	$198.67	$0.00	$377.47
114681	LED Wall Washer Light Fixture - Recessed, Square Lensed, 4" Point Source	EA	$178.80	$266.56	$0.00	$445.36
	26-51-12 LED Linear Interior Lighting					
114682	LED Linear Light Fixture - Recessed, 4" X 7' w/ Lens	EA	$223.50	$677.41	$0.00	$900.91
114683	LED Linear Light Fixture - Recessed, 4" X 4' w/Opal Lens	EA	$178.80	$395.21	$0.00	$574.01
114684	LED Linear Light Fixture - Recessed, 4" X 21' w/ Lens	EA	$536.41	$1,974.65	$0.00	$2,511.06
114685	LED Linear Light Fixture - Recessed, a Light D5 4" X 4'	EA	$178.80	$376.73	$0.00	$555.53
114686	LED Linear Light Fixture - Recessed, AWL Superplane Slot Continuous	LF	$22.34	$98.09	$0.00	$120.43
114687	LED Linear Light Fixture - Recessed, AWL Lightplane 2R Series Continuous	LF	$22.34	$98.09	$0.00	$120.43
114688	LED Linear Light Fixture - Recessed, AXIS 2" X 2' Sculpt Geometric	EA	$178.80	$244.52	$0.00	$423.32
114689	LED Linear Light Fixture - Recessed, Barbican 96D	LF	$357.60	$2,841.83	$0.00	$3,199.43
114690	LED Linear Light Fixture - Recessed, Coronet PG4 Perimeter Continuous	LF	$22.34	$108.11	$0.00	$130.45
114691	LED Linear Light Fixture - Recessed, Finelite 4' X 4" w/Satin Lens	EA	$178.80	$369.63	$0.00	$548.43
114692	LED Linear Light Fixture - Recessed, Fluxwerx w/Satin Lens Continuous	LF	$44.70	$103.07	$0.00	$147.77
114693	LED Linear Light Fixture - Recessed, Focal Point SEEM 4 FSM4L	LF	$26.82	$96.67	$0.00	$123.49
114694	LED Linear Light Fixture - Recessed, Focal Point Focus Wall Washer Slot Continuous	LF	$26.82	$96.67	$0.00	$123.49
114695	LED Linear Light Fixture - Recessed, Focal Point Seem 4 Continuous	LF	$22.34	$106.05	$0.00	$128.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114696	LED Linear Light Fixture - Recessed, Focal Point 4' Skydome	EA	$268.20	$3,127.59	$0.00	$3,395.79
114697	LED Linear Light Fixture - Recessed, Forum 2-3/8" Aqua Slot	EA	$268.20	$943.96	$0.00	$1,212.16
114698	LED Linear Light Fixture - Recessed, KLUS Sekoma LAD Tape in Extrusion	LF	$17.88	$57.49	$0.00	$75.37
114699	LED Linear Light Fixture - Recessed, Litecontrol 4LRD w/Lens	LF	$22.34	$108.76	$0.00	$131.10
114700	LED Linear Light Fixture - Recessed, Luminli Lini System	EA	$268.20	$503.93	$0.00	$772.13
114701	LED Linear Light Fixture - Recessed, Mark Lighting 4" X 4' w/Satin Lens	EA	$178.80	$409.43	$0.00	$588.23
114702	LED Linear Light Fixture - Recessed, Mark Lighting 8' X 4" w/Satin Lens	EA	$268.20	$648.26	$0.00	$916.46
114703	LED Linear Light Fixture - Recessed, Mark Lighting S6LR 8' Slot	EA	$178.80	$636.89	$0.00	$815.69
114704	LED Linear Light Fixture - Recessed, Mark Lighting S6LR 6" Slot	LF	$22.34	$79.88	$0.00	$102.22
114705	LED Linear Light Fixture - Recessed, Mark Lighting 4' Fin	EA	$178.80	$622.68	$0.00	$801.48
114706	LED Linear Light Fixture - Recessed, Mark Lighting 6' Fin	EA	$268.20	$849.42	$0.00	$1,117.62
114707	LED Linear Light Fixture - Recessed, Mark Lighting 8' Fin	EA	$357.60	$1,089.75	$0.00	$1,447.35
114708	LED Linear Light Fixture - Recessed, Neoray Define 4' X 1'	EA	$89.40	$98.39	$0.00	$187.79
114709	LED Linear Light Fixture - Recessed, Neoray Define 4' X 4'	EA	$178.80	$392.16	$0.00	$570.96
114710	LED Linear Light Fixture - Recessed, Neoray 23XR 2" Wall Washer	LF	$22.34	$119.06	$0.00	$141.40
114711	LED Linear Light Fixture - Recessed, Neoray 79PF Perimeter Slot w/Louvered Diffuser Continuous	LF	$22.34	$176.28	$0.00	$198.62
114712	LED Linear Light Fixture - Recessed, Neoray Define 4" Slot Continuous	LF	$22.34	$97.96	$0.00	$120.30
114713	LED Linear Light Fixture - Recessed, Neoray Define 7" Slot Continuous	LF	$22.34	$95.25	$0.00	$117.59
114714	LED Linear Light Fixture - Recessed, Nulite RG1 FF w/Satin Lens	LF	$22.34	$103.07	$0.00	$125.41
114715	LED Linear Light Fixture - Recessed, Slot Wall Glazer	LF	$22.34	$102.36	$0.00	$124.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114716	LED Linear Light Fixture - Recessed, Prudential STR2 LED35	LF	$26.82	$228.88	$0.00	$255.70
114717	LED Linear Light Fixture - Recessed, Prudential Bio-Std	LF	$22.34	$111.94	$0.00	$134.28
114718	LED Linear Light Fixture - Recessed, TruGroove Micro LED w/Satin Lens	LF	$22.34	$103.07	$0.00	$125.41
114719	LED Linear Light Fixture - Recessed, TruGroove 8' X 4" w/Satin Lens	EA	$268.20	$870.04	$0.00	$1,138.24
114720	LED Linear Light Fixture - Recessed, TruGroove Slot w/Lens	LF	$22.34	$108.76	$0.00	$131.10
114721	LED Linear Light Fixture - Recessed, Cove, Bartco ADL 210	LF	$44.70	$90.99	$0.00	$135.69
114722	LED Linear Light Fixture - Recessed, Cove, Clear Polycarbonate Lens	LF	$35.76	$68.95	$0.00	$104.71
114723	LED Linear Light Fixture - Recessed, Cove, Ecosense Knife Edge	LF	$22.34	$88.15	$0.00	$110.49
114724	LED Linear Light Fixture - Recessed, Cove, Ecosense Trov	LF	$22.34	$111.25	$0.00	$133.59
114725	LED Linear Light Fixture - Recessed, Cove, Ecosense SCIS 48	EA	$134.10	$270.05	$0.00	$404.15
114726	LED Linear Light Fixture - Recessed, Cove, Electrix Lumiledge	LF	$44.70	$97.41	$0.00	$142.11
114727	LED Linear Light Fixture - Recessed, Cove, Litecontrol 17LC	LF	$22.34	$100.19	$0.00	$122.53
114728	LED Linear Light Fixture - Recessed, Cove, Mini Edgeless	LF	$22.34	$115.57	$0.00	$137.91
114729	LED Linear Light Fixture - Recessed, Cove, 12" Wide	LF	$22.34	$98.09	$0.00	$120.43
114730	LED Linear Light Fixture - Recessed, Cove, 12"	EA	$89.40	$105.20	$0.00	$194.60
114731	LED Linear Light Fixture - Recessed, Cove, 4'	EA	$178.80	$335.51	$0.00	$514.31
114732	LED Linear Light Fixture - Surface Mounted, 4' Wrap W/EM	EA	$178.80	$231.72	$0.00	$410.52
114733	LED Linear Light Fixture - Surface Mounted, 4' Wrap	EA	$178.80	$177.71	$0.00	$356.51
114734	LED Linear Light Fixture - Surface Mounted, 4' Strip w/EM	EA	$178.80	$258.73	$0.00	$437.53
114735	LED Linear Light Fixture - Surface Mounted, 4' Stripe w/ Acrylic lens	EA	$178.80	$196.19	$0.00	$374.99

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114736	LED Linear Light Fixture - Surface Mounted, 4' Stripe in Gasketed Fiberglass Enclosure	EA	$178.80	$309.92	$0.00	$488.72
114737	LED Linear Light Fixture - Surface Mounted, 1' X 4' Acrylic	EA	$134.10	$146.43	$0.00	$280.53
114738	LED Linear Light Fixture - Surface Mounted, AION AT 401 Silver Continuous	LF	$22.34	$68.95	$0.00	$91.29
114739	LED Linear Light Fixture - Surface Mounted, AION 4924 Continuous	LF	$22.34	$97.39	$0.00	$119.73
114740	LED Linear Light Fixture - Surface Mounted, Cali 8000 Tape	LF	$17.88	$12.76	$0.00	$30.64
114741	LED Linear Light Fixture - Surface Mounted, Columbia MPS4	EA	$134.10	$214.13	$0.00	$348.23
114742	LED Linear Light Fixture - Surface Mounted, Ecosense Trov L50 Wall Washer	EA	$134.10	$262.93	$0.00	$397.03
114743	LED Linear Light Fixture - Surface Mounted, Finelite 4' X 4"	EA	$178.80	$433.26	$0.00	$612.06
114744	LED Linear Light Fixture - Surface Mounted, HE Williams 6" X 4' 39 Series Acrylic	EA	$134.10	$241.68	$0.00	$375.78
114745	LED Linear Light Fixture - Surface Mounted, HE Williams SL Continuous	LF	$22.34	$73.92	$0.00	$96.26
114746	LED Linear Light Fixture - Surface Mounted, JCI Tech T-Bar	EA	$223.50	$499.59	$0.00	$723.09
114747	LED Linear Light Fixture - Surface Mounted, Lithonia CLX 48 4000LM	EA	$134.10	$214.13	$0.00	$348.23
114748	LED Linear Light Fixture - Surface Mounted, Lithonia CLX 48 7000LM	EA	$134.10	$245.26	$0.00	$379.36
114749	LED Linear Light Fixture - Surface Mounted, Luminii Kendo 8	LF	$26.82	$54.73	$0.00	$81.55
114750	LED Linear Light Fixture - Surface Mounted, Mark Lighting FIN Continuous	LF	$26.82	$99.52	$0.00	$126.34
114751	LED Linear Light Fixture - Surface Mounted, Nulite Regolo 6" Satin Lens Continuous	LF	$22.34	$86.01	$0.00	$108.35
114752	LED Linear Light Fixture - Surface Mounted, Narrow Wrap w/Acrylic Lens	EA	$178.80	$181.97	$0.00	$360.77
114753	LED Linear Light Fixture - Surface Mounted, Nulite Regolo 6" X 4' Satin Lens	EA	$178.80	$346.88	$0.00	$525.68
114754	LED Linear Light Fixture - Surface Mounted, Pixel Backlighting Sheet	LF	$134.10	$234.23	$0.00	$368.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114755	LED Linear Light Fixture - Surface Mounted, Q Tran Torq Flat (Toe Kick)	EA	$178.80	$392.05	$0.00	$570.85
114756	LED Linear Light Fixture - Surface Mounted, Qtran Vers 07 Continuous	LF	$22.34	$114.90	$0.00	$137.24
114757	LED Linear Light Fixture - Surface Mounted, Qtran TORQ Continuous	LF	$22.34	$101.36	$0.00	$123.70
114758	LED Linear Light Fixture - Surface Mounted, Qtran Kurv Flexible Continuous	LF	$22.34	$121.27	$0.00	$143.61
114759	LED Linear Light Fixture - Surface Mounted, Rope Continuous	LF	$8.94	$7.81	$0.00	$16.75
114760	LED Linear Light Fixture - Wall Mounted, 4' X 4" Wrap	EA	$178.80	$176.71	$0.00	$355.51
114761	LED Linear Light Fixture - Wall Mounted, 4' X 4.5" XtraLight Wrap, Premium	EA	$148.90	$610.04	$0.00	$758.94
114762	LED Linear Light Fixture - Wall Mounted, 8' X 4" Wrap	EA	$268.20	$325.56	$0.00	$593.76
114763	LED Linear Light Fixture - Wall Mounted, 4' X 4" Wall Washer	EA	$178.80	$276.23	$0.00	$455.03
114764	LED Linear Light Fixture - Wall Mounted, 1" X 4' Direct/Indirect Cantilevered	EA	$178.80	$508.37	$0.00	$687.17
114765	LED Linear Light Fixture - Wall Mounted, Ecosense Trov L50 Wall Washer	EA	$134.10	$262.93	$0.00	$397.03
114766	LED Linear Light Fixture - Wall Mounted, Bartco BSS755 66.5" LED	EA	$223.50	$562.97	$0.00	$786.47
114767	LED Linear Light Fixture - Wall Mounted, HE Williams PX Graze w/ Point Source on 9" Centers, Continuous Perimeter	LF	$22.34	$109.47	$0.00	$131.81
114768	LED Linear Light Fixture - Suspended, Lithonia GRD LSL 4'	EA	$178.80	$359.68	$0.00	$538.48
114769	LED Linear Light Fixture - Suspended, Prudential Bionic	LF	$22.34	$111.94	$0.00	$134.28
114770	LED Linear Light Fixture - Suspended, 4' Vode Double Race	EA	$178.80	$489.04	$0.00	$667.84
114771	LED Linear Light Fixture - Various Mounting, AXIS Beam 4 Continuous	LF	$22.34	$92.40	$0.00	$114.74
114772	LED Linear Light Fixture - Various Mounting, AXIS Beam 2	LF	$22.34	$100.93	$0.00	$123.27
114773	LED Linear Light Fixture - Various Mounting, AXIS StencilFlex Indirect	LF	$44.70	$100.93	$0.00	$145.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114774	LED Linear Light Fixture - Various Mounting, Focal Point Seem 1 FSL 6'	LF	$223.50	$560.50	$0.00	$784.00
114775	LED Linear Light Fixture - Various Mounting, Lumenwerx Continuous Pivot w/ Dot Modules	LF	$44.70	$141.73	$0.00	$186.43
114776	LED Linear Light Fixture - Various Mounting, Lumenwerx VIA 4 Slot	LF	$22.34	$83.88	$0.00	$106.22
114777	LED Linear Light Fixture - Various Mounting, Luminii Sland Channel LLX Tape	EA	$26.82	$38.56	$0.00	$65.38
114778	LED Linear Light Fixture - Various Mounting, Mark S4LS 4" X 4' Slot	EA	$178.80	$318.44	$0.00	$497.24
114779	LED Linear Light Fixture - Various Mounting, Pinnacle Edge Evolution 3 Wall Grazer	LF	$22.34	$90.99	$0.00	$113.33
114780	LED Linear Light Fixture - Various Mounting, Pinnacle Edge EX2DI Series	LF	$22.34	$95.25	$0.00	$117.59
	26-51-13 LED Pendent Interior Lighting					
114781	LED Pendant Light Fixture - Cylinder, RBW CFT 18"	EA	$223.50	$1,905.53	$0.00	$2,129.03
114782	LED Pendant Light Fixture - Cylinder, 6" Diameter 4' Long	EA	$223.50	$564.38	$0.00	$787.88
114783	LED Pendant Light Fixture - Cylinder, 6" Diameter 3' Long	EA	$223.50	$503.25	$0.00	$726.75
114784	LED Pendant Light Fixture - Cylinder, 6" Diameter 2' Long	EA	$223.50	$596.37	$0.00	$819.87
114785	LED Pendant Light Fixture - Cylinder, Lucifer CY2 2.5" Adjustable	EA	$178.80	$694.84	$0.00	$873.64
114786	LED Pendant Light Fixture - Cylinder, Lucifer CY2 3" Adjustable	EA	$178.80	$743.31	$0.00	$922.11
114787	LED Pendant Light Fixture - Cylinder, WAC Banded	EA	$178.80	$750.62	$0.00	$929.42
114788	LED Pendant Light Fixture - Cylinder, Winona 5800 Giselle w/ Dimming	EA	$178.80	$527.42	$0.00	$706.22
114789	LED Pendant Light Fixture - Cylinder, 8' Wall Mounted w/ Clear Tempered Glass Lens	EA	$178.80	$594.24	$0.00	$773.04
114790	LED Pendant Light Fixture - Cylinder Tech Lighting 700PPR	EA	$178.80	$557.28	$0.00	$736.08
114791	LED Pendant Light Fixture - Cylinder Lighthead C3P 3"	EA	$178.80	$513.14	$0.00	$691.94
114792	LED Pendant Light Fixture - Cylinder, SPI 4" w/ Dimming	EA	$178.80	$385.26	$0.00	$564.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114793	LED Pendant Light Fixture - Cylinder SPI 6" w/ Dimming	EA	$178.80	$442.13	$0.00	$620.93
114794	LED Pendant Light Fixture - Cylinder, SPI 9" w/ Dimming	EA	$178.80	$463.79	$0.00	$642.59
114795	LED Pendant Light Fixture - Cord, 4' X 2" Camman P2440	EA	$268.20	$523.16	$0.00	$791.36
114796	LED Pendant Light Fixture - Cord, 5' X 2" Camman P2440	EA	$268.20	$636.89	$0.00	$905.09
114797	LED Pendant Light Fixture - Cord, 6' X 2" Camman P2440	EA	$268.20	$750.62	$0.00	$1,018.82
114798	LED Pendant Light Fixture - Cord, LuxDynamics 8'	EA	$357.60	$818.86	$0.00	$1,176.46
114799	LED Pendant Light Fixture - Cord, Eureka 4235-22	EA	$268.20	$816.01	$0.00	$1,084.21
114800	LED Pendant Light Fixture - Cord, Eureka 4235-35	EA	$268.20	$1,360.50	$0.00	$1,628.70
114801	LED Pendant Light Fixture - Cord, Amerlux Rook 350 Series Cylinder	EA	$178.80	$534.53	$0.00	$713.33
114802	LED Pendant Light Fixture - Cord, Hightower Caravaggio 1.5"	EA	$178.80	$1,535.35	$0.00	$1,714.15
114803	LED Pendant Light Fixture - Cord, Hightower Caravaggio Decorative 12"	EA	$178.80	$368.20	$0.00	$547.00
114804	LED Pendant Light Fixture - Cord, Beta Calco Blown Glass 24"	EA	$178.80	$703.70	$0.00	$882.50
114805	LED Pendant Light Fixture - Cord, Eaton Shaper	EA	$178.80	$524.58	$0.00	$703.38
114806	LED Pendant Light Fixture - High Bay, Lithonia IGB 24L	EA	$268.20	$382.99	$0.00	$651.19
114807	LED Pendant Light Fixture - High Bay, Lithonia JCBL LED	EA	$268.20	$489.04	$0.00	$757.24
114808	LED Pendant Light Fixture - High Bay, 20" X 48" HBLED Industrial w/ Wireguard	EA	$178.80	$349.72	$0.00	$528.52
114809	LED Pendant Light Fixture - High Bay, Spec Grade HPF	EA	$268.20	$551.60	$0.00	$819.80
114810	LED Pendant Light Fixture - Linear, 4' Square by 2" Wide Direct	EA	$357.60	$1,091.81	$0.00	$1,449.41
114811	LED Pendant Light Fixture - Linear, 7" X 4' Direct / Indirect w/ Acrylic Lens	EA	$178.80	$379.57	$0.00	$558.37
114812	LED Pendant Light Fixture - Linear, 6" X 4' Direct / Indirect w/ Acrylic Lens	EA	$223.50	$345.45	$0.00	$568.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114813	LED Pendant Light Fixture - Linear, Lithonia WL (Stairwell)	EA	$178.80	$487.62	$0.00	$666.42
114814	LED Pendant Light Fixture - Linear, Lithonia PTNSL 8'	EA	$357.60	$523.87	$0.00	$881.47
114815	LED Pendant Light Fixture - Linear, 8' Focal Point SEEM 2 FSM2LS	EA	$357.60	$818.86	$0.00	$1,176.46
114816	LED Pendant Light Fixture - Linear, Columbia LCL 35M 2" X 4'	EA	$178.80	$308.49	$0.00	$487.29
114817	LED Pendant Light Fixture - Linear, Columbia LCL 35M 2" X 8'	EA	$268.20	$587.13	$0.00	$855.33
114818	LED Pendant Light Fixture - Linear, Finelite HP-4	EA	$178.80	$371.04	$0.00	$549.84
114819	LED Pendant Light Fixture - Linear, Finelite Series 11 Micro Flex	LF	$31.29	$175.57	$0.00	$206.86
114820	LED Pendant Light Fixture - Linear, PMC ARCX SE (Curved)	LF	$31.29	$175.57	$0.00	$206.86
114821	LED Pendant Light Fixture - Linear, LF Lumination Glowstx	LF	$44.70	$234.57	$0.00	$279.27
114822	LED Pendant Light Fixture - Linear, 38" Diameter Buzzimoon	EA	$357.60	$4,263.46	$0.00	$4,621.06
114823	LED Pendant Light Fixture - Linear, 8" X 41" DMX Color Changing	EA	$357.60	$1,390.35	$0.00	$1,747.95
114824	LED Pendant Light Fixture - Linear, 4' Direct	EA	$178.80	$278.64	$0.00	$457.44
114825	LED Pendant Light Fixture - Linear, 8' Direct	EA	$268.20	$530.26	$0.00	$798.46
114826	LED Pendant Light Fixture - Linear, 4" X 4' Litecontrol MOD44	EA	$178.80	$369.63	$0.00	$548.43
114827	LED Pendant Light Fixture - Linear, 4" X 4' Litecontrol MOD44 ACT	EA	$178.80	$369.63	$0.00	$548.43
114828	LED Pendant Light Fixture - Linear, Continuous, ALW Superplane 2.5	LF	$22.34	$94.53	$0.00	$116.87
114829	LED Pendant Light Fixture - Linear, Continuous, Litecontrol Rail 3'	LF	$22.34	$94.53	$0.00	$116.87
114830	LED Pendant Light Fixture - Linear, Continuous, Litecontrol MOD	LF	$22.34	$94.53	$0.00	$116.87
114831	LED Pendant Light Fixture - Linear, Continuous, Bartco BSS512	LF	$26.82	$120.27	$0.00	$147.09
114832	LED Pendant Light Fixture - Linear, Continuous, Finelite HP-2	LF	$22.34	$96.67	$0.00	$119.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114833	LED Pendant Light Fixture - Linear, Continuous, 1"	LF	$22.34	$102.36	$0.00	$124.70
114834	LED Pendant Light Fixture - Linear, Continuous, Focal Point NERA	LF	$22.34	$137.19	$0.00	$159.53
114835	LED Pendant Light Fixture - Linear, Continuous, Focal Point FSM1S	LF	$44.70	$119.15	$0.00	$163.85
114836	LED Pendant Light Fixture - Linear, Continuous, 3" X 4' Gammalux GB35D2 Direct	EA	$178.80	$358.96	$0.00	$537.76
114837	LED Pendant Light Fixture - Linear, Continuous, RBGW ALW Superplane 2.5	LF	$31.29	$179.84	$0.00	$211.13
114838	LED Pendant Light Fixture - Linear, Continuous, ALW Lightplane 2R	LF	$26.82	$122.97	$0.00	$149.79
114839	LED Pendant Light Fixture - Linear, Continuous, XAL Move it 2.1	LF	$31.29	$80.32	$0.00	$111.61
114840	LED Pendant Light Fixture - 6" Round Recessed Can w/ 9" Diameter Deco Glass	EA	$196.68	$436.44	$0.00	$633.12
114841	LED Pendant Light Fixture - 32" Quartz Mosaic Stone	EA	$536.41	$7,321.39	$0.00	$7,857.80
114842	LED Pendant Light Fixture - 8" Diameter 16" Long Blown Glass	EA	$223.50	$798.25	$0.00	$1,021.75
114843	LED Pendant Light Fixture - 4' X 12" LED Game Table	EA	$178.80	$356.83	$0.00	$535.63
114844	LED Pendant Light Fixture - 24" Polished Brass	EA	$357.60	$2,395.44	$0.00	$2,753.04
114845	LED Pendant Light Fixture - 17" Diameter Fabric	EA	$178.80	$406.59	$0.00	$585.39
114846	LED Pendant Light Fixture - 27" Diameter Fabric	EA	$268.20	$537.37	$0.00	$805.57
114847	LED Pendant Light Fixture - 36" Diameter Fabric	EA	$357.60	$1,106.02	$0.00	$1,463.62
114848	LED Pendant Light Fixture - 48" Diameter Fabric	EA	$536.41	$1,634.87	$0.00	$2,171.28
114849	LED Pendant Light Fixture - Allied Maker Dome 14"	EA	$312.90	$2,092.91	$0.00	$2,405.81
114850	LED Pendant Light Fixture - Allied Maker Bishop	EA	$223.50	$1,526.90	$0.00	$1,750.40
114851	LED Pendant Light Fixture - Artimide Lana	EA	$178.80	$326.97	$0.00	$505.77
114852	LED Pendant Light Fixture - Barbican 96D, 72D, 48D	EA	$536.41	$6,108.74	$0.00	$6,645.15
114853	LED Pendant Light Fixture - Barbican Donut	EA	$268.20	$1,357.66	$0.00	$1,625.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114854	LED Pendant Light Fixture - Black Jack MLFL MINI Pendent	EA	$178.80	$422.23	$0.00	$601.03
114855	LED Pendant Light Fixture - Beta Calco 8" Diameter 16" Long Blown Glass	EA	$223.50	$667.45	$0.00	$890.95
114856	LED Pendant Light Fixture - Beta Calco MRDP2P01	EA	$178.80	$1,963.20	$0.00	$2,142.00
114857	LED Pendant Light Fixture - Beta Calco MTRP1P01	EA	$178.80	$1,171.15	$0.00	$1,349.95
114858	LED Pendant Light Fixture - Delta SuperLoop 48"	EA	$268.20	$1,242.50	$0.00	$1,510.70
114859	LED Pendant Light Fixture - Delta SuperLoop 36"	EA	$178.80	$1,077.60	$0.00	$1,256.40
114860	LED Pendant Light Fixture - Delta SuperLoop 72"	EA	$268.20	$1,559.53	$0.00	$1,827.73
114861	LED Pendant Light Fixture - Delta SuperLoop 12"	EA	$178.80	$446.39	$0.00	$625.19
114862	LED Pendant Light Fixture - Delta SuperLoop 18"	EA	$134.10	$531.69	$0.00	$665.79
114863	LED Pendant Light Fixture - Delray Dos Curve 96"	EA	$357.60	$2,078.42	$0.00	$2,436.02
114864	LED Pendant Light Fixture - Delray Dos Curve 72"	EA	$357.60	$1,560.95	$0.00	$1,918.55
114865	LED Pendant Light Fixture - Delray Dos Stick	LF	$26.82	$122.27	$0.00	$149.09
114866	LED Pendant Light Fixture - Hubbardton Banded Medium	EA	$268.20	$3,629.89	$0.00	$3,898.09
114867	LED Pendant Light Fixture - Hubbardton Staccato	EA	$223.50	$920.41	$0.00	$1,143.91
114868	LED Pendant Light Fixture - Hubbardton Large	EA	$268.20	$2,067.46	$0.00	$2,335.66
114869	LED Pendant Light Fixture - Hubbardton Exos Large	EA	$268.20	$2,067.46	$0.00	$2,335.66
114870	LED Pendant Light Fixture - Hubbardton Rythm Mini	EA	$178.80	$999.20	$0.00	$1,178.00
114871	LED Pendant Light Fixture - Kitchler Aubry Mini w/ Dimming	EA	$178.80	$105.20	$0.00	$284.00
114872	LED Pendant Light Fixture - LBL Lighting Top SI Coax	EA	$178.80	$841.61	$0.00	$1,020.41
114873	LED Pendant Light Fixture - Lithonia VCPG	EA	$223.50	$708.71	$0.00	$932.21
114874	LED Pendant Light Fixture - Lite Control Inde-Pendent	EA	$178.80	$526.68	$0.00	$705.48
114875	LED Pendant Light Fixture - Louis Poulsen VL45 Radiohus	EA	$178.80	$1,291.65	$0.00	$1,470.45

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114876	LED Pendant Light Fixture - Lukas Lighting 6' Ring	EA	$536.41	$3,753.11	$0.00	$4,289.52
114877	LED Pendant Light Fixture - Lukas Lighting 8' Ring	EA	$715.21	$5,459.06	$0.00	$6,174.27
114878	LED Pendant Light Fixture - Lukas Lighting 10' Ring	EA	$1,072.81	$7,165.01	$0.00	$8,237.82
114879	LED Pendant Light Fixture - Prudential Sky P4000 4'	EA	$268.20	$1,755.71	$0.00	$2,023.91
114880	LED Pendant Light Fixture - Prudential Sky P4000 2'	EA	$268.20	$1,168.58	$0.00	$1,436.78
114881	LED Pendant Light Fixture - Prudential Sky P4000 3'	EA	$268.20	$1,171.42	$0.00	$1,439.62
114882	LED Pendant Light Fixture - Prudential SKY 1' Diameter	EA	$223.50	$837.34	$0.00	$1,060.84
114883	LED Pendant Light Fixture - Prudential SKY 2' Diameter	EA	$268.20	$1,350.54	$0.00	$1,618.74
114884	LED Pendant Light Fixture - Prudential SKY 3' Diameter	EA	$268.20	$1,848.11	$0.00	$2,116.31
114885	LED Pendant Light Fixture - Prudential SKY 4' Diameter	EA	$268.20	$2,274.61	$0.00	$2,542.81
114886	LED Pendant Light Fixture - Prudential Sky P9000 4'	EA	$268.20	$1,721.59	$0.00	$1,989.79
114887	LED Pendant Light Fixture - Prudential Sky P9000 3'	EA	$268.20	$1,288.00	$0.00	$1,556.20
114888	LED Pendant Light Fixture - Prudential Sky P9000 2'	EA	$268.20	$887.09	$0.00	$1,155.29
114889	LED Pendant Light Fixture - Prudential Oculus 2' Diameter	EA	$268.20	$1,848.11	$0.00	$2,116.31
114890	LED Pendant Light Fixture - Prudential BTRI 22 3'	EA	$268.20	$1,394.62	$0.00	$1,662.82
114891	LED Pendant Light Fixture - RBW Delta Vii 26" Diameter	EA	$357.60	$3,499.92	$0.00	$3,857.52
114892	LED Pendant Light Fixture - RBW Delta Vii 35" Diameter	EA	$357.60	$4,583.06	$0.00	$4,940.66
114893	LED Pendant Light Fixture - Shaper Fabrique 146	EA	$223.50	$855.82	$0.00	$1,079.32
114894	LED Pendant Light Fixture - Shaper 2ft Drum	EA	$268.20	$2,128.18	$0.00	$2,396.38
114895	LED Pendant Light Fixture - SPI AIW	EA	$178.80	$1,239.66	$0.00	$1,418.46
114896	LED Pendant Light Fixture - SPI AIP 5' Diameter	EA	$357.60	$1,386.09	$0.00	$1,743.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114897	LED Pendant Light Fixture - Tech Lighting Crossblend Grande w/ Dimming	EA	$223.50	$727.88	$0.00	$951.38
114898	LED Pendant Light Fixture - Tech Lighting 700 INT 30" Diameter	EA	$268.20	$1,467.12	$0.00	$1,735.32
114899	LED Pendant Light Fixture - Winona POPS02 Three LED	EA	$268.20	$1,381.82	$0.00	$1,650.02
114900	LED Pendant Light Fixture - XAL 36" Diameter 2.5 Circle	EA	$536.41	$4,431.22	$0.00	$4,967.63
114901	LED Pendant Light Fixture - XAL 48" Diameter 2.5 Circle	EA	$536.41	$5,157.67	$0.00	$5,694.08
114902	LED Pendant Light Fixture - XAL 60" Diameter 2.5 Circle	EA	$536.41	$5,551.46	$0.00	$6,087.87
114903	LED Pendant Light Fixture - Zaneen D9-1150 15"	EA	$178.80	$909.84	$0.00	$1,088.64
114904	LED Pendant Light Fixture - Zumtobel Caela	EA	$178.80	$722.18	$0.00	$900.98
	26-51-14 LED Troffer Interior Lighting					
114905	LED Troffer Light Fixture - Day O Light "New Age" 4' Diameter	EA	$357.60	$3,275.43	$0.00	$3,633.03
114906	LED Troffer Light Fixture - Day O Light "New Age" 3' Diameter	EA	$268.20	$2,706.78	$0.00	$2,974.98
114907	LED Troffer Light Fixture - Day O Light "New Age" 2' Diameter	EA	$268.20	$1,711.65	$0.00	$1,979.85
114908	LED Troffer Light Fixture - Surface Mounted, 2' X 4' w/ Parabolic Diffuser	EA	$178.80	$254.47	$0.00	$433.27
114909	LED Troffer Light Fixture - Surface Mounted, 2' X 2' w/ Parabolic Diffuser	EA	$178.80	$226.04	$0.00	$404.84
114910	LED Troffer Light Fixture - Surface Mounted, 1' X 4' w/ Parabolic Diffuser	EA	$178.80	$197.61	$0.00	$376.41
114911	LED Troffer Light Fixture - Surface Mounted, Panel Diffuser, 2' X 4' LED Acrylic (TYPE 19)	EA	$178.80	$254.47	$0.00	$433.27
114912	LED Troffer Light Fixture - Surface Mounted, Panel Diffuser, 2' X 2' LED Acrylic (TYPE 19)	EA	$178.80	$226.75	$0.00	$405.55
114913	LED Troffer Light Fixture - Surface Mounted, Panel Diffuser, 1' X 4' LED Acrylic (Type 19)	EA	$178.80	$197.61	$0.00	$376.41
114914	LED Troffer Light Fixture - Surface Mounted, Panel Diffuser, 2' X 4' Acrylic Lens	EA	$178.80	$214.67	$0.00	$393.47
114915	LED Troffer Light Fixture - Surface Mounted, 6" X 4' LED Lensed Volumetric Direct/Indirect	EA	$178.80	$226.04	$0.00	$404.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114916	LED Troffer Light Fixture - Surface Mounted, 2' X 4' LED Lensed Volumetric Direct/Indirect Stem Mount	EA	$178.80	$313.58	$0.00	$492.38
114917	LED Troffer Light Fixture - Surface Mounted, 2' X 2' LED Lensed Volumetric Direct/Indirect	EA	$178.80	$264.43	$0.00	$443.23
114918	LED Troffer Light Fixture - Surface Mounted, 1' X 4' LED Lensed Volumetric Direct/Indirect	EA	$178.80	$197.61	$0.00	$376.41
114919	LED Troffer Light Fixture - Surface Mounted, Geometric (13.75 X 42.175)	EA	$178.80	$470.56	$0.00	$649.36
114920	LED Troffer Light Fixture - Surface Mounted, Geometric (6.25 X 39)	EA	$178.80	$470.56	$0.00	$649.36
114921	LED Troffer Light Fixture - Surface Mounted, 1' X 4' Edge Lit	EA	$178.80	$276.20	$0.00	$455.00
114922	LED Troffer Light Fixture - Surface Mounted, 12" Square	EA	$178.80	$166.33	$0.00	$345.13
114923	LED Troffer Light Fixture - Recessed, 1' X 4' LED Acrylic Panel Diffuser	EA	$178.80	$169.17	$0.00	$347.97
114924	LED Troffer Light Fixture - Recessed, 2' X 2' X 2" Barbican Jut Box	EA	$178.80	$538.09	$0.00	$716.89
114925	LED Troffer Light Fixture - Recessed, 2' X 4' w/ Parabolic Diffuser	EA	$178.80	$240.25	$0.00	$419.05
114926	LED Troffer Light Fixture - Recessed, 2' X 2' w/ Parabolic Diffuser	EA	$178.80	$211.83	$0.00	$390.63
114927	LED Troffer Light Fixture - Recessed, 1' X 4' w/ Parabolic Diffuser	EA	$178.80	$183.39	$0.00	$362.19
114928	LED Troffer Light Fixture - Recessed, LSI LSRP 1' X 4' Low Profile	EA	$178.80	$228.88	$0.00	$407.68
114929	LED Troffer Light Fixture - Recessed, Edge Lit, Columbia VSY14	EA	$178.80	$324.95	$0.00	$503.75
114930	LED Troffer Light Fixture - Recessed, Edge Lit, Columbia VSY14	EA	$178.80	$324.95	$0.00	$503.75
114931	LED Troffer Light Fixture - Recessed, Edge Lit, 1' X 4'	EA	$178.80	$263.73	$0.00	$442.53
114932	LED Troffer Light Fixture - Recessed, Edge Lit, 4' X 4' w/ Acrylic Panel Diffuser	EA	$178.80	$383.27	$0.00	$562.07
114933	LED Troffer Light Fixture - Recessed, Edge Lit, 2' X 4' W/EM	EA	$178.80	$326.96	$0.00	$505.76
114934	LED Troffer Light Fixture - Recessed, Metalux Lighting Encounter 2' X 4'	EA	$178.80	$369.63	$0.00	$548.43
114935	LED Troffer Light Fixture - Recessed, 6" X 4' Volumetric Direct/Indirect	EA	$178.80	$211.83	$0.00	$390.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114936	LED Troffer Light Fixture - Recessed, 2' X 4' Volumetric Direct/Indirect	EA	$178.80	$278.64	$0.00	$457.44
114937	LED Troffer Light Fixture - Recessed, 2' X 2' Volumetric Direct/Indirect	EA	$178.80	$250.21	$0.00	$429.01
114938	LED Troffer Light Fixture - Recessed, 1' X 4' Volumetric Direct/Indirect	EA	$178.80	$183.39	$0.00	$362.19
114939	LED Troffer Light Fixture - Recessed, Panel Diffuser, Lithonia EPANL 1' X 4'	EA	$178.80	$142.15	$0.00	$320.95
114940	LED Troffer Light Fixture - Recessed, Panel Diffuser, Lithonia EPANL 2' X 2'	EA	$178.80	$142.15	$0.00	$320.95
114941	LED Troffer Light Fixture - Recessed, Panel Diffuser, Lithonia EPANL 2' X 4'	EA	$178.80	$184.80	$0.00	$363.60
114942	LED Troffer Light Fixture - Recessed, Panel Diffuser, Elite Lighting 22-FPL 2' X 2'	EA	$178.80	$214.67	$0.00	$393.47
114943	LED Troffer Light Fixture - Recessed, Panel Diffuser, Lumafilm Flexible 2' X 4'	EA	$268.20	$780.48	$0.00	$1,048.68
114944	LED Troffer Light Fixture - Recessed, 1' X 4' Lithonia SRTL	EA	$178.80	$260.98	$0.00	$439.78
114945	LED Troffer Light Fixture - Recessed, 2' X 2' Lithonia SRTL	EA	$178.80	$290.09	$0.00	$468.89
114946	LED Troffer Light Fixture - Recessed, 2' X 4' Lithonia SRTL	EA	$178.80	$321.22	$0.00	$500.02
114947	LED Troffer Light Fixture - Recessed, Mark Lighting Tunable White 2' X 4'	EA	$178.80	$360.75	$0.00	$539.55
114948	LED Troffer Light Fixture - Recessed, Mark Lighting Tunable White 2' X 2'	EA	$178.80	$307.96	$0.00	$486.76
	26-51-15 LED Wall Mounted Interior Lighting					
114949	LED Wall Light Fixture - Surface Mounted, Cove, Cantilevered	EA	$178.80	$368.92	$0.00	$547.72
114950	LED Wall Light Fixture - Surface Mounted, 6" iGiuzzini	EA	$268.20	$578.60	$0.00	$846.80
114951	LED Wall Light Fixture - Surface Mounted, Mirror, 3' Horizonal	EA	$178.80	$203.29	$0.00	$382.09
114952	LED Wall Light Fixture - Surface Mounted, Mirror, Visa CB1852	EA	$178.80	$447.81	$0.00	$626.61
114953	LED Wall Light Fixture - Surface Mounted, Mirror, 4' Lightstick	EA	$178.80	$457.76	$0.00	$636.56
114954	LED Wall Light Fixture - Surface Mounted, Mirror, Electric Integrity Series	EA	$357.60	$1,593.57	$0.00	$1,951.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114955	LED Wall Light Fixture - Surface Mounted, Mirror, AWL Triplane 2' Horizonal Direct / Indirect	EA	$223.50	$250.21	$0.00	$473.71
114956	LED Wall Light Fixture - Surface Mounted, Mirror, Electric	EA	$223.50	$894.21	$0.00	$1,117.71
114957	LED Wall Light Fixture - Surface Mounted, Vanity, Oxygen Lighting 2"	EA	$178.80	$609.27	$0.00	$788.07
114958	LED Wall Light Fixture - Surface Mounted, Vanity, Sconce, Tech Lighting	EA	$178.80	$487.62	$0.00	$666.42
114959	LED Wall Light Fixture - Surface Mounted, Vanity, Delray ST1	EA	$178.80	$237.41	$0.00	$416.21
114960	LED Wall Light Fixture - Surface Mounted, Vanity, Lithonia FMVCCLS	EA	$178.80	$125.00	$0.00	$303.80
114961	LED Wall Light Fixture - Surface Mounted, Vanity, Lightstick	EA	$178.80	$467.72	$0.00	$646.52
114962	LED Wall Light Fixture - Surface Mounted, Vanity, Visage Vertical 3" X 24"	EA	$178.80	$475.53	$0.00	$654.33
114963	LED Wall Light Fixture - Surface Mounted, Vanity, Bartco BSS205 Continuous	LF	$22.34	$88.15	$0.00	$110.49
114964	LED Wall Light Fixture - Surface Mounted, Vanity, Bartco BSS210	EA	$178.80	$352.56	$0.00	$531.36
114965	LED Wall Light Fixture - Surface Mounted, Primarysma MIMIC 30	EA	$178.80	$361.09	$0.00	$539.89
114966	LED Wall Light Fixture - Surface Mounted, Continuous, Wall Glazer Color Kinetic	LF	$35.76	$139.32	$0.00	$175.08
114967	LED Wall Light Fixture - Surface Mounted, Linear, Cantilevered Bookcase	LF	$17.88	$81.03	$0.00	$98.91
114968	LED Wall Light Fixture - Surface Mounted, Linear, Stair Riser	LF	$13.41	$164.91	$0.00	$178.32
114969	LED Wall Light Fixture - Surface Mounted, Linear, Cantilevered, 6' X 2" Wall Washer	EA	$178.80	$499.84	$0.00	$678.64
114970	LED Wall Light Fixture - Surface Mounted, Linear, 7" X 4' Direct / Indirect w/ Acrylic Lens	EA	$178.80	$336.93	$0.00	$515.73
114971	LED Wall Light Fixture - Surface Mounted, Linear, 4' X 6"	EA	$178.80	$265.84	$0.00	$444.64
114972	LED Wall Light Fixture - Surface Mounted, Linear, 4' X 5"	EA	$178.80	$247.36	$0.00	$426.16
114973	LED Wall Light Fixture - Surface Mounted, Lithonia TWR1	EA	$178.80	$190.49	$0.00	$369.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114974	LED Wall Light Fixture - Surface Mounted, Lithonia WSQ LED	EA	$223.50	$825.97	$0.00	$1,049.47
114975	LED Wall Light Fixture - Surface Mounted, Lithonia WSTM LED	EA	$178.80	$248.79	$0.00	$427.59
114976	LED Wall Light Fixture - Surface Mounted, Daybright CSW 8	EA	$312.90	$597.08	$0.00	$909.98
114977	LED Wall Light Fixture - Surface Mounted, Electric Mirror Bel-2442	EA	$268.20	$3,505.33	$0.00	$3,773.53
114978	LED Wall Light Fixture - Surface Mounted, Finelite HP-4 8' w/ Acrylic Lens	EA	$268.20	$739.25	$0.00	$1,007.45
114979	LED Wall Light Fixture - Surface Mounted, Finelite HP-4 4' w/ Acrylic Lens	EA	$178.80	$369.63	$0.00	$548.43
114980	LED Wall Light Fixture - Surface Mounted, Stairwell, ILP Cavern CV4	EA	$178.80	$304.23	$0.00	$483.03
114981	LED Wall Light Fixture - Surface Mounted, Stairwell, 4' LED Bilevel	EA	$178.80	$223.20	$0.00	$402.00
114982	LED Wall Light Fixture - Surface Mounted, Stairwell, 8' Lithonia BLWP	EA	$223.50	$375.31	$0.00	$598.81
114983	LED Wall Light Fixture - Surface Mounted, Stairwell, Metalux 4SWLED	EA	$178.80	$233.38	$0.00	$412.18
114984	LED Wall Light Fixture - Surface Mounted, 28" Teron Lighting Dunbar Up and Down	EA	$178.80	$368.77	$0.00	$547.57
114985	LED Wall Light Fixture - Surface Mounted, 4' ALW LD2 (Ladder 2)	EA	$44.70	$2,683.15	$0.00	$2,727.85
114986	LED Wall Light Fixture - Surface Mounted, Allied Maker Contour Wall Lamp 22	EA	$178.80	$3,897.76	$0.00	$4,076.56
114987	LED Wall Light Fixture - Surface Mounted, Allied Maker Concentric 10	EA	$178.80	$1,340.39	$0.00	$1,519.19
114988	LED Wall Light Fixture - Surface Mounted, Halo Dusk to Dawn Twin Flood	EA	$178.80	$206.13	$0.00	$384.93
114989	LED Wall Light Fixture - Surface Mounted, Lumiere 303-W1-LEDB2 Wall Pack	EA	$223.50	$985.18	$0.00	$1,208.68
114990	LED Wall Light Fixture - Surface Mounted, Kim Lighting ARFX	EA	$268.20	$595.66	$0.00	$863.86
114991	LED Wall Light Fixture - Surface Mounted, Lemark Crosstour Wall Pack	EA	$134.10	$216.09	$0.00	$350.19
114992	LED Wall Light Fixture - Surface Mounted, Tech Lighting Aspen 15	EA	$178.80	$382.41	$0.00	$561.21
114993	LED Wall Light Fixture - Surface Mounted, 4' Indirect Acrylic Lens	EA	$178.80	$322.71	$0.00	$501.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
114994	LED Wall Light Fixture - Surface Mounted, 4' Direct / Indirect Acrylic Lens	EA	$178.80	$180.55	$0.00	$359.35
114995	LED Wall Light Fixture - Surface Mounted, Klus Design WP K 35 1220 LED Tape	LF	$22.34	$24.17	$0.00	$46.51
114996	LED Wall Light Fixture - Surface Mounted, Sconce, Deco Lighting D-443	EA	$178.80	$518.89	$0.00	$697.69
114997	LED Wall Light Fixture - Surface Mounted, Sconce, Louis Polsen RIPLS	EA	$178.80	$618.41	$0.00	$797.21
114998	LED Wall Light Fixture - Surface Mounted, Sconce, Sistemalux Blitz	EA	$178.80	$1,164.14	$0.00	$1,342.94
114999	LED Wall Light Fixture - Surface Mounted, Sconce, Beta Calco 32 2755	EA	$223.50	$503.97	$0.00	$727.47
115000	LED Wall Light Fixture - Surface Mounted, Sconce, Bega 22 295	EA	$178.80	$265.84	$0.00	$444.64
115001	LED Wall Light Fixture - Surface Mounted, Sconce, Bega 22 385	EA	$178.80	$432.17	$0.00	$610.97
115002	LED Wall Light Fixture - Surface Mounted, Sconce, Bega 22 395	EA	$223.50	$550.17	$0.00	$773.67
115003	LED Wall Light Fixture - Surface Mounted, Sconce, Cooper Shaper 163-W	EA	$178.80	$402.32	$0.00	$581.12
115004	LED Wall Light Fixture - Surface Mounted, Sconce, RBW Crisp	EA	$178.80	$549.70	$0.00	$728.50
115005	LED Wall Light Fixture - Surface Mounted, Sconce, Visage Cylinder 2" X 13.5"	EA	$178.80	$546.61	$0.00	$725.41
115006	LED Wall Light Fixture - Surface Mounted, Sconce, Alva Slim 32	EA	$312.90	$881.41	$0.00	$1,194.31
115007	LED Wall Light Fixture - Surface Mounted, SPI Echo Blade	EA	$178.80	$518.15	$0.00	$696.95
115008	LED Wall Light Fixture - Surface Mounted, Bay Max LED High Bay	EA	$268.20	$422.93	$0.00	$691.13
115009	LED Wall Light Fixture - Surface Mounted, BEGA 33687	EA	$178.80	$1,117.40	$0.00	$1,296.20
	26-51-16 Fluorescent Interior Lighting					
115010	2x4 Recessed Troffer 2L F32T8 Type 12 Lens Fluorescent	EA	$178.80	$145.41	$0.00	$324.21
115011	1x4 Recessed Fluorescent Lens 3L F32T8 Type 12 Fluorescent	EA	$178.80	$128.35	$0.00	$307.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115012	1x4 Recessed Fluorescent Lens 2L F32T8 Type 12 Dimming Ballast Fluorescent	EA	$178.80	$157.59	$0.00	$336.39
115013	1x4 Recessed DW Fluorescent Lens 2L F32T8 Type 12 Fluorescent	EA	$134.10	$131.60	$0.00	$265.70
115014	9" Direct/Indirect Pendant 2L F32T8 Fluorescent	EA	$178.80	$380.18	$0.00	$558.98
115015	CMH 39W Par 20 Downlight Fluorescent	EA	$178.80	$253.45	$0.00	$432.25
115016	6" Recessed Downlight 1L 32W CFL Fluorescent	EA	$178.80	$173.84	$0.00	$352.64
115017	4' Edge Lit 4L F28T5 Pendent 126W Fluorescent	EA	$178.80	$648.26	$0.00	$827.06
115018	Direct/Indirect Rectangular Pendent Sten 3L Parabolic Baffle, Aluminum Fluorescent	EA	$178.80	$446.80	$0.00	$625.60
115019	4" X 12' Pendant Mounted Up/Down Linear 6L F28T5 Fluorescent	EA	$357.60	$1,111.31	$0.00	$1,468.91
115020	4" X 16' Pendant Mounted Up/Down Linear 8L F28T5 Fluorescent	EA	$357.60	$1,481.74	$0.00	$1,839.34
115021	4" X 20' Pendant Mounted Up/Down Linear 10L F28T5 Fluorescent	EA	$536.41	$1,852.19	$0.00	$2,388.60
115022	4" X 22' Pendant Mounted Up/Down Linear 8L F28T5 Fluorescent	EA	$536.41	$2,037.40	$0.00	$2,573.81
115023	4" X 4' Pendant Mounted Up/Down Linear 2L F28T5 Fluorescent	EA	$178.80	$370.44	$0.00	$549.24
115024	16" Direct Elliptical Pendant Fluorescent	EA	$178.80	$323.32	$0.00	$502.12
115025	4" X 4' Surface Mounted Linear Acrylic lens 1L F28T5 Fluorescent	EA	$178.80	$432.17	$0.00	$610.97
115026	5" X 8' Pendent Mounted Direct/Indirect Linear A19 lens 4L F28T5 Fluorescent	EA	$268.20	$864.36	$0.00	$1,132.56
115027	6" X 60" Tech Zone Style Fixture Fluorescent	EA	$178.80	$502.03	$0.00	$680.83
115028	Continuous 3" Recessed Linear 1L F32T8 Fluorescent	LF	$26.82	$79.61	$0.00	$106.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115029	Direct/Indirect Rectangular Pendent Sten 2L Parabolic Baffle, Aluminum Fluorescent	EA	$178.80	$446.80	$0.00	$625.60
115030	Linear Direct/Indirect Pendent 2L Parabolic Baffle Fluorescent	EA	$178.80	$255.08	$0.00	$433.88
115031	36" Diameter Surface Mounted Fluorescent 3L Fluorescent	EA	$357.60	$646.64	$0.00	$1,004.24
115032	4' Linear Cantilever Mount Louvered Face 2L F28T5 Fluorescent	EA	$178.80	$508.54	$0.00	$687.34
115033	DIR PEND 6L DUAL LENS Fluorescent	EA	$178.80	$526.41	$0.00	$705.21
115034	CONCEALED COVE 2L SEMI-SPEC AL REF Fluorescent	EA	$178.80	$149.47	$0.00	$328.27
115035	WALL MNT COVE SURF 2L SEMI-SPEC REF Fluorescent	EA	$178.80	$376.94	$0.00	$555.74
115036	DIR/INDIR PEND STEM 9L POLYCARB REF 3 BLLST Fluorescent	EA	$178.80	$506.91	$0.00	$685.71
115037	2x4 Recessed Fluorescent Acrylic Lens 3L F28T5 Inboard/Outboard Fluorescent	EA	$178.80	$206.34	$0.00	$385.14
115038	8' Vertical Fluorescent Accent Light 1L T8 Smooth Acrylic Lens Fluorescent	EA	$223.50	$363.93	$0.00	$587.43
115039	Continuous Surface Mounted Cove 1L Fluorescent	LF	$22.34	$69.86	$0.00	$92.20
115040	4' Fluorescent Wall Washer 2L T5 Fluorescent	EA	$134.10	$246.96	$0.00	$381.06
115041	4' Surface Mount Micro Strip 1L F28T5 Fluorescent	EA	$134.10	$131.60	$0.00	$265.70
115042	6" Aperture Continuous Recessed Fluorescent Linear Fluorescent	LF	$26.82	$100.74	$0.00	$127.56
115043	8" X 4' 6Cell Parabolic Louver 1L F28T5 Fluorescent	EA	$178.80	$313.58	$0.00	$492.38
115044	6" Recessed Linear Fluorescent with Soft Glow Acrylic Lens Fluorescent	LF	$22.34	$59.30	$0.00	$81.64
115045	2x4 Recessed Procedure Fixture 3L Type 19 lens Fluorescent	EA	$223.50	$706.75	$0.00	$930.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115046	Recessed Wall Washer Slot w/open Cross Blade Reflector Fluorescent	LF	$22.34	$42.24	$0.00	$64.58
115047	3" Wide Continuous Recessed Linear 1L Staggered Fluorescent	LF	$22.34	$77.99	$0.00	$100.33
115048	4" X 2' Recessed Narrow Profile 2L F17T5 Fluorescent	EA	$178.80	$225.83	$0.00	$404.63
115049	4" X 3' Recessed Narrow Profile 2L F21T5 Fluorescent	EA	$178.80	$297.33	$0.00	$476.13
115050	4" Wide Semi Recessed Continuous Linear 1L F32T8 Fluorescent	LF	$17.88	$58.49	$0.00	$76.37
115051	4' Strip with Fiberglass Housing 2L F32T Fluorescent	EA	$223.50	$381.80	$0.00	$605.30
115052	4" X 4' Surface Mounted Narrow Profile 1L F28T5 Fluorescent	EA	$178.80	$232.33	$0.00	$411.13
115053	8' 2L F96T8HO Cold/Wet Location Fiberglass Housing Fluorescent	EA	$134.10	$430.55	$0.00	$564.65
115054	4' 2L F32T8 Strip in Gasketed Fiberglass Housing Fluorescent	EA	$223.50	$424.05	$0.00	$647.55
115055	HIGH BAY Fluorescent 8L 42W CFL Fluorescent	EA	$223.50	$461.42	$0.00	$684.92
115056	8" X 4' 6 Cell Parabolic Louver 2L F32T8 Fluorescent	EA	$178.80	$313.58	$0.00	$492.38
115057	4 ' Open Industrial Pendent 2L F32T8 w/Wire Guard Fluorescent	EA	$178.80	$144.60	$0.00	$323.40
115058	Continuous Cove Light Staggered Lamp 1L F32T8 Fluorescent	LF	$22.34	$45.49	$0.00	$67.83
115059	2x4 Recessed Grid Ceiling Medium Security Troffer 2L F28T5 Fluorescent	EA	$357.60	$538.59	$0.00	$896.19
115060	2x4 Recessed Fluorescent Clean Room Fluorescent	EA	$178.80	$601.15	$0.00	$779.95
115061	4 ' Open Industrial Pendent 2L F32T8 Fluorescent	EA	$134.10	$126.73	$0.00	$260.83
115062	6" Recessed Downlight 1L 26W CFL Fluorescent	EA	$178.80	$188.47	$0.00	$367.27
115063	2x4 Recessed LED Gasketed Wet Label P12 Lens Fluorescent	EA	$178.80	$466.29	$0.00	$645.09

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115064	Recessed 2 x 4 2L F32T8 Type 19 Lens Fluorescent	EA	$134.10	$151.10	$0.00	$285.20
115065	2x4 Direct/Indirectect Recessed 3L T8 Perf Lamp Shield Fluorescent	EA	$178.80	$272.96	$0.00	$451.76
115066	2' X 4' Recessed Troffer 3L F32T8 Gasketed Wet Location Type 19 Lens Fluorescent	EA	$178.80	$320.07	$0.00	$498.87
115067	1x4 Pattern 12 Lens Troffer 2L F32T8 Fluorescent	EA	$134.10	$131.60	$0.00	$265.70
115068	1' x 4' Direct/Indirect 2L F32T8 Prismatic Acrylic Lens w/ Bi Level Ballast Fluorescent	EA	$178.80	$253.45	$0.00	$432.25
115069	2' x 4' Direct/Indirect Troffer 3L F28T5 w/ Dimming Ballast Fluorescent	EA	$178.80	$271.50	$0.00	$450.30
115070	12" Recessed Wet Label 1L 57W CFL Fluorescent	EA	$178.80	$238.84	$0.00	$417.64
115071	2' x 4' Direct/Indirect Troffer 3L F28T5 w/ Dimming and Emergency Ballast Fluorescent	EA	$223.50	$320.23	$0.00	$543.73
115072	2x4 Recessed 2L F32T8 Type 12 Lens Fluorescent	EA	$178.80	$157.59	$0.00	$336.39
115073	2x2 Pattern 12 Lens Troffer 2L F17T8 Fluorescent	EA	$134.10	$120.23	$0.00	$254.33
115074	2x2 Recessed Direct/Indirect 2L F14T5 w/Emergency Ballast Fluorescent	EA	$178.80	$266.45	$0.00	$445.25
115075	2' x 2' Direct/Indirect Troffer 3L F14T5 w/Dimming Ballast Fluorescent	EA	$178.80	$239.00	$0.00	$417.80
115076	2' X 4' Recessed Troffer 3L F32T8 Type 19 Lens Fluorescent	EA	$178.80	$165.72	$0.00	$344.52
115077	6" Recessed Fluorescent Downlight 1L 32W Dimming Ballast Fluorescent	EA	$178.80	$242.08	$0.00	$420.88
115078	1' X 4' Recessed Fluorescent Type 19 Lens 2L F28T5 w/Emer Ballast Fluorescent	EA	$178.80	$185.21	$0.00	$364.01
115079	6" x 4' Recessed Slot 1L F28T5 w/ 3" Crossbaffle Fluorescent	EA	$178.80	$258.33	$0.00	$437.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115080	1' X 4' Recessed Fluorescent Type 19 Lens 1L F32T8 Fluorescent	EA	$178.80	$152.73	$0.00	$331.53
115081	4' Under Counter Task Light 1L Fluorescent	EA	$89.40	$112.11	$0.00	$201.51
115082	4' Vandal Proof Wall 2L F28T5 Stairwell Fluorescent	EA	$178.80	$347.70	$0.00	$526.50
115083	8' X 6" Wall Mounted Cove Staggered Lamps 4L F32T8 Fluorescent	EA	$357.60	$546.72	$0.00	$904.32
115084	2' Wall Mirror 1L F17T8 UP/DWN Fluorescent	EA	$178.80	$189.27	$0.00	$368.07
115085	6" Recessed Downlight 1L 26W CFL w/ Emergency Ballast Fluorescent	EA	$178.80	$237.21	$0.00	$416.01
115086	8' X 6" Linear Staggered Lamps Frosted Acrylic Lens Flangeless edge Fluorescent	EA	$357.60	$546.72	$0.00	$904.32
115087	C Archer HWP3 Patient Fixture LED35 Fluorescent	EA	$178.80	$700.25	$0.00	$879.05
115088	4' Semi Indirect Wall 2L F32T8 Stairwell Fluorescent	EA	$134.10	$217.71	$0.00	$351.81
115089	2x4 Recessed Multi-Function Fixture w/Exam LT Fluorescent	EA	$223.50	$1,036.58	$0.00	$1,260.08
115090	4" Direct/Indirect Patient Room Multifunction Fluorescent	EA	$134.10	$503.67	$0.00	$637.77
115091	6" Recessed Downlight 1L 26W Wall Washer Fluorescent	EA	$178.80	$199.84	$0.00	$378.64
115092	6" Aperture Recessed Can 1L 35W CFL Damp Location Fluorescent	EA	$178.80	$193.35	$0.00	$372.15
115093	21" Diameter Semi Recessed Fluorescent 1L 32W CFL Fluorescent	EA	$178.80	$360.69	$0.00	$539.49
115094	8" Recessed Fluorescent Downlight 1L 32W Fluorescent	EA	$134.10	$188.47	$0.00	$322.57
115095	4.5" Aperture Recessed CFL Downlight 1L 32W Fluorescent	EA	$134.10	$220.96	$0.00	$355.06
115096	8" Recessed Fluorescent Downlight 1L F32TT MicroPrimarysm Lens Fluorescent	EA	$134.10	$190.09	$0.00	$324.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115097	Column Mounted Wet Location Downlight 32W CFL Fluorescent	EA	$178.80	$248.58	$0.00	$427.38
115098	Vapor Tight Surface Mt 1L CFL Wet Loc Fluorescent	EA	$134.10	$78.15	$0.00	$212.25
115099	Lumetta 5ft Drum Fixture Fluorescent	EA	$536.41	$5,199.10	$0.00	$5,735.51
115100	Lumetta 3ft Drum Fixture Fluorescent	EA	$268.20	$1,949.67	$0.00	$2,217.87
115101	Lumetta 8ft Drum Fixture Fluorescent	EA	$1,072.81	$11,048.09	$0.00	$12,120.90
115102	18" Diameter Drum Fixture Fluorescent	EA	$178.80	$419.18	$0.00	$597.98
115103	22" Frosted Acrylic Diff With Dimmable LED Fluorescent	EA	$357.60	$913.09	$0.00	$1,270.69
115104	Max Security Recessed Wet Location Can 1L 6" APERTURE Fluorescent	EA	$178.80	$414.30	$0.00	$593.10
115105	Emergency Battery Pack w/2 - heads Fluorescent	EA	$134.10	$129.81	$0.00	$263.91
115106	4" X 4' Recessed Linear 1L F32T8 Fluorescent	LF	$22.34	$58.49	$0.00	$80.83
115107	4 ' Surface Mounted Stairwell Wrap 1L F28T5 Fluorescent	EA	$134.10	$142.98	$0.00	$277.08
115108	Continuous 4" Pendent Mounted Linear 1L F32T8 w/Satin Lens Fluorescent	LF	$26.82	$92.61	$0.00	$119.43
115109	4" X 6' Recessed Linear 1L F32T8 w/Opal Lens Fluorescent	EA	$178.80	$506.91	$0.00	$685.71
115110	4" X 2' Recessed Linear 1L F32T8 w/Opal Lens Fluorescent	EA	$178.80	$168.97	$0.00	$347.77
115111	4" X 4' Recessed Linear 1L F32T8 w/Opal Lens Fluorescent	EA	$178.80	$337.94	$0.00	$516.74
115112	4" X 4' Recessed Linear Damp Location 1L F32T8 w/Opal Lens Fluorescent	EA	$178.80	$386.68	$0.00	$565.48
115113	4" X 4' Recessed Lay in Linear Damp Location 1L F32T8 w/Opal Lens Fluorescent	EA	$178.80	$386.68	$0.00	$565.48
115114	Pool Light 40' Light Tube 2L 1000W MH Fluorescent	EA	$715.21	$15,434.83	$0.00	$16,150.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115115	In Floor Uplight 18W LED Fluorescent	EA	$178.80	$451.68	$0.00	$630.48
115116	Continuous Recessed Wall Washer Slot w/open Para Reflector Fluorescent	LF	$22.34	$64.58	$0.00	$86.92
115117	4' 2L Strip F32T8 Fiberglass Housing Fluorescent	EA	$178.80	$271.33	$0.00	$450.13
115118	1' X 8' Direct/Indirect 2L F96T8 Fluorescent	EA	$178.80	$281.08	$0.00	$459.88
115119	6"x 4' Pendent Mounted Acrylic Lensed 1L F32T8 Fluorescent	EA	$178.80	$149.47	$0.00	$328.27
115120	8' X 4" Recessed Slot Staggered Lamps Satin Lens Flangeless edge Fluorescent	EA	$357.60	$545.90	$0.00	$903.50
115121	8' X 6" Recessed Linear Staggered Lamps Frosted Acrylic Lens Fluorescent	EA	$357.60	$709.19	$0.00	$1,066.79
115122	1' x 4' Recessed Gasketed, Tamper Resistant Damp Location 2L F32T8 Fluorescent	EA	$178.80	$368.81	$0.00	$547.61
115123	8' Vertical Fluorescent Cylinder Pendent Light 1L T8 Smooth Acrylic Lens Fluorescent	EA	$357.60	$1,988.65	$0.00	$2,346.25
115124	Remove and Replace Fluorescent Ballast Includes Recycling of Ballast	EA	$45.15	$43.19	$0.00	$88.34
	26-51-17 Fluorescent to LED Retrofit					
115125	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - 24" x 24" C Flex, RP-TTV-2x2-28L-CCT1-10V-G1 or equal	EA	$135.88	$147.04	$0.37	$283.29
115126	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - 48" x 48" C Flex, RP-TTV 2x4-47L-CCTX-10V-G1 or equal	EA	$135.88	$201.72	$0.37	$337.97
115127	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 24” 1 Lamp, 10V C Flex RP-T8-2FT-1L-835-10V-C-G2 or equal	EA	$172.43	$55.50	$0.37	$228.30
115128	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 24” 3 Lamp, 10V C Flex RP-T8C-G2-30W-2FT-3L-8xx-10V or equal	EA	$172.43	$77.08	$0.37	$249.88
115129	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 24” 3 Lamp, 2STEP C Flex RP-T8C-G2-30W-2FT-3L-8xx-10V or equal	EA	$172.43	$124.61	$0.37	$297.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115130	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 48” 1 Lamp, 10V C Flex RP-T8-4FT-1L-835-10V-C-G2 or equal	EA	$172.43	$67.02	$0.37	$239.82
115131	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 48” 2 Lamp, 10V C Flex RP-T8C-G2-45W-4FT-2L-8xx-10V or equal	EA	$172.43	$73.73	$0.37	$246.53
115132	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 48” 2 Lamp, 2STEP C Flex RP-T8C-G2-45W-4FT-2L-8xx-2STEP or equal	EA	$172.43	$113.15	$0.37	$285.95
115133	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 48” 3 Lamp, 10V C Flex RP-T8C-G2-70W-4FT-3L-8xx-10V or equal	EA	$172.43	$89.10	$0.37	$261.90
115134	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-3 48” 3 Lamp, 2STEP C Flex RP-T8C-G2-70W-4FT-3L-8xx-2STEP or equal	EA	$172.43	$135.04	$0.37	$307.84
115135	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-6 C Flex RP-G24Q-126H-1L-835-10V-C-G2 or equal	EA	$194.35	$81.12	$0.37	$275.84
115136	Compact Fluorescent Lamp (CFL) to LED Ballast Retrofit Kit - F-2 C Flex RXL-4H (35/25/18S)/8A or equal	EA	$192.62	$78.86	$0.37	$271.85
115137	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - 24" 1 Lamp Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$32.64	$21.98	$0.37	$54.99
115138	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - 36" 1 Lamp Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$34.33	$22.62	$0.37	$57.32
115139	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - 48" 1 Lamp Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$35.13	$26.03	$0.37	$61.53
115140	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - 96" 1 Lamp Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$77.06	$51.05	$0.37	$128.48
115141	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - PL-L Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$36.03	$32.52	$0.37	$68.92
115142	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - PAR-38 Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$49.80	$77.81	$0.37	$127.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115143	Compact Fluorescent Lamp (CFL) to LED Bulb Plug-In-Place Replacement - A-19 Includes cleaning fixture and lens, replacing lamp, and recycling.	EA	$45.77	$34.10	$0.37	$80.24
115144	F-7 Compact Fluorescent (CFL) to LED Retrofit Kit C Flex RP-G24Q-126H-1L-835-10V-C-G2 or equal	EA	$104.39	$80.28	$0.37	$185.04
115145	F-8 Alphalite, LCDL-6-40-10V-8-A	EA	$272.78	$183.86	$0.37	$457.01
115146	F-9 LiteLine, RA3-7G-35K-90WH	EA	$272.78	$71.53	$0.37	$344.68
115147	F-10 XtraLite, SHB-15000L-35DIM-SCP-WG	EA	$479.24	$528.29	$76.37	$1,083.90
115148	F-11 XtraLite, SHB-25000L-35DIM-90-WG	EA	$516.14	$801.09	$82.25	$1,399.48
115149	F-5 C Flex, RP-T5-4FT-2L-835-10V-10V-G2 LED Troffers Recessed	EA	$194.35	$96.15	$0.37	$290.87
	26-51-23 HID Interior Lighting					
115150	HID Light Fixture - Recessed, Downlight, Wet Location 1L 70W	EA	$178.80	$369.63	$0.00	$548.43
115151	HID Light Fixture - Recessed, Downlight, 1L 39W MH w/Quartz Restrike	EA	$178.80	$342.61	$0.00	$521.41
115152	HID Light Fixture - High Bay, 21" w/ Wire Guard 250W MH	EA	$268.20	$517.08	$0.00	$785.28
115153	HID Light Fixture - High Bay, 24" w/ Wire Guard 400W MH	EA	$268.20	$602.37	$0.00	$870.57
115154	HID Light Fixture - Wall Mounted, Cylinder Sconce 1L 39W CMH	EA	$178.80	$352.56	$0.00	$531.36
	26-52-00 Safety Lighting					
	26-52-13 Emergency and Exit Lighting					
115155	LED Emergency Light Fixture - Soffit, Vandal Proof w/ Battery Backup	EA	$178.80	$453.50	$0.00	$632.30
115156	LED Emergency Light Fixture - Wall Mounted, Sure-Lite SEL 50 Two Head w/ Battery Backup	EA	$134.10	$176.27	$0.00	$310.37
115157	LED Emergency Light Fixture - Wall Mounted, Lithonia Indura Two Head w/ Battery Backup	EA	$134.10	$352.44	$0.00	$486.54
115158	LED Emergency Light Fixture - Wall Mounted, Sure-Lite SEL 50 Two Head w/ Battery Backup	EA	$134.10	$176.27	$0.00	$310.37
115159	LED Emergency Light Fixture - Wall Mounted, Kenall Millenium Metrex Two Head w/Battery Backup	EA	$143.04	$178.45	$0.00	$321.49
115160	LED Emergency Light Fixture - Recessed, Isolite MIGN	EA	$178.80	$462.03	$0.00	$640.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115161	LED Emergency Light Fixture - Exterior, Lithonia 129W Flood	EA	$223.50	$823.12	$0.00	$1,046.62
115162	LED Emergency Light Fixture - Exterior, Wall Mount, Single Remote Head	EA	$178.80	$69.62	$0.00	$248.42
115163	LED Emergency Light Fixture - Exterior, Wall Mount, Dual Remote Head	EA	$178.80	$104.21	$0.00	$283.01
115164	LED Emergency Exit / Light Combo Fixture - Morris 73442	EA	$178.80	$126.52	$0.00	$305.32
115165	LED Emergency Exit Light Fixture - Ceiling Mounted, Sure-Lite EUX	EA	$178.80	$479.09	$0.00	$657.89
115166	LED Emergency Exit Light Fixture - Lithonia Edge W-1-R	EA	$134.10	$161.25	$0.00	$295.35
115167	LED Emergency Exit Light Fixture - Ceiling or Wall Mounted, Sure-Lite LPX Red	EA	$178.80	$163.82	$0.00	$342.62
115168	LED Emergency Exit Light Fixture - Encore UNO Edge Lit	EA	$134.10	$244.35	$0.00	$378.45
115169	LED Emergency Exit Light Fixture - Wet Location, Wall Mounted, Williams	EA	$178.80	$183.81	$0.00	$362.61
115170	LED Emergency Exit Light Fixture - Lithonia LQM Series	EA	$134.10	$101.88	$0.00	$235.98
115171	LED Emergency Exit Light Fixture - High Abuse, Kenall CMEXR	EA	$178.80	$561.54	$0.00	$740.34
115172	LED Emergency Exit Light Fixture - High Abuse, Lithonia LV S W	EA	$178.80	$561.47	$0.00	$740.27
	26-55-00 Special Purpose Lighting					
	26-55-13 Utility Lighting					
115173	LED Utility Downlight Fixture - Recessed, Explosion Proof, Holophane LED Point Source	EA	$178.80	$1,427.31	$0.00	$1,606.11
115174	LED Utility Downlight Fixture - Recessed, Wet Location, LDN4 HSG 4" LED Point Source	EA	$178.80	$223.20	$0.00	$402.00
115175	LED Utility Downlight Fixture - Recessed, Wet Location, 6DR Lensed LED Point Source	EA	$178.80	$194.76	$0.00	$373.56
115176	LED Utility Downlight Fixture - Recessed, Wet Location, Linear, ALW Lightplane 3.5 LED Point Source	EA	$223.50	$492.60	$0.00	$716.10
115177	LED Utility Downlight Fixture - Recessed, Damp Location, Linear, 8' X 3" Wall / Ceiling Mounted LED Point Source	EA	$268.20	$567.23	$0.00	$835.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115178	LED Utility Downlight Fixture - Recessed, Damp Location, 5" Round 22W LED Point Source	EA	$178.80	$311.33	$0.00	$490.13
115179	LED Utility Downlight Fixture - Recessed, Damp Location, USAI Beveled Mini Basic Lensed LED Point Source	EA	$178.80	$442.74	$0.00	$621.54
115180	LED Utility Troffer Light Fixture - Surface Mounted, Hose Down, 2' X 4' Gasketed w/ Inverted Pattern Acrylic Lens	EA	$223.50	$626.94	$0.00	$850.44
115181	LED Utility Troffer Light Fixture - Surface Mounted, Hose Down, 2' X 2' Gasketed w/ Inverted Pattern Acrylic Lens	EA	$223.50	$572.92	$0.00	$796.42
115182	LED Utility Troffer Light Fixture - Surface Mounted, Hose Down, 1' X 4' Gasketed w/ Inverted Pattern Acrylic Lens	EA	$223.50	$553.01	$0.00	$776.51
115183	LED Utility Troffer Light Fixture - Surface Mounted, Grow Light, Volt FL-1 Full Cycle	EA	$223.50	$880.06	$0.00	$1,103.56
115184	LED Utility Troffer Light Fixture - Surface Mounted, Grow Light, Kind LED K3 XL300	EA	$223.50	$518.76	$0.00	$742.26
115185	LED Utility Troffer Light Fixture - Recessed, Wet Location, Stainless Steel, 1' X 4' Gasketed w/ Inverted Pattern Acrylic Lens	EA	$223.50	$396.64	$0.00	$620.14
115186	LED Utility Troffer Light Fixture - Recessed, Wet Location, 1' X 4' Gasketed w/ Inverted Pattern Acrylic Lens	EA	$178.80	$395.21	$0.00	$574.01
115187	LED Utility Troffer Light Fixture - Recessed, Damp Location, 2' X 2' Gasketed Acrylic Panel Diffuser	EA	$178.80	$339.77	$0.00	$518.57
115188	LED Utility Troffer Light Fixture - Recessed, Damp Location, 1' X 4' Gasketed Acrylic Panel Diffuser	EA	$178.80	$368.20	$0.00	$547.00
115189	LED Utility Troffer Light Fixture - Recessed, Damp Location, 2' X 4' Gasketed Acrylic Panel Diffuser 66W	EA	$178.80	$425.07	$0.00	$603.87
115190	LED Utility Troffer Light Fixture - Recessed, Damp Location, 1' X 4'	EA	$178.80	$183.39	$0.00	$362.19
115191	LED Utility Wall Light Fixture - Surface Mounted, Hubbell Killard EML Vaportight Jelly Jar	EA	$178.80	$339.77	$0.00	$518.57
115192	LED Utility Wall Light Fixture - Surface Mounted, Sconce, Holophane HRLL Class 1 / Division 2	EA	$223.50	$766.26	$0.00	$989.76
115193	LED Utility Pendant Light Fixture - Lithonia FEM 4' Light Stripe w/ Fiberglass Enclosure	EA	$178.80	$338.35	$0.00	$517.15
115194	LED Utility Pendant Light Fixture - 4' Open Industrial Light Stripe	EA	$178.80	$149.27	$0.00	$328.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115195	LED Utility Pendant Light Fixture - 4' Open Industrial Light Stripe w/ Wire Guard	EA	$178.80	$174.87	$0.00	$353.67
115196	LED Utility Pendant Light Fixture - 4' Light Stripe w/ Fiberglass Enclosure	EA	$178.80	$328.40	$0.00	$507.20
115197	LED Utility Pendant Light Fixture - Surface Mount, Metalux SNLED 2'	EA	$178.80	$108.04	$0.00	$286.84
115198	LED Utility Pendant Light Fixture - Metalux LBLED 4'	EA	$178.80	$250.21	$0.00	$429.01
115199	LED Utility Pendant Light Fixture - Metalux 4WSL 4'	EA	$178.80	$304.23	$0.00	$483.03
115200	LED Utility Pendant Light Fixture - Metalux SNLED 8'	EA	$268.20	$452.08	$0.00	$720.28
115201	LED Utility Pendant Light Fixture - Cree LS4 4' Wrapped Light Stripe	EA	$178.80	$216.09	$0.00	$394.89
115202	LED Utility Pendant Light Fixture - Cree LS4 8' Wrapped Light Stripe	EA	$268.20	$349.72	$0.00	$617.92
115203	LED Utility Pendant Light Fixture - Lithonia IBG	EA	$178.80	$296.51	$0.00	$475.31
115204	LED Utility Pendant Light Fixture - High Bay, Lithonia JCBL 21"	EA	$223.50	$712.98	$0.00	$936.48
115205	LED Utility Pendant Light Fixture - High Bay, Lithonia JEBL 18"	EA	$223.50	$264.43	$0.00	$487.93
115206	LED Utility Pendant Light Fixture - High Bay, Metallux HB 48" Chain Hung	EA	$268.20	$240.25	$0.00	$508.45
115207	LED Utility Pendant Light Fixture - High Bay, Lithonia ZL2N 48" Narrow Strip Chain Hung	EA	$134.10	$237.41	$0.00	$371.51
115208	LED Utility Pendant Light Fixture - High Bay, Lithonia ZLIN 48" Narrow Strip Chain Hung	EA	$134.10	$174.87	$0.00	$308.97
115209	LED Utility Pendant Light Fixture - Axis Beam 6 Linear	EA	$178.80	$946.49	$0.00	$1,125.29
115210	LED Utility Pendant Light Fixture - Recessed, 4' Open Industrial Light Stripe w/ Reflector	EA	$134.10	$120.13	$0.00	$254.23
115211	LED Utility Light Fixture - Recessed, Underwater Luminaire 2W RGB	EA	$268.20	$898.46	$0.00	$1,166.66
115212	LED Utility Light Fixture - Recessed, Lithonia CLX48 Light Stripe	EA	$178.80	$138.61	$0.00	$317.41
115213	LED Utility Light Fixture - Recessed, Lithonia FM 48"	EA	$134.10	$166.33	$0.00	$300.43
115214	LED Utility Light Fixture - Recessed, Lithonia ZLIN 48" Narrow Strip Chain Hung w/ Emer Ballast	EA	$178.80	$204.72	$0.00	$383.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115215	LED Utility Light Fixture - Recessed, Lithonia OLCFM 12" Round 17W Soffit Fixture	EA	$134.10	$159.23	$0.00	$293.33
115216	LED Utility Light Fixture - Recessed, Illunox Continuous Handrail	LF	$35.76	$1,445.79	$0.00	$1,481.55
115217	LED Utility Light Fixture - Recessed, Large Surface Back Lighting	SF	$13.41	$27.01	$0.00	$40.42
115218	LED Utility Light Fixture - Recessed, In Grade White	EA	$178.80	$480.51	$0.00	$659.31
115219	LED Utility Light Fixture - Recessed, Night Light	EA	$134.10	$116.57	$0.00	$250.67
115220	LED Utility Light Fixture - Recessed, 8.5" Light Sheet	EA	$178.80	$3,359.31	$0.00	$3,538.11
115221	LED Utility Light Fixture - Recessed, Step Light	EA	$178.80	$457.76	$0.00	$636.56
115222	LED Utility Light Fixture - Surface Mounted, Mercury Lighting LW10	EA	$178.80	$346.88	$0.00	$525.68
115223	LED Utility Light Fixture - Surface Mount, 4' Lensed Light Stripe	EA	$178.80	$163.49	$0.00	$342.29
115224	LED Utility Light Fixture - Surface Mounted, Mercury Lighting Alt Mounting Pack	EA	$89.40	$54.03	$0.00	$143.43
115225	LED Utility Light Fixture - Surface Mounted, 4' LED Light Stripe w/ Fiberglass Enclosure	EA	$178.80	$299.96	$0.00	$478.76
115226	LED Utility Light Fixture - Surface Mounted, 2' LED Light Stripe w/ Fiberglass Enclosure	EA	$178.80	$169.17	$0.00	$347.97
115227	LED Utility Light Fixture - Surface Mounted, 4' LED Light Stripe w/ Class 1, Division 2 Enclosure	EA	$223.50	$825.97	$0.00	$1,049.47
115228	LED Utility Light Fixture - Surface Mounted, Vapor Tight, 2" X 4'	EA	$178.80	$442.13	$0.00	$620.93
115229	LED Utility Light Fixture - Surface Mounted, Vapor Tight, Cooper VT1730	EA	$178.80	$91.62	$0.00	$270.42
115230	LED Utility Light Fixture - Surface Mounted, Vapor Tight, Trace Lite	EA	$178.80	$140.88	$0.00	$319.68
115231	LED Utility Light Fixture - Surface Mounted, Explosion Resistant, 2' w/ Fiberglass Enclosure	EA	$178.80	$227.47	$0.00	$406.27
115232	LED Utility Light Fixture - Surface Mounted, Damp Location, Linear, 48" Motion Sensing	EA	$178.80	$422.23	$0.00	$601.03
115233	LED Utility Light Fixture - Surface Mounted, Datasheet Rigo Line 100 4" X 6'	EA	$178.80	$331.37	$0.00	$510.17
115234	LED Utility Light Fixture - Surface Mounted, Axis "Primaryme"	LF	$44.70	$78.53	$0.00	$123.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115235	LED Utility Light Fixture - Surface Mounted, Lithonia FEM w/Fiberglass Enclosure	EA	$178.80	$277.21	$0.00	$456.01
115236	LED Utility Light Fixture - Surface Mounted, Lithonia CLX L48 Strip	EA	$178.80	$186.85	$0.00	$365.65
115237	LED Utility Light Fixture - Wall Mounted, Lithonia ZLIN 48" Narrow Strip	EA	$134.10	$174.87	$0.00	$308.97
115238	LED Utility Light Fixture - Surface Mounted, RAB VXBR	EA	$178.80	$525.33	$0.00	$704.13
115239	LED Utility Light Fixture - Surface Mounted, Metalux SNLED Strip	EA	$178.80	$194.76	$0.00	$373.56
115240	LED Utility Light Fixture - Surface Mounted, Continuous Tape, 1" Wide Weatherproof	LF	$22.34	$24.17	$0.00	$46.51
115241	LED Utility Light Fixture - Surface Mounted, Continuous Tape, NovaFlex Series 64 LED Utility Surface	LF	$13.41	$29.78	$0.00	$43.19
115242	LED Utility Light Fixture - Surface Mounted, Continuous Tape, NovaFlex Series 120 LED Utility Surface	LF	$13.41	$34.69	$0.00	$48.10
115243	LED Utility Light Fixture - Surface Mounted, Track Head, Single Circuit	LF	$35.76	$10.43	$0.00	$46.19
115244	LED Utility Light Fixture - Surface Mounted, Track Head, Edison Primaryce Sightline	LF	$35.76	$11.37	$0.00	$47.13
115245	LED Utility Light Fixture - Surface Mounted, Track Head, Black Cylinder 32 Degree	EA	$22.34	$152.12	$0.00	$174.46
115246	LED Utility Light Fixture - Surface Mounted, Track Head, 48W 25 Degree	EA	$22.34	$146.43	$0.00	$168.77
115247	LED Utility Light Fixture - Surface Mounted, Track Head, Edison Primaryce MiniMax O Adjustable Cylinder	EA	$22.34	$152.12	$0.00	$174.46
115248	LED Utility Light Fixture - Surface Mounted, Track Head, Stencil-Flex SFTDUTA	LF	$44.70	$24.21	$0.00	$68.91
115249	LED Utility Light Fixture - Surface Mounted, Track Head, Pendant, Decorative	EA	$22.34	$264.49	$0.00	$286.83
115250	LED Utility Light Fixture - Surface Mounted, Track Head, Pendent, Single Circuit	LF	$22.34	$6.25	$0.00	$28.59
115251	LED Utility Light Fixture - Surface Mounted, Track Head, Two Circuit	LF	$22.34	$7.96	$0.00	$30.30
115252	LED Utility Light Fixture - Surface Mounted, Track Head, PAR 20 50W MR16	EA	$22.34	$36.96	$0.00	$59.30
115253	LED Utility Light Fixture - Surface Mounted, Track Head, Accent	EA	$22.34	$183.25	$0.00	$205.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115254	LED Utility Light Fixture - Surface Mounted, Track Head, Times Square CR80	EA	$22.34	$112.31	$0.00	$134.65
115255	LED Utility Light Fixture - Surface Mounted, Track Head, LiteLab A01	EA	$22.34	$55.44	$0.00	$77.78
115256	LED Utility Light Fixture - Surface Mounted, Track Head, High Output	EA	$22.34	$237.75	$0.00	$260.09
115257	LED Utility Light Fixture - Surface Mounted, Flexible Light Emitting Sheet	SF	$22.34	$41.23	$0.00	$63.57
115258	LED Utility Light Fixture - Surface Mounted, Undercounter, Juno UPLED 14"	EA	$134.10	$120.84	$0.00	$254.94
115259	LED Utility Light Fixture - Surface Mounted, Undercounter, Juno UPLED 40"	EA	$178.80	$343.90	$0.00	$522.70
115260	LED Utility Light Fixture - Surface Mounted, Undercounter, Fail Safe UCL LED	LF	$17.88	$101.29	$0.00	$119.17
115261	LED Utility Light Fixture - Surface Mounted, Undercounter, Luminii Kendo	LF	$22.34	$125.11	$0.00	$147.45
115262	LED Utility Light Fixture - Surface Mounted, Undercounter, Columbia CUC	LF	$22.34	$54.03	$0.00	$76.37
115263	LED Utility Light Fixture - Surface Mounted, Undercounter, 4'	EA	$134.10	$197.75	$0.00	$331.85
115264	LED Utility Light Fixture - Surface Mounted, Cantilevered, Up Light RGB	EA	$178.80	$1,054.85	$0.00	$1,233.65
115265	LED Utility Light Fixture - Surface Mounted, Allied Maker Dome Table Lamp	EA	$22.34	$1,272.70	$0.00	$1,295.04
115266	LED Utility Light Fixture - Surface Mounted, Alboe AHH1 LED Loading Dock Fixture	EA	$178.80	$995.14	$0.00	$1,173.94
115267	LED Utility Light Fixture - Surface Mounted, 4' 42W 5000K Light Stripe w /Lens	EA	$178.80	$226.04	$0.00	$404.84
115268	LED Utility Light Fixture - Surface Mounted, 4' 42W 5000K Light Stripe w/ Emer Ballast	EA	$178.80	$254.47	$0.00	$433.27
	26-55-53 Security Lighting					
115269	LED High Abuse Light Fixture - Recessed Downlight, 7" Polycarbonate Lens Vandal / Tamper Resistant Security Fixture	EA	$178.80	$265.84	$0.00	$444.64
115270	LED High Abuse Light Fixture - Recessed Troffer, 2' X 4' Lay In Vandal / Tamper Resistant Security Fixture	EA	$223.50	$496.15	$0.00	$719.65
	26-55-61 Theatrical Lighting					
115271	DMX Two Circuit Track	LF	$44.70	$94.09	$0.00	$138.79

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115272	DMX Adjusable Floor Track Mount	EA	$89.40	$358.79	$0.00	$448.19
115273	DMX Adjusable Accent Track Mount	EA	$89.40	$247.77	$0.00	$337.17
115274	DMX Controls and set up	EA	$1,430.42	$7,758.37	$0.00	$9,188.79
115275	Clarus 8LE-MX3 LED Downlight	EA	$178.80	$265.84	$0.00	$444.64
115276	Clarus 8LEC-MX3 LED Pendant	EA	$178.80	$288.59	$0.00	$467.39
115277	SSRC WK LED 100-W	EA	$178.80	$1,100.95	$0.00	$1,279.75
115278	Rigging Plug Box for Mounted Lighting	EA	$178.80	$221.05	$0.00	$399.85
115279	CRP	EA	$178.80	$181.14	$0.00	$359.94
115280	Control and Network Devices	EA	$11,443.33	$121,583.12	$0.00	$133,026.45
115281	Power Control and Distribution Devices	EA	$11,443.33	$90,307.29	$0.00	$101,750.62
115282	Company Switches	EA	$2,860.83	$23,355.33	$0.00	$26,216.16
115283	Ceiling Downlighting Luminaires and Accessories	EA	$28,608.32	$379,507.24	$0.00	$408,115.56
115284	ETC Color Source DMX Controller	EA	$715.21	$3,736.04	$0.00	$4,451.25
115285	Chauvet Colorado Batten	EA	$357.60	$1,334.91	$0.00	$1,692.51
115286	ETC UH 10005	EA	$178.80	$231.72	$0.00	$410.52
115287	ETC Com	EA	$17,880.20	$1,421.63	$0.00	$19,301.83
115288	ETC FW40	EA	$715.21	$3,980.56	$0.00	$4,695.77
115289	ETC UH 10010	EA	$178.80	$308.49	$0.00	$487.29
115290	ETC ion XE20	EA	$715.21	$3,717.56	$0.00	$4,432.77
115291	ETC ULCD	EA	$178.80	$268.69	$0.00	$447.49
115292	ETC TS2	EA	$715.21	$4,671.48	$0.00	$5,386.69
115293	ETC UF MP4	EA	$357.60	$924.06	$0.00	$1,281.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115294	ETC ERN 4	EA	$715.21	$4,111.35	$0.00	$4,826.56
115295	ETC Sensor SR3-48	EA	$1,430.42	$8,650.61	$0.00	$10,081.03
115296	ETC 436 LED Ellipsoidal Theatrical Light	EA	$134.10	$857.04	$0.00	$991.14
115297	Chauvet Maverack MK2 Theatrical Spot Light	EA	$715.21	$6,822.40	$0.00	$7,537.61
115298	ETC Colorsourse Theatrical Light	EA	$357.60	$1,144.41	$0.00	$1,502.01
115299	ETC/HPL 750W Theatrical Light	EA	$357.60	$1,091.81	$0.00	$1,449.41
115300	Par 38 6' - 12 Fixture Border Light	EA	$715.21	$958.18	$0.00	$1,673.39
115301	Color Kinetics Color Burst	EA	$268.20	$916.96	$0.00	$1,185.16
115302	ETC/S4 Par 64 575W Theatrical Light	EA	$357.60	$682.38	$0.00	$1,039.98
115303	Canto 1200 MDS Long Throw Follow Spot	EA	$357.60	$1,135.88	$0.00	$1,493.48
115304	Chroma Q 48	EA	$536.41	$4,776.68	$0.00	$5,313.09
115305	Chauvet Ovation E-160WW	EA	$357.60	$1,420.21	$0.00	$1,777.81
115306	Gotham EV04 Recessed LED Downlight	EA	$178.80	$296.51	$0.00	$475.31
115307	Gotham IC04ADJ Recessed LED Downlight	EA	$178.80	$366.92	$0.00	$545.72
115308	RAB VXBR LED	EA	$357.60	$993.79	$0.00	$1,351.39
115309	Beacon Theatrical LED Aisle Lights	EA	$89.40	$157.80	$0.00	$247.20
115310	Jesco Lighting LED Rope lighting	LF	$2.68	$7.11	$0.00	$9.79
115311	Theatrical House Light Lifter	EA	$357.60	$1,030.82	$0.00	$1,388.42
115312	House Light Dimming Panel	EA	$3,576.04	$4,023.21	$0.00	$7,599.25
115313	Wireless Intercom Base	EA	$357.60	$845.86	$0.00	$1,203.46
115314	Wireless Intercom Personal Devices	EA	$44.70	$319.87	$0.00	$364.57
115315	Stage Manager Dimming Panel	EA	$3,576.04	$10,235.72	$0.00	$13,811.76
115316	Rack Mounted Dimming System (24 Dimmers)	EA	$2,145.62	$8,814.10	$0.00	$10,959.72

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115317	Rack Mounted Dimming Module (48 dimmers)	EA	$715.21	$11,223.76	$0.00	$11,938.97
115318	Rack Mounted Dimming Module (96 dimmers)	EA	$7,152.08	$80,294.62	$0.00	$87,446.70
115319	Mid America DWR	EA	$357.60	$1,135.88	$0.00	$1,493.48
115320	3' Mic Cord	EA	$22.34	$15.30	$0.00	$37.64
115321	Mic Cord	LF	$0.71	$0.37	$0.00	$1.08
115322	Cue Light Converter	EA	$357.60	$405.16	$0.00	$762.76
115323	NuDelta Digital Master Controller	EA	$715.21	$1,279.46	$0.00	$1,994.67
115324	Theatrical Lighting Multi Circuit Batten	LF	$134.10	$120.84	$0.00	$254.94
115325	Rigging Pipe for Lighting	LF	$6.70	$17.27	$0.00	$23.97
115326	Rigging Mounted Lighting Cable	LF	$3.58	$8.73	$0.00	$12.31
115327	Rigging Mounted Lighting Disconnect	EA	$357.60	$518.89	$0.00	$876.49
115328	Rigging Local J-Box for Mounted Lighting	EA	$715.21	$221.07	$0.00	$936.28
115329	Mosaic Tessera DMX Controller	EA	$1,430.42	$1,556.69	$0.00	$2,987.11
115330	Mosaic DMX Remote I/O	EA	$357.60	$419.38	$0.00	$776.98
115331	DMX Single Port	EA	$178.80	$598.10	$0.00	$776.90
115332	DMX/RDM Opto-Splitter	EA	$357.60	$828.81	$0.00	$1,186.41
115333	DMX Software and Programming	EA	$2,860.83	$7,946.90	$0.00	$10,807.73
115334	Belden 9829 DMX Cable	LF	$2.68	$3.89	$0.00	$6.57
115335	DMX Connector	EA	$22.34	$22.39	$0.00	$44.73
115336	SPI Echo Blade	EA	$178.80	$1,001.91	$0.00	$1,180.71
115337	CBX-ST Lumenpulse Daisey Chain Box	EA	$178.80	$1,251.02	$0.00	$1,429.82
115338	Programming	EA	$1,430.42	$0.00	$0.00	$1,430.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115339	Neutrik PowerCon Connectors	EA	$89.40	$13.86	$0.00	$103.26
115340	Luminated "On Air" Fixture	EA	$178.80	$258.73	$0.00	$437.53
115341	Theater Lighting System	SF	$8.94	$12.80	$0.00	$21.74
115342	Gotham Incito (House Lights)	EA	$268.20	$567.23	$0.00	$835.43
115343	Luminpulse LOGP RGBW	EA	$268.20	$1,377.56	$0.00	$1,645.76
115344	Luminfacade Nano LOGNI RGBW	EA	$268.20	$1,211.22	$0.00	$1,479.42
115345	Lumenpulse Lumenbeam Large	EA	$357.60	$1,431.58	$0.00	$1,789.18
115346	Luminpulse Lumin Quad Grande	EA	$357.60	$2,398.28	$0.00	$2,755.88
115347	Meteor Signum 10 Series	EA	$178.80	$948.22	$0.00	$1,127.02
115348	Luminbeam LXB	EA	$268.20	$1,462.59	$0.00	$1,730.79
115349	Lumini KMW RGBW	EA	$268.20	$1,345.81	$0.00	$1,614.01
	26-55-68 Athletic Field Lighting					
115350	SPI Echo Sconce Hub Mount	EA	$268.20	$689.49	$0.00	$957.69
115351	SPI Echo Round 1000W MH	EA	$357.60	$2,146.66	$0.00	$2,504.26
115352	Hubbell SLS 1000h Athletic Sports	EA	$357.60	$705.13	$0.00	$1,062.73
115353	Musco 400W LED Arena Fixtures	EA	$357.60	$1,728.70	$0.00	$2,086.30
115354	Supersport 2 400W LED Sports light	EA	$357.60	$2,303.04	$0.00	$2,660.64
115355	SPI ECHO Round 800W MH	EA	$357.60	$844.45	$0.00	$1,202.05
115356	GLA 6L Fluorescent High Bay	EA	$223.50	$479.09	$0.00	$702.59
115357	22" Diameter 102W LED High Bay	EA	$223.50	$545.90	$0.00	$769.40
115358	Columbia PEL High Bay	EA	$223.50	$479.09	$0.00	$702.59
115359	Lux Dynamics IK10 High Bay	EA	$357.60	$1,444.38	$0.00	$1,801.98
115360	Gravitas Pro Line 1000W	EA	$223.50	$638.32	$0.00	$861.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115361	Hubbell LED High Bay Columbia LLPH	EA	$268.20	$1,066.22	$0.00	$1,334.42
115362	Lithonia IBH High Bay	EA	$223.50	$474.82	$0.00	$698.32
115363	Lithonia JCBL High Bay	EA	$223.50	$499.00	$0.00	$722.50
115364	Metalux Steeler High Bay	EA	$357.60	$582.85	$0.00	$940.45
115365	Continuous Light Pipe	LF	$31.29	$164.91	$0.00	$196.20
115366	Ameritrix ASY LED Double Pendent	EA	$536.41	$2,577.42	$0.00	$3,113.83
115367	Ameritrix ASY LED Pendent	EA	$357.60	$1,440.11	$0.00	$1,797.71
115368	Lite Truss Racking System	LF	$89.40	$112.31	$0.00	$201.71
115369	Lite Truss 1000W Spots	EA	$357.60	$1,442.95	$0.00	$1,800.55
115370	Lite Truss 741W LED Spots	EA	$357.60	$1,448.64	$0.00	$1,806.24
115371	Lite Truss WP Speakers	EA	$178.80	$450.65	$0.00	$629.45
115372	Lite Truss 388 W DMX LED Spots	EA	$357.60	$2,298.78	$0.00	$2,656.38
115373	Sealed Pool Fixtures 70LED w 100' cord	EA	$268.20	$1,085.73	$0.00	$1,353.93
115374	NewStar 37M22 LED Racquet Court Fixtures	EA	$223.50	$995.48	$0.00	$1,218.98
115375	Racquet Court Fixtures 6L 54W T5HO w/Emergency Ballast	EA	$223.50	$518.89	$0.00	$742.39
115376	Fixture racks and rigging	EA	$10,728.12	$83,165.29	$0.00	$93,893.41
115377	Ephesus Lumadapt 8 LED Arena Spots	EA	$357.60	$2,465.11	$0.00	$2,822.71
115378	Metalux OHB 2' X 4' High Bay Pendants	EA	$268.20	$324.13	$0.00	$592.33
115379	Ephesus All Spot 750W LED Stadium Spots	EA	$715.21	$2,749.43	$0.00	$3,464.64
115380	Musco 1000W LED Stadium Spots	EA	$715.21	$2,594.47	$0.00	$3,309.68
	26-55-69 Healthcare Lighting					
115381	Bovie MI 750 Cantilevered Single Head LED Procedure Light	EA	$357.60	$4,536.42	$0.00	$4,894.02
115382	Cantilevered Single Head LED Surgical Light	EA	$715.21	$27,191.50	$0.00	$27,906.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115383	Cantilevered Two Head LED Surgical Light	EA	$2,145.62	$39,986.16	$0.00	$42,131.78
115384	Skytron Argos II w/ Wall Controller	EA	$536.41	$11,315.53	$0.00	$11,851.94
115385	Peerless BRW9L Wall Mounted LED Patient Fixture	EA	$178.80	$409.07	$0.00	$587.87
115386	2x4 Patient Rm LED Multifunction w/ Exam Lt	EA	$223.50	$1,241.08	$0.00	$1,464.58
115387	24" X 24" Skytile LED Light-Box	EA	$178.80	$454.92	$0.00	$633.72
115388	4' Under Counter LED Task Light	EA	$89.40	$240.25	$0.00	$329.65
115389	ALKCO 103 LED Nightlight w/Emer Receptacle	EA	$178.80	$370.98	$0.00	$549.78
115390	2'x2' Recessed Exam Light 4L	EA	$178.80	$850.13	$0.00	$1,028.93
115391	Kenall LED Surface Mount Corner	EA	$268.20	$953.92	$0.00	$1,222.12
115392	Kenall MCSL LED Patient Night Light	EA	$223.50	$607.04	$0.00	$830.54
115393	Bovie MI 1000 LED Exam light	EA	$357.60	$6,235.27	$0.00	$6,592.87
115394	Medmaster 6" Round Sealed Downlight	EA	$178.80	$844.45	$0.00	$1,023.25
115395	Skydome recessed LED 4' X 4'	EA	$312.90	$1,393.20	$0.00	$1,706.10
115396	Skydome recessed 5' Oval	EA	$357.60	$1,108.88	$0.00	$1,466.48
115397	Kenall Medmaster 6" LED Operating Room Downlight	EA	$178.80	$489.04	$0.00	$667.84
115398	8" Recessed Dimmable LED Procedure fixture w/sealed diffuser	EA	$223.50	$554.44	$0.00	$777.94
115399	Kenall M4SEDI14 1 X 4 LED Exam Light	EA	$223.50	$707.36	$0.00	$930.86
115400	Kenall M4SEDL12 1 X 2 LED Exam Light	EA	$178.80	$382.41	$0.00	$561.21
115401	8" X 4' Recessed Mounted LED Multi-function Patient Fixture	EA	$223.50	$831.30	$0.00	$1,054.80
115402	Kenall MCSL MedMaster LED Nightlight	EA	$178.80	$408.00	$0.00	$586.80
115403	Fail Safe MLN LED Patient Night Light	EA	$178.80	$287.17	$0.00	$465.97
115404	Kenall Medmaster 2x4 LED Operating Room	EA	$223.50	$1,057.69	$0.00	$1,281.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115405	Kenall Medmaster 2X2 LED Operating Room	EA	$178.80	$744.93	$0.00	$923.73
115406	2X4 Recessed Patient Exam Light	EA	$223.50	$649.69	$0.00	$873.19
115407	2x4 Recessed Multifunction Patient Light	EA	$223.50	$794.69	$0.00	$1,018.19
115408	1X4 Recessed Multifunction Patient Light	EA	$223.50	$639.73	$0.00	$863.23
115409	Continuous Non-Ferrous Cove with Satin Lens	LF	$26.82	$245.18	$0.00	$272.00
115410	4" Kenall MRIDL4 Non-Ferrous LED Downlight	EA	$178.80	$595.66	$0.00	$774.46
115411	2' X 2' Non-Ferrous LED Lay in	EA	$178.80	$328.40	$0.00	$507.20
115412	Kirlin MRS 12440 12" surface mounted LED	EA	$178.80	$452.08	$0.00	$630.88
115413	Kenall MPWUD Wall Mounted Patient Fixture	EA	$178.80	$625.52	$0.00	$804.32
115414	Room "IN-USE" Light w/Relay	EA	$223.50	$294.28	$0.00	$517.78
115415	SKY - V Digital Cinema	EA	$1,430.42	$49,046.20	$0.00	$50,476.62
115416	SKY - Virtual Window	EA	$357.60	$3,980.56	$0.00	$4,338.16
115417	Visa Unity 1900 2x2 Exam Light	EA	$178.80	$744.93	$0.00	$923.73
115418	Chloride WG2H LED Patient Night Light	EA	$178.80	$476.25	$0.00	$655.05
115419	2-EX100W LDR w/ Controls	EA	$536.41	$11,102.92	$0.00	$11,639.33
115420	4' Fail Safe MRI4 ASR Non-Ferrous Recessed Linear	LF	$178.80	$978.08	$0.00	$1,156.88
115421	8' Fail Safe MRI4 ASR Non-Ferrous Recessed Linear	LF	$357.60	$1,956.17	$0.00	$2,313.77
115422	Peerless BRW9L	EA	$178.80	$1,192.74	$0.00	$1,371.54
115423	Surface Mounted Accent Trac	LF	$44.70	$24.17	$0.00	$68.87
115424	Trac Head 39W T4 MH	EA	$44.70	$194.76	$0.00	$239.46
	26-55-73 Clean Room and High Abuse Lighting					
115425	LED High Abuse Light Fixture - HE Williams AVX Wrap Vandal / Tamper Resistant Security Fixture	EA	$178.80	$716.24	$0.00	$895.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115426	LED High Abuse Light Fixture - 2' X 4' Secure Troffer Vandal / Tamper Resistant Security Fixture	EA	$178.80	$895.62	$0.00	$1,074.42
115427	LED Hazardous Location Light Fixture - Vapor Tight, Lithonia OLVTCM	EA	$178.80	$135.33	$0.00	$314.13
115428	LED High Abuse Light Fixture - Surface Mounted, Kenall Mighty Mac CC Vandal / Tamper Resistant Security Fixture	EA	$223.50	$1,212.39	$0.00	$1,435.89
115429	LED High Abuse Light Fixture - New Star 51HA4 Vandal / Tamper Resistant Security Fixture	EA	$223.50	$547.33	$0.00	$770.83
115430	LED High Abuse Light Fixture - Surface Mounted, Wet Location, 1' Vandal / Tamper Resistant Security Fixture	EA	$223.50	$281.48	$0.00	$504.98
115431	LED High Abuse Light Fixture - New Star 55M2 Vandal / Tamper Resistant Security Fixture	EA	$223.50	$800.37	$0.00	$1,023.87
115432	LED High Abuse Light Fixture - Hubbell PVL3 180L Vandal / Tamper Resistant Security Fixture	EA	$178.80	$476.23	$0.00	$655.03
115433	LED High Abuse Light Fixture - Recessed Downlight, Lightolier 6" Vandal / Tamper Resistant Security Fixture	EA	$178.80	$588.56	$0.00	$767.36
115434	LED High Abuse Light Fixture - Kenall Mighty Mac SSA 1' X 2' Vandal / Tamper Resistant Security Fixture	EA	$223.50	$467.72	$0.00	$691.22
115435	LED High Abuse Light Fixture - Kenall RMCA 2' x 2' Vandal / Tamper Resistant Security Fixture	EA	$223.50	$679.54	$0.00	$903.04
115436	LED High Abuse Light Fixture - Kenall RMCA 2' x 4' Vandal / Tamper Resistant Security Fixture	EA	$223.50	$736.40	$0.00	$959.90
115437	LED High Abuse Light Fixture - Recessed Linear, Kenall RMCA Vandal / Tamper Resistant Security Fixture	EA	$223.50	$707.97	$0.00	$931.47
115438	LED Hazardous Location Light Fixture - Recessed Downlight, Fail-Safe FFLD6 Operating Room	EA	$178.80	$588.56	$0.00	$767.36
115439	Fail Safe SGI 2' X 2' LED Tamper-Resistant Polycarbonate Lensed Lay in	EA	$223.50	$553.01	$0.00	$776.51
115440	Fail Safe SGI 2' X 2' LED Tamper-Resistant Polycarbonate Lensed Drywall	EA	$223.50	$567.23	$0.00	$790.73
115441	4" Secure High Abuse Recessed Downlight	EA	$178.80	$531.69	$0.00	$710.49
115442	4" Secure High Abuse Recessed Wall Washer	EA	$178.80	$541.64	$0.00	$720.44
115443	Kenall BHD 6" Secure High Abuse Recessed Downlight	EA	$178.80	$588.56	$0.00	$767.36

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115444	6" Secure High Abuse Recessed Downlight Wet Location	EA	$178.80	$631.20	$0.00	$810.00
115445	Fail-Safe B95 Wall Pack	EA	$178.80	$614.35	$0.00	$793.15
115446	Fail-Safe 4' FWL LED	EA	$178.80	$614.14	$0.00	$792.94
115447	Fail-Safe 2' FWL LED	EA	$178.80	$514.63	$0.00	$693.43
115448	Kenal Two Head Wall Mounted LED Battery	EA	$178.80	$467.72	$0.00	$646.52
115449	Kenall MMEX LED Exit sign	EA	$134.10	$419.38	$0.00	$553.48
115450	Visa CM1988-T 23" Recessed Surface Mount	EA	$268.20	$2,558.94	$0.00	$2,827.14
115451	Visa CM1978-T 45" Recessed Surface Mount	EA	$357.60	$4,122.72	$0.00	$4,480.32
115452	1' X 4' Kenall CSEDI LED Clean Room	EA	$178.80	$837.34	$0.00	$1,016.14
115453	2' X 2' Kenall CSEDI LED Clean Room	EA	$223.50	$553.01	$0.00	$776.51
115454	2' X 4' Kenall CSEDI LED Clean Room	EA	$223.50	$595.66	$0.00	$819.16
115455	2' X 4' Kenall CSEDI LED Simple Seal Red Series	EA	$223.50	$1,492.71	$0.00	$1,716.21
115456	Failsafe FLD4B Sealed Downlight	EA	$178.80	$587.13	$0.00	$765.93
115457	1" X 2' Kurtzon (DKS-F/G) Photo Lab Fixtures	EA	$223.50	$593.63	$0.00	$817.13
115458	2' X 4' LED Stainless Steel Gasketed Clean Room w/Inverted Pattern Acrylic lens	EA	$223.50	$766.26	$0.00	$989.76
115459	2' X 2' LED Stainless Steel Gasketed Clean Room w/Inverted Pattern Acrylic lens	EA	$223.50	$752.04	$0.00	$975.54
115460	2' X 2' Lithonia SRTL LED Clean Room LED Troffers Recessed	EA	$178.80	$453.50	$0.00	$632.30
115461	1' X 4' Lithonia SRTL LED Clean Room LED Troffers Recessed	EA	$178.80	$524.58	$0.00	$703.38
115462	2' X 4' Lithonia SRTL LED Clean Room LED Troffers Recessed	EA	$178.80	$595.66	$0.00	$774.46
	26-56-00 Exterior Lighting					
	26-55-68 Athletic Field Lighting					
115463	Ephesus Lighting 600W LED	EA	$357.60	$2,303.04	$0.00	$2,660.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115464	Relocate Field Lighting Pole	EA	$7,152.08	$7,392.47	$0.00	$14,544.55
115465	Hubbell SLAL LED Sports Lighting	EA	$357.60	$1,202.70	$0.00	$1,560.30
115466	Hubbell LED High Bay Pool Lighting	EA	$223.50	$710.81	$0.00	$934.31
115467	Basketball Court Lighting	EA	$2,145.62	$5,629.65	$0.00	$7,775.27
115468	IPL Lighting EDV High Bay Pendants	EA	$268.20	$217.51	$0.00	$485.71
115469	40' Wooden Field Lighting Pole, Crossarm, with 6 heads	EA	$3,576.04	$38,810.47	$0.00	$42,386.51
115470	40' Steel Field Lighting Pole with Foundation	EA	$3,576.04	$59,850.58	$0.00	$63,426.62
115471	60' Steel Field Lighting Pole with Foundation	EA	$4,291.25	$74,066.87	$0.00	$78,358.12
115472	80' Steel Field Lighting Pole with Foundation	EA	$5,721.66	$97,381.58	$0.00	$103,103.24
115473	85' Steel Field Lighting Pole with Foundation	EA	$5,721.66	$101,504.30	$0.00	$107,225.96
115474	300W LED Racket Court Lighting	EA	$223.50	$621.25	$0.00	$844.75
115475	20' 4" round Court Lighting Poles	EA	$715.21	$706.54	$0.00	$1,421.75
	26-56-19 LED Exterior Lighting					
115476	LED Surface Mounted Canopy Lights LED Point Source Surface	EA	$178.80	$254.47	$0.00	$433.27
115477	Exterior Two Headed Wall Mounted LED Flood LED Point Source Recessed	EA	$268.20	$268.69	$0.00	$536.89
115478	LED Exterior Wall Mounted Down Lights LED Point Source Recessed	EA	$178.80	$528.85	$0.00	$707.65
115479	6" Round Recessed Can Exterior Location LED 39W LED Point Source Recessed	EA	$178.80	$325.56	$0.00	$504.36
115480	4" Exterior recessed LED Downlight LED Point Source Recessed	EA	$178.80	$324.13	$0.00	$502.93
115481	5" Exterior recessed LED Downlight LED Point Source Recessed	EA	$178.80	$325.56	$0.00	$504.36
115482	LED Exterior Light Fixture - Linear, Recessed, Lumenfacade 2.5" X 4" Color Changing	LF	$44.70	$525.29	$0.00	$569.99
115483	LED Exterior Light Fixture - Linear, Recessed, Lumenfacade Grand	EA	$178.80	$779.05	$0.00	$957.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115484	LED Exterior Light Fixture - Linear, Recessed, Lumenfacade Continuous Tunable White	LF	$26.82	$226.04	$0.00	$252.86
115485	LED Exterior Light Fixture - Linear, Recessed, Lumenfacade 4' Color Changing	EA	$178.80	$1,813.99	$0.00	$1,992.79
115486	LED Exterior Light Fixture - Linear, Recessed, Lumenfacade Color Changing	LF	$44.70	$453.22	$0.00	$497.92
115487	Continuous Exterior Linear LED 10W/LF LED Linear Recessed	LF	$26.82	$95.68	$0.00	$122.50
115488	8' X 4" LED Exterior Linear w/Satin Lens LED Linear Recessed	EA	$268.20	$870.04	$0.00	$1,138.24
115489	Exterior LED Cantilevered Surface Mounted Cove LED Wall Surface	EA	$223.50	$511.08	$0.00	$734.58
115490	FCC 410P Exterior Location 4" Cylinder LED Wall Mounted Fixture LED Wall Surface	EA	$223.50	$516.05	$0.00	$739.55
115491	Exterior Location Wall Mounted LED Lantern LED Wall Surface	EA	$178.80	$331.24	$0.00	$510.04
115492	LED Wall Light Fixture - Surface Mounted, Sconce, Lithonia Ollwu Exterior LED Wall Surface	EA	$223.50	$241.68	$0.00	$465.18
115493	LED Wall Light Fixture - Surface Mounted, GVA Lighting STR9 Exterior Wall Washer Linear LED Wall Recessed	EA	$178.80	$644.00	$0.00	$822.80
115494	LED Parking Lot Fixture 104W LED Utility Recessed	EA	$178.80	$958.18	$0.00	$1,136.98
115495	Exterior Recessed Stainless Steal LED Up Light LED Utility Recessed	EA	$178.80	$240.25	$0.00	$419.05
115496	Exterior mounted LED Slot LED Utility Recessed	EA	$178.80	$496.15	$0.00	$674.95
115497	LED Parking Deck Fixture - McGraw Edison 56W 3500K LED Utility Surface	EA	$178.80	$781.89	$0.00	$960.69
115498	LED Parking Deck Fixture - LSI 68W 5000K, 4000 Lumens LED Utility Surface	EA	$178.80	$604.20	$0.00	$783.00
115499	LED Parking Deck Fixture - Hubbell Sedona LED Utility Surface	EA	$178.80	$909.84	$0.00	$1,088.64
115500	LED Parking Deck Fixture - 56W 5000K, 4000 Lumens LED Utility Surface	EA	$178.80	$959.60	$0.00	$1,138.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115501	LED Parking Deck Fixture - 56W 5000K, 4000 Lumens w/PC LED Utility Surface	EA	$178.80	$980.93	$0.00	$1,159.73
115502	16' Light Support Pole w/mounting brackets LED Utility Surface	EA	$178.80	$149.27	$0.00	$328.07
115503	Pole Mounted LED Flood Light LED Utility Surface	EA	$134.10	$126.52	$0.00	$260.62
115504	Teka Beacon Exterior Surface Mounted LED 12" Shade LED Utility Surface	EA	$178.80	$496.15	$0.00	$674.95
115505	Teka Large Beacon Exterior Surface Mounted LED 27" Shade LED Utility Surface	EA	$178.80	$587.13	$0.00	$765.93
115506	Exterior Surface Mounted LED Gardco 101L LED Utility Surface	EA	$178.80	$481.93	$0.00	$660.73
115507	Exterior Surface Mounted LED Gardco SFC LED Utility Surface	EA	$223.50	$1,319.27	$0.00	$1,542.77
115508	Cree KR4 4" Exterior LED Down Light LED Utility Surface	EA	$134.10	$197.61	$0.00	$331.71
115509	LED Exterior Backlighting Dome Light	EA	$178.80	$547.27	$0.00	$726.07
115510	Qtran FlexRound Series Continuous LED Linear LED Linear Surface	LF	$44.70	$128.45	$0.00	$173.15
115511	250-Watt High Pressure Sodium (HPS) Exterior Pole Light to LED Retrofit Kit Clean both sides of lens and fixture, remove bulb, ballast and install new bulb. Includes recycling of old bulb.	EA	$75.45	$246.68	$0.00	$322.13
115512	100-Watt Low Pressure Sodium (LPS) Exterior Pole Light to LED Retrofit Kit Clean both sides of lens and fixture, remove bulb, ballast and install new bulb. Includes recycling of old bulb.	EA	$65.62	$193.66	$0.00	$259.28
115513	LED Exterior Wall Pack - Lithonia WPX1 P1 30K MVOLT DDBXD	EA	$178.80	$242.97	$0.00	$421.77

27-00-00 Communications

27-00-00 Communications

27-05-00 Common Work Results for Communications

27-05-13 Communications Wireless and Antenna Systems

115514	Roof Penetration (Pitch Pan)	EA	$357.60	$231.41	$0.00	$589.01
115515	MATV Amplifier	EA	$178.80	$1,084.02	$0.00	$1,262.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115516	HD Antenna	EA	$178.80	$149.23	$0.00	$328.03
115517	HD Antenna Tripod	EA	$715.21	$267.06	$0.00	$982.27
115518	HD Antenna Tuner	EA	$178.80	$235.64	$0.00	$414.44
115519	RG 6 Coax Cable (Broadband)	LF	$1.78	$0.93	$0.00	$2.71
	27-05-28 Communications Conduits, Raceways and Supports					
115520	1" Plenum INNERDUCT	LF	$3.58	$1.32	$0.00	$4.90
115521	1" INNERDUCT Connectors	EA	$8.94	$1.95	$0.00	$10.89
115522	EZ Path Assemblies	EA	$268.20	$425.14	$0.00	$693.34
115523	2" Firestop Sleeve Hilti CP 653 2365150 or Equal	EA	$89.40	$369.00	$0.00	$458.40
115524	4" Firestop Sleeve Hilti CP 653 2365151 or Equal	EA	$89.40	$408.00	$0.00	$497.40
115525	Bridle Rings with Saddle	EA	$17.88	$4.14	$0.00	$22.02
115526	J Hooks	EA	$17.88	$7.73	$0.00	$25.61
115527	110 Block	EA	$89.40	$45.57	$0.00	$134.97
115528	Cable Pulling String or Tape	LF	$0.54	$0.16	$0.00	$0.70
115529	Data Lightning Protection Device	EA	$49.83	$163.14	$0.00	$212.97
	27-05-33 Communications Outlets					
115530	OUTLET 2-PORT, 2 Data Single gang two port plate with two RJ45 jacks, and two terminations	EA	$89.40	$31.00	$0.00	$120.40
115531	OUTLET 4-PORT, 2 Data and 1 Voice Two gang plate, with two RJ45 jacks, one RJ11 Jack, one Blank, and three terminations	EA	$89.40	$39.00	$0.00	$128.40
115532	OUTLET 4-PORT, 2 Data and 2 Blank Single gang Plate with two RJ45 Jacks, Two Blanks, and Two Terminations	EA	$89.40	$34.72	$0.00	$124.12
115533	OUTLET 6 PORT, 4 Data and 2 Voice Two gang Plate with Four RJ45 Jacks, Two RJ11 Jacks, and six Terminations	EA	$178.80	$58.00	$0.00	$236.80
115534	OUTLET Plate 2-PORT	EA	$44.70	$8.92	$0.00	$53.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115535	OUTLET 2-PORT, 1 Data, 1 Blank Single gang PLate with one RJ45 Jack, one Blank, and One Termination	EA	$89.40	$33.00	$0.00	$122.40
115536	OUTLET 2-PORT, 2 Data Single Gang Plate with two RJ45 Jacks, and Two Terminations	EA	$89.40	$41.65	$0.00	$131.05
115537	OUTLET 4-PORT, 3 Data, 1 Blank Single Gang Plate with Three RJ45 Jacks, One Blank, and Three Terminations	EA	$178.80	$38.00	$0.00	$216.80
115538	OUTLET 4-PORT, 4 Data Single Gang Plate with Four RJ45 Jacks, and Four Terminations	EA	$180.46	$55.04	$0.00	$235.50
115539	OUTLET 6 PORT, 6 Data Two Gang Plate with Six RJ45 Jacks, and Six Terminations	EA	$202.49	$56.00	$0.00	$258.49
115540	OUTLET 1-PORT, USB	EA	$134.10	$18.00	$0.00	$152.10
115541	OUTLET 1-PORT, BNC - RG6	EA	$89.40	$13.38	$0.00	$102.78
115542	Communication Device Labeling .5" X 1.5" (Tape style label maker)	EA	$116.04	$2.62	$0.00	$118.66
	27-10-00 Communications Structured Cabling					
	27-15-00 Communications Horizontal Cabling					
	27-15-16 Voice Communications Cabling					
115543	25 PR Cat6 UTP	LF	$0.90	$1.56	$0.00	$2.46
115544	50 PR CAT6 UTP	LF	$8.94	$2.97	$0.00	$11.91
115545	100 PR CAT 6 UTP	LF	$8.05	$8.02	$0.00	$16.07
115546	300 PR CAT 3 UTP	LF	$8.94	$10.17	$0.00	$19.11
115547	1300 PR CAT 6 UTP	LF	$17.88	$36.35	$0.00	$54.23
115548	Cat5e Plenum Cable	LF	$1.43	$0.46	$0.00	$1.89
115549	Cat6 Plenum Cable	LF	$1.35	$0.52	$0.00	$1.87
115550	Cat6a Plenum Cable - Small Diameter W/ATX Mitigation	LF	$1.43	$0.65	$0.00	$2.08
115551	Cat6a Plenum Cable - Shielded	LF	$1.35	$0.71	$0.00	$2.06
115552	Cat6a Plenum Cable - Belkin 14' Patch Cable	EA	$17.88	$14.35	$0.00	$32.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115553	Cat6a Plenum Cable - Test	EA	$21.04	$0.00	$0.00	$21.04
115554	Cat6a Plenum Cable - Terminate and Test on RJ45 per 568B	EA	$22.34	$20.87	$0.00	$43.21
115555	Label Both Ends of Cat Cable	EA	$62.19	$4.23	$0.00	$66.42
115556	Label Communications Faceplate	EA	$38.87	$4.23	$0.00	$43.10
115557	1 Meter Duplex ST to ST Fiber Optic Patch Cable Allen Tel # GBST2-D1-01 or equal	EA	$17.88	$39.43	$0.00	$57.31
115558	12 strand fiber cable prep, splice tray, plate, pigtail and labels	EA	$425.29	$324.49	$0.00	$749.78
115559	2 Panel Wall Mounted Fiber Optic Enclosure Corning WCH-02P or equal	EA	$357.64	$241.67	$0.00	$599.31
115560	4 Panel Wall Mounted Fiber Optic Enclosure Corning WCH-04P or equal	EA	$357.64	$361.98	$0.00	$719.62
115561	Fiber Optic Cable Test per strand OTDR - Bi-Directional with Documentation	EA	$68.60	$0.00	$0.00	$68.60
115562	Splice-On Connector - Single-Mode OS2 LC UPC, 900 µm. Corning FuseLite 2 FL2-LCU-900-SM-6 or Equal	EA	$21.15	$21.20	$0.00	$42.35
115563	Splice-On Connector - Multimode OM4 LC, 900 µm. Corning FuseLite 2 FL2-LC-900-OM4-6 or Equal	EA	$21.15	$22.30	$0.00	$43.45
115564	USB Double Ended Cat6 Patch Cable	LF	$1.78	$0.83	$0.00	$2.61
115565	RG 6 Coax Cable (Broadband)	LF	$1.78	$0.77	$0.00	$2.55
115566	PS - 2 Connector	EA	$22.34	$10.07	$0.00	$32.41
115567	BNC Connector	EA	$22.34	$5.72	$0.00	$28.06
115568	N Connector	EA	$22.34	$6.14	$0.00	$28.48
115569	RG 11 Trunk Line	LF	$1.78	$1.43	$0.00	$3.21
115570	RG 59 Trunk Line	LF	$1.78	$0.90	$0.00	$2.68
115571	Terminate and Test ES485 to DB9	EA	$67.04	$10.40	$0.00	$77.44
115572	Terminate T1 (2Shd Pr) on RJ48X	EA	$178.80	$679.48	$0.00	$858.28
115573	6 Strand Fiber Optic Cable - Type 50/125 Multimode	LF	$1.78	$1.28	$0.00	$3.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115574	12 Strand Fiber Optic Cable - Type 50/125 6 Single-Mode / 6 Multimode	LF	$1.78	$4.92	$0.00	$6.70
115575	24 Strand Fiber Optic Cable - Type 50/125 Multimode	LF	$1.78	$7.72	$0.00	$9.50
115576	24 Strand Fiber Optic Cable - Type 50/125 Single-Mode	LF	$1.78	$7.72	$0.00	$9.50
115577	152 Strand Fiber Optic Cable - Type 50/125 76 Single-Mode / 76 Multimode	LF	$1.97	$21.21	$0.00	$23.18
115578	6 Strand Fiber Optic Cable - Single-Mode Plenum Rated	LF	$1.93	$3.00	$0.00	$4.93
115579	6 Strand Fiber Optic Cable - Single-Mode Armored Plenum Rated	LF	$1.93	$3.50	$0.00	$5.43
115580	12 Strand Fiber Optic Cable - Single-Mode OS2 Indoor, Tight-Buffered, Plenum Rated, Interlocking Armor. Corning MIC 012E88-33131-A3 or Equal	LF	$1.99	$3.69	$0.00	$5.68
115581	12 Strand Fiber Optic Cable - Single-Mode OS3 Indoor, Tight-Buffered, Plenum Rated, Interlocking Armor. Corning MIC or Equal	LF	$1.99	$4.25	$0.00	$6.24
115582	12 Strand Fiber Optic Cable - Multimode OM4 Indoor, Tight-Buffered, Plenum Rated, Interlocking Armor. Corning MIC 012T88-33190-A3 or Equal	LF	$1.99	$5.50	$0.00	$7.49
115583	12 Strand Fiber Optic Cable - Multimode OM5 Indoor, Tight-Buffered, Plenum Rated, Interlocking Armor. BELDEN FI5D012A9 or Equal	LF	$1.99	$7.57	$0.00	$9.56
115584	24 Strand Fiber Optic Cable - Single-Mode Plenum Rated	LF	$2.23	$6.00	$0.00	$8.23
115585	24 Strand Fiber Optic Cable - Single-Mode Armored Plenum Rated	LF	$2.23	$7.80	$0.00	$10.03
115586	48 Strand Fiber Optic Cable - 24 Single-Mode / 24 Multimode	LF	$1.78	$8.96	$0.00	$10.74
115587	96 Strand Fiber Optic Cable - Single-Mode Indoor/Outdoor	LF	$2.68	$17.91	$0.00	$20.59
115588	96 Strand Fiber Optic Cable - 48 Single-Mode / 48 Multimode	LF	$2.68	$20.69	$0.00	$23.37

27-20-00 Data Communications

27-21-00 Data Communications Network Equipment

27-21-33 Data Communications Wireless Access Points

115589	Triplite Locking WAP Enclosure	EA	$0.00	$190.01	$0.00	$190.01

27-30-00 Voice Communications

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	27-32-00 Voice Communications Systems					
	27-32-13 Voice Communications Equipment					
115590	Oberon 1006-CC0AP3800	EA	$89.40	$95.95	$0.00	$185.35
115591	Plywood Backboard, Fire Retardant Floor	EA	$178.80	$173.29	$0.00	$352.09
115592	Plywood Backboard, Fire Retardant MAIN	EA	$178.80	$315.09	$0.00	$493.89
115593	Oberton 1047 LPDome	EA	$134.10	$324.33	$0.00	$458.43
115594	Oberton 1012 Wall	EA	$134.10	$157.88	$0.00	$291.98
115595	WAP Device (POE)	EA	$107.28	$1,300.51	$0.00	$1,407.79
115596	Wireless Controller	EA	$1,430.42	$37,075.04	$0.00	$38,505.46
115597	Cisco IP Phone 8811	EA	$89.40	$142.84	$0.00	$232.24
115598	Cisco C3560CX (Switch)	EA	$980.03	$2,918.38	$0.00	$3,898.41
115599	24-Port Patch Panel - Cat6a	EA	$134.10	$499.29	$0.00	$633.39
115600	48-Port Patch Panel - Cat6a	EA	$134.10	$562.19	$0.00	$696.29
115601	48-Port Patch Panel - QUICKPORT High-Density 1RU Keystone LEVITON 49255-V48 or Equal	EA	$134.10	$139.00	$0.00	$273.10
115602	48-Port Patch Panel - QUICKPORT 2U Keystone w/Magnifying Lense Label Holder LEVITON 49255-L48 or Equal	EA	$134.10	$79.00	$0.00	$213.10
115603	TPE-2840ws 24-PORT, PoE Switch	EA	$309.70	$279.99	$0.00	$589.69
115604	24" X 36" Data Cabinet w/ Front and Rear Access	EA	$715.21	$1,450.10	$0.00	$2,165.31
115605	Network Cabinet - 3-Section, Double Hinged, Stainless Steel, NEMA Type 4, 12 Outdoor, Mounts up to 26 RU of Equipment w/4K BTU/HR AC Solid Door AC, 48.54" x 23.62" x 31.06", NVENT HOFFMAN PtHS482430G4A or Equal.	EA	$1,276.65	$12,244.86	$0.00	$13,521.51
115606	Cable Management for Racks	EA	$357.60	$450.05	$0.00	$807.65
115607	Rack IU Brush	EA	$66.39	$19.26	$0.00	$85.65
115608	19" Enclosed Wall Mounted Rack	EA	$178.80	$446.97	$0.00	$625.77

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115609	19" Tripp Lite 15U Wall Mounted Rack	EA	$178.04	$729.00	$0.00	$907.04
115610	Cable Management Rack Midatlantic CK-45E	EA	$534.13	$479.94	$0.00	$1,014.07
115611	19" Floor Mount Rack	EA	$536.41	$601.10	$0.00	$1,137.51
115612	30" Enclosed Data Rack Wire Management	EA	$357.60	$2,387.72	$0.00	$2,745.32
115613	ServerRack - 4-Post Adjustable Steel 84" High, 45 Ring Main Unit (RMU), 29.53" to 35.43" Deep Channel, #12-24 Threaded Mounting Holes. Chatsworth 15217-703 or Equal.	EA	$536.41	$1,196.27	$0.00	$1,732.68
115614	Vertical Wall Bracket, Flush Mount, Mounts up to 3U of Equipment Chatsworth 11583-719 or Equal.	EA	$89.40	$191.14	$0.00	$280.54
115615	Vertical Wall Bracket, Flush Mount, Mounts up to 6U of Equipment Chatsworth 11754-719 or Equal.	EA	$89.40	$237.07	$0.00	$326.47
115616	96-Port Connector Mount - REVConnect Wall-Mount, 10GX System Belden RVUXCMT96E or Equal.	EA	$178.80	$221.80	$0.00	$400.60
115617	16-Port Connector Mount - REVConnect Wall-Mount, 10GX System Belden RVUXCCM16E or Equal.	EA	$89.40	$78.70	$0.00	$168.10
115618	72-Port GigaBIX Termination Kit Belden AX101470 or Equal.	EA	$22.34	$269.96	$0.00	$292.30
115619	Cat5e Plenum Cable - 24 AWG Copper, 25 Pair, FEP/FRPVC SUPERIOR ESSEX 51-478-38 or Equal.	LF	$0.90	$9.67	$0.00	$10.57

27-40-00 Audio-Video Communications

27-41-00 Audio-Video Communications Systems

27-41-16 Audio-Video Communications Equipment

115620	Shure BLX14R Transmitter	EA	$178.80	$719.45	$0.00	$898.25
115621	Shure ULXD4D Receiver	EA	$223.50	$3,939.31	$0.00	$4,162.81
115622	Shure SM35 TQG Headset Mic	EA	$22.34	$155.69	$0.00	$178.03
115623	Shure CVL-B/G Lavalier Microphone	EA	$89.40	$61.33	$0.00	$150.73
115624	Shure ULX1 Wireless Body Pack	EA	$89.40	$699.79	$0.00	$789.19
115625	Shure Ceiling Mounted Microphones	EA	$178.80	$281.49	$0.00	$460.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115626	Shure Hand Held Wireless Microphones	EA	$89.40	$391.57	$0.00	$480.97
115627	Shure Beltpack Wireless Microphones (ULXD)	EA	$89.40	$699.79	$0.00	$789.19
115628	Shure Tabletop Microphones (522)	EA	$89.40	$215.45	$0.00	$304.85
115629	Community ENT 220	EA	$178.80	$1,616.61	$0.00	$1,795.41
115630	Community R.2.5	EA	$178.80	$746.98	$0.00	$925.78
115631	Sound Tube HP129A	EA	$223.50	$1,220.32	$0.00	$1,443.82
115632	TLM-W Bi-directional Speakers	EA	$178.80	$385.28	$0.00	$564.08
115633	JBL-16CT Speakers	EA	$89.40	$246.90	$0.00	$336.30
115634	Yamaha C115VA Gym Speakers	EA	$178.80	$602.81	$0.00	$781.61
115635	Yamaha VXC-8 Speakers	EA	$178.80	$602.81	$0.00	$781.61
115636	Yamaha VXC-6 Speakers	EA	$178.80	$380.04	$0.00	$558.84
115637	Yamaha VXC-4 Speakers	EA	$178.80	$313.21	$0.00	$492.01
115638	Yamaha VXS-8 Speakers	EA	$178.80	$665.72	$0.00	$844.52
115639	Electro-Voice EVID	EA	$89.40	$300.11	$0.00	$389.51
115640	Klipsch AW650 All Weather Speaker	EA	$268.20	$486.19	$0.00	$754.39
115641	Shure UA 221	EA	$134.10	$184.78	$0.00	$318.88
115642	Shure UA 844SW	EA	$134.10	$622.48	$0.00	$756.58
115643	Shure UAB	EA	$134.10	$91.02	$0.00	$225.12
115644	Lowell ACSPR RPCI 2009	EA	$178.80	$895.06	$0.00	$1,073.86
115645	Lowell ASP VTE 2002	EA	$134.10	$528.12	$0.00	$662.22
115646	Listen Tech LA-122	EA	$89.40	$136.28	$0.00	$225.68
115647	Listen Tech LT 800-216	EA	$178.80	$994.66	$0.00	$1,173.46
115648	QSC Q System Core	EA	$536.41	$1,440.21	$0.00	$1,976.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115649	QSC System 5/8	EA	$178.80	$73.29	$0.00	$252.09
115650	QSC AD S12	EA	$357.60	$1,047.07	$0.00	$1,404.67
115651	QSC SPA 2-200	EA	$357.60	$863.60	$0.00	$1,221.20
115652	Areotech UNBT2A EXP	EA	$178.80	$522.88	$0.00	$701.68
115653	Denon DN 500BD	EA	$178.80	$522.88	$0.00	$701.68
115654	Infocus Lightshow 4BD	EA	$178.80	$588.41	$0.00	$767.21
115655	D-Link DGs-1008P	EA	$89.40	$108.76	$0.00	$198.16
115656	Liberty DL S41	EA	$178.80	$275.20	$0.00	$454.00
115657	Liberty DL 1H1A1U WPKT	EA	$178.80	$754.84	$0.00	$933.64
115658	Crestron DM-TX-200-C-2G	EA	$89.40	$103.53	$0.00	$192.93
115659	Symetrix Primarysm 8X8 Audio Switcher	EA	$1,430.42	$4,390.11	$0.00	$5,820.53
115660	Crestron DM-RMC-4K-100-C	EA	$357.60	$917.33	$0.00	$1,274.93
115661	Crestron DMPS3-4K-250-C	EA	$1,072.81	$13,474.35	$0.00	$14,547.16
115662	Ducanali 6404 Amplifier	EA	$715.21	$7,206.33	$0.00	$7,921.54
115663	Crestron DM TX 200c	EA	$357.60	$1,711.10	$0.00	$2,068.70
115664	Crestron C2N 10	EA	$134.10	$432.45	$0.00	$566.55
115665	Cisco WS-C3850-48PW-S (POE Switch)	EA	$357.60	$9,009.54	$0.00	$9,367.14
115666	Crestron TSW-752 Media Controller	EA	$357.60	$1,644.78	$0.00	$2,002.38

27-50-00 Distributed Communications and Monitoring Systems

27-51-00 Distributed Audio-Video Communications Systems

27-51-13 Paging Communications Systems

115667	24 Channel Acoustics Processing Matrix type AE1	EA	$4,291.25	$150,508.61	$0.00	$154,799.86
115668	19 Channel Processing Extension	EA	$2,860.83	$62,916.14	$0.00	$65,776.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115669	5 Channel Processing Extension	EA	$715.21	$14,742.90	$0.00	$15,458.11
115670	Speaker Rough In Box	EA	$89.40	$36.19	$0.00	$125.59
115671	Bogen TPU100B Wall Mounted Amplifier	EA	$178.80	$885.88	$0.00	$1,064.68
115672	Bogen C100	EA	$178.80	$595.29	$0.00	$774.09
115673	Door Intercom	EA	$134.10	$299.90	$0.00	$434.00
115674	Intercom System Cabling	LF	$3.58	$0.62	$0.00	$4.20
115675	Rauland Bogan TCU Paging Console	EA	$1,430.42	$11,340.56	$0.00	$12,770.98
115676	Vandal Proof Air Phones Door Intercom	EA	$178.80	$708.30	$0.00	$887.10
115677	Terminal Cabinet	EA	$268.20	$387.31	$0.00	$655.51
115678	Exterior Wall Mounting Bracket	EA	$178.80	$95.28	$0.00	$274.08
115679	Volume Control	EA	$53.64	$64.16	$0.00	$117.80
115680	Call Button	EA	$89.40	$106.93	$0.00	$196.33
115681	Audio System Cabling	LF	$1.35	$0.62	$0.00	$1.97
115682	Paging System (Cat6A) Cabling	LF	$1.35	$0.63	$0.00	$1.98
115683	Rack Mounted Ambient Sound Sensor	EA	$134.10	$366.21	$0.00	$500.31
115684	Rack Mounted Amplifiers	EA	$357.60	$1,053.42	$0.00	$1,411.02
115685	Microphone and stand	EA	$89.40	$339.09	$0.00	$428.49
115686	Intercom Microphone	EA	$89.40	$263.73	$0.00	$353.13
115687	Speakers (Ceiling)	EA	$89.40	$88.91	$0.00	$178.31
115688	Damp Location Speakers	EA	$223.50	$239.62	$0.00	$463.12
115689	GYM Speakers	EA	$223.50	$433.28	$0.00	$656.78
115690	Pool Speakers	EA	$223.50	$550.83	$0.00	$774.33
115691	Klipsch AW-500SM All Weather Loudspeaker	EA	$223.50	$601.31	$0.00	$824.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115692	Paging System UF Cabling	LF	$1.61	$0.84	$0.00	$2.45
115693	All Weather Ground Mounted Loudspeaker	EA	$223.50	$601.31	$0.00	$824.81
115694	Speaker Surface Mounted Horn	EA	$89.40	$102.48	$0.00	$191.88
115695	Speaker (Surface)	EA	$89.40	$94.95	$0.00	$184.35
115696	Speakers (Assisted Listening)	EA	$89.40	$194.41	$0.00	$283.81
115697	Bi-Direction Speakers	EA	$134.10	$357.17	$0.00	$491.27
115698	Speakers (A/V Ceiling Type)	EA	$89.40	$274.29	$0.00	$363.69
115699	Speakers (Wall)	EA	$178.80	$143.17	$0.00	$321.97
115700	Speakers (Faceplates)	EA	$89.40	$25.77	$0.00	$115.17
115701	Table Top Speaker	EA	$89.40	$477.74	$0.00	$567.14
115702	Exterior Loud Speaker (WP)	EA	$178.80	$197.43	$0.00	$376.23
115703	70V Paging System Cabling	LF	$1.35	$0.85	$0.00	$2.20
115704	Push to Talk Switch	EA	$89.40	$51.32	$0.00	$140.72
115705	Sound Masking Speakers	EA	$89.40	$214.00	$0.00	$303.40
115706	Zenitel Master station	EA	$491.71	$2,670.76	$0.00	$3,162.47
115707	Zenitel Intercom station	EA	$447.00	$1,463.81	$0.00	$1,910.81
115708	Zenitel Paging Adaptor	EA	$447.00	$796.77	$0.00	$1,243.77
115709	Zenitel Intelligent Gateway	EA	$491.71	$3,627.40	$0.00	$4,119.11
115710	HP Fiber Transceiver Module	EA	$89.40	$503.23	$0.00	$592.63
115711	IP over UTP Extender	EA	$178.80	$222.78	$0.00	$401.58
	27-51-26 Assistive Listening Communications Systems					
115712	Wireless Head Sets	EA	$22.34	$263.73	$0.00	$286.07
115713	Speaker Cabling	EA	$1.78	$0.72	$0.00	$2.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115714	Wall Jacks	EA	$178.80	$149.69	$0.00	$328.49
115715	Head Sets	EA	$22.34	$188.38	$0.00	$210.72
115716	Ceiling Mounted Wir TX9 Assisted Listening Emitter	EA	$357.60	$1,243.32	$0.00	$1,600.92
115717	Williams sound PPA T45 Transmitter	EA	$357.60	$1,152.89	$0.00	$1,510.49
115718	Williams Sound PPA R37 Receiver	EA	$22.34	$167.28	$0.00	$189.62
115719	Extron MPA 152 Amplifier	EA	$268.20	$435.54	$0.00	$703.74
115720	Omnidirectional Emitter Assisted Listening System	EA	$7,152.08	$17,409.47	$0.00	$24,561.55
115721	Sound Field Cabinet	EA	$715.21	$1,505.55	$0.00	$2,220.76
115722	Sound Field Speakers	EA	$89.40	$400.88	$0.00	$490.28
	27-52-00 Healthcare Communications and Monitoring Systems					
	27-52-23 Nurse Call Communications Systems					
115723	Anti-Ligature Door Assembly	EA	$357.60	$3,628.35	$0.00	$3,985.95
115724	Single bedside unit with Intercom, and Pillow Speakers	EA	$178.80	$864.09	$0.00	$1,042.89
115725	Dual Bedside Station w/ Intercom	EA	$357.60	$1,334.44	$0.00	$1,692.04
115726	Toilet / Dressing Room Station	EA	$178.80	$337.70	$0.00	$516.50
115727	Bath/Shower Station	EA	$178.80	$337.70	$0.00	$516.50
115728	Code Blue Station	EA	$178.80	$249.93	$0.00	$428.73
115729	Dome Light	EA	$178.80	$296.05	$0.00	$474.85
115730	Patient Light Assembly	EA	$178.80	$269.26	$0.00	$448.06
115731	Duty Station	EA	$268.20	$1,236.25	$0.00	$1,504.45
115732	Staff Station	EA	$178.80	$501.34	$0.00	$680.14
115733	Staff Emergency Station	EA	$178.80	$513.39	$0.00	$692.19
115734	Staff Emergency Push Button	EA	$178.80	$367.46	$0.00	$546.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115735	Staff Register Station	EA	$134.10	$478.29	$0.00	$612.39
115736	Zone Dome Light	EA	$178.80	$316.88	$0.00	$495.68
115737	Code Blue Zone Dome Light	EA	$178.80	$265.30	$0.00	$444.10
115738	Room Occupied Status	EA	$178.80	$199.60	$0.00	$378.40
115739	Hillrom Room Controller	EA	$178.80	$265.30	$0.00	$444.10
115740	Psychiatric Patient Station	EA	$178.80	$531.84	$0.00	$710.64
115741	Speaker / Microphone Ceiling Mt	EA	$178.80	$411.58	$0.00	$590.38
115742	Psychiatric Toilet Station	EA	$178.80	$479.03	$0.00	$657.83
115743	Psychiatric Bath Station	EA	$178.80	$416.54	$0.00	$595.34
115744	Psychiatric Key Station	EA	$178.80	$1,457.91	$0.00	$1,636.71
115745	Psychiatric Dome Light	EA	$178.80	$278.19	$0.00	$456.99
115746	Nurse Call Digital Annunciator	EA	$715.21	$4,552.61	$0.00	$5,267.82
115747	EZCMD121 w/Controller and Cable Harness	EA	$1,430.42	$15,555.91	$0.00	$16,986.33
115748	Nurse Call Cat6a Cabling	LF	$1.35	$0.65	$0.00	$2.00
115749	Nurse Call Cat6a 25' Patch Cord	EA	$44.70	$21.99	$0.00	$66.69
115750	Entertainment Station	EA	$178.80	$860.20	$0.00	$1,039.00
115751	Nurse Call Equipment Cabinet	EA	$715.21	$1,725.12	$0.00	$2,440.33
115752	Nurse Call Server	EA	$1,430.42	$25,313.75	$0.00	$26,744.17
115753	Nurse Master Annunciator	EA	$715.21	$4,403.21	$0.00	$5,118.42
115754	Nurse Master (LCD Display)	EA	$1,430.42	$13,209.63	$0.00	$14,640.05
115755	Telemetry Device	EA	$178.80	$409.11	$0.00	$587.91
115756	OUTLET 2-PORT, PM	EA	$134.10	$58.02	$0.00	$192.12
115757	Room Control Board	EA	$178.80	$220.18	$0.00	$398.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115758	3000 Watt 208V 1Ph Rack Mount UPS	EA	$357.60	$3,498.47	$0.00	$3,856.07
115759	Rack Mount 48 Port POE Switch	EA	$715.21	$10,449.77	$0.00	$11,164.98
115760	Tripp Lite 8 Port KVM POE Switch	EA	$309.70	$904.00	$0.00	$1,213.70
115761	Room Status Master	EA	$357.60	$812.01	$0.00	$1,169.61
115762	Room Status Station	EA	$178.80	$221.91	$0.00	$400.71
115763	4C Plenum Rated Cabling	LF	$1.35	$0.43	$0.00	$1.78
115764	Room Status Station Back Box	EA	$178.80	$68.19	$0.00	$246.99
115765	RTLS System	SF	$4.47	$2.83	$0.00	$7.30
	27-53-00 Distributed Communications Systems					
	27-53-13 Clock Communications Systems					
115766	Pyramid Wireless, Battery Operated 17" Clock	EA	$67.04	$247.68	$0.00	$314.72
115767	Pyramid Model 5200 13" Clock	EA	$67.04	$282.70	$0.00	$349.74
115768	Pyramid Time Trax Sync 7000 Master Clock Controller	EA	$357.60	$1,852.87	$0.00	$2,210.47
115769	Time Clock	EA	$178.80	$842.44	$0.00	$1,021.24
115770	Clocks--Wire Guard Standard 12"	EA	$89.40	$78.37	$0.00	$167.77
115771	Two Sided 12" Clocks	EA	$89.40	$167.28	$0.00	$256.68
115772	Clocks / Speaker Combo	EA	$89.40	$177.83	$0.00	$267.23
115773	Clocks -15" system	EA	$89.40	$245.65	$0.00	$335.05
115774	Clocks System (Cat6A) Cabling	LF	$1.35	$0.63	$0.00	$1.98
115775	Clocks System Rack Equipment	EA	$178.80	$1,733.11	$0.00	$1,911.91
115776	18" Digital Time Elapsed Clock	EA	$89.40	$179.34	$0.00	$268.74
115777	Digital lane Timmer	EA	$715.21	$4,998.89	$0.00	$5,714.10

28-00-00 Electronic Safety and Security

28-00-00 Electronic Safety and Security

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	28-05-00 Common Work Results for Electronic Safety and Security					
	28-05-00 Common Work Results for Electronic Safety and Security					
115778	Area of Refuge Vandal resistant Intercom	EA	$360.21	$673.17	$0.00	$1,033.38
115779	Area of Refuge Annunciator	EA	$692.05	$3,172.67	$0.00	$3,864.72
115780	Area of Refuge Vandal Lighted Sign	EA	$181.00	$225.77	$0.00	$406.77
	28-10-00 Safety and Security Access Control					
	28-13-00 Access Control Software and Database Management					
	28-13-11 Access Control Software					
115781	Access Control Programing - Biometric	EA	$10,728.12	$19,460.63	$0.00	$30,188.75
115782	Access Control Test and Certification	EA	$7,152.08	$0.15	$0.00	$7,152.23
115783	Access Control Service Contract - Visitor Management Yerkada SWhipe or Equal	YR	$89.40	$1,729.83	$0.00	$1,819.23
115784	Access Control Visitor Management System Yerkada SWhipe or Equal	EA	$715.21	$5,785.64	$0.00	$6,500.85
115785	Access Control Software Bosch SE2010 or Equal	EA	$3,576.04	$5,862.52	$0.00	$9,438.56
115786	Access Control Central Station Interface Bosch or Equal	EA	$715.21	$419.03	$0.00	$1,134.24
	28-14-00 Access Control System Hardware					
	28-14-11 Access Control Network Controllers					
115787	Access Control Controller - Intelligent DSX Access Systems DSX-1042 or Equal	EA	$2,860.83	$5,758.91	$0.00	$8,619.74
115788	Access Control Controller - Expansion Module Bosch B208 or Equal	EA	$227.98	$76.37	$0.00	$304.35
115789	Access Control Controller - Communication Board Accelaterm or Equal	EA	$116.14	$49.00	$0.00	$165.14
115790	Access Control Controller - Control Panel Bosch D7412GV4 or Equal	EA	$357.60	$340.93	$0.00	$698.53
115791	Access Control Controller - Alarm Panel with Preprogramed Digit Communicator AES or Equal	EA	$316.85	$1,395.46	$0.00	$1,712.31
115792	Access Control Controller - Network Switch	EA	$2,145.62	$3,430.84	$0.00	$5,576.46
115793	Access Control Controller - Audio / Video Master Station Aiphone JK-1MED or Equal	EA	$223.50	$753.91	$0.00	$977.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115794	Access Control Controller - Power Supply w/ Enclosure and Charger, 6A Altronix Maximal or Equal	EA	$715.21	$1,022.18	$0.00	$1,737.39
115795	Access Control Controller - Power Supply w/ Enclosure and Charger, 4A Altronix SMP5CTX or Equal	EA	$357.60	$388.86	$0.00	$746.46
115796	Access Control Controller - Power Supply w/ Enclosure, 150W LifeSafety Power - FPO150-B100D8M8NL4E4S or Equal	EA	$357.60	$1,273.86	$0.00	$1,631.46
115797	Access Control Controller - Battery, 12V 12AH	EA	$19.65	$46.01	$0.00	$65.66
115798	Access Control Controller - Battery, 12V 7AH	EA	$19.65	$19.00	$0.00	$38.65
115799	Access Control Controller - Battery, 12V 4AH	EA	$19.65	$15.01	$0.00	$34.66
115800	Access Control Wireless Radio Unit - PTMP Base Station (VEHP207) Siklu MultiHaul MH-B100-CCS-PoE-MWB or Equal	EA	$227.98	$2,935.35	$0.00	$3,163.33
115801	Access Control Wireless Radio Unit - Terminal Unit (VEHP208) Siklu MultiHaul MH-T200-CCC-PoE-MWB or Equal	EA	$227.98	$1,386.00	$0.00	$1,613.98
115802	Access Control Wireless Radio Unit - Terminal Unit (VEHP209) Siklu MultiHaul MH-T200-CNN-PoE-MWB or Equal	EA	$227.98	$932.54	$0.00	$1,160.52
115803	Access Control Wireless Radio Unit - PTMP Terminal Unit CTU (VEHP213) Siklu MultiHaul MH-T201-CNN-PoE-MWB or Equal	EA	$227.98	$588.78	$0.00	$816.76
	28-14-13 Access Control Door Controllers					
115804	Access Control Door Controller Yerkada AC41 or Equal	EA	$178.80	$2,357.56	$0.00	$2,536.36
115805	Access Control Door Controller - Up to 16 Doors Software House iSTAR PRO or Equal	EA	$178.80	$1,217.78	$0.00	$1,396.58
	28-14-19 Access Control Enclosures					
115806	Access Control Cabinet	EA	$1,072.81	$2,234.37	$0.00	$3,307.18
115807	Access Control Cabinet - 11" x 11" x 2.5" NEMA 1 Lockable J-Box	EA	$178.80	$254.31	$0.00	$433.11
115808	Access Control Cabinet - Indoor Bosch AE_100 or Equal	EA	$89.40	$105.50	$0.00	$194.90
115809	Access Control Cabinet - Outdoor Bosch AE_101 or Equal	EA	$89.40	$251.66	$0.00	$341.06
	28-15-00 Integrated Access Control Hardware Devices					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

28-15-11 Integrated Credential Readers and Entry Management

		Units	Labor	Material	Equipment	Total
115810	Access Control Key Card Reader - Standard Mullion Wavelynx Ethos ET10 or Equal	EA	$178.80	$502.23	$0.00	$681.03
115811	Access Control Key Card Reader	EA	$178.80	$1,203.68	$0.00	$1,382.48
115812	Access Control Key Card Reader - Extender Board	EA	$89.40	$982.86	$0.00	$1,072.26
115813	Access Control Key Card Reader Accelaterm or Equal	EA	$957.67	$2,587.00	$0.00	$3,544.67
115814	Access Control Key Card Reader - Expander Card Accelaterm or Equal	EA	$638.46	$1,766.00	$0.00	$2,404.46
115815	Access Control Key Card Reader - RFID Proximity Sensor	EA	$134.10	$304.16	$0.00	$438.26
115816	Access Control Key Card Reader - RFID Proximity Sensor w/ Keypad HID or Equal	EA	$265.52	$477.02	$0.00	$742.54
115817	Access Control Key Card Reader - RFID Proximity Sensor (Weatherproof)	EA	$134.10	$318.57	$0.00	$452.67
115818	Access Control Key Card Reader - RFID Proximity Sensor (Elevator)	EA	$178.80	$332.99	$0.00	$511.79
115819	Access Control Key Card Reader - Double Low/High Stanchion	EA	$357.60	$1,505.03	$0.00	$1,862.63
115820	Access Control Biometric Reader - Thumb Print	EA	$134.10	$498.77	$0.00	$632.87
115821	Access Control Door Reader - Supports Multiple Credentials Yerkada AD32 or Equal	EA	$134.10	$457.36	$0.00	$591.46
115822	Access Control Door Access Hardware - Stand Alone (Hotel / Dorm)	EA	$178.80	$1,146.02	$0.00	$1,324.82
115823	Access Control Video Intercom - Vandal Proof Aiphone JK-1AEDY or Equal	EA	$223.50	$753.91	$0.00	$977.41
115824	Access Control Metal Detector	EA	$715.21	$3,402.42	$0.00	$4,117.63
115825	Access Control Keypad Bosch D1255 or Equal	EA	$268.20	$106.61	$0.00	$374.81
115826	Access Control Cable / Wire - Shielded 18 AWG 2 Conductor (2C/18)	LF	$3.13	$0.67	$0.00	$3.80
115827	Access Control Cable / Wire - Shielded 18 AWG 4 Conductor (4C/18)	LF	$3.13	$0.80	$0.00	$3.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115828	Access Control Cable / Wire - Shielded 18 AWG 6 Conductor (6C/18)	LF	$3.13	$0.93	$0.00	$4.06
115829	Access Control Cable / Wire - 18 AWG 2 Twisted Pair (4 Conductor) Aiphone or Equal	LF	$3.58	$0.37	$0.00	$3.95
115830	Access Control Cable / Wire - Termination	EA	$8.05	$0.13	$0.00	$8.18
115831	Access Control Composite Cable - 4 Element	LF	$1.16	$0.89	$0.00	$2.05
115832	Access Control Conduit - Flexible w/ Junction Box (J Box)	EA	$134.10	$49.02	$0.00	$183.12
	28-15-13 Access Control Credentials					
115833	Access Control Push Button Remote	EA	$1,430.42	$1,599.24	$0.00	$3,029.66
115834	Access Control Escort Receiver Bosch WP or Equal	EA	$178.80	$409.11	$0.00	$587.91
115835	Access Control Escort Receiver Bosch EA 102A-304 or Equal	EA	$178.80	$280.17	$0.00	$458.97
115836	Access Control Personal Transmitter Bosch SE88A 90S-304 or Equal	EA	$8.94	$127.69	$0.00	$136.63
115837	Access Control Personal Transmitter Holster Bosch or Equal	EA	$8.94	$44.70	$0.00	$53.64
115838	Access Control Duress Button	EA	$178.80	$111.45	$0.00	$290.25
	28-15-15 Electrified Locking Devices and Accessories					
115839	Access Control Electric Door Strike	EA	$134.10	$251.54	$0.00	$385.64
115840	Access Control Electromagnetic Lock Schlage M490 or Equal	EA	$178.80	$883.78	$0.00	$1,062.58
115841	Access Control Electromagnetic Lock Sentrol 2505 or Equal	EA	$134.10	$462.55	$0.00	$596.65
115842	Access Control Electromagnetic Lock - 1,200 LB Securitron M62 or Equal	EA	$134.10	$348.00	$0.00	$482.10
115843	Access Control Electromagnetic Lock - 1,200 LB Housing 96" Long. Securitron HVD M62 or Equal	EA	$239.42	$707.00	$0.00	$946.42
115844	Access Control Electromagnetic Lock - 1,800 LB Securitron M82 or Equal	EA	$134.10	$456.00	$0.00	$590.10
115845	Access Control Electromagnetic Lock - 1,800 LB Housing 96" Long. Securitron HVD M82 or Equal	EA	$239.42	$862.00	$0.00	$1,101.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115846	Access Control Push Button Door Release	EA	$134.10	$117.21	$0.00	$251.31
115847	Access Control Door Contacts	EA	$89.40	$76.86	$0.00	$166.26
115848	Access Control Door Contact Module	EA	$357.60	$1,840.98	$0.00	$2,198.58
115849	Access Control Electric Door Relay	EA	$89.40	$208.28	$0.00	$297.68
115850	Access Control Electric Door Strike	EA	$89.40	$278.93	$0.00	$368.33
115851	Access Control Electric Door Power Supply	EA	$89.40	$154.97	$0.00	$244.37
115852	Access Control Sounder Base	EA	$134.10	$220.92	$0.00	$355.02
115853	Access Control Security System Cable	LF	$1.43	$0.54	$0.00	$1.97
115854	Access Control Security System Cable - CAT6 Shielded Plenum Cable	LF	$0.71	$1.05	$0.00	$1.76
115855	Access Control Security System Cable - 16 AWG 4 Conductor Shielded Plenum Cable	LF	$0.71	$1.38	$0.00	$2.09
115856	Access Control Wiegand/Serial Single Gang Reader with 1 year warranty	EA	$134.10	$368.50	$0.00	$502.60
115857	Access Control Priax Mobile Map Units	EA	$0.00	$6,807.33	$0.00	$6,807.33
	28-15-17 Egress Management Devices					
115858	Access Control - Egress Control	EA	$178.80	$123.25	$0.00	$302.05
	28-15-21 Telephone Entry Systems					
115859	Blue Phone Assembly	EA	$1,430.42	$7,155.75	$0.00	$8,586.17
115860	Blue Phone Rough In Assembly	EA	$178.80	$194.42	$0.00	$373.22
	28-16-00 Access Control Interfaces					
	28-16-11 Access Control Interfaces to Access Control Hardware					
115861	Access Control Interface Relay	EA	$178.80	$349.11	$0.00	$527.91
115862	Access Control Elevator Control System	EA	$1,430.42	$5,304.82	$0.00	$6,735.24
	28-20-00 Safety and Security Video Surveillance					
	28-21-00 Safety and Security Video Surveillance Systems					
	28-21-11 Safety and Security Video Surveillance Equipment					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115863	Gimble Mounting Bracket - Motion Sensor Bosch B328 or Equal	EA	$106.92	$14.70	$0.00	$121.62
115864	1 TB CCTV Network Recorder	EA	$357.60	$1,153.22	$0.00	$1,510.82
115865	3 TB CCTV Network Recorder - 32 Channel Panasonic WJ-NV300 or Equal	EA	$715.21	$3,652.65	$0.00	$4,367.86
115866	6 TB CCTV Network Recorder - 32 Channel Panasonic WJ-NV300 or Equal	EA	$715.21	$3,726.48	$0.00	$4,441.69
115867	8 TB CCTV Network Recorder - 32 Channel Panasonic WJ-NV300 or Equal	EA	$715.21	$4,011.73	$0.00	$4,726.94
115868	CCTV Network Recorder - 8 Camera Expansion Kit Panasonic WJ-NV300 or Equal	EA	$357.60	$1,382.35	$0.00	$1,739.95
115869	8 TB CCTV Network Recorder - 16 Channel w/ Windows OS Axis S2216 MK II or Equal	EA	$1,276.90	$5,399.00	$0.00	$6,675.90
115870	12 TB CCTV Network Recorder - 24 Channel w/ Windows OS Axis S2224 MK II or Equal	EA	$1,276.90	$5,399.00	$0.00	$6,675.90
115871	8 TB CCTV Network Recorder - 16 Channel Axis S4000 or S3016 or Equal	EA	$1,276.90	$2,945.47	$0.00	$4,222.37
115872	16 TB CCTV Network Recorder - 16 Channel Axis S4000 or S3016 or Equal	EA	$1,276.90	$3,548.51	$0.00	$4,825.41
115873	32 TB CCTV Network Recorder - 16 Channel Axis S4000 or S3016 or Equal	EA	$1,276.90	$4,978.40	$0.00	$6,255.30
115874	CCTV Network Interface	EA	$178.80	$1,003.10	$0.00	$1,181.90
115875	CCTV Unified Hybrid Flash Storage Dell EMC VNX or Equal	EA	$715.21	$9,434.15	$0.00	$10,149.36
115876	CCTV Rack Equipment	EA	$1,430.42	$3,632.64	$0.00	$5,063.06
115877	CCTV Monitor - LED 24" Viewz or Equal	EA	$89.08	$417.85	$0.00	$506.93
115878	CCTV Equipment Relay Cabinet	EA	$1,430.42	$1,821.56	$0.00	$3,251.98
115879	2 MP CCTV Network Camera - Box/Bullet, Indoor, Hybrid Bosch Dinion IP Starlight 6000 or Equal	EA	$178.80	$853.12	$0.00	$1,031.92
115880	2 MP CCTV Network Camera - Box/Bullet, Indoor Sony IPELA or Equal	EA	$357.60	$744.36	$0.00	$1,101.96
115881	2 MP CCTV Network Camera - Dome, Indoor Axis P3265-LV or Equal	EA	$134.10	$827.70	$0.00	$961.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115882	5 MP CCTV Network Camera - Dome, Indoor Bosch Flexidome 5000i or Equal	EA	$134.10	$860.98	$0.00	$995.08
115883	2 MP CCTV Network Camera - Dome, Outdoor Verint 3820 FDW-DN or Equal	EA	$223.50	$570.05	$0.00	$793.55
115884	2 MP CCTV Network Camera - Dome, Outdoor Axis P3267-LVE or Equal	EA	$134.10	$1,034.93	$0.00	$1,169.03
115885	4 MP CCTV Network Camera - Dome, Outdoor, Dual -Sensor, Multidirectional Axis P3715-PLVE or Equal	EA	$134.10	$1,254.35	$0.00	$1,388.45
115886	5 MP CCTV Network Camera - Dome, Outdoor Verint 4750 FDW-DN or Equal	EA	$223.50	$845.25	$0.00	$1,068.75
115887	8 MP CCTV Network Camera - Dome, Outdoor Axis P3268-LVE or Equal	EA	$134.10	$1,381.13	$0.00	$1,515.23
115888	8 MP CCTV Network Camera - Dome, Outdoor, Quad-Sensor, Panoramic Axis P3807-PVE or Equal	EA	$134.10	$1,949.18	$0.00	$2,083.28
115889	9 MP CCTV Network Camera - Dome, Outdoor, Vandal Resistant, 360-Degree Fisheye Panasonic WV-SFV481 or Equal	EA	$134.10	$2,064.01	$0.00	$2,198.11
115890	15 MP CCTV Network Camera - Dome, Outdoor, Quad-Sensor, Multidirectional Axis P3719-PLE or Equal	EA	$134.10	$2,436.78	$0.00	$2,570.88
115891	8 MP CCTV Network Camera - PTZ Dome, Outdoor Axis Q6078-E or Equal	EA	$223.50	$4,448.13	$0.00	$4,671.63
115892	20 MP CCTV Network Camera - PTZ Dome, Outdoor, Quad-Sensor, Panoramic Axis Q6010-E or Equal	EA	$178.80	$2,839.05	$0.00	$3,017.85
115893	2 MP CCTV Network Camera - PTZ Dome, Outdoor Panasonic WV-SW598	EA	$134.10	$3,846.26	$0.00	$3,980.36
115894	8 MP CCTV Network Camera - PTZ Ball, Outdoor Axis Q6128-E 4KPTZ or Equal	EA	$223.50	$4,841.87	$0.00	$5,065.37
115895	CCTV Digital Management Appliance - 8 x 18 TB NVR Bosch DIP 74CI 8HD or Equal	EA	$1,276.90	$18,385.99	$0.00	$19,662.89
115896	CCTV Wall Plate - Two Port	EA	$0.00	$3.34	$0.00	$3.34
115897	CCTV TV Wall Mount - Swivel & Tilt, 26" to 55" Inch TV's UL Listed, f/u/w, Center Design, Full Motion 052-0392, Mounting Dream or Equal	EA	$175.48	$70.82	$0.00	$246.30
115898	CCTV Wall/Ceiling Mounting Box	EA	$89.40	$18.63	$0.00	$108.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115899	CCTV Cat6a Patch Cord	EA	$17.88	$7.53	$0.00	$25.41
115900	CCTV Cat6a Cable	LF	$1.43	$0.55	$0.00	$1.98
115901	CCTV Cat6a to Fiber - ComNet Ethernet CNFE 100X	EA	$178.80	$543.84	$0.00	$722.64
115902	License Plate Reader Bosch VER_L2R2 or Equal	EA	$223.50	$1,569.95	$0.00	$1,793.45

28-30-00 Security Detection, Alarm, and Monitoring

28-31-00 Intrusion Detection

28-31-11 Building Intrusion Detection

115903	Access Control Glass Break Detector	EA	$89.40	$128.19	$0.00	$217.59
115904	Access Control Laser Scan Motion Detector - POE Enabled Optex RLS-2020S or Equal	EA	$178.80	$1,952.57	$0.00	$2,131.37
115905	Access Control Motion Sensors	EA	$89.40	$107.86	$0.00	$197.26
115906	Bosch ISc PDL 1W18G Access Control 60' Motion Sensors	EA	$89.40	$107.86	$0.00	$197.26
115907	Glass Break Detector	EA	$89.40	$135.38	$0.00	$224.78
115908	Intrusion Horn	EA	$89.40	$53.73	$0.00	$143.13
115909	Bosch Angle Intrusion Detector (ISC-CDL1-WA15G)	EA	$178.80	$61.74	$0.00	$240.54
115910	Bosch 360 Intrusion Detector (DS936)	EA	$178.80	$103.21	$0.00	$282.01
115911	Microphone Axis T8353A or Equal	EA	$178.80	$596.27	$0.00	$775.07

28-40-00 Safety and Security Life Safety

28-46-00 Safety and Security Fire Detection and Alarm Systems

28-46-20 Safety and Security Fire Alarm Devices

115912	CM Speaker/ Strobe	EA	$89.40	$142.70	$0.00	$232.10
115913	CM TR Speaker/ Strobe	EA	$89.40	$155.09	$0.00	$244.49
115914	CM Speaker	EA	$89.40	$136.49	$0.00	$225.89
115915	CM Strobe	EA	$89.40	$136.37	$0.00	$225.77
115916	WP Strobe	EA	$89.40	$146.29	$0.00	$235.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115917	WG Smoke Detector	EA	$89.40	$148.77	$0.00	$238.17
115918	WP Speaker- Strobe	EA	$89.40	$153.73	$0.00	$243.13
115919	Pull Station	EA	$89.40	$101.79	$0.00	$191.19
115920	Pull Station Protective Cover	EA	$59.56	$135.00	$0.00	$194.56
115921	Heat Detector	EA	$89.40	$105.50	$0.00	$194.90
115922	Bosch 465 Communicator	EA	$268.20	$301.25	$0.00	$569.45
115923	Fire/Smoke Damper	EA	$178.80	$472.08	$0.00	$650.88
115924	Smoke Detector	EA	$89.40	$105.50	$0.00	$194.90
115925	Smoke Detector (Elevator Lobby)	EA	$89.40	$130.30	$0.00	$219.70
115926	CO Detector w/ Sounder Base	EA	$178.80	$466.06	$0.00	$644.86
115927	CO Horn/Strobe	EA	$134.10	$126.45	$0.00	$260.55
115928	COMBO Speaker / Strobe	EA	$134.10	$120.25	$0.00	$254.35
115929	Strobe	EA	$89.40	$112.82	$0.00	$202.22
115930	COMBO Horn / Strobe	EA	$134.10	$120.25	$0.00	$254.35
115931	Fire Phone Jack	EA	$134.10	$92.99	$0.00	$227.09
115932	Fire Phone Cabinets	EA	$223.50	$464.90	$0.00	$688.40
115933	Speaker	EA	$89.40	$50.83	$0.00	$140.23
115934	Water Proof Speaker	EA	$89.40	$127.69	$0.00	$217.09
115935	Water Flow	EA	$89.40	$230.03	$0.00	$319.43
115936	Tamper	EA	$89.40	$230.03	$0.00	$319.43
115937	Fan Shut-Down Relay	EA	$178.80	$274.67	$0.00	$453.47
115938	Smoke Detector/Duct Mounted	EA	$134.10	$292.01	$0.00	$426.11
115939	Test Station w/ Keyed Switch	EA	$89.40	$98.62	$0.00	$188.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115940	Magnetic Door Holders w/Relay	EA	$107.28	$97.39	$0.00	$204.67
115941	Door Holders Power Connection	EA	$178.80	$185.40	$0.00	$364.20
115942	Under Floor Smoke Detectors	EA	$134.10	$167.98	$0.00	$302.08
115943	Fire Alarm Exterior Beacon	EA	$178.80	$334.10	$0.00	$512.90
115944	Flow/Tamper Relay	EA	$89.40	$171.21	$0.00	$260.61
115945	Elevator Relay Module	EA	$89.40	$126.82	$0.00	$216.22
115946	Weather Poof Fire Bell / Strobe	EA	$134.10	$355.80	$0.00	$489.90
115947	Smoke Detector/Ceiling Mounted Beam (Set)	EA	$357.60	$952.72	$0.00	$1,310.32
115948	Smoke Exhaust Relay	EA	$214.57	$220.68	$0.00	$435.25
115949	Control Module (F/A Interface)	EA	$134.10	$369.44	$0.00	$503.54
115950	F/A Addressable Relay	EA	$89.40	$77.48	$0.00	$166.88
115951	Addressable Monitor Module	EA	$89.40	$194.64	$0.00	$284.04
115952	Vesda Air Sampling Smoke Detection	EA	$2,860.83	$9,946.54	$0.00	$12,807.37
115953	Vesda Air Sampling Smoke Detection Tube	LF	$1.78	$3.94	$0.00	$5.72
115954	CO System Module	EA	$89.40	$370.44	$0.00	$459.84
115955	Air Sampling Smoke Detection Tube	EA	$67.04	$20.59	$0.00	$87.63
115956	FM 200 System	EA	$2,860.83	$7,115.90	$0.00	$9,976.73
115957	Heat Detection Cable Supports	EA	$4.47	$1.73	$0.00	$6.20
115958	Heat Detection Cable	LF	$2.96	$3.93	$0.00	$6.89
115959	Position Indicator	EA	$89.40	$87.46	$0.00	$176.86
115960	CI FA Cable	LF	$1.78	$6.86	$0.00	$8.64
115961	FA Metal Clad Cable 2C/G	LF	$1.78	$2.19	$0.00	$3.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115962	FA Cable-Plenum-2 pair/16	LF	$1.78	$0.54	$0.00	$2.32
115963	FA Cable Non-Plenum-2 pair/16	LF	$1.78	$0.50	$0.00	$2.28
115964	FA-2C/14 Plenum Power Cable	LF	$1.78	$0.56	$0.00	$2.34
115965	FA 2C/14 Non Plenum Power Cable	LF	$1.78	$0.41	$0.00	$2.19
115966	System Test and Certify	EA	$14,304.16	$0.00	$0.00	$14,304.16
115967	Device Test and Certify	EA	$178.80	$0.00	$0.00	$178.80
115968	14-2 Metal Clad Fire Alarm Cable	LF	$3.13	$1.54	$0.00	$4.67
115969	Beam Detection Set	EA	$357.60	$973.86	$0.00	$1,331.46
115970	Municipal Interface Modem	EA	$1,430.42	$2,765.83	$0.00	$4,196.25
115971	CO Speaker	EA	$89.40	$50.83	$0.00	$140.23
115972	Isolation Module	EA	$268.20	$151.24	$0.00	$419.44
115973	Hazardous Location Speaker	EA	$268.20	$1,301.71	$0.00	$1,569.91
115974	Class 116 Explosion Proof FA Strobe	EA	$268.20	$2,034.66	$0.00	$2,302.86
115975	Explosion Proof FA Strobe Wall Elbow	EA	$89.40	$317.62	$0.00	$407.02
115976	Explosion Proof FA Strobe Wall Mount Box	EA	$89.40	$418.76	$0.00	$508.16
115977	Explosion Proof FA Strobe Pendant Mount	EA	$89.40	$290.68	$0.00	$380.08
115978	Edwards 105 Series LED Beacon	EA	$134.10	$528.14	$0.00	$662.24
115979	SSM24-6 System Sensor 24V Bell	EA	$134.10	$79.34	$0.00	$213.44
	28-46-21 Safety and Security Fire Alarm Panels					
115980	Fire Alarm Programming - (Per Hour)	HR	$96.34	$0.00	$0.00	$96.34
115981	Fire Alarm Programming - Notifier (Per Hour)	HR	$96.34	$0.00	$0.00	$96.34
115982	Voice EVAC Panel Upgrade	EA	$2,145.62	$22,002.96	$0.00	$24,148.58
115983	Fire Alarm Annunciator Panel	EA	$2,860.83	$4,095.25	$0.00	$6,956.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
115984	Fire Alarm Control Panel (NW-100)	EA	$2,860.83	$5,569.54	$0.00	$8,430.37
115985	Fire Alarm nfc 50/100 Control Panel	EA	$2,860.83	$2,964.30	$0.00	$5,825.13
115986	Fire Alarm Command Center	EA	$10,728.12	$46,128.89	$0.00	$56,857.01
115987	Fire Alarm Campus Interface Panel	EA	$2,860.83	$4,879.84	$0.00	$7,740.67
115988	Fire Alarm Honeywell NSF-320 Control Unit	EA	$2,860.83	$5,030.93	$0.00	$7,891.76
115989	Fire Alarm Control Unit	EA	$5,721.66	$24,374.93	$0.00	$30,096.59
115990	Notifier DGP NSS-AFS-3030	EA	$1,430.42	$10,089.25	$0.00	$11,519.67
115991	Fire Alarm Notifier Control Panel Honeywell NFS2-3030 or Equal	EA	$1,430.42	$3,108.45	$0.00	$4,538.87
115992	Fire Alarm Notification Panel	EA	$1,430.42	$2,258.88	$0.00	$3,689.30
115993	Fire Alarm Amplifier Panel	EA	$357.60	$684.72	$0.00	$1,042.32
115994	F/A Pre-Action Panel	EA	$1,430.42	$5,463.39	$0.00	$6,893.81
115995	Fire Alarm Primarynter (Simplex 4190)	EA	$715.21	$3,930.13	$0.00	$4,645.34
115996	Fire Alarm Remote Power Supply	EA	$715.21	$522.88	$0.00	$1,238.09
115997	Fire Alarm Smoke Control Panel	EA	$1,430.42	$2,226.50	$0.00	$3,656.92
115998	Fire Alarm Strobe Booster Panel	EA	$1,430.42	$2,457.15	$0.00	$3,887.57
115999	Fire Alarm Terminal Cabinet	EA	$1,430.42	$1,127.01	$0.00	$2,557.43
116000	Fire Fighter's Smoke Control Panel	EA	$1,430.42	$2,037.79	$0.00	$3,468.21
116001	Field Processing Unit-Transponder	EA	$1,430.42	$4,966.72	$0.00	$6,397.14
116002	Notification Appliance Circuit	EA	$357.60	$517.64	$0.00	$875.24

28-50-00 Safety and Security Specialized Systems

28-55-00 Safety and Security Specialized Systems

28-55-11 Safety and Security Laser Safety

116003	Armored Duel Magnetic Switch	EA	$89.40	$42.15	$0.00	$131.55
116004	Card Reader	EA	$89.40	$370.67	$0.00	$460.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116005	Warning Module	EA	$89.40	$349.60	$0.00	$439.00
116006	Interlock Control	EA	$89.40	$246.70	$0.00	$336.10
116007	Emergency Crash	EA	$89.40	$167.36	$0.00	$256.76
116008	Sutter Interface	EA	$89.40	$246.70	$0.00	$336.10
116009	Means of Egress	EA	$89.40	$110.95	$0.00	$200.35
116010	Non-Defeatable Access Control	EA	$89.40	$334.18	$0.00	$423.58
116011	Defeatable Access Control	EA	$357.60	$1,580.43	$0.00	$1,938.03
116012	8C Interlock Cable	LF	$0.18	$0.61	$0.00	$0.79
116013	Tyton Single Gang Box	EA	$44.70	$8.63	$0.00	$53.33
116014	Tyton 6' Track Conduit	EA	$44.70	$13.58	$0.00	$58.28
116015	Power Supply	EA	$89.40	$43.25	$0.00	$132.65

31-00-00 Earthwork

Includes all required fuel, hauling/trucking up to 30 miles, and dumping fees unless noted otherwise. Units and costs are based on "Bank Measure" (Volume is in its natural state before excavation. Pricing includes any factors for expansion and compaction)

31-00-00 Earthwork

Includes all required fuel, hauling/trucking up to 30 miles, and dumping fees unless noted otherwise. Units and costs are based on "Bank Measure" (Volume is in its natural state before excavation. Pricing includes any factors for expansion and compaction)

31-09-00 Geotechnical Instrumentation and Monitoring of Earthwork

31-09-13 Geotechnical Instrumentation and Monitoring

116016	Drill and Install 2.75" Steel Casing Wells and 2" Schedule 80 PVC Wells Includes drill rig mobilization/demobilization, drill rig, labor and materials. Based on 715 lf; 6 wells total	LF	$24.79	$31.35	$94.25	$150.39

31-10-00 Site Clearing

31-14-00 Earth Stripping and Stockpiling

31-14-13 Soil Stripping and Stockpiling

116017	Strip and Stockpile Topsoil / Sand on Site – Up To 700 Feet to Stockpile Location By Machine	CY	$2.78	$0.27	$1.61	$4.66
116018	Strip and Stockpile Topsoil / Sand on Site – 701 To 1,400 Feet to Stockpile Location By Machine	CY	$3.48	$0.32	$1.93	$5.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116019	Strip and Stockpile Topsoil / Sand on Site – Greater Than 1,400 Feet to Stockpile Location By Machine	CY	$3.88	$0.34	$2.12	$6.34
116020	Strip Topsoil / Sand and Haul Off Site – Up To 15 Miles By Machine	CY	$15.44	$1.45	$8.90	$25.79
116021	Strip Topsoil / Sand and Haul Off Site – 16 To 30 Miles By Machine	CY	$19.31	$1.74	$10.68	$31.73
116022	Strip Topsoil / Sand and Haul Off Site – Greater Than 30 Miles By Machine	CY	$21.45	$1.91	$11.75	$35.11
116023	Clear/Grubb - Brush and Tree Removal (Up to 2" Caliper) Excludes Tree (Over 2" Caliper) and Stump Removal; Removals are Included in Division 02 41 13	SF	$0.06	$0.00	$0.03	$0.09
116024	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (31-50 CY) Quantity premium can be used when total cubic yardage in section 31-14-16 Soil Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	CY	$13.44	$0.00	$0.00	$13.44
116025	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (11-30 CY) Quantity premium can be used when total cubic yardage in section 31-14-16 Soil Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	CY	$22.40	$0.00	$0.00	$22.40
116026	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 31-14-16 Soil Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	CY	$67.21	$0.00	$0.00	$67.21
	31-14-16 Sod Stripping and Stockpiling					
116027	Grass Sod Cutting – By Hand	SF	$8.13	$0.00	$0.00	$8.13
116028	Grass Sod Cutting – Machine	SF	$0.40	$0.06	$0.05	$0.51
116029	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (101-500 SF) Quantity premium can be used when total square footage in section 31-14-16 Sod Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$1.96	$0.00	$0.00	$1.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116030	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (51-100 SF) Quantity premium can be used when total square footage in section 31-14-16 Sod Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$4.88	$0.00	$0.00	$4.88
116031	[Modifier] Quantity Premium - Soil Stripping and Stockpiling (< or = to 50 SF) Quantity premium can be used when total square footage in section 31-14-16 Sod Stripping and Stockpiling are within stated quantities. Can be applied cumulatively to base line items.	SF	$9.75	$0.00	$0.00	$9.75
31-20-00 Earth Moving						
31-22-00 Grading						
31-22-00 Grading						
116032	Rough Grading – Cut Site To remove excess dirt material from select areas	CY	$6.56	$0.62	$3.78	$10.96
116033	Rough Grading – Fill Site To add dirt native or approved import material to select areas	CY	$6.92	$0.66	$3.98	$11.56
116034	Rough Grading – Fill Site With Imported Material As approved by the projects Landscape Architect/Geotechnical Engineer, includes compaction.	CY	$6.92	$19.41	$3.98	$30.31
116035	Fine Grading – Fill Site With Stockpiled Material	CY	$7.29	$0.68	$4.20	$12.17
116036	Fine Grading – Fill Site With Imported Material As approved by the projects Landscape Architect/Geotechnical Engineer, includes compaction.	CY	$7.29	$30.83	$4.20	$42.32
116037	Fine Grading By Hand – Fill Site With Imported Material As approved by the projects Landscape Architect/Geotechnical Engineer, includes compaction.	CY	$48.78	$30.83	$0.00	$79.61
116038	Fine Grading By Hand – Fill Site With Stockpiled Material	CY	$48.78	$0.34	$0.00	$49.12
116039	Fine Grading to +/ -0.1' at Flatwork Or tolerance as required by project specifications	SY	$0.28	$0.02	$0.16	$0.46
116040	Existing Soil Compaction Cannot be used with items that already include compaction	CY	$4.55	$0.43	$2.62	$7.60
116041	[Modifier] Quantity Premium - Grading (31-50 CY) Quantity premium can be used when total cubic yardage in section 31-22-00 Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$13.44	$0.00	$0.00	$13.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116042	[Modifier] Quantity Premium - Grading (11-30 CY) Quantity premium can be used when total cubic yardage in section 31-22-00 Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$22.40	$0.00	$0.00	$22.40
116043	[Modifier] Quantity Premium - Grading (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 31-22-00 Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$67.21	$0.00	$0.00	$67.21
	31-22-19 Finish Grading					
116044	Finish Grade to +/- 0.1' for Street Paving Fine Grading with compaction to +/- 0.1', or tolerance as required by project specifications	SF	$0.08	$0.00	$0.06	$0.14
116045	Finish Grade to +/- 0.1' for Parking Lot Paving Fine Grading with compaction to +/- 0.1', or tolerance as required by project specifications	SF	$0.16	$0.00	$0.08	$0.24
116046	Finish Grade to +/ -0.1' for Building Slab Fine Grading with compaction to +/- 0.1', or tolerance as required by project specifications	SF	$0.08	$0.00	$0.06	$0.14
116047	Finish Grade to +/- 0.1' for Concrete Sidewalk Paving Fine Grading with compaction to +/- 0.1', or tolerance as required by project specifications	SF	$0.16	$0.00	$0.08	$0.24
	31-23-00 Excavation and Fill					
	Classified by a Geotechnical Engineer as suitable for use					
	31-23-16 Excavation					
	Hauling/Trucking items include dumping fees and all required fuel for up to 30 miles unless noted otherwise.					
116048	Excavation - Building Foundations (Under 5,000 CY Total) By power equipment. Includes all soil and earthwork types except those identified below.	CY	$10.90	$1.02	$6.28	$18.20
116049	Excavation - Building Foundations (5,000 CY Total and Up) By power equipment. Includes all soil and earthwork types except those identified below.	CY	$7.79	$0.62	$3.77	$12.18
116050	Excavation – Building Foundations – 18” to 24” Diameter Drilled Hole Includes skid steer w/auger attachment and assumes standard soils. Excludes removal of excavated materials.	LF	$62.28	$0.00	$14.19	$76.47
116051	Excavation – Building Foundations – 26" to 28"” Diameter Drilled Hole Includes skid steer w/auger attachment and assumes standard soils. Excludes removal of excavated materials.	LF	$71.17	$0.00	$16.22	$87.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116052	Excavation – Building Foundations – 30" to 36" Diameter Drilled Hole Includes skid steer w/auger attachment and assumes standard soils. Excludes removal of excavated materials.	LF	$83.04	$0.00	$18.92	$101.96
116053	Excavation - Building Foundations Rock By power equipment. Includes hard materials which require blasting, ripping or fracturing.	CY	$73.30	$6.89	$42.25	$122.44
116054	Excavation - Building Foundations Rubble By power equipment. Includes materials not consistent with surrounding soil conditions including but not limited to broken concrete, masonry, tree stumps, brick, etc.	CY	$24.31	$2.41	$14.74	$41.46
116055	Excavation - Site (Under 5,000 CY Total) By power equipment. Includes all soil and earthwork types except those identified below.	CY	$10.90	$1.02	$6.28	$18.20
116056	Excavation - Site (5,000 CY Total and Up) By power equipment. Includes all soil and earthwork types except those identified below.	CY	$7.79	$0.62	$3.77	$12.18
116057	Excavation - Site Rock By power equipment. Includes hard materials which require blasting, ripping or fracturing.	CY	$73.30	$6.89	$42.25	$122.44
116058	Excavation - Site Rubble By power equipment. Includes materials not consistent with surrounding soil conditions including but not limited to broken concrete, masonry, tree stumps, brick, etc.	CY	$24.31	$2.41	$14.74	$41.46
116059	Hand Excavation – Interior Includes all soil and earthwork types except those identified below. Not eligible for [Modifier] Quantity Premium	CY	$167.90	$0.00	$0.00	$167.90
116060	Hand Excavation – Interior Stone Not eligible for [Modifier] Quantity Premium	CY	$248.19	$0.00	$0.00	$248.19
116061	Hand Excavation – Exterior Includes all soil and earthwork types except those identified below. Not eligible for [Modifier] Quantity Premium	CY	$142.72	$0.00	$0.00	$142.72
116062	Hand Excavation – Exterior Stone Not eligible for [Modifier] Quantity Premium	CY	$285.43	$0.00	$0.00	$285.43
116063	Trenching Excavation & Backfill - Up To 8" Wide and 24" Deep By chain trencher (walk behind or ride on). Backfill of excavated materials by chain trencher backfill blade.	LF	$9.60	$0.90	$5.53	$16.03
116064	Trenching Excavation & Backfill - Up to 8" Wide and 25" To 36" Deep By chain trencher (walk behind or ride on). Backfill of excavated materials by chain trencher backfill blade.	LF	$12.80	$1.13	$6.92	$20.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116065	Trenching Excavation & Backfill - Up to 8" Wide and 37" To 60" Deep By chain trencher (walk behind or ride on). Backfill of excavated materials by chain trencher backfill blade.	LF	$17.07	$1.41	$8.65	$27.13
116066	Trench Excavation for Utilities - by Backhoe For Excavation trench widths of 1.5' or less	CY	$13.26	$0.00	$2.54	$15.80
116067	Trench Excavation for Utilities - by Backhoe For Excavation trench widths of 2'	CY	$8.68	$0.00	$1.67	$10.35
116068	Trench Excavation for Utilities - by Backhoe For Excavation trench widths of 2.5'	CY	$6.53	$0.00	$1.25	$7.78
116069	Trench Excavation for Utilities - by Backhoe For Excavation trench widths of 3' or greater	CY	$4.05	$0.00	$0.78	$4.83
116070	Trench Excavation for Utilities - by Excavator For Excavation trench widths of 3.5' (Excavator size to be mini, medium or less than 50 Ton)	CY	$3.73	$0.00	$2.53	$6.26
116071	Trench Excavation for Utilities - by Excavator For Excavation trench widths of 4' (Excavator size to be mini, medium or less than 50 Ton)	CY	$3.05	$0.00	$2.07	$5.12
116072	Trench Excavation for Utilities - by Excavator For Excavation trench widths of 4.5' (Excavator size to be mini, medium or less than 50 Ton)	CY	$2.62	$0.00	$1.77	$4.39
116073	Trench Excavation for Utilities - by Excavator For Excavation trench widths of 5' (Excavator size to be mini, medium or less than 50 Ton)	CY	$2.12	$0.00	$1.44	$3.56
116074	Trench Excavation for Utilities - by Excavator For Excavation trench widths of 5.5' or greater (Excavator size to be mini, medium or less than 50 Ton)	CY	$1.81	$0.00	$1.22	$3.03
116075	Trench Excavation for Utilities - by Large Excavator For Excavation trench widths of 5.5' (Excavator size to be 50 Ton or Larger)	CY	$5.90	$0.00	$1.72	$7.62
116076	Trench Excavation for Utilities - by Large Excavator For Excavation trench widths of 6' (Excavator size to be 50 Ton or Larger)	CY	$5.76	$0.00	$1.68	$7.44
116077	Trench Excavation for Utilities - by Large Excavator For Excavation trench widths of 6.5' or greater (Excavator size to be 50 Ton or Larger)	CY	$5.37	$0.00	$1.56	$6.93
116078	Haul Excavated Materials – Building Foundations (Under 5,000 CY Total) Up to 30 miles. Not eligible for [Modifier] Quantity Premium	CY	$15.82	$1.43	$8.75	$26.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116079	Haul Excavated Materials – Building Foundations (5,000 CY Total and Up) Up to 30 miles. Not eligible for [Modifier] Quantity Premium	CY	$11.30	$0.85	$5.26	$17.41
116080	Haul Excavated Materials – Site (Under 5,000 CY Total) Up to 30 miles. Not eligible for [Modifier] Quantity Premium	CY	$15.82	$1.43	$8.75	$26.00
116081	Haul Excavated Materials – Site (5,000 CY Total and Up) Up to 30 miles. Not eligible for [Modifier] Quantity Premium	CY	$11.30	$0.85	$5.26	$17.41

31-23-19 Dewatering

Self-contained truck unit with 11-13 CY capacity tank to remove water and/or soils within a confined area. Includes delivery, set up, suction, and discharge hoses. Hourly Hydrovac provided with one operator. Trailered Hydrovac is bare.

116082	Trash Pump - 2" Gas (DY) Daily Rate for 2" Trash Pump	DY	$0.00	$0.00	$104.01	$104.01
116083	Trash Pump - 2" Gas (WK) Weekly Rate for 2" Trash Pump	WK	$0.00	$0.00	$284.00	$284.00
116084	Trash Pump - 2" Gas (MO) Monthly Rate for 2" Trash Pump	MO	$0.00	$0.00	$847.00	$847.00
116085	Trash Pump - 3" Gas (DY) Daily Rate for 3" Trash Pump	DY	$0.00	$0.00	$124.00	$124.00
116086	Trash Pump - 3" Gas (WK) Weekly Rate for 3" Trash Pump	WK	$0.00	$0.00	$344.00	$344.00
116087	Trash Pump - 3" Gas (MO) Monthly Rate for 3" Trash Pump	MO	$0.00	$0.00	$1,025.00	$1,025.00
116088	Trash Pump - 4" Gas (DY) Daily Rate for 4" Trash Pump	DY	$0.00	$0.00	$177.00	$177.00
116089	Trash Pump - 4" Gas (WK) Weekly Rate for 4" Trash Pump	WK	$0.00	$0.00	$497.00	$497.00
116090	Trash Pump - 4" Gas (MO) Monthly Rate for 4" Trash Pump	MO	$0.00	$0.00	$1,491.00	$1,491.00
116091	Diaphragm Pump - 2" Gas (DY)	DY	$0.00	$0.00	$136.00	$136.00
116092	Diaphragm Pump - 2" Gas (WK)	WK	$0.00	$0.00	$404.00	$404.00
116093	Diaphragm Pump - 2" Gas (MO)	MO	$0.00	$0.00	$942.00	$942.00
116094	Diaphragm Pump - 3" Gas (DY)	DY	$0.00	$0.00	$145.00	$145.00
116095	Diaphragm Pump - 3" Gas (WK)	WK	$0.00	$0.00	$432.00	$432.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116096	Diaphragm Pump - 3" Gas (MO)	MO	$0.00	$0.00	$1,029.00	$1,029.00
116097	Diaphragm Pump - 4" Diesel (DY)	DY	$0.00	$0.00	$185.00	$185.00
116098	Diaphragm Pump - 4" Diesel (WK)	WK	$0.00	$0.00	$550.00	$550.00
116099	Diaphragm Pump - 4" Diesel (MO)	MO	$0.00	$0.00	$1,643.00	$1,643.00
116100	Diaphragm Pump - 6" Diesel (DY)	DY	$0.00	$0.00	$268.00	$268.00
116101	Diaphragm Pump - 6" Diesel (WK)	WK	$0.00	$0.00	$714.00	$714.00
116102	Diaphragm Pump - 6" Diesel (MO)	MO	$0.00	$0.00	$2,038.00	$2,038.00
116103	Submersible Pump - 2" Electric (DY)	DY	$0.00	$0.00	$77.00	$77.00
116104	Submersible Pump - 2" Electric (WK)	WK	$0.00	$0.00	$209.00	$209.00
116105	Submersible Pump - 2" Electric (MO)	MO	$0.00	$0.00	$623.00	$623.00
116106	Submersible Pump - 3" Electric (DY)	DY	$0.00	$0.00	$145.00	$145.00
116107	Submersible Pump - 3" Electric (WK)	WK	$0.00	$0.00	$380.01	$380.01
116108	Submersible Pump - 3" Electric (MO)	MO	$0.00	$0.00	$1,008.00	$1,008.00
116109	Submersible Pump - 4" Electric (DY)	DY	$0.00	$0.00	$228.00	$228.00
116110	Submersible Pump - 4" Electric (WK)	WK	$0.00	$0.00	$625.00	$625.00
116111	Submersible Pump - 4" Electric (MO)	MO	$0.00	$0.00	$1,814.00	$1,814.00
116112	Hydrovac Trailered Pump (DY) Trailered Pump with 800 Gal capacity tank to remove water and/or liquidized soils within a confined area. Hydrovac (trailered) provided for stationary dewatering only. Rate includes equipment placement and standby availability. Equipment only; no labor included.	DY	$0.00	$0.00	$900.00	$900.00
116113	Hydrovac Trailered Pump (WK) Trailered Pump with 800 Gal capacity tank to remove water and/or liquidized soils within a confined area. Hydrovac (trailered) provided for stationary dewatering only. Rate includes equipment placement and standby availability. Equipment only; no labor included.	WK	$0.00	$0.00	$2,500.00	$2,500.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116114	Hydrovac Trailered Pump (MO) Trailered Pump with 800 Gal capacity tank to remove water and/or liquidized soils within a confined area. Hydrovac (trailered) provided for stationary dewatering only. Rate includes equipment placement and standby availability. Equipment only; no labor included.	MO	$0.00	$0.00	$7,000.00	$7,000.00
116115	Hydrovac Excavator (HR) - Operated Self-contained truck unit with 11-13 CY capacity tank to remove water and/or soils within a confined area. Provided with one operator. Excludes hard surface removal or replacement, providing water or usage fees, disposal of removed material, or backfilling of the area.	HR	$87.71	$0.00	$261.92	$349.63
116116	Hydrovac Excavator (HR) - Operated Self-contained truck unit with 11-13 CY capacity tank to remove water and/or soils within a confined area. Provided with a two-person crew: one operator and one general laborer. Excludes hard surface removal or replacement, providing water or usage fees, disposal of removed material, or backfilling of the area.	HR	$151.90	$0.00	$261.92	$413.82

31-23-23 Fill

Includes all required fuel, hauling/trucking up to 30 miles, compaction unless noted otherwise

116117	Backfill with Excavated Materials – Building Foundations By power equipment.	CY	$8.73	$0.82	$5.04	$14.59
116118	Backfill with Crushed Stone – Building Foundations By power equipment.	CY	$6.72	$39.26	$3.36	$49.34
116119	Backfill with Sand – Building Foundations By power equipment.	CY	$6.72	$34.13	$3.36	$44.21
116120	Backfill with Pea Gravel – Building Foundations By power equipment.	CY	$6.72	$43.71	$3.36	$53.79
116121	Backfill with Base Rock – Building Foundations Item includes all miscellaneous types of compactable aggregate materials (excluding recycled), including different sizes as required by the specifications	CY	$6.72	$38.97	$3.36	$49.05
116122	Backfill with Recycled Base Rock – Building Foundations Item includes all miscellaneous types of compactable aggregate materials (excluding recycled), including different sizes as required by the specifications. Use of this Item may only be used where permitted and approved by Agency.	CY	$6.72	$18.10	$3.36	$28.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116123	Trench Bedding Zone for Utilities With Native Material - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$8.43	$0.00	$1.04	$9.47
116124	Trench Bedding Zone for Utilities With Native Material - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$14.62	$0.00	$1.20	$15.82
116125	Trench Bedding Zone for Utilities With Native Material - Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$22.48	$0.00	$1.20	$23.68
116126	Trench Bedding Zone for Utilities With Sand - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$8.43	$34.13	$1.04	$43.60
116127	Trench Bedding Zone for Utilities With Sand - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$14.62	$34.13	$1.20	$49.95
116128	Trench Bedding Zone for Utilities With Sand - Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$22.48	$34.13	$1.20	$57.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116129	Trench Bedding Zone for Utilities With Pea Gravel - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$8.43	$43.71	$1.04	$53.18
116130	Trench Bedding Zone for Utilities With Pea Gravel - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$14.62	$43.71	$1.20	$59.53
116131	Trench Bedding Zone for Utilities With Pea Gravel - Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$22.48	$43.71	$1.20	$67.39
116132	Trench Bedding Zone for Utilities With Crushed Stone - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$8.43	$39.26	$1.04	$48.73
116133	Trench Bedding Zone for Utilities With Crushed Stone - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$14.62	$39.26	$1.20	$55.08
116134	Trench Bedding Zone for Utilities With Crushed Stone - Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$22.48	$39.26	$1.20	$62.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116135	Trench Bedding Zone for Utilities With Aggregate Base Rock - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$8.43	$38.97	$1.04	$48.44
116136	Trench Bedding Zone for Utilities With Aggregate Base Rock - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$14.62	$38.97	$1.20	$54.79
116137	Trench Bedding Zone for Utilities With Aggregate Base Rock - Trenches Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids.	CY	$22.48	$38.97	$1.20	$62.65
116138	Trench Bedding Zone for Utilities With Recycled Aggregate Base Rock - Trenches 5' Deep or less For Nominal trench Depths Less than 5'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids. Use of this Item may only be used where permitted and approved by Agency.	CY	$8.43	$18.10	$1.04	$27.57
116139	Trench Bedding Zone for Utilities With Recycled Aggregate Base Rock - Trenches 5'-14' Deep For Nominal Trench Depths 5'-14'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids. Use of this Item may only be used where permitted and approved by Agency.	CY	$14.62	$18.10	$1.20	$33.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116140	Trench Bedding Zone for Utilities With Recycled Aggregate Base Rock - Trenches Trenches 14'-21' Deep For Nominal Trench Depths 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Loader, Laborers with shovels and Pogo Sticks, Jumping Jacks, whackers, or Vibraplate(s) to fully encompass and compact around pipe exterior without voids. Use of this Item may only be used where permitted and approved by Agency.	CY	$22.48	$18.10	$1.20	$41.78
116141	Trench Backfill for Utilities With Native Material - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s).	CY	$4.21	$0.00	$0.52	$4.73
116142	Trench Backfill for Utilities With Native Material - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium)	CY	$7.85	$0.00	$1.87	$9.72
116143	Trench Backfill for Utilities With Native Material - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger)	CY	$11.94	$0.00	$2.43	$14.37
116144	Trench Backfill for Utilities With Sand - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s).	CY	$4.21	$34.13	$0.52	$38.86
116145	Trench Backfill for Utilities With Sand - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium)	CY	$7.85	$34.13	$1.87	$43.85
116146	Trench Backfill for Utilities With Sand - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger)	CY	$11.94	$34.13	$2.43	$48.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116147	Trench Backfill for Utilities With Pea Gravel - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s).	CY	$4.21	$43.71	$0.52	$48.44
116148	Trench Backfill for Utilities With Pea Gravel - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium)	CY	$7.85	$43.71	$1.87	$53.43
116149	Trench Backfill for Utilities With Pea Gravel - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger)	CY	$11.94	$43.71	$2.43	$58.08
116150	Trench Backfill for Utilities With Crushed Stone - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s).	CY	$4.21	$39.26	$0.52	$43.99
116151	Trench Backfill for Utilities With Crushed Stone - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium)	CY	$7.85	$39.26	$1.87	$48.98
116152	Trench Backfill for Utilities With Crushed Stone - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger)	CY	$11.94	$39.26	$2.43	$53.63
116153	Trench Backfill for Utilities With Aggregate Base Rock - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s).	CY	$4.21	$38.97	$0.52	$43.70
116154	Trench Backfill for Utilities With Aggregate Base Rock - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium)	CY	$7.85	$38.97	$1.87	$48.69

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116155	Trench Backfill for Utilities With Aggregate Base Rock - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger)	CY	$11.94	$38.97	$2.43	$53.34
116156	Trench Backfill for Utilities With Recycled Aggregate Base Rock - By Loader Includes Mechanical Compaction in lifts per specifications. Using Loader or Backhoe with Whacker(s) or Vibraplate(s). Use of this Item may only be used where permitted and approved by Agency.	CY	$4.21	$18.10	$0.52	$22.83
116157	Trench Backfill for Utilities With Recycled Aggregate Base Rock - By Excavator For nominal trench depths of 10'-14'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be mini or medium) Use of this Item may only be used where permitted and approved by Agency.	CY	$7.85	$18.10	$1.87	$27.82
116158	Trench Backfill for Utilities With Recycled Aggregate Base Rock - By Large Excavator For nominal trench depths of 14'-21'. Includes Mechanical Compaction in lifts per specifications. Using Excavator with Plate Compactor Attachment. (Excavator size to be 50Ton or larger) Use of this Item may only be used where permitted and approved by Agency.	CY	$11.94	$18.10	$2.43	$32.47
116159	Hand Backfill with Excavated Materials – Interior	CY	$57.38	$0.00	$0.00	$57.38
116160	Hand Backfill with Crushed Stone – Interior	CY	$57.38	$39.26	$0.00	$96.64
116161	Hand Backfill with Sand – Interior	CY	$57.38	$35.01	$0.00	$92.39
116162	Hand Backfill with Pea Gravel – Interior	CY	$57.38	$43.71	$0.00	$101.09
116163	Hand Backfill with Base Rock – Interior Item includes placing and compacting all miscellaneous types of aggregate materials (excluding recycled), including different sizes as required by the specifications and installed by hand with whacker or vibraplate.	CY	$88.57	$38.97	$10.00	$137.54
116164	Hand Backfill with Recycled Base Rock – Interior Item includes placing and compacting Recycled Aggregate Base Rock materials by hand with whacker or vibraplate. Use of this Item may only be used where permitted and approved by Agency.	CY	$88.57	$18.10	$10.00	$116.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116165	Hand Backfill with Excavated Materials – Exterior	CY	$48.78	$0.00	$0.00	$48.78
116166	Hand Backfill with Crushed Stone – Exterior	CY	$48.78	$39.26	$0.00	$88.04
116167	Hand Backfill with Sand – Exterior	CY	$48.78	$35.01	$0.00	$83.79
116168	Hand Backfill with Pea Gravel – Exterior	CY	$48.78	$43.71	$0.00	$92.49
116169	Hand Backfill with Base Rock – Exterior Item includes placing and compacting all miscellaneous types of aggregate materials (excluding recycled), including different sizes as required by the specifications and installed by hand with whacker or vibraplate.	CY	$59.05	$38.97	$6.67	$104.69
116170	Hand Backfill with Recycled Base Rock – Exterior Item includes placing and compacting Recycled Aggregate Base Rock materials by hand with whacker or vibraplate. Use of this Item may only be used where permitted and approved by Agency.	CY	$59.05	$18.10	$6.67	$83.82
116171	Flowable Fill (40 To 90 PSI) One sack slurry or equal	CY	$6.72	$51.37	$3.36	$61.45
116172	Flowable Fill (100 To 200 PSI) Two sack slurry or equal	CY	$6.72	$57.09	$3.36	$67.17
116173	Geofoam – Up To 0.9 Lb/Cuft	CY	$22.40	$85.56	$0.00	$107.96
116174	Geofoam – Up To 1.8 Lb/Cuft	CY	$22.40	$171.14	$0.00	$193.54
116175	[Modifier] Quantity Premium - Fill (31-50 CY) Quantity premium can be used when total cubic yardage in section 31-23-23 Fill are within stated quantities. Can be applied cumulatively to base line items.	CY	$13.44	$0.00	$0.00	$13.44
116176	[Modifier] Quantity Premium - Fill (11-30 CY) Quantity premium can be used when total cubic yardage in section 31-23-23 Fill are within stated quantities. Can be applied cumulatively to base line items.	CY	$22.40	$0.00	$0.00	$22.40
116177	[Modifier] Quantity Premium - Fill (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 31-23-23 Fill are within stated quantities. Can be applied cumulatively to base line items.	CY	$67.21	$0.00	$0.00	$67.21

31-25-00 Erosion and Sedimentation Controls

31-25-00 Erosion and Sedimentation Controls

116178	Silt Fence Includes removal	LF	$2.44	$1.87	$0.00	$4.31

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116179	Super Silt Fence Includes removal	LF	$3.75	$4.47	$0.00	$8.22
116180	Tree and Plant Protection / Safety Fence Up To 4' Tall Wooden post and rails with plastic barrier fencing. Includes removal	LF	$6.97	$9.13	$0.00	$16.10
116181	Tree and Plant Protection / Safety Fence Up To 6' Tall Wooden post and rails with plastic barrier fencing. Includes removal	LF	$7.51	$10.28	$0.00	$17.79
116182	Tree and Plant Protection / Safety Fence Up To 8' Tall Wooden post and rails with plastic barrier fencing. Includes removal	LF	$8.13	$11.42	$0.00	$19.55
116183	Hydraulic Mulch Hydraulic matrix and binder	SY	$0.28	$0.11	$0.10	$0.49
116184	Hydroseeding Includes Seed, fertilizer, wood fiber, and binder	SY	$0.24	$0.21	$0.10	$0.55
116185	[Modifier] Quantity Premium - Hydroseeding (less than 170 SY) Quantity premium can be used when total square yardage in section 31-25-00 Erosion and Sedimentation Controls (or 32-92-19 Seeding) are within stated quantities. Can be applied cumulatively to base line items.	SY	$3.97	$3.64	$4.00	$11.61
116186	Soil Binder – Short Lived Powder	SY	$0.14	$0.06	$0.05	$0.25
116187	Soil Binder – Long Lived Liquid	SY	$0.14	$0.11	$0.10	$0.35
116188	Soil Binder – Polymeric Emulsion Blends Powder / Liquid	SY	$0.14	$0.17	$0.15	$0.46
116189	Straw Mulch Applied by Broadcasting	SY	$0.28	$0.11	$0.10	$0.49
116190	Erosion Control Blanket / Mats – Stabilization Biodegradable fiber rolls	SY	$0.61	$1.67	$0.00	$2.28
116191	Plastic Cover – Stabilization Plastic sheeting up to 8 mil with taped seams and sandbag weighting. Includes removal	SY	$0.61	$1.06	$0.00	$1.67
116192	Mulch (Hand Spread) Hand Spread 2-4 inches deep or as required by project specifications	CY	$32.52	$17.13	$0.00	$49.65
116193	Mulch (Pneumatic Spread) By Material Blower	CY	$16.26	$17.13	$2.00	$35.39
116194	Earth Dike / Drainage Swale	SF	$0.38	$0.06	$0.05	$0.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116195	Lined Ditch Includes removal	SF	$0.54	$0.37	$0.05	$0.96
116196	Sediment / Desilting Basin Includes required grading, riser, gravel, barrel, and outlet protection	SF	$1.08	$0.55	$0.10	$1.73
116197	Sediment Trap Includes required grading and gravel	SF	$0.54	$0.37	$0.05	$0.96
116198	Sand / Gravel Bag Check Dam – Per Bag 50 LB bags, includes removal	EA	$4.88	$0.45	$0.00	$5.33
116199	Sand / Gravel Bag Berm/Barrier – Per Bag 50 LB bags, includes removal	EA	$4.88	$0.45	$0.00	$5.33
116200	Straw Bale Barrier Includes removal	LF	$3.48	$1.43	$0.00	$4.91
116201	Wind Erosion Control – Per Water Application	SY	$0.05	$0.01	$0.01	$0.07
116202	Fiber Roll Wattle / Filter Sock Includes staking and removal	LF	$1.96	$5.70	$0.00	$7.66
116203	Inlet Protection Includes removal	EA	$130.82	$127.71	$0.00	$258.53
116204	Trench Drain Inlet Filter Includes removal	LF	$1.77	$4.79	$0.00	$6.56
116205	Stabilized Construction Entrance Up to 12" crushed stone and filter fabric, and removal	SF	$4.37	$2.80	$0.36	$7.53
116206	Stabilized Construction Roadway Up to 12" crushed stone and filter fabric, and removal	SF	$4.37	$2.80	$0.36	$7.53
116207	Construction Rumble / Shaker Plate Includes removal	SF	$1.35	$2.79	$0.00	$4.14
116208	Tire Wash Station Includes drainage panel, crushed stone, filter fabric, and removal	EA	$303.63	$167.53	$50.00	$521.16

31-30-00 Earthwork Methods

31-35-00 Slope Protection

31-35-00 Slope Protection

116209	Reinforced Retention Mat - Turf / Top Soil 1H/1V Slope angle 15-50 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$2.54	$9.35	$0.00	$11.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116210	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle 21-50 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$3.19	$18.70	$0.00	$21.89
116211	Reinforced Retention Mat - High-tensile steel wire mesh (Pinned) Pinned Mesh Wire System (3mm) for shallower slopes (up to 51°), requires tighter nail spacing. Similar to (TECCO G65/3) Includes Soil Nails (up to 10 FT), Spike Plates, Mesh Panels, and Grout. Excludes: Optional Border Ropes	SY	$343.41	$59.34	$10.00	$412.75
116212	Reinforced Retention Mat - High-tensile steel wire mesh (Pinned) Pinned Mesh Wire System (4mm) for steeper slopes (up to 56°), allows wider nail spacing. Similar to (TECCO G65/4) Includes Soil Nails (up to 10 FT), Spike Plates, Mesh Panels, and Grout. Excludes: Optional Border Ropes	SY	$343.41	$71.19	$10.00	$424.60
116213	[Modifier] Optional Border Ropes for Reinforced Retention Mat (Pinned) Install Optional Border Ropes for Pinned System (Similar to Tecco G65/3 or G65/4)	SY	$9.65	$0.11	$3.30	$13.06
116214	Reinforced Retention Mat - High-tensile steel wire mesh (Draped) Draped System Mesh Wire System (3mm) for Smaller Blocks (2-4ft diameter). (Similar to TECCO G65/3) Includes Grout and Top Support Rope. Excludes: Optional Lateral and Bottom Ropes	SY	$114.47	$37.09	$10.00	$161.56
116215	Reinforced Retention Mat - High-tensile steel wire mesh (Draped) Draped System Mesh Wire System (4mm) for Moderate Blocks (4-5ft diameter). (Similar to TECCO G65/4) Includes Grout and Top Support Rope. Excludes: Optional Lateral and Bottom Ropes	SY	$114.47	$42.09	$10.00	$166.56
116216	[Modifier] Optional Lateral and Bottom Ropes for Reinforced Retention Mat (Draped) Install Optional Lateral and Bottom Ropes for Draped System (Similar to Tecco G65/3 or G65/4)	SY	$5.24	$0.11	$3.30	$8.65
116217	Reinforced Retention Mat - High-tensile steel wire mesh (Draped) Draped System Mesh Wire System for drilling Larger Blocks (5-6ft diameter) w/Highest strength & bearing resistance, and larger mesh opening. (Similar to SPIDER S4-250) Includes Grout and Top Support Rope. Excludes: Optional Lateral and Bottom Ropes	SY	$114.47	$31.33	$10.00	$155.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116218	[Modifier] Optional Border Ropes for Reinforced Retention Mat (Draped) Install Optional Lateral and Bottom Ropes for Spider System (Similar to Spider S4-250)	SY	$6.29	$0.11	$3.30	$9.70
	31-35-19 Geosynthetic Slope Protection					
116219	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Light Reinforced PP Net Material (Similar to MacMat R1 005) Excludes: Anchors	SY	$1.28	$6.23	$0.00	$7.51
116220	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 15-20 Feet High Installation Includes: Pins or staples Light Reinforced PP Net Material (Similar to MacMat R1 005) Excludes: Anchors	SY	$2.54	$6.23	$0.00	$8.77
116221	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Light Reinforced PP Net Material (Similar to MacMat R1 005) Excludes: Anchors	SY	$1.91	$6.23	$0.00	$8.14
116222	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle 15-20 Feet High Installation Includes: Pins or staples Light Reinforced PP Net Material (Similar to MacMat R1 005) Excludes: Anchors	SY	$2.54	$6.23	$0.00	$8.77
116223	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$1.28	$9.35	$0.00	$10.63
116224	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 15-20 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$1.59	$9.35	$0.00	$10.94
116225	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 21-30 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$1.91	$9.35	$0.00	$11.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116226	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 31-50 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$2.54	$9.35	$0.00	$11.89
116227	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$1.59	$9.35	$0.00	$10.94
116228	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle 15-20 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$1.91	$9.35	$0.00	$11.26
116229	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle 21-50 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$2.54	$9.35	$0.00	$11.89
116230	Reinforced Retention Mat - Turf / Top Soil 1H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Geogrid Reinforcement PET Net Material (Similar to MacMat R1 060S) Excludes: Anchors	SY	$2.23	$9.35	$0.00	$11.58
116231	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle up to 15 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$1.91	$18.70	$0.00	$20.61
116232	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 15-20 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$2.54	$18.70	$0.00	$21.24
116233	Reinforced Retention Mat - Turf / Top Soil 3H/1V Slope angle 21-50 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$3.19	$18.70	$0.00	$21.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116234	Reinforced Retention Mat - Turf / Top Soil 2H/1V Slope angle up to 20 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$2.54	$18.70	$0.00	$21.24
116235	Reinforced Retention Mat - Turf / Top Soil 1H/1V Slope angle up to 20 Feet High Installation Includes: Pins or staples Steel Reinforced PET Turf Mat (Similar to MacMat R1 STEEL) Excludes: Anchors	SY	$3.19	$18.70	$0.00	$21.89

31-36-00 Gabions

31-36-13 Gabion Boxes

116236	Furnish & Install Gabion Baskets Material costs include Gabion baskets, and Hog Rings only. Equipment costs include trucking/freight of gabion basket materials and equipment. Labor costs include crew to assemble and install gabion baskets.	EA	$38.06	$205.46	$19.81	$263.33

31-37-00 Riprap

Includes trucking up to 15 miles, all necessary labor and equipment for a complete installation

31-37-00 Riprap

Includes trucking up to 15 miles, all necessary labor and equipment for a complete installation

116237	Riprap - Up To 9" Diameter / Up To 60 LB Stones	TON	$6.72	$31.68	$3.36	$41.76
116238	Riprap - 10" Up To 15" Diameter / 150 To 300 LB Stones	TON	$6.72	$45.02	$3.36	$55.10
116239	Riprap - 18" Diameter and Up / 1/4 Ton or Greater Stones	TON	$6.72	$50.02	$3.36	$60.10

31-40-00 Shoring and Underpinning

Shoring Equipment Material may be used for safely accessing depths per OSHA requirements.

31-41-00 Shoring

31-41-00 Shoring

116240	Sheet Shoring – Steel Includes removal	SF	$37.18	$12.29	$2.00	$51.47
116241	Wood (Timber) Lagging - Up To 1,000 SF	SF	$34.07	$19.52	$7.26	$60.85
116242	Wood (Timber) Lagging - Over 1,000 SF	SF	$28.38	$19.52	$7.26	$55.16

31-41-33 Trench Shielding

116243	Trench Box / Shield – Up To 8' Deep x 16' Long (DY) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	DY	$89.52	$178.34	$129.38	$397.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116244	Trench Box / Shield – Up To 8' Deep x 16' Long (WK) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	WK	$447.60	$580.61	$646.88	$1,675.09
116245	Trench Box / Shield – Up To 8' Deep x 16' Long (MO) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	MO	$1,790.42	$1,411.97	$2,587.50	$5,789.89
116246	Trench Box / Shield – Up To 10' Deep x 16' Long (DY) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	DY	$89.52	$196.02	$129.38	$414.92
116247	Trench Box / Shield – Up To 10' Deep x 16' Long (WK) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	WK	$447.60	$667.15	$646.88	$1,761.63
116248	Trench Box / Shield – Up To 10' Deep x 16' Long (MO) Includes spreaders to correct width, pins, keepers, and moving or repositioning of shield.	MO	$1,790.42	$1,713.13	$2,587.50	$6,091.05
116249	Trench Box / Shield – Mobilization Includes mobilization and assembly of shield, plus disassembly and demobilization of shield. This item is limited to one use per project.	LS	$432.31	$609.50	$258.75	$1,300.56
116250	Trench Shoring Jack – Up To 8' Deep Up to four jacks	DY	$146.45	$0.00	$59.50	$205.95
116251	Trench Shoring Jack – Up To 8' Deep Up to four jacks	WK	$738.10	$0.00	$196.01	$934.11
116252	Trench Shoring Jack – Up To 16' Deep Up to eight jacks	DY	$195.27	$0.00	$105.00	$300.27
116253	Trench Shoring Jack – Up To 16' Deep Up to eight jacks	WK	$984.15	$0.00	$378.00	$1,362.15

31-48-00 Underpinning

31-48-00 Underpinning

116254	Underpinning Groundwork and reinforcement to strengthen foundation or structure	CY	$935.58	$171.25	$0.00	$1,106.83

31-60-00 Special Foundations and Load-Bearing Elements

31-62-00 Driven Piles

31-62-13 Concrete Piles

116255	Precast Piles Up To 12" Square	LF	$12.98	$36.07	$0.00	$49.05

31-62-16 Steel Piles

116256	Steel H Piles - Up To HP 12 x 84 Includes material, fabrication, and delivery to the project site	TON	$0.00	$2,480.59	$1,656.00	$4,136.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116257	Steel H Piles - HP 14 x 73 Up To HP 14 x 117 Includes material, fabrication, and delivery to the project site	TON	$0.00	$2,593.40	$1,656.00	$4,249.40
116258	Steel H Piles - HP 16 x 88 Up To HP 16 x 162 Includes material, fabrication, and delivery to the project site	TON	$0.00	$2,593.40	$1,656.00	$4,249.40
116259	Steel H Piles - HP 16 x 183 Up To HP 18 x 204 Includes material, fabrication, and delivery to the project site	TON	$0.00	$2,853.63	$1,656.00	$4,509.63
116260	Drill and Set Soldier Beams Includes mobilization/de-mobilization, and all labor and equipment required for installation	TON	$880.84	$0.00	$0.00	$880.84
116261	Steel Concrete Filled Pipe Piles Up to 13.625" Diameter Pipe x .625" wall, Concrete Filled, Uncased	LF	$18.88	$45.85	$0.00	$64.73
	31-63-00 Bored Piles					
	31-63-33 Drilled Micropiles					
116262	Micro Piles 12"ø or less borehole with grouted pile with internal reinforcement	LF	$12.98	$39.76	$0.00	$52.74
	31-64-00 Caissons					
	31-64-00 Caissons					
116263	Concrete To Soldier Beam Holes	CY	$159.68	$233.54	$0.00	$393.22
116264	Drill Caissons and Dispose Of Spoils	LF	$34.57	$7.91	$0.00	$42.48
116265	Reinforced Cages for Caissons	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
116266	Reinforced Cages for Belled Caisson	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
116267	Concrete Placed in Caissons	CY	$159.68	$233.54	$0.00	$393.22
116268	Concrete Placed in Belled Caisson	CY	$159.68	$233.54	$0.00	$393.22
116269	[Modifier] For Cased Caisson Includes concrete/slurry mix and pumping	LF	$216.08	$196.12	$72.00	$484.20
	31-66-00 Special Foundations					
	31-66-15 Helical Foundation Piles					
116270	Helical Piles – 7" Diameter	LF	$16.82	$32.74	$0.00	$49.56
116271	Rammed Aggregate Pier – 30" Diameter	LF	$54.31	$14.81	$0.00	$69.12
	31-70-00 Tunneling and Mining					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	31-74-00 Tunnel Construction					
	31-74-00 Tunnel Construction					
116272	Precast Utility Tunnel 6' X 6' Excludes Excavation	LF	$162.18	$428.11	$0.00	$590.29

32-00-00 Exterior Improvements

Includes all required fuel, delivery, hauling/trucking, surface preparation, and dumping fees unless noted otherwise. Aggregate materials include any factors for expansion and compaction, but are limited to hauling/trucking up to 30 miles.

32-00-00 Exterior Improvements

Includes all required fuel, delivery, hauling/trucking, surface preparation, and dumping fees unless noted otherwise. Aggregate materials include any factors for expansion and compaction, but are limited to hauling/trucking up to 30 miles.

32-01-00 Operation and Maintenance of Exterior Improvements

32-01-16 Flexible Paving Rehabilitation

116273	Mill Existing Asphalt Surface 1.5" (< or = to 250 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$10.22	$0.00	$8.40	$18.62
116274	Mill Existing Asphalt Surface 1.5" (251-1,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$6.19	$0.00	$5.08	$11.27
116275	Mill Existing Asphalt Surface 1.5" (1,001-2,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$4.12	$0.00	$3.38	$7.50
116276	Mill Existing Asphalt Surface 1.5" (2,501-5,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$3.24	$0.00	$2.66	$5.90
116277	Mill Existing Asphalt Surface 1.5" (5,001-7,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.54	$0.00	$2.09	$4.63
116278	Mill Existing Asphalt Surface 1.5" (7,501-10,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.18	$0.00	$1.79	$3.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116279	Mill Existing Asphalt Surface 1.5" (10,001-25,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.77	$0.00	$1.45	$3.22
116280	Mill Existing Asphalt Surface 1.5" (25,001-50,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.33	$0.00	$1.10	$2.43
116281	Mill Existing Asphalt Surface 2" (< or = to 250 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$11.82	$0.00	$9.72	$21.54
116282	Mill Existing Asphalt Surface 2" (251-1,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$5.69	$0.00	$4.68	$10.37
116283	Mill Existing Asphalt Surface 2" (1,001-2,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$3.80	$0.00	$3.12	$6.92
116284	Mill Existing Asphalt Surface 2" (2,501-5,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.98	$0.00	$2.45	$5.43
116285	Mill Existing Asphalt Surface 2" (5,001-7,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.35	$0.00	$1.92	$4.27
116286	Mill Existing Asphalt Surface 2" (7,501-10,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.01	$0.00	$1.66	$3.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116287	Mill Existing Asphalt Surface 2" (10,001-25,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.83	$0.00	$1.51	$3.34
116288	Mill Existing Asphalt Surface 2" (25,001-50,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.58	$0.00	$1.29	$2.87
116289	Mill Existing Asphalt Surface 2.5" (< or = to 250 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$12.36	$0.00	$10.15	$22.51
116290	Mill Existing Asphalt Surface 2.5" (251-1,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$6.60	$0.00	$5.43	$12.03
116291	Mill Existing Asphalt Surface 2.5" (1,001-2,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$4.27	$0.00	$3.50	$7.77
116292	Mill Existing Asphalt Surface 2.5" (2,501-5,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$3.44	$0.00	$2.83	$6.27
116293	Mill Existing Asphalt Surface 2.5" (5,001-7,500 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.88	$0.00	$2.36	$5.24
116294	Mill Existing Asphalt Surface 2.5" (7,501-10,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.55	$0.00	$2.10	$4.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116295	Mill Existing Asphalt Surface 2.5" (10,001-25,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.47	$0.00	$2.04	$4.51
116296	Mill Existing Asphalt Surface 2.5" (25,001-50,000 SY) Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.08	$0.00	$1.71	$3.79
116297	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (< or = to 250 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$10.14	$0.00	$8.33	$18.47
116298	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (251-1,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$4.76	$0.00	$3.91	$8.67
116299	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (1,001-2,500 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.64	$0.00	$2.17	$4.81
116300	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (1,001-2,500 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.12	$0.00	$1.74	$3.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116301	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (5,001-7,500 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.97	$0.00	$1.61	$3.58
116302	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (7,501-10,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.79	$0.00	$1.47	$3.26
116303	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (10,001-25,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.68	$0.00	$1.38	$3.06
116304	Mill Existing Asphalt Surface Variable Thicknesses 0" -3" (25,001-50,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.63	$0.00	$1.35	$2.98
116305	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (< or = to 250 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$12.60	$0.00	$10.35	$22.95
116306	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (251-1,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$5.67	$0.00	$4.66	$10.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116307	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (1,001-2,500 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$3.21	$0.00	$2.63	$5.84
116308	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (2,500-5,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.14	$0.00	$1.76	$3.90
116309	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (5,001-7,500 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$2.10	$0.00	$1.74	$3.84
116310	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (7,501-10,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.92	$0.00	$1.58	$3.50
116311	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (10,000-25,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.81	$0.00	$1.48	$3.29
116312	Mill Existing Asphalt Surface Variable Thicknesses 3" -6" (25,001-50,000 SY) For variable thicknesses that require transitions in depth. Includes milling operation, loading into trucks, and hauling away for up to 30 miles. Excludes pre-cleaning, sweeping, tack coat, crack filling, or dump fees.	SY	$1.77	$0.00	$1.45	$3.22

32-01-17 Flexible Paving Repair

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116313	Geosynthetic Overlay (Stress-Absorbing Interlayer) Includes tack coat, geosynthetic overlay, all labor and equipment for a complete installation. (Petromat 4597 or equal)	SY	$2.46	$1.85	$1.08	$5.39
116314	Asphaltic Crack Sealer - for minor and shallow cracks For minor width and shallow cracks without major equipment. Includes cleaning prep.	LF	$0.55	$1.16	$0.00	$1.71
116315	Asphaltic Crack Filler/Sealer - Block and Reflective type cracks (both transverse and longitudinal) Includes cleaning prep with Hot Air Lance, Hot Sealant placed with Applicator Wand attached to heated trailer and vee shaped squeegee	LF	$1.86	$2.12	$1.47	$5.45

32-05-00 Common Work Results for Exterior Improvements

32-05-19 Geosynthetics for Exterior Improvements

116316	Geotextile Fabric Stabilization	SF	$0.45	$0.34	$0.00	$0.79

32-10-00 Bases, Ballasts, and Paving

32-11-00 Base Courses

32-11-13 Subgrade Modifications

116317	Geotextile Fabric – Stabilization Woven polypropylene or equal. Includes removal	SY	$0.61	$1.43	$0.00	$2.04
116318	Pulverize in Place Existing 2.5"-6" Asphalt Roadway 2,500-7,500 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.76	$0.00	$2.23	$2.99
116319	Pulverize in Place Existing 2.5"-6" Asphalt Roadway 7,500-12,500 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.25	$0.00	$0.77	$1.02
116320	Pulverize in Place Existing 2.5"-6" Asphalt Roadway 12,501-25,000 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.17	$0.00	$0.52	$0.69
116321	Pulverize in Place Existing 2.5"-6" Asphalt Roadway 25,001-50,000 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.15	$0.00	$0.45	$0.60
116322	Pulverize in Place Existing 2.5"-6" Asphalt Roadway 50,001-75,000 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.12	$0.00	$0.34	$0.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116323	Pulverize in Place Existing 2.5"-6" Asphalt Roadway > 75,001 SF Includes reshaping, rolling, and specified compaction within same roadway footprint	SF	$0.10	$0.00	$0.31	$0.41
116324	[Modifier] Pulverizing Thickness Premium (6.5"-9") May only be used in addition to, and included with, Pulverizing Asphalt Roadway items	SF	$0.02	$0.00	$0.09	$0.11
116325	Mobilization of Pulverizing Equipment Item used only for Mobilizing Pulverizing Machine	LS	$172.18	$0.00	$510.00	$682.18

32-11-23 Aggregate Base Courses

Aggregate Base material pricing includes trucking up to 30 miles.

116326	Aggregate Base Course for Site Work - (<= 500 CY) Item includes Class II aggregate base rock (excluding recycled), 3/4" maximum size with mechanical compaction in lifts as required.	CY	$37.60	$38.97	$6.85	$83.42
116327	Aggregate Base Course for Site Work - (501 to 3,000 CY) Item includes Class II aggregate base rock (excluding recycled), 3/4" maximum size with mechanical compaction in lifts as required.	CY	$27.47	$38.97	$8.71	$75.15
116328	Aggregate Base Course for Site Work - (3,001 to 10,000 CY) Item includes Class II aggregate base rock (excluding recycled), 3/4" maximum size with mechanical compaction in lifts as required.	CY	$22.71	$38.97	$11.81	$73.49
116329	Aggregate Base Course for Site Work - (10,001 to 60,000 CY) Item includes Class II aggregate base rock (excluding recycled), 3/4" maximum size with mechanical compaction in lifts as required.	CY	$20.15	$38.97	$12.74	$71.86
116330	Recycled Aggregate Base Course for Site Work - (<= 500 CY) Item includes only Class II recycled aggregate base rock, 3/4" maximum size with mechanical compaction in lifts as required. Use of this Item may only be used where permitted and approved by Agency.	CY	$37.60	$18.10	$6.85	$62.55
116331	Recycled Aggregate Base Course for Site Work - (501 to 3,000 CY) Item includes only Class II recycled aggregate base rock, 3/4" maximum size with mechanical compaction in lifts as required. Use of this Item may only be used where permitted and approved by Agency.	CY	$27.47	$18.10	$8.71	$54.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116332	Recycled Aggregate Base Course for Site Work - (3,001 to 10,000 CY) Item includes only Class II recycled aggregate base rock, 3/4" maximum size with mechanical compaction in lifts as required. Use of this Item may only be used where permitted and approved by Agency.	CY	$22.71	$18.10	$11.81	$52.62
116333	Recycled Aggregate Base Course for Site Work - (10,001 to 60,000 CY) Item includes only Class II recycled aggregate base rock, 3/4" maximum size with mechanical compaction in lifts as required. Use of this Item may only be used where permitted and approved by Agency.	CY	$20.15	$18.10	$12.74	$50.99
116334	[Modifier] Additional Compaction - Stone Base Rock Course Item can be used when scarification and compaction of the existing sub-base is required after pavement is removed in accordance with the specification requirements	SF	$0.69	$0.26	$0.08	$1.03
116335	[Modifier] Additional Compaction - Asphalt Binder or Surface Course This item can only be used when compaction of the existing binder and/or existing surface course is required in accordance with the specification requirements. Can be applied cumulatively to baseline SF unit items only.	SF	$0.69	$0.28	$0.08	$1.05
	32-12-00 Flexible Paving					
	32-12-13 Preparatory Coats					
116336	Prime Coat Rock for Asphalt Placement <1000 Gal Application may be placed by power machine sprayer or by hand provided application rate is per specifications.	GAL	$1.20	$4.00	$3.34	$8.54
116337	Prime Coat Rock for Asphalt Placement 1000-7500 Gal Application may be placed by power machine sprayer or by hand provided application rate is per specifications.	GAL	$0.94	$3.16	$2.63	$6.73
116338	Prime Coat Rock for Asphalt Placement >7500 Gal Application may be placed by power machine sprayer or by hand provided application rate is per specifications.	GAL	$0.69	$2.32	$1.93	$4.94
116339	Tack Coat Placement on Asphalt surface Application placed by power machine sprayer at application rate per specifications. May be used only on top of existing pavement or between lifts if specified.	SF	$0.01	$0.04	$0.05	$0.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116340	Tack Coat (NTT/CNTT) Placement on Asphalt surface Application placed by power machine sprayer at application rate per specifications. May be used only on top of existing pavement or between lifts if specified. (NTT/CNTT) = Non Tracking	GAL	$0.83	$1.66	$2.07	$4.56

32-12-16 Asphalt Paving

Asphalt material pricing includes delivery up to 30 miles.
Hand Placed Asphalt has a premium built into those items, and will not qualify for additional modifiers.
Other modifiers may be used only on base items that have similar units (example: CY with CY, SF with SF, Tons with Tons)
Dump Fee Cost for Milling or pulverizing is not included due to common material reusage.

116341	Asphalt Concrete Paving 1" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$287.21	$136.25	$98.28	$521.74
116342	Asphalt Concrete Paving 1" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$147.13	$136.25	$50.35	$333.73
116343	Asphalt Concrete Paving 1" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$71.96	$136.25	$38.32	$246.53
116344	Asphalt Concrete Paving 1" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$23.98	$136.25	$17.02	$177.25
116345	Asphalt Concrete Paving 1" Thick (2,251 - 3,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$21.21	$136.25	$15.05	$172.51
116346	Asphalt Concrete Paving 1" Thick (3,000 - 5,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$17.71	$136.25	$14.17	$168.13
116347	Asphalt Concrete Paving 1.5" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$269.13	$136.25	$92.09	$497.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116348	Asphalt Concrete Paving 1.5" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$136.07	$136.25	$46.55	$318.87
116349	Asphalt Concrete Paving 1.5" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$64.99	$136.25	$34.60	$235.84
116350	Asphalt Concrete Paving 1.5" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$29.32	$136.25	$20.82	$186.39
116351	Asphalt Concrete Paving 2" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$194.46	$136.25	$66.54	$397.25
116352	Asphalt Concrete Paving 2" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$97.69	$136.25	$33.43	$267.37
116353	Asphalt Concrete Paving 2" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$54.91	$136.25	$29.23	$220.39
116354	Asphalt Concrete Paving 2" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$26.22	$136.25	$18.62	$181.09
116355	Asphalt Concrete Paving 2" Thick (2,251 - 3,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$20.77	$136.25	$14.74	$171.76
116356	Asphalt Concrete Paving 2" Thick (3,000 - 5,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$9.96	$136.25	$7.97	$154.18
116357	Asphalt Concrete Paving 2" Thick (5,001 - 10,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$8.35	$136.25	$6.68	$151.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116358	Asphalt Concrete Paving 2.5" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$189.09	$136.25	$64.70	$390.04
116359	Asphalt Concrete Paving 2.5" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$94.25	$136.25	$32.25	$262.75
116360	Asphalt Concrete Paving 2.5" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$52.46	$136.25	$27.93	$216.64
116361	Asphalt Concrete Paving 2.5" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$21.80	$136.25	$15.48	$173.53
116362	Asphalt Concrete Paving 2.5" Thick (2,251 - 3,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$16.62	$136.25	$11.80	$164.67
116363	Asphalt Concrete Paving 2.5" Thick (3,000 - 5,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$6.47	$136.25	$5.19	$147.91
116364	Asphalt Concrete Paving 2.5" Thick (5,001 - 10,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course.	TON	$4.94	$136.25	$3.96	$145.15
116365	Asphalt Concrete Paving 3" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$169.75	$136.25	$58.09	$364.09
116366	Asphalt Concrete Paving 3" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$106.08	$136.25	$36.29	$278.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116367	Asphalt Concrete Paving 3" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$50.77	$136.25	$27.02	$214.04
116368	Asphalt Concrete Paving 3" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$20.73	$136.25	$14.72	$171.70
116369	Asphalt Concrete Paving 3" Thick (2,251 - 3,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$14.12	$136.25	$10.03	$160.40
116370	Asphalt Concrete Paving 3" Thick (3,000 - 5,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$5.29	$136.25	$4.23	$145.77
116371	Asphalt Concrete Paving 3" Thick (5,001 - 10,000 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$4.78	$136.25	$3.83	$144.86
116372	Asphalt Concrete Paving 3.5" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$164.88	$136.25	$56.42	$357.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116373	Asphalt Concrete Paving 3.5" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$102.46	$136.25	$35.06	$273.77
116374	Asphalt Concrete Paving 3.5" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$48.40	$136.25	$25.77	$210.42
116375	Asphalt Concrete Paving 3.5" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$19.08	$136.25	$13.55	$168.88
116376	Asphalt Concrete Paving 4" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$160.08	$136.25	$54.77	$351.10
116377	Asphalt Concrete Paving 4" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$84.21	$136.25	$28.82	$249.28
116378	Asphalt Concrete Paving 4" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$46.08	$136.25	$24.54	$206.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116379	Asphalt Concrete Paving 4" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$17.46	$136.25	$12.39	$166.10
116380	Asphalt Concrete Paving 4.5" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$155.40	$136.25	$53.18	$344.83
116381	Asphalt Concrete Paving 4.5" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$81.04	$136.25	$27.73	$245.02
116382	Asphalt Concrete Paving 4.5" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$27.69	$136.25	$14.74	$178.68
116383	Asphalt Concrete Paving 4.5" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$15.86	$136.25	$11.26	$163.37
116384	Asphalt Concrete Paving 5" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$150.80	$136.25	$51.60	$338.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116385	Asphalt Concrete Paving 5" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$77.94	$136.25	$26.67	$240.86
116386	Asphalt Concrete Paving 5" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$25.79	$136.25	$13.73	$175.77
116387	Asphalt Concrete Paving 5" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$14.31	$136.25	$10.15	$160.71
116388	Asphalt Concrete Paving 6" Thick (<= 150 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$146.30	$136.25	$50.06	$332.61
116389	Asphalt Concrete Paving 6" Thick (151 - 500 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$74.89	$136.25	$25.62	$236.76
116390	Asphalt Concrete Paving 6" Thick (501 - 1,100 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$23.53	$136.25	$12.54	$172.32

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116391	Asphalt Concrete Paving 6" Thick (1,101 - 2,250 Tons) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$12.78	$136.25	$9.07	$158.10
116392	Recycled Asphalt Concrete Paving 1" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$287.21	$120.78	$98.28	$506.27
116393	Recycled Asphalt Concrete Paving 1" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$147.13	$120.78	$50.35	$318.26
116394	Recycled Asphalt Concrete Paving 1" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$71.96	$120.78	$38.32	$231.06
116395	Recycled Asphalt Concrete Paving 1" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$23.98	$120.78	$17.02	$161.78
116396	Recycled Asphalt Concrete Paving 1" Thick (2,251 - 3,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$21.21	$120.78	$15.05	$157.04
116397	Recycled Asphalt Concrete Paving 1" Thick (3,000 - 5,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top or Wearing Course.	TON	$17.71	$120.78	$14.17	$152.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116398	Recycled Asphalt Concrete Paving 1.5" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$269.13	$120.78	$92.09	$482.00
116399	Recycled Asphalt Concrete Paving 1.5" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$136.07	$120.78	$46.55	$303.40
116400	Recycled Asphalt Concrete Paving 1.5" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$64.99	$120.78	$34.60	$220.37
116401	Recycled Asphalt Concrete Paving 1.5" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$29.32	$120.78	$20.82	$170.92
116402	Recycled Asphalt Concrete Paving 2" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$194.46	$120.78	$66.54	$381.78
116403	Recycled Asphalt Concrete Paving 2" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$97.69	$120.78	$33.43	$251.90
116404	Recycled Asphalt Concrete Paving 2" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$54.91	$120.78	$29.23	$204.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116405	Recycled Asphalt Concrete Paving 2" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$26.22	$120.78	$18.62	$165.62
116406	Recycled Asphalt Concrete Paving 2" Thick (2,251 - 3,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$20.77	$120.78	$14.74	$156.29
116407	Recycled Asphalt Concrete Paving 2" Thick (3,000 - 5,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$9.96	$120.78	$7.97	$138.71
116408	Recycled Asphalt Concrete Paving 2" Thick (5,001 - 10,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$8.35	$120.78	$6.68	$135.81
116409	Recycled Asphalt Concrete Paving 2.5" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$189.09	$120.78	$64.70	$374.57
116410	Recycled Asphalt Concrete Paving 2.5" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$94.25	$120.78	$32.25	$247.28
116411	Recycled Asphalt Concrete Paving 2.5" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$52.46	$120.78	$27.93	$201.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116412	Recycled Asphalt Concrete Paving 2.5" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$21.80	$120.78	$15.48	$158.06
116413	Recycled Asphalt Concrete Paving 2.5" Thick (2,251 - 3,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$16.62	$120.78	$11.80	$149.20
116414	Recycled Asphalt Concrete Paving 2.5" Thick (3,000 - 5,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$6.47	$120.78	$5.19	$132.44
116415	Recycled Asphalt Concrete Paving 2.5" Thick (5,001 - 10,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Top, Wearing or Binder Course.	TON	$4.94	$120.78	$3.96	$129.68
116416	Recycled Asphalt Concrete Paving 3" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$169.75	$120.78	$58.09	$348.62
116417	Recycled Asphalt Concrete Paving 3" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$106.08	$120.78	$36.29	$263.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116418	Recycled Asphalt Concrete Paving 3" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$50.77	$120.78	$27.02	$198.57
116419	Recycled Asphalt Concrete Paving 3" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$20.73	$120.78	$14.72	$156.23
116420	Recycled Asphalt Concrete Paving 3" Thick (2,251 - 3,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$14.12	$120.78	$10.03	$144.93
116421	Recycled Asphalt Concrete Paving 3" Thick (3,000 - 5,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$5.29	$120.78	$4.23	$130.30
116422	Recycled Asphalt Concrete Paving 3" Thick (5,001 - 10,000 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$4.78	$120.78	$3.83	$129.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116423	Recycled Asphalt Concrete Paving 3.5" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$164.88	$120.78	$56.42	$342.08
116424	Recycled Asphalt Concrete Paving 3.5" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$102.46	$120.78	$35.06	$258.30
116425	Recycled Asphalt Concrete Paving 3.5" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$48.40	$120.78	$25.77	$194.95
116426	Recycled Asphalt Concrete Paving 3.5" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Wearing, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$19.08	$120.78	$13.55	$153.41
116427	Recycled Asphalt Concrete Paving 4" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$160.08	$120.78	$54.77	$335.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116428	Recycled Asphalt Concrete Paving 4" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$84.21	$120.78	$28.82	$233.81
116429	Recycled Asphalt Concrete Paving 4" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$46.08	$120.78	$24.54	$191.40
116430	Recycled Asphalt Concrete Paving 4" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$17.46	$120.78	$12.39	$150.63
116431	Recycled Asphalt Concrete Paving 4.5" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$155.40	$120.78	$53.18	$329.36
116432	Recycled Asphalt Concrete Paving 4.5" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$81.04	$120.78	$27.73	$229.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116433	Recycled Asphalt Concrete Paving 4.5" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$27.69	$120.78	$14.74	$163.21
116434	Recycled Asphalt Concrete Paving 4.5" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. Use of this Item may only be used where permitted and approved by Agency. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$15.86	$120.78	$11.26	$147.90
116435	Recycled Asphalt Concrete Paving 5" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$150.80	$120.78	$51.60	$323.18
116436	Recycled Asphalt Concrete Paving 5" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$77.94	$120.78	$26.67	$225.39
116437	Recycled Asphalt Concrete Paving 5" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$25.79	$120.78	$13.73	$160.30
116438	Recycled Asphalt Concrete Paving 5" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$14.31	$120.78	$10.15	$145.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116439	Recycled Asphalt Concrete Paving 6" Thick (<= 150 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$146.30	$120.78	$50.06	$317.14
116440	Recycled Asphalt Concrete Paving 6" Thick (151 - 500 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$74.89	$120.78	$25.62	$221.29
116441	Recycled Asphalt Concrete Paving 6" Thick (501 - 1,100 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$23.53	$120.78	$12.54	$156.85
116442	Recycled Asphalt Concrete Paving 6" Thick (1,101 - 2,250 Tons) Includes Recycled Asphalt (RAP) delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course. Use of this item is contingent upon placement in a single lift if approved by Agency, otherwise tack between lifts may be required.	TON	$12.78	$120.78	$9.07	$142.63
116443	Rubberized Asphalt Concrete Paving 1.5" Thick (<= 150 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$307.84	$159.73	$105.34	$572.91
116444	Rubberized Asphalt Concrete Paving 1.5" Thick (151 - 500 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$154.81	$159.73	$52.97	$367.51
116445	Rubberized Asphalt Concrete Paving 1.5" Thick (501 - 1,100 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$73.23	$159.73	$39.00	$271.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116446	Rubberized Asphalt Concrete Paving 1.5" Thick (1,101 - 2,250 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$46.06	$159.73	$32.69	$238.48
116447	Rubberized Asphalt Concrete Paving 2" Thick (<= 150 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$288.10	$159.73	$98.58	$546.41
116448	Rubberized Asphalt Concrete Paving 2" Thick (151 - 500 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$142.72	$159.73	$48.83	$351.28
116449	Rubberized Asphalt Concrete Paving 2" Thick (501 - 1,100 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$65.62	$159.73	$34.94	$260.29
116450	Rubberized Asphalt Concrete Paving 2" Thick (1,101 - 2,250 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$40.11	$159.73	$28.47	$228.31
116451	Rubberized Asphalt Concrete Paving 2" Thick (2,251 - 3,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$4.01	$159.73	$2.85	$166.59
116452	Rubberized Asphalt Concrete Paving 2" Thick (3,001 - 5,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$2.42	$159.73	$1.93	$164.08
116453	Rubberized Asphalt Concrete Paving 2" Thick (5,001 - 10,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top or Wearing Course.	TON	$0.98	$159.73	$0.78	$161.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116454	Rubberized Asphalt Concrete Paving 2.5" Thick (<= 150 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$284.35	$159.73	$97.29	$541.37
116455	Rubberized Asphalt Concrete Paving 2.5" Thick (151 - 500 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$140.42	$159.73	$48.05	$348.20
116456	Rubberized Asphalt Concrete Paving 2.5" Thick (501 - 1,100 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$64.17	$159.73	$34.17	$258.07
116457	Rubberized Asphalt Concrete Paving 2.5" Thick (1,101 - 2,250 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$38.98	$159.73	$27.67	$226.38
116458	Rubberized Asphalt Concrete Paving 2.5" Thick (2,251 - 3,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$3.24	$159.73	$2.30	$165.27
116459	Rubberized Asphalt Concrete Paving 2.5" Thick (3,001 - 5,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$2.08	$159.73	$1.66	$163.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116460	Rubberized Asphalt Concrete Paving 2.5" Thick (5,001 - 10,000 Tons) Includes Rubberized Asphalt Concrete (RAC) delivered and placed with all associated materials labor and equipment. For either Top, Wearing or Binder Course. Use of this item is contingent upon single lift if allowed, otherwise tack between lifts required.	TON	$0.26	$159.73	$0.22	$160.21
116461	Asphalt Concrete Patch Paving Hot Mix Asphalt (HMA) - Placed by Hand Includes Asphalt delivered and placed with labor and vibrating plate or whacker and other hand equipment. To be used for small or tight areas where paving machine, loader, and rollers cannot be used.	TON	$115.75	$130.15	$26.19	$272.09
116462	Pervious (Permeable) Asphalt Paving	CY	$142.50	$215.42	$8.00	$365.92
116463	SuperPave Asphalt 9.5mm Wearing Course (< or = to 150 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$126.79	$128.56	$95.58	$350.93
116464	SuperPave Asphalt 9.5mm Wearing Course (151 to 600 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$40.25	$128.56	$30.34	$199.15
116465	SuperPave Asphalt 9.5mm Wearing Course (601 to 1400 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$29.67	$128.56	$22.37	$180.60
116466	SuperPave Asphalt 9.5mm Wearing Course (1401 to 2350 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$19.99	$128.56	$15.06	$163.61
116467	SuperPave Asphalt 9.5mm Wearing Course (2351 to 2800 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$16.87	$128.56	$12.72	$158.15
116468	SuperPave Asphalt 9.5mm Wearing Course (= or > 2801 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$7.27	$128.56	$5.47	$141.30
116469	SuperPave Asphalt 12.5mm Wearing Course (< or = to 150 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$126.79	$121.70	$95.58	$344.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116470	SuperPave Asphalt 12.5mm Wearing Course (151 to 600 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Top Course	TON	$40.25	$121.70	$30.34	$192.29
116471	SuperPave Asphalt 19mm Binder Course (< or = to 150 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Base Course	TON	$90.98	$114.83	$68.59	$274.40
116472	SuperPave Asphalt 19mm Binder Course (151 to 600 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Base Course	TON	$43.39	$114.83	$32.71	$190.93
116473	SuperPave Asphalt 19mm Binder Course (601 to 1400 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Wearing Course or Base Course	TON	$27.46	$114.83	$20.70	$162.99
116474	SuperPave Asphalt 25mm Base Course (< or = to 150 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course	TON	$105.04	$110.27	$79.18	$294.49
116475	SuperPave Asphalt 25mm Base Course (151 to 600 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course	TON	$41.30	$110.27	$31.13	$182.70
116476	SuperPave Asphalt 25mm Base Course (601 to 1400 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course	TON	$25.54	$110.27	$19.25	$155.06
116477	SuperPave Asphalt 37.5mm Base Course (< or = to 150 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course	TON	$107.70	$106.66	$81.18	$295.54
116478	SuperPave Asphalt 37.5mm Base Course (151 to 600 Ton) Includes Asphalt delivered and placed with all associated materials labor and equipment. For either Base, Leveling or Binder Course	TON	$67.39	$106.66	$50.80	$224.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116479	[Modifier] Quantity Premium - Asphalt Paving (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 32-12-16 Asphalt Paving are within stated quantities. Can be applied cumulatively to baseline CY unit items only.	CY	$67.21	$0.00	$0.00	$67.21
116480	[Modifier] Quantity Premium - Asphalt Paving (11-30 CY) Quantity premium can be used when total cubic yardage in section 32-12-16 Asphalt Paving are within stated quantities. Can be applied cumulatively to baseline CY unit items only.	CY	$22.40	$0.00	$0.00	$22.40
116481	[Modifier] Quantity Premium - Asphalt Paving (31-50 CY) Quantity premium can be used when total cubic yardage in section 32-12-16 Asphalt Paving are within stated quantities. Can be applied cumulatively to baseline CY unit items only.	CY	$13.44	$0.00	$0.00	$13.44
116482	Redwood Header With Stakes	LF	$1.22	$0.69	$0.00	$1.91
	32-12-36 Seal Coats					
116483	Fog Seal (< or = to 1,000 SY) Includes pre cleaning, sweeping, fog coat and finishing for a complete system	SY	$0.84	$0.26	$0.12	$1.22
116484	Fog Seal (1,001 - 5,000 SY) Includes pre cleaning, sweeping, fog coat and finishing for a complete system	SY	$0.79	$0.24	$0.10	$1.13
116485	Fog Seal (5,001 - 25,000 SY) Includes pre cleaning, sweeping, fog coat and finishing for a complete system	SY	$0.77	$0.24	$0.10	$1.11
116486	Fog Seal (25,001 - 50,000 SY) Includes pre cleaning, sweeping, fog coat and finishing for a complete system	SY	$0.74	$0.23	$0.09	$1.06
116487	Fog Seal (over 50,001 SY) Includes pre cleaning, sweeping, fog coat and finishing for a complete system	SY	$0.69	$0.22	$0.09	$1.00
116488	Slurry Seal Type 1 (< or = to 1,000 SY) Includes pre-cleaning, sweeping, slurry seal coat, and finishing for a complete system.	SY	$2.35	$1.38	$0.34	$4.07
116489	Slurry Seal Type 1 (1,001 -5,000 SY) Includes pre-cleaning, sweeping, slurry seal coat, and finishing for a complete system.	SY	$2.07	$1.21	$0.30	$3.58
116490	Slurry Seal Type 1 (5,001 -25,000 SY) Includes pre-cleaning, sweeping, slurry seal coat, and finishing for a complete system.	SY	$1.79	$1.05	$0.26	$3.10

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116491	Slurry Seal Type 1 (25,001 -50,000 SY) Includes pre-cleaning, sweeping, slurry seal coat, and finishing for a complete system.	SY	$1.70	$1.00	$0.25	$2.95
116492	Slurry Seal Type 1 (over 50,001 SY) Includes pre-cleaning, sweeping, slurry seal coat, and finishing for a complete system.	SY	$1.51	$0.89	$0.23	$2.63
116493	[Modifier] For Type 2 Slurry Seal Can be applied cumulatively to increase base line price of Slurry Seal Type 1 to Type 2. Only applies to items chosen within 32-12-36.	SY	$0.53	$0.24	$0.00	$0.77
116494	Chip Seal 1/4" (< or = to 1,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.96	$1.69	$0.49	$5.14
116495	Chip Seal 1/4" (1,001 -5,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.81	$1.60	$0.48	$4.89
116496	Chip Seal 1/4" (5,001 -25,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.64	$1.51	$0.45	$4.60
116497	Chip Seal 1/4" (25,001 -50,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.30	$1.32	$0.39	$4.01
116498	Chip Seal 1/4" (over 50,001 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.06	$1.17	$0.34	$3.57
116499	Chip Seal 5/16" (< or = to 1,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$3.17	$1.76	$0.49	$5.42
116500	Chip Seal 5/16" (1,001 -5,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$3.04	$1.69	$0.47	$5.20
116501	Chip Seal 5/16" (5,001 -25,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.91	$1.62	$0.45	$4.98
116502	Chip Seal 5/16" (25,001 -50,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.50	$1.39	$0.39	$4.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116503	Chip Seal 5/16" (over 50,001 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.22	$1.23	$0.34	$3.79
116504	Chip Seal 3/8" (< or = to 1,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$3.31	$1.84	$0.58	$5.73
116505	Chip Seal 3/8" (1,001 -5,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$3.21	$1.78	$0.56	$5.55
116506	Chip Seal 3/8" (5,001 -25,000 SY). Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$3.10	$1.72	$0.54	$5.36
116507	Chip Seal 3/8" (25,001 -50,000 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.63	$1.46	$0.46	$4.55
116508	Chip Seal 3/8" (over 50,001 SY) Includes pre-cleaning, sweeping, chip seal emulsion, compressed aggregate, and fog seal for a complete system	SY	$2.35	$1.30	$0.41	$4.06

32-13-00 Rigid Paving

32-13-13 Concrete Paving

Cast-in-place concrete is based on 2,500 PSI normal weight air entrained concrete. Baseline pricing is for concrete quantities greater than or equal to seven cubic yards. Refer to Division Three for any Formwork, Curing, Finishing, and Reinforcing requirements

116509	Concrete Sidewalks / Pads Installation of concrete Only. Excludes: fine grading, finishing, formwork, reinforcement, Base Rock, or Sand.	CY	$31.84	$233.54	$0.00	$265.38
116510	Concrete ADA Curb Ramps Installation of concrete Only. Includes flares and ramps. Excludes: fine grading, reinforcement, Base Rock, or Sand.	CY	$430.38	$233.54	$0.00	$663.92
116511	Concrete Paving Installation of concrete Only. Excludes: fine grading, reinforcement, Base Rock, or Sand.	CY	$36.63	$233.54	$0.00	$270.17
116512	Patch Existing Concrete Walk Installation of concrete Only. Excludes: fine grading, reinforcement, Base Rock, or Sand.	SF	$2.20	$39.96	$0.00	$42.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116513	Stained Concrete Finish (1 Color)-Shake On- Trowel In Includes follow up seal coat	SF	$2.17	$1.43	$0.00	$3.60
116514	Stained Concrete Finish (2 Color)-Shake On- Trowel In Includes follow up seal coat	SF	$2.71	$2.28	$0.00	$4.99
116515	Stamped Concrete Finish Includes follow up seal coat	SF	$3.62	$2.28	$0.00	$5.90
116516	Stamped Concrete Finish – Shake On Color Includes follow up seal coat	SF	$4.35	$3.43	$0.00	$7.78
116517	Truncated Dome Warning Strip – Surface Mounted	SF	$13.58	$21.28	$0.00	$34.86
116518	Truncated Dome Warning Strip – Recessed	SF	$18.10	$21.28	$0.00	$39.38
116519	Detectable Warning Tiles – Surface Mounted Stainless Steel Cast in Place w/ yellow epoxy polymer composition surface. (This item MAY ALSO BE USED with Concrete Group Work: ADA Curb Ramp Replacement)	SF	$19.10	$127.87	$0.00	$146.97
116520	Foam and Sealant Expansion Joint	LF	$0.89	$0.90	$0.00	$1.79
116521	Expansion Joint - Polyvinyl	LF	$0.63	$2.39	$0.00	$3.02
116522	Concrete Group Work: ADA Curb Ramp Replacement - 6" Curb w/24" Gutter Base width Installation of concrete Only. Includes ramp depressions and returns, all formwork, required expansion joints, weep holes, and finish. This item is only for use as Concrete Group Work: ADA Curb Ramp Replacement - other [concrete modifiers] may NOT be applied to this item. Excludes: Fine grading, Reinforcement, Base Rock, or Sand.	LF	$71.43	$19.17	$0.00	$90.60
116523	Concrete Group Work: ADA Curb Ramp Replacement - 6"X15" Curb Installation of concrete Only. Includes ramp depressions and returns, all formwork, required expansion joints, weep holes, and finish. This item is only for use as Concrete Group Work: ADA Curb Ramp Replacement - other [concrete modifiers] may NOT be applied to this item. Excludes: Fine grading, Reinforcement, Base Rock, or Sand.	LF	$66.53	$15.98	$0.00	$82.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116524	Concrete Group Work: ADA Curb Ramp Replacement - 4" Sidewalk Installation of concrete Only. Includes all associated sidewalk, ramp depressions and returns, all formwork, required expansion joints, weep holes, and finish. This item is only for use as Concrete Group Work: ADA Curb Ramp Replacement - other [concrete modifiers] may NOT be applied to this item. Excludes: Fine grading, Reinforcement, Base Rock, or Sand.	SF	$14.24	$3.19	$0.00	$17.43
116525	Concrete Group Work: ADA Curb Ramp Replacement - 7" Cross Gutter and/or Spandrel Installation of concrete Only. Includes ramp depressions and returns, all formwork, required expansion joints, weep holes, and finish. This item is only for use as Concrete Group Work: ADA Curb Ramp Replacement - other [concrete modifiers] may NOT be applied to this item. Excludes: Fine grading, Reinforcement, Base Rock, or Sand.	SF	$15.85	$3.96	$0.00	$19.81
116526	[Modifier] 2,500 PSI to 3,000 PSI Concrete Paving/Sidewalk Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$4.00	$0.00	$4.00
116527	[Modifier] 2,500 PSI to 3,500 PSI Concrete Paving/Sidewalk Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$5.49	$0.00	$5.49
116528	[Modifier] 2,500 PSI to 4,000 PSI Concrete Paving/Sidewalk Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$9.59	$0.00	$9.59
116529	[Modifier] 2,500 PSI to 4,500 PSI Concrete Paving/Sidewalk Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$15.07	$0.00	$15.07
116530	[Modifier] 2,500 PSI to 5,000 PSI Concrete Paving/Sidewalk Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$20.55	$0.00	$20.55
116531	[Modifier] For Integral Color Concrete Can be applied cumulatively to base line items chosen within 32-13-13. Includes truck wash out	CY	$0.00	$13.70	$0.00	$13.70
116532	[Modifier] For Non Chloride Accelerator – Up to 1% Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$10.51	$0.00	$10.51
116533	[Modifier] For Non Chloride Accelerator – Up to 2% Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$21.00	$0.00	$21.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116534	[Modifier] For Non Chloride Accelerator – Up to 3% Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$31.51	$0.00	$31.51
116535	[Modifier] For Retarder – Up to 2.5 OZ/CWT Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$7.22	$0.00	$7.22
116536	[Modifier] For Mid Range Water Reducer Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$6.56	$0.00	$6.56
116537	[Modifier] For High Range Water Reducer Can be applied cumulatively to base line items chosen within 32-13-13.	CY	$0.00	$10.51	$0.00	$10.51
116538	[Modifier] Cold Weather Curing Blankets To be used only in addition to items chosen within 32 -13-13 R-Value up to 2.8. Includes installation and removal	SF	$0.58	$1.15	$0.00	$1.73
116539	[Modifier] Quantity Premium - Concrete Paving (4-6 CY) This line item can be used if the total cubic yardage of concrete falls within 4-6 cubic yards. It Can be applied cumulatively to applicable line items chosen within 32-13-13.	LS	$449.78	$1,141.62	$0.00	$1,591.40
116540	[Modifier] Quantity Premium - Concrete Paving (< Or = To 3 CY) This line item can be used if the total cubic yardage of concrete is less than or equal to 3 cubic yards. It Can be applied cumulatively to applicable line items chosen within 32-13-13.	LS	$899.54	$1,141.62	$0.00	$2,041.16
116541	[Modifier] Quantity Premium - Concrete Paving (101-500 SF) Quantity premium can be used when total square footage in section 32-13-13 Concrete Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$1.96	$0.00	$0.00	$1.96
116542	[Modifier] Quantity Premium - Concrete Paving (51-100 SF) Quantity premium can be used when total square footage in section 32-13-13 Concrete Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$4.88	$0.00	$0.00	$4.88
116543	[Modifier] Quantity Premium - Concrete Paving (< or = to 50 SF) Quantity premium can be used when total square footage in section 32-13-13 Concrete Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$9.75	$0.00	$0.00	$9.75

32-14-00 Unit Paving

Price includes 8" stone base, setting bed, edge restraints, polymeric joint sand or equal

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	32-14-13 Unit Paving					
116544	Outdoor Grassroad Pavers – Or Equal	SF	$4.88	$7.37	$0.00	$12.25
116545	Outdoor Precast Pavers – Or Equal	SF	$8.12	$19.46	$0.00	$27.58
116546	Outdoor Brick Pavers – Or Equal	SF	$8.12	$17.76	$0.00	$25.88
116547	Outdoor Granite Pavers – Or Equal	SF	$8.12	$33.99	$0.00	$42.11
116548	Bluestone Paver – Or Equal	SF	$8.12	$41.78	$0.00	$49.90
116549	Limestone Paver (< 2' X 2' Paver) – Or Equal	SF	$8.12	$22.23	$0.00	$30.35
116550	Limestone Paver (> 2' X 2' Paver) – Or Equal	SF	$8.12	$33.34	$0.00	$41.46
116551	Permeable Paver – Or Equal	SF	$8.12	$20.55	$0.00	$28.67
116552	[Modifier] Quantity Premium - Unit Paving (101-500 SF) Quantity premium can be used when total square footage in section 32-14-00 Unit Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$1.96	$0.00	$0.00	$1.96
116553	[Modifier] Quantity Premium - Unit Paving (51-100 SF) Quantity premium can be used when total square footage in section 32-14-00 Unit Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$4.88	$0.00	$0.00	$4.88
116554	[Modifier] Quantity Premium - Unit Paving (< or = to 50 SF) Quantity premium can be used when total square footage in section 32-14-00 Unit Paving are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$9.75	$0.00	$0.00	$9.75
	32-15-00 Aggregate Surfacing					
	32-15-40 Crushed Stone Surfacing					
116555	Decomposed Granite Paving Up To 3" with 3" Stone Base Includes edge restraints	SF	$2.78	$2.22	$0.00	$5.00
116556	Decomposed Granite Paving Up To 4" with 4" Stone Base Includes edge restraints	SF	$3.25	$3.34	$0.00	$6.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116557	[Modifier] Quantity Premium - Crushed Stone Surfacing (101-500 SF) Quantity premium can be used when total square footage in section 32-15-40 Crushed Stone Surfacing are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$1.96	$0.00	$0.00	$1.96
116558	[Modifier] Quantity Premium - Crushed Stone Surfacing (51-100 SF) Quantity premium can be used when total square footage in section 32-15-40 Crushed Stone Surfacing are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$4.88	$0.00	$0.00	$4.88
116559	[Modifier] Quantity Premium - Crushed Stone Surfacing (< or = to 50 SF) Quantity premium can be used when total square footage in section 32-15-40 Crushed Stone Surfacing are within stated quantities. Can be applied cumulatively to base line items chosen within 32-13-13.	SF	$9.75	$0.00	$0.00	$9.75

32-16-00 Curbs, Gutters, Sidewalks, and Driveways

32-16-13 Curbs and Gutters

Refer to Division Three for any reinforcing requirements

116560	Concrete Curb – Standard Curb Includes concrete, forms, expansion joints, finish and cure Excludes: fine grading, reinforcement, Base Rock, or Sand. (If rebar is required, please see division 3-21-00).	CY	$581.20	$233.54	$30.90	$845.64
116561	Concrete Curb and Gutter Includes concrete, forms, expansion joints, finish and cure Excludes: fine grading, reinforcement, Base Rock, or Sand. (If rebar is required, please see division 3-21-00).	CY	$581.20	$233.54	$30.90	$845.64
116562	Concrete Curb – Gutter Includes concrete, forms, expansion joints, finish and cure Excludes: fine grading, reinforcement, Base Rock, or Sand. (If rebar is required, please see division 3-21-00).	CY	$581.20	$233.54	$30.90	$845.64
116563	Granite Curb New or Reclaimed	LF	$25.99	$15.57	$0.00	$41.56
116564	Precast Concrete Curbs and Bumpers	LF	$25.99	$9.58	$0.00	$35.57
116565	Asphalt Curb - Standard, Machine Extruded	TON	$58.93	$119.78	$15.00	$193.71
116566	Asphalt Curb - Mountable, Machine Extruded	TON	$73.66	$119.78	$15.00	$208.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116567	Asphalt Curb - Standard and Mountable, Installed by Hand	TON	$190.54	$119.78	$15.00	$325.32
116568	[Modifier] Steel Facing On Curb Can be applied cumulatively to base line items chosen within 32-13-13.	LF	$2.97	$4.50	$0.00	$7.47
116569	[Modifier] Quantity Premium - Concrete Curbs and Gutters (4-6 CY) This line item can be used if the total cubic yardage of concrete falls within 4-6 cubic yards. It Can be applied cumulatively to applicable line items chosen within 32-13-13.	LS	$449.78	$1,141.62	$0.00	$1,591.40
116570	[Modifier] Quantity Premium - Concrete Curbs and Gutters (< Or = To 3 CY) This line item can be used if the total cubic yardage of concrete is less than or equal to 3 cubic yards. It Can be applied cumulatively to applicable line items chosen within 32-13-13.	LS	$899.54	$1,141.62	$0.00	$2,041.16
116571	[Modifier] Quantity Premium - Asphalt Standard Curbs and Gutters (< Or = To 1 Ton) Quantity premium can be used when total tonnage in section 32-16-13 is less than or equal to 1 ton. Can be applied cumulatively to line items chosen within 32-13-13.	TON	$29.46	$0.00	$3.75	$33.21
116572	[Modifier] Quantity Premium - Asphalt Mountable Curbs and Gutters (< Or = To 1 Ton) Quantity premium can be used when total tonnage in section 32-16-13 is less than or equal to 1 ton. Can be applied cumulatively to line items chosen within 32-13-13.	TON	$95.28	$0.00	$3.75	$99.03
	32-17-00 Paving Specialties					
	32-17-13 Parking Bumpers					
116573	Concrete Wheel Stop Up To 4' Long – Standard Duty Includes rebar spikes	EA	$37.52	$85.62	$0.00	$123.14
116574	Concrete Wheel Stop Up To 6' Long – Standard Duty Includes rebar spikes	EA	$40.65	$114.16	$0.00	$154.81
116575	Concrete Wheel Stop Up To 4' Long – Heavy Duty Includes rebar spikes	EA	$37.52	$102.75	$0.00	$140.27
116576	Concrete Wheel Stop Up To 6' Long – Heavy Duty Includes rebar spikes	EA	$40.65	$136.99	$0.00	$177.64
116577	Rubber Wheel Stop Up To 4' Long – Standard Duty Includes rebar spikes	EA	$37.52	$63.85	$0.00	$101.37
116578	Rubber Wheel Stop Up To 6' Long – Standard Duty Includes rebar spikes	EA	$40.65	$85.13	$0.00	$125.78
116579	Rubber Wheel Stop Up To 4' Long – Heavy Duty Includes rebar spikes	EA	$37.52	$79.82	$0.00	$117.34

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116580	Rubber Wheel Stop Up To 6' Long – Heavy Duty Includes rebar spikes	EA	$40.65	$106.42	$0.00	$147.07
116581	Rubber Speed Bump – Standard Duty Includes rebar spikes	LF	$4.88	$26.61	$0.00	$31.49
116582	Rubber Speed Bump – Heavy Duty Includes rebar spikes	LF	$4.88	$33.25	$0.00	$38.13
116583	Rubber Speed Bump - 10.5' L x 18' W x 3" Speed Hump With Colored Markings Includes required layout, drilling, applicator, adhesive, bolts, washers, and nylon anchors complete.	EA	$2,234.70	$6,049.80	$0.00	$8,284.50

32-17-15 Built In Place-Traffic Calming

116584	Asphalt Speed Bump - 2' Wide x 8' to 12' Long Includes grinding depression of 1" to 3", removal & disposal of grindings, tack coat, and placement of Asphalt up to 3" above street finish grade, with Thermoplastic striping/graphics. Excludes Speed Bump Signs	EA	$2,309.27	$2,880.14	$1,032.70	$6,222.11
116585	Concrete Speed Bump - 2' Wide x 8' to 12' Long Includes grinding depression of 1" to 3", removal & disposal of grindings, and placement of Concrete up to 3" above street finish grade, with Thermoplastic striping/graphics. Excludes Speed Bump Signs	EA	$1,886.16	$2,906.66	$193.49	$4,986.31

32-17-23 Pavement Markings

Follow project documents as well as manufacturers requirements for mil thickness. Unit pricing for the pavement striping is inclusive of white or yellow paint.

116586	Traffic Paint Striping Up To 4" Wide – Parking Lot	LF	$0.25	$0.26	$0.00	$0.51
116587	Traffic Paint Striping Up To 6" Wide – Parking Lot	LF	$0.30	$0.38	$0.00	$0.68
116588	Traffic Paint Striping Up To 8" Wide – Parking Lot	LF	$0.36	$0.56	$0.00	$0.92
116589	Traffic Paint Striping Up To 12" Wide – Parking Lot	LF	$0.40	$0.74	$0.00	$1.14
116590	Traffic Paint Striping - 2 Coat, 4" Wide – Road, Less than 350 LF	LF	$2.33	$0.54	$0.47	$3.34
116591	Traffic Paint Striping - 2 Coat, Double 4" Wide – Road, Less than 350 LF	LF	$2.33	$1.07	$0.47	$3.87
116592	Traffic Paint Striping - 1 Coat, 4" Wide – Road, Up To 1,000 LF	LF	$0.33	$0.26	$0.00	$0.59
116593	Traffic Paint Striping - 1 Coat, 4" Wide – Road, 1,001 to 10,000 LF	LF	$0.31	$0.24	$0.00	$0.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116594	Traffic Paint Striping - 1 Coat, 4" Wide – Road, 10,001 LF and Up	LF	$0.31	$0.23	$0.00	$0.54
116595	Traffic Paint Striping - 2 Coat, 4" Wide – Road, Up to 1,000 LF	LF	$0.51	$0.51	$0.00	$1.02
116596	Traffic Paint Striping - 2 Coat, 4" Wide – Road, 1,001 to 10,000 LF	LF	$0.48	$0.50	$0.00	$0.98
116597	Traffic Paint Striping - 2 Coat, 4" Wide – Road, 10,001 LF and Up	LF	$0.47	$0.46	$0.00	$0.93
116598	Traffic Striping - Thermoplastic, 4" Wide – Road, Up to 1,000 LF	LF	$0.82	$0.66	$0.00	$1.48
116599	Traffic Striping - Thermoplastic, 4" Wide – Road, 1,001 to 10,000 LF	LF	$0.78	$0.63	$0.00	$1.41
116600	Traffic Striping - Thermoplastic, 4" Wide – Road, 10,001 LF and Up	LF	$0.76	$0.62	$0.00	$1.38
116601	Traffic Paint Striping - 1 Coat, Double 4" Wide – Road, Up to 1,000 LF	LF	$0.40	$0.51	$0.00	$0.91
116602	Traffic Paint Striping - 1 Coat, Double 4" Wide – Road, 1,001 to 10,000 LF	LF	$0.39	$0.50	$0.00	$0.89
116603	Traffic Paint Striping - 1 Coat, Double 4" Wide – Road, 10,001 LF and Up	LF	$0.39	$0.46	$0.00	$0.85
116604	Traffic Paint Striping - 2 Coat, Double 4" Wide – Road, Up to 1,000 LF	LF	$0.62	$1.02	$0.00	$1.64
116605	Traffic Paint Striping - 2 Coat, Double 4" Wide – Road, 1,001 to 10,000 LF	LF	$0.60	$0.99	$0.00	$1.59
116606	Traffic Paint Striping - 2 Coat, Double 4" Wide – Road, 10,001 LF and Up	LF	$0.60	$0.94	$0.00	$1.54
116607	Traffic Paint Striping - 1 Coat, 4" Wide Broken – Road, Up to 1,000 LF	LF	$0.40	$0.26	$0.00	$0.66
116608	Traffic Paint Striping - 1 Coat, 4" Wide Broken – Road, 1,001 to 10,000 LF	LF	$0.39	$0.24	$0.00	$0.63
116609	Traffic Paint Striping - 1 Coat, 4" Wide Broken – Road, 10,001 LF and Up	LF	$0.39	$0.23	$0.00	$0.62
116610	Traffic Paint Striping - 1 Coat, 6" Wide – Road, Up To 1,000 LF	LF	$0.39	$0.38	$0.00	$0.77
116611	Traffic Paint Striping - 1 Coat, 6" Wide – Road, 1,001 to 10,000 LF	LF	$0.37	$0.38	$0.00	$0.75
116612	Traffic Paint Striping - 1 Coat, 6" Wide – Road, 10,001 LF and Up	LF	$0.37	$0.35	$0.00	$0.72
116613	Traffic Paint Striping - 2 Coat, 6" Wide – Road, Up to 1,000 LF	LF	$0.58	$0.77	$0.00	$1.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116614	Traffic Paint Striping - 2 Coat, 6" Wide – Road, 1,001 to 10,000 LF	LF	$0.72	$0.54	$0.00	$1.26
116615	Traffic Paint Striping - 2 Coat, 6" Wide – Road, 10,001 LF and Up	LF	$0.70	$0.52	$0.00	$1.22
116616	Traffic Striping - Thermoplastic, 6" Wide – Road, Up to 1,000 LF	LF	$1.06	$0.78	$0.00	$1.84
116617	Traffic Striping - Thermoplastic, 6" Wide – Road, 1,001 to 10,000 LF	LF	$1.04	$0.76	$0.00	$1.80
116618	Traffic Striping - Thermoplastic, 6" Wide – Road, 10,001 LF and Up	LF	$0.99	$0.72	$0.00	$1.71
116619	Traffic Paint Striping - 1 Coat, Double 6" Wide – Road, Up to 1,000 LF	LF	$0.48	$0.77	$0.00	$1.25
116620	Traffic Paint Striping - 1 Coat, Double 6" Wide – Road, 1,001 to 10,000 LF	LF	$0.46	$0.74	$0.00	$1.20
116621	Traffic Paint Striping - 1 Coat, Double 6" Wide – Road, 10,001 LF and Up	LF	$0.46	$0.72	$0.00	$1.18
116622	Traffic Paint Striping - 2 Coat, Double 6" Wide – Road, Up to 1,000 LF	LF	$0.72	$1.54	$0.00	$2.26
116623	Traffic Paint Striping - 2 Coat, Double 6" Wide – Road, 1,001 to 10,000 LF	LF	$0.92	$1.07	$0.00	$1.99
116624	Traffic Paint Striping - 2 Coat, Double 6" Wide – Road, 10,001 LF and Up	LF	$0.87	$1.04	$0.00	$1.91
116625	Traffic Paint Striping - 1 Coat, 6" Wide Broken – Road, Up to 1,000 LF	LF	$0.58	$0.38	$0.00	$0.96
116626	Traffic Paint Striping - 1 Coat, 6" Wide Broken – Road, 1,001 to 10,000 LF	LF	$0.56	$0.38	$0.00	$0.94
116627	Traffic Paint Striping - 1 Coat, 6" Wide Broken – Road, 10,001 LF and Up	LF	$0.55	$0.35	$0.00	$0.90
116628	Traffic Paint Striping - 1 Coat, 8" Wide – Road, Up to 1,000 LF	LF	$0.44	$0.56	$0.00	$1.00
116629	Traffic Paint Striping - 1 Coat, 8" Wide – Road, 1,001 to 10,000 LF	LF	$0.54	$0.40	$0.00	$0.94
116630	Traffic Paint Striping - 1 Coat, 8" Wide – Road, 10,001 LF and Up	LF	$0.53	$0.38	$0.00	$0.91
116631	Traffic Paint Striping - 2 Coat, 8" Wide – Road, Up to 1,000 LF	LF	$0.87	$0.63	$0.00	$1.50
116632	Traffic Paint Striping - 2 Coat, 8" Wide – Road, 1,001 to 10,000 LF	LF	$0.85	$0.63	$0.00	$1.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116633	Traffic Paint Striping - 2 Coat, 8" Wide – Road, 10,001 LF and Up	LF	$0.82	$0.60	$0.00	$1.42
116634	Traffic Striping - Thermoplastic, 8" Wide – Road, Up to 1,000 LF	LF	$1.23	$0.90	$0.00	$2.13
116635	Traffic Striping - Thermoplastic, 8" Wide – Road, 1,001 to 10,000 LF	LF	$1.18	$0.88	$0.00	$2.06
116636	Traffic Striping - Thermoplastic, 8" Wide – Road, 10,001 LF and Up	LF	$1.15	$0.84	$0.00	$1.99
116637	Traffic Paint Striping - 1 Coat, 12" Wide – Road, Up to 1,000 LF	LF	$0.51	$0.74	$0.00	$1.25
116638	Traffic Paint Striping - 1 Coat, 12" Wide – Road, 1,001 to 10,000 LF	LF	$0.68	$0.50	$0.00	$1.18
116639	Traffic Paint Striping - 1 Coat, 12" Wide – Road, 10,001 LF and Up	LF	$0.64	$0.48	$0.00	$1.12
116640	Traffic Paint Striping - 2 Coat, 12" Wide – Road, Up to 1,000 LF	LF	$1.17	$0.87	$0.00	$2.04
116641	Traffic Paint Striping - 2 Coat, 12" Wide – Road, 1,001 to 10,000 LF	LF	$1.14	$0.84	$0.00	$1.98
116642	Traffic Paint Striping - 2 Coat, 12" Wide – Road, 10,001 LF and Up	LF	$1.10	$0.80	$0.00	$1.90
116643	Traffic Striping - Thermoplastic, 12" Wide – Road, Up to 1,000 LF	LF	$1.37	$1.00	$0.00	$2.37
116644	Traffic Striping - Thermoplastic, 12" Wide – Road, 1,001 to 10,000 LF	LF	$1.32	$0.98	$0.00	$2.30
116645	Traffic Striping - Thermoplastic, 12" Wide – Road, 10,001 LF and Up	LF	$1.28	$0.94	$0.00	$2.22
116646	Paint Pavement Markings - 1 Coat	SF	$1.93	$1.56	$0.00	$3.49
116647	Paint Pavement Markings - 2 Coat	SF	$2.61	$2.11	$0.00	$4.72
116648	Thermoplastic Pavement Markings	SF	$4.28	$3.47	$0.00	$7.75
116649	Thermoplastic Chevron Detail - 6' x 6' Includes delivery, pavement preparation, layout and installation	EA	$309.90	$191.42	$0.00	$501.32
116650	Green Bike Box Priority Queue Lane for Cyclists	SF	$4.80	$3.88	$0.00	$8.68
116651	Diagonal Van Accessable Parking Stall	EA	$427.85	$353.58	$0.00	$781.43
116652	Red Curb Painting and 'No Parking Fire Lane' Stencil	LF	$1.74	$1.28	$0.00	$3.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116653	Raised Pavement Markers (RPM's), Surface Mounted Similar or equal to 3M Marker Series 290, application to be epoxy or bitumen, colors - white, yellow, green, red or blue	EA	$0.63	$4.23	$0.37	$5.23
116654	[Modifier] (< or = 200 LF) Quantity premium can be used when total Linear Footage in section 32-17-23 Pavement Markings are within stated quantities. Can be applied cumulatively to base line items.	LF	$3.36	$0.00	$0.00	$3.36
116655	[Modifier] (< or = 10 EA) Quantity premium can be used when total Count in section 32-17-23 Pavement Markings are within stated quantities. Can be applied cumulatively to base line items.	EA	$67.21	$0.00	$0.00	$67.21
116656	Tactile Warning Surfacing ADA Compliant Systems	SF	$12.72	$32.80	$0.00	$45.52
	32-18-00 Athletic and Recreational Surfacing					
	32-18-23 Athletic Surfacing					
116657	Outdoor Sand Volleyball Court	SF	$1.28	$1.88	$0.00	$3.16
116658	Tennis Court – Asphalt Includes asphalt, green coat, and striping	SF	$3.25	$3.29	$0.00	$6.54
116659	Basketball Court – Asphalt Includes asphalt and striping	SF	$3.25	$2.57	$0.00	$5.82
116660	Rubber Running Track – Outdoor Includes crushed stone base, 2" asphalt binder, 1" topping and synthetic rubber surfacing (poured in place or spray applied)	SF	$4.39	$3.38	$0.80	$8.57
116661	Synthetic Turf Field - Site Work Includes earthwork, concrete curbs, drainage and stone base. Does not include sand pits, takeoff boards, goal posts, shot/discus pads, netting or cages, concrete pitchers or home plate areas	SF	$4.72	$3.63	$0.86	$9.21
116662	Synthetic Turf Field (Artificial Turf) - Football, Soccer, Lacrosse Includes shock pad (up to 22 mm), up to 2.25" polyethylene fibers, sand and rubber infill mix, field lines, numbers and logos	SF	$3.81	$2.93	$0.69	$7.43
116663	Synthetic Turf Field (Artificial Turf) - Baseball / Softball	SF	$3.02	$2.38	$0.55	$5.95
116664	Athletic Field - Seed (Baseball / Softball) Price includes removing 14" topsoil, mixing and reusing 10", 4" pea gravel, fine grading, seed, mulch, and fertilizer	SF	$0.82	$0.91	$0.00	$1.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116665	Athletic Field - Sod (Baseball / Softball) Price includes removing 14" topsoil, mixing and reusing 10", 4" pea gravel, fine grading, and sod	SF	$0.89	$1.33	$0.00	$2.22
116666	Anti Microbial Turf Cleaning Spray	SF	$0.06	$0.05	$0.00	$0.11
116667	Tennis Court Topping (Indoor)	SF	$2.44	$2.40	$0.00	$4.84
116668	Tennis Court Topping (Outdoor)	SF	$2.44	$2.40	$0.00	$4.84
116669	Rubber Playground Surfacing Includes wearing surface (1/2" thick), base layer of shock absorbing rubber material (various thicknesses), multiple colors. SpectraPour Rubber Playground Surfacing or equal	CY	$339.76	$1,379.14	$0.00	$1,718.90
116670	Synthetic Playground Surfacing Does not include subbase. Up to 3/4" thick, multiple colors	SF	$2.54	$2.61	$0.00	$5.15
116671	Shock Absorbing Rubber Base Layer - Playground Does not include wearing surface. Various thicknesses as required by design	CF	$26.32	$17.11	$0.00	$43.43

32-30-00 Site Improvements

32-31-00 Fences and Gates

32-31-00 Fences and Gates

116672	Aluminum Track Sliding Gate, Up To 8' High x 30' Wide Includes posts with concrete foundation, gate and gate operator, anodized finish	SF	$38.88	$81.53	$3.63	$124.04
116673	Steel Track Sliding Gate, Up To 8' High x 30' Wide Includes posts with concrete foundation, gate and gate operator, galvanized finish	SF	$38.88	$67.84	$3.63	$110.35
116674	Sally Port Vehicle Gate Includes removal of existing to foundations 6" below grade, new gate frames with anti-climb material, conduit extensions to new operator, W4 beams to support existing conduit, fencing and razor wire; similar or equal to Tymetal PLUSS Sally Ports	SF	$191.36	$168.34	$50.59	$410.29
116675	Excavate Post Hole by Vertical Linear Foot of Depth - 6" - 8" Diameter Hole Includes mobilization/demobilization, post hole excavated by machine (auger); backfill with excavated material, compacted	VLF	$15.38	$0.00	$5.04	$20.42
116676	Excavate Post Hole by Vertical Linear Foot of Depth - 8" to 10" Diameter Hole Includes mobilization/demobilization, post hole excavated by machine (auger); backfill with excavated material, compacted	VLF	$19.22	$0.00	$5.04	$24.26

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116677	Excavate Post Hole by Vertical Linear Foot of Depth - 10" to 12" Diameter Hole Includes mobilization/demobilization, post hole excavated by machine (auger); backfill with excavated material, compacted	VLF	$20.45	$0.00	$5.04	$25.49
116678	[Modifier] Add for Hand Excavation - 6" - 8" Diameter Hole Backfill with excavated material, compacted	VLF	$12.30	$0.00	$0.00	$12.30
116679	[Modifier] Add for Hand Excavation - 8" to 10" Diameter Hole Backfill with excavated material, compacted	VLF	$15.39	$0.00	$0.00	$15.39
116680	[Modifier] Add for Hand Excavation - 10" to 12" Diameter Hole Backfill with excavated material, compacted	VLF	$16.38	$0.00	$0.00	$16.38
116681	[Modifier] Add for Backfill with Sakrete or Gravel - 6" - 8" Diameter Hole Does not include disposal of excavated material	VLF	$1.53	$3.62	$0.00	$5.15
116682	[Modifier] Add for Backfill with Sakrete or Gravel - 8" to 10" Diameter Hole Does not include disposal of excavated material	VLF	$1.92	$5.44	$0.00	$7.36
116683	[Modifier] Add for Backfill with Sakrete or Gravel - 10" to 12" Diameter Hole Does not include disposal of excavated material	VLF	$2.05	$7.24	$0.00	$9.29
116684	[Modifier] Add for Post Holes in Rock - 6" - 8" Diameter Hole Does not include disposal of excavated material; assumes jack hammer and compressor	VLF	$58.43	$0.00	$39.79	$98.22
116685	[Modifier] Add for Post Holes in Rock - 8" to 10" Diameter Hole Does not include disposal of excavated material; assumes jack hammer and compressor	VLF	$73.05	$0.00	$39.79	$112.84
116686	[Modifier] Add for Post Holes in Rock - 10" to 12" Diameter Hole Does not include disposal of excavated material; assumes jack hammer and compressor	VLF	$77.73	$0.00	$39.79	$117.52
116687	M50-P1 Post and Cable Barrier System Includes concrete foundations, rebar, posts, cables w/threaded studs, post sleeves and rails. Similar or equal to Atlas Post and Cable/Rail Fence M50/P1	LF	$298.63	$1,162.97	$31.46	$1,493.06
	32-31-11 Gate Operators					
116688	Gate Operator – Up To 1 HP Includes (one set) of safety detection photo eyes and (two) pressure sensors	EA	$1,233.34	$3,797.39	$0.00	$5,030.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116689	Gate Operator Controller Automated	EA	$0.00	$85.62	$0.00	$85.62
116690	Entry / Exit Loop Direct Burry or Saw Cut	LF	$2.67	$5.21	$0.00	$7.88

32-31-13 Chain Link Fences and Gates

Fence post holes/auguring are not included unless noted. Refer to Division 32-31-00 for post holes and associated backfill

116691	Galvanized Institutional Chain Link Fence - Up To 8' Tall Includes 9 ga x 2" mesh fabric, line posts, 3-line rails, fasteners, braces, clamps, caps and tension wire as required. For setting of posts, refer to Division 32-31-00 Excavate Post Hole by VLF	SF	$8.54	$4.30	$0.00	$12.84
116692	Galvanized Institutional Chain Link Fence - 8' To 14' Tall Includes 9 ga x 2" mesh fabric, line posts, 3-line rails, fasteners, braces, clamps, caps and tension wire as required. For setting of posts, refer to Division 32-31-00 Excavate Post Hole by VLF	SF	$9.08	$4.62	$0.00	$13.70
116693	Galvanized Institutional Chain Link Fence - Mesh Only Mesh to be 9 gauge, galvanized, 2" chain link on existing posts and rails	SF	$2.55	$2.43	$0.00	$4.98
116694	Galvanized Institutional Chain Link Fence - 5' Wide Walk Gate Includes Mounted Posts and Hardware	EA	$217.57	$190.04	$0.00	$407.61
116695	Galvanized Institutional Chain Link Fence - 10' Wide Double Swing Gate Includes Mounted Posts and Hardware	EA	$435.14	$380.07	$0.00	$815.21
116696	Galvanized Institutional Chain Link Fence - 12' Wide Double Swing Gate Includes Mounted Posts and Hardware	EA	$580.01	$469.47	$0.00	$1,049.48
116697	Galvanized Institutional Chain Link Fence - 18' Wide Double Swing Gate Includes Mounted Posts and Hardware	EA	$774.27	$849.24	$0.00	$1,623.51
116698	[Modifier] Galvanized Institutional Chain Link Fence - Vinyl Slats Based on double wall - self top locking vinyl slats, for 2" diamond shape chain link	SF	$1.60	$2.15	$0.00	$3.75
116699	[Modifier] Galvanized Institutional Chain Link Fence - Vinyl Coating Vinyl coated chain link fence, powder coated posts and rails	SF	$0.39	$1.68	$0.00	$2.07
116700	Razor Wire Razor wire at top of fencing	LF	$3.51	$1.51	$0.00	$5.02
116701	Barbed Wire Barbed wire at top of fencing, 3 strand	LF	$1.99	$2.23	$0.45	$4.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116702	Snake Mesh - 1/4" galvanized welded 23 ga (.025) wire diameter mesh Mesh to be embedded a minimum of 2" below grade. Does not include fence posts or rails	LF	$3.77	$1.95	$0.00	$5.72
116703	Outdoor PVC Mesh Privacy Screen	SF	$0.74	$0.82	$0.00	$1.56
116704	Security Fence - 12' High with Razor Wire Includes excavation, footers, 1/2" x 2" chain link fabric, bottom, middle and line posts, razor wire, and galvanized finish	LF	$168.00	$390.13	$7.83	$565.96
116705	Security Fence - 12' Wide x 12' High Sliding Gate with Razor Wire Includes 2" welded wire, 6-gauge, galvanized tube framed gate, heavy duty hinges, diagonal brace with lock box. Excludes electronics, automation and locks	EA	$2,470.51	$5,736.61	$115.09	$8,322.21
116706	Security Fence - 3' Wide x 12' High Pedestrian Gate with Razor Wire Includes 2" welded wire, 6-gauge, galvanized tube framed gate, heavy duty hinges, diagonal brace with lock box. Excludes electronics, access control, panic bars and locks	EA	$953.80	$2,214.78	$44.42	$3,213.00
116707	Security Fence - 3' Wide x 8' High Pedestrian Gate with Razor Wire Includes 2" welded wire, 6-gauge, galvanized tube framed gate, heavy duty hinges, diagonal brace with lock box. Excludes electronics, access control, panic bars and locks	EA	$839.57	$1,563.64	$0.00	$2,403.21
116708	Security Fence - 10' Wide x 8' High Double Gate with Razor Wire Includes 2" welded wire, 6-gauge, galvanized tube framed gate, heavy duty hinges, diagonal brace with lock box. Excludes electronics, access control, panic bars and locks	EA	$1,573.52	$3,127.26	$0.00	$4,700.78
	32-31-16 Welded Wire Fences and Gates					
116709	Anti Climb High Security Fence - 10.5-Gauge Includes layout, new post and all labor, material and equipment for a complete fence installation. Similar or equal to Riverdale Mills 0.5 x 3, 10.5 gauge, 87"w x 96"l, black. For setting of posts, refer to Division 32 -31-00 Excavate Post Hole by VLF	SF	$7.19	$14.57	$6.44	$28.20
116710	Anti Climb High Security 10.5-Gauge - 12' Wide Double Gate, Up To 8' High, Manual Operation Includes layout, new post and all labor, material and equipment for a complete fence installation. Similar or equal to Riverdale Mills 0.5 x 3, 10.5 gauge, 87"w x 96"l, black. For setting of posts, refer to Division 32 -31-00 Excavate Post Hole by VLF	EA	$1,797.44	$1,607.57	$1,600.00	$5,005.01

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116711	Anti Climb High Security 10.5-Gauge - 10' Wide Double Gate, Up To 8' High, Manual Operation Includes layout, new post and all labor, material and equipment for a complete fence installation. Similar or equal to Riverdale Mills 0.5 x 3, 10.5 gauge, 87"w x 96"l, black. For setting of posts, refer to Division 32 -31-00 Excavate Post Hole by VLF	EA	$1,797.44	$1,339.64	$1,600.00	$4,737.08
	32-31-19 Decorative Metal Fences and Gates					
116712	Wrought Iron Fence 4' Tall	LF	$34.84	$139.61	$0.00	$174.45
116713	Wrought Iron Fence 6' Tall	LF	$40.65	$150.78	$0.00	$191.43
116714	Wrought Iron Fence 8' Tall	LF	$48.78	$161.94	$0.00	$210.72
116715	Wrought Iron Fence 10' Tall	LF	$60.97	$173.12	$0.00	$234.09
116716	Ornamental Steel Picket Fence – 6' Tall	LF	$42.41	$77.24	$0.00	$119.65
116717	Ornamental Steel Gate – 6' H X 10' Wide	EA	$2,117.33	$1,697.65	$0.00	$3,814.98
116718	Ornamental Welded Wire Fence – 6' Tall Architectural fence; 6' high, black With 3" posts	LF	$16.04	$48.03	$0.00	$64.07
116719	Square Tube Picket Fence - 9' Tall Fabricate, paint, and install fencing. Perimeter of fence sections to be 1-1/2" Square tube 3/16"Thick. The inner "Pickets" - 1" square tube 1/8"Thick	LF	$167.27	$282.67	$12.96	$462.90
116720	Custom Fabricated Gauntlet Style Pales - 32-1/2" High' Mounted on Top of Brick Masonry Walls Includes core drilling and fasteners for a complete installation. Similar or equal to Ameristar Impasse II Steel pales	LF	$84.35	$153.85	$21.18	$259.38
116721	Security Fence with Anti-Scale Gauntlet Style Pales & Exodus Egress Gate, 10' High Fence, (1) 4' Single Pedestrian Gate Includes concrete foundations, posts, rails, 2 3/4" x 14 gauge pales. Similar or equal to Ameristar Impasse II Gauntlet	LF	$368.75	$1,211.43	$47.75	$1,627.93
116722	Security Gate - M50-P1 Slide Gate - Overall Gate Length 27'-8", Clear Opening 15' Includes hydraulic operators 2FPS to 3FPS field adjustable, vehicle detection loops, UL 325 compliant safety. Excludes conduits, wire and final terminations to control systems. Similar or equal to Tymental TCG -112 M50-P1 slide gates & Operators	EA	$25,504.33	$210,405.25	$3,232.50	$239,142.08
116723	Security Gate - Pedestrian Gate Mounted into ICF/Brick Masonry Walls Similar or equal to Exodus Single Egress Gate, up to 4' wide	EA	$3,873.28	$13,600.01	$420.00	$17,893.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	32-31-23 Plastic Fences and Gates					
116724	Vinyl Fence, 4' High, 3 Rail Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$26.52	$36.72	$0.00	$63.24
	32-31-29 Wood Fences and Gates					
116725	Wood Post and Rail Fence, 4' High, Pine, 3 Rail Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$15.49	$14.62	$0.00	$30.11
116726	Wood Post and Rail Fence, 4' High, Redwood, 3 Rail Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$25.17	$23.75	$0.00	$48.92
116727	Wood Post and Rail Fence, 6' High, Pine, 3 Rail Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$20.61	$19.43	$0.00	$40.04
116728	Wood Post and Rail Fence, 6' High, Redwood, 3 Rail Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$33.49	$31.57	$0.00	$65.06
116729	Wood Post and Rail Gate, Up to 4' Wide, Pine Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	EA	$123.62	$116.61	$0.00	$240.23
116730	Wood Post and Rail Gate, Upt to 4' Wide, Redwood Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	EA	$200.90	$189.48	$0.00	$390.38
116731	Wood Picket Fence, 4' High, Pine Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$21.78	$20.55	$0.00	$42.33
116732	Wood Picket Fence, 4' High, Redwood Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$31.46	$29.68	$0.00	$61.14
116733	Wood Picket Fence, 6' High, Pine Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$28.97	$27.33	$0.00	$56.30
116734	Wood Picket Fence, 6' High, Redwood Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	LF	$41.85	$39.48	$0.00	$81.33
116735	Wood Picket Gate, Up to 4' Wide, Pine Includes layout, post holes, concrete footing and all labor and material for a complete fence installation	EA	$173.86	$163.98	$0.00	$337.84
116736	Wood Picket Gate, Upt to 4' Wide, Redwood Includes layouIncludes layout, post holes, concrete footing and all labor and material for a complete fence installationt, post holes, concrete footing and all labor and material for a complete fence installation	EA	$251.11	$236.86	$0.00	$487.97

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116737	Shadowbox Style Fence, Western Red Cedar Includes layout, post holes, concrete footings, 2" x 4" rails and 1" x 6" pickets, pickets are adjusted to grade	SF	$16.02	$29.65	$4.29	$49.96
116738	Pressure Wash Wood Fence/Deck Prep for paint or stain	SF	$0.30	$0.06	$0.00	$0.36
116739	Fence Post, Wood or Metal Includes layout, post holes, concrete footing and all labor and material to attached exisitng fence	EA	$112.25	$142.71	$0.00	$254.96
	32-32-00 Retaining Walls					
	32-32-13 Cast-in-Place Concrete Retaining Walls					
116740	Formwork Retaining Wall Footing	SF	$10.25	$3.08	$0.00	$13.33
116741	Formwork For Retaining Wall	SF	$11.51	$3.08	$0.00	$14.59
116742	Rebar for Foundations and Retaining Walls Includes furnishing and installation of all sizes of required steel bent to angles required with dobies, chair supports, ties and lap splicing per specifications.	TON	$1,748.90	$1,317.81	$0.00	$3,066.71
116743	Concrete To Retaining Wall	CY	$104.67	$233.54	$0.00	$338.21
116744	Concrete To Retaining Wall Footing	CY	$88.16	$233.54	$0.00	$321.70
	32-32-23 Segmental Retaining Walls					
116745	Segmented Block Retaining Wall	SF	$19.87	$8.56	$0.00	$28.43
	32-33-00 Site Furnishings					
	32-33-00 Site Furnishings					
116746	Parking or Traffic Signage - Pole Mounted (Less Than 1.5 SF) Corrosion-Resistant Aluminum Sign. Posts Provide 8' -0" of Clearance from Bottom of Sign.	EA	$97.28	$111.68	$0.00	$208.96
116747	Parking or Traffic Signage - Wall Mounted (Less Than 1.5 SF) Corrosion-Resistant Aluminum Sign.	EA	$25.98	$55.84	$0.00	$81.82
116748	Parking or Traffic Signage - Pole Mounted (1.5 SF to 6.25 SF) Corrosion-Resistant Aluminum Sign. Posts Provide 8' -0" of Clearance from Bottom of Sign.	EA	$121.95	$167.53	$0.00	$289.48
116749	Parking or Traffic Signage - Wall Mounted (1.5 SF to 6.25 SF) Corrosion-Resistant Aluminum Sign.	EA	$32.52	$111.68	$0.00	$144.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116750	Angle Mount Exhibit Signage - Pole Mounted Corrosion-Resistant Aluminum Sign. Framed or Frameless.	EA	$1,083.98	$1,396.10	$0.00	$2,480.08
116751	Tennis Net with Posts and Supports	SET	$1,300.09	$1,116.88	$0.00	$2,416.97
116752	Volleyball Net with Posts and Supports	SET	$1,300.09	$1,675.32	$0.00	$2,975.41
116753	Basketball Backstop with Supports	SET	$1,300.09	$2,233.76	$0.00	$3,533.85
116754	Gaga Ball Pit Playground Sports	SET	$1,300.09	$4,256.96	$0.00	$5,557.05
	32-33-13 Site Bicycle Racks					
116755	Site Outdoor - Loop Wave Style Bike Rack - 5 Bikes	EA	$141.75	$279.41	$0.00	$421.16
116756	Site Outdoor - Loop Wave Style Bike Rack - 7 Bikes	EA	$212.62	$351.94	$0.00	$564.56
116757	Site Outdoor - Loop Wave Style Bike Rack - 9 Bikes	EA	$283.50	$469.71	$0.00	$753.21
116758	Site Outdoor - Loop Wave Style Bike Rack - 11 Bikes	EA	$283.50	$633.82	$0.00	$917.32
116759	[Modifier] Site Outdoor - Loop Wave Style Bike Rack Shipping Shipping costs for 5 and 7 loop bike racks (up to 10 bike racks shipped at the same time). Unit cost is per shippment	EA	$0.00	$287.71	$0.00	$287.71
116760	[Modifier] Site Outdoor - Loop Wave Style Bike Rack Shipping Shipping costs for 9 and 11 loop bike racks (up to 10 bike racks shipped at the same time). Unit cost is per shippment	EA	$0.00	$811.07	$0.00	$811.07
116761	Site Outdoor - Park Style Bike Rack	EA	$74.86	$139.61	$0.00	$214.47
116762	Remove and Relocate Bike Rack	EA	$230.74	$41.32	$0.00	$272.06
	32-33-23 Site Trash and Litter Receptacles					
116763	Site Outdoor - Trash or Recycle Can, Round, DHS Compliant, Clear Polycarbonate Panels, 35 Gallon - HS35 DHS	EA	$142.24	$1,307.01	$100.00	$1,549.25
	32-33-43 Site Seating and Tables					
116764	Site Outdoor - Metal Backless Bench w/Horizontal Steel Slats Includes metallic powder coat, tubular steel posts, surface mounted, 6' long	EA	$146.25	$2,218.71	$100.00	$2,464.96
	32-39-00 Manufactured Site Specialties					
	32-39-13 Manufactured Metal Bollards					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116765	HDPE Bollard Cover - 6" Diameter	EA	$16.94	$87.61	$0.00	$104.55
116766	HDPE Bollard Cover - 8" To 10" Diameter	EA	$16.94	$101.10	$0.00	$118.04
116767	Stainless Steel Bollard Cover – Up To 10” Diameter x 38” Long Includes dome top, #4 brushed finish	EA	$63.66	$595.73	$0.00	$659.39
116768	Pipe Bollard – Up To 8” Diameter, 84” Long, Schedule 40, Primed Includes excavation, concrete footing/bollard fill and backfill	EA	$425.58	$739.88	$149.99	$1,315.45
116769	Pipe Bollard - Concrete Filled, Up To 10" Diameter Mounted with epoxy set anchor bolts	EA	$241.91	$167.53	$0.00	$409.44
116770	Impact Resistant Bollard - Fixed, Up To 6 Bollards Includes furnish and installation of bollard only. Concrete footing placement and re-bar are not included. Similar to Truckstopper 6-30 manufactured by Safetyflex	EA	$549.56	$9,314.99	$0.00	$9,864.55
116771	Impact Resistant Bollard - Fixed, 7 To 12 Bollards Includes furnish and installation of bollard only. Concrete footing placement and re-bar are not included. Similar to Truckstopper 6-30 manufactured by Safetyflex	EA	$536.91	$5,647.86	$0.00	$6,184.77
116772	Fixed / Removable Bollard – Prime Coated Steel/Iron Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,119.53	$0.00	$1,509.76
116773	Fixed / Removable Bollard – Prime Coated Steel/Iron Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,343.44	$0.00	$1,733.67
116774	Fixed / Removable Bollard – Aluminum Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,679.29	$0.00	$2,069.52
116775	Fixed / Removable Bollard – Aluminum Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,015.15	$0.00	$2,405.38
116776	Fixed / Removable Bollard – Stainless Steel Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,239.07	$0.00	$2,629.30

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116777	Fixed / Removable Bollard – Stainless Steel Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,686.88	$0.00	$3,077.11
116778	Fixed / Removable Bollard – Prime Coated Steel Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,231.48	$0.00	$1,621.71
116779	Fixed / Removable Bollard – Prime Coated Steel Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,477.78	$0.00	$1,868.01
116780	Fixed / Removable Bollard – Aluminum Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,847.22	$0.00	$2,237.45
116781	Fixed / Removable Bollard – Aluminum Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,216.68	$0.00	$2,606.91
116782	Fixed / Removable Bollard – Stainless Steel Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,462.97	$0.00	$2,853.20
116783	Fixed / Removable Bollard – Stainless Steel Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,955.56	$0.00	$3,345.79
116784	Fixed / Removable Bollard – Prime Coated Steel Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,354.64	$0.00	$1,744.87
116785	Fixed / Removable Bollard – Prime Coated Steel Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$1,625.56	$0.00	$2,015.79
116786	Fixed / Removable Bollard – Aluminum Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,031.95	$0.00	$2,422.18
116787	Fixed / Removable Bollard – Aluminum Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,438.34	$0.00	$2,828.57
116788	Fixed / Removable Bollard – Stainless Steel Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$2,709.26	$0.00	$3,099.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116789	Fixed / Removable Bollard – Stainless Steel Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$390.23	$3,251.12	$0.00	$3,641.35
116790	Retractable Bollard Hydraulic – Prime Coated Steel / Iron Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$4,478.13	$0.00	$5,128.52
116791	Retractable Bollard Hydraulic – Prime Coated Steel / Iron Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$5,373.75	$0.00	$6,024.14
116792	Retractable Bollard Hydraulic – Aluminum Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$6,717.19	$0.00	$7,367.58
116793	Retractable Bollard Hydraulic – Aluminum Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$8,060.64	$0.00	$8,711.03
116794	Retractable Bollard Hydraulic – Stainless Steel Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$8,956.26	$0.00	$9,606.65
116795	Retractable Bollard Hydraulic – Stainless Steel Luminated Up To 8" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$10,747.51	$0.00	$11,397.90
116796	Retractable Bollard Hydraulic – Prime Coated Steel Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$4,925.94	$0.00	$5,576.33
116797	Retractable Bollard Hydraulic – Prime Coated Steel Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$5,911.13	$0.00	$6,561.52
116798	Retractable Bollard Hydraulic – Aluminum Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$7,388.91	$0.00	$8,039.30
116799	Retractable Bollard Hydraulic – Aluminum Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$8,866.70	$0.00	$9,517.09
116800	Retractable Bollard Hydraulic – Stainless Steel Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$9,851.88	$0.00	$10,502.27

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116801	Retractable Bollard Hydraulic – Stainless Steel Luminated Up To 10" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$11,822.26	$0.00	$12,472.65
116802	Retractable Bollard Hydraulic – Prime Coated Steel Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$5,418.54	$0.00	$6,068.93
116803	Retractable Bollard Hydraulic – Prime Coated Steel Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$6,502.24	$0.00	$7,152.63
116804	Retractable Bollard Hydraulic – Aluminum Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$8,127.80	$0.00	$8,778.19
116805	Retractable Bollard Hydraulic – Aluminum Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$9,753.37	$0.00	$10,403.76
116806	Retractable Bollard Hydraulic – Stainless Steel Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$10,837.07	$0.00	$11,487.46
116807	Retractable Bollard Hydraulic – Stainless Steel Luminated Up To 12" Diameter Up to 42" High. Includes all hook ups and concrete foundation	EA	$650.39	$13,004.49	$0.00	$13,654.88

32-80-00 Irrigation

Pricing applicable for both standard and reclaimed irrigation system components. Trenching for irrigation systems is not included in the LF unit cost

32-80-00 Irrigation

Pricing applicable for both standard and reclaimed irrigation system components. Trenching for irrigation systems is not included in the LF unit cost

32-80-00 Irrigation

Pricing applicable for both standard and reclaimed irrigation system components. Trenching for irrigation systems is not included in the LF unit cost

116808	Landscape Maintenance - 30 Days Includes, but not limited to, maintenance of plants during establishment period, replace unsuitable plants, weed control and the application of water to all planted areas	SF	$0.58	$0.00	$0.13	$0.71
116809	Landscape Maintenance - 60 Days Includes, but not limited to, maintenance of plants during establishment period, replace unsuitable plants, weed control and the application of water to all planted areas	SF	$1.16	$0.00	$0.26	$1.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116810	Landscape Maintenance - 90 Days Includes, but not limited to, maintenance of plants during establishment period, replace unsuitable plants, weed control and the application of water to all planted areas	SF	$1.74	$0.00	$0.39	$2.13
116811	Irrigation System – Temporary Complete system. Includes controllers, rain sensor, and timer. All piping above ground.	SF	$0.24	$0.24	$0.00	$0.48
116812	Irrigation System – Residential Complete system. Includes trenching, backfill, reseed, controllers, rain sensor, and timer	SF	$0.34	$0.24	$0.00	$0.58
116813	Irrigation System – Athletic / Sports Complete system. Includes trenching, backfill, reseed, controllers, rain sensor, and timer	SF	$0.66	$0.40	$0.00	$1.06
116814	Irrigation System – Field and Park Complete system. Includes controllers, rain sensor, and timer	SF	$0.48	$0.34	$0.00	$0.82
116815	Irrigation System – Plant Complete system. Includes trenching, backfill, reseed, controllers, rain sensor, and timer	SF	$0.48	$0.28	$0.00	$0.76
116816	Irrigation System – Drip Complete system. Includes controllers, rain sensor, and timer	SF	$0.70	$0.51	$0.00	$1.21
116817	Drip Irrigation Tape – 5/8" Up to 15 mil.	LF	$1.96	$0.07	$0.00	$2.03
116818	Drip Irrigation Tubing – 1/2" Dripline Polyethylene	LF	$2.90	$0.32	$0.00	$3.22
116819	Drip Irrigation Tubing – 1/2" Mainline Polyethylene	LF	$2.90	$0.11	$0.00	$3.01
116820	Drip Irrigation Tubing – 3/4" Mainline Polyethylene	LF	$3.13	$0.22	$0.00	$3.35
116821	Drip Irrigation Tubing – 1" Mainline Polyethylene	LF	$3.48	$1.07	$0.00	$4.55
116822	Drip Irrigation Fittings – 1/2" Perma-Loc	EA	$16.26	$1.26	$0.00	$17.52
116823	Drip Irrigation Fittings – 3/4" Perma-Loc	EA	$18.76	$2.93	$0.00	$21.69
116824	Drip Irrigation Fittings – 1" Perma-Loc	EA	$22.17	$4.91	$0.00	$27.08
116825	Drip Irrigation Dripper Adjustable, compensating or fixed.	EA	$4.88	$0.30	$0.00	$5.18
116826	Drip Irrigation Mister Head	EA	$4.88	$1.82	$0.00	$6.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116827	Drip Irrigation Control Valve – 1"	EA	$24.39	$124.44	$0.00	$148.83
116828	Drip Irrigation Control Valve – 1-1/2"	EA	$32.52	$166.67	$0.00	$199.19
116829	Drip Irrigation Pressure Regulator – 1" and Down	EA	$16.26	$9.08	$0.00	$25.34
116830	Drip Irrigation Filter – 1" and Down Canister type.	EA	$16.26	$25.10	$0.00	$41.36
116831	Drip Irrigation Filter – 1-1/2" Canister type.	EA	$22.17	$114.15	$0.00	$136.32
116832	Drip Irrigation Filter – 2" Cartridge/screen type.	EA	$60.97	$392.71	$0.00	$453.68
116833	Drip Irrigation Controller	EA	$975.58	$170.10	$0.00	$1,145.68
116834	Irrigation System – Repair Pipe Or Tube – Less than 5 Per location	EA	$121.95	$17.13	$0.00	$139.08
116835	Irrigation System Repair Pipe Or Tube – Greater Than 5 But Less Than 10 Per location	EA	$97.55	$17.13	$0.00	$114.68
116836	Irrigation System – Repair Pipe Or Tube – 10 Or Greater Per location	EA	$81.29	$17.13	$0.00	$98.42
116837	Irrigation System – Replace Pop Up Head – Less than 5 Per head	EA	$34.84	$20.77	$0.00	$55.61
116838	Irrigation System – Replace Pop Up Head – Greater Than 5 But Less Than 10 Per head	EA	$27.09	$20.77	$0.00	$47.86
116839	Irrigation System – Replace Pop Up Head – 10 or Greater Per head	EA	$22.17	$20.77	$0.00	$42.94
116840	Irrigation System – Replace Controller	EA	$1,219.48	$170.10	$0.00	$1,389.58
116841	Irrigation System – Replace Control Valve	EA	$34.84	$100.46	$0.00	$135.30
	32-81-00 Irrigation Components					
	32-81-13 Irrigation Intake Screens					
116842	10,000 Gallon Irrigation Water Storage Tank Steel	EA	$2,550.57	$14,572.78	$0.00	$17,123.35
116843	Irrigation Water Storage Tank Accessories Includes Level Indicator, Float Valve, Drain Valve, Fittings, etc.	EA	$1,540.97	$3,006.46	$0.00	$4,547.43

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116844	Irrigation Water Storage Tank Remote Level Monitoring Includes Controller, Solar Panel, Antenna and Submersible Pressure Gauge	EA	$1,142.44	$2,564.02	$0.00	$3,706.46
116845	1-1/2" Irrigation Water Sand Separator System Includes Purge/Isolation Kit, Valve, Actuator, Supports and Gauges	EA	$708.49	$7,548.96	$0.00	$8,257.45

32-82-00 Irrigation Pumps

32-82-13 Irrigation Pumps

116846	3 HP Simplex Packaged Irrigation Water Booster Pump Prefabricated System Including Pump, Piping, Valves, Specialties, Weather Resistant Enclosure and Control Panel.	EA	$1,275.28	$12,472.20	$0.00	$13,747.48
116847	5 HP Simplex Packaged Irrigation Water Booster Pump Prefabricated System Including Pump, Piping, Valves, Specialties, Weather Resistant Enclosure and Control Panel.	EA	$850.20	$12,997.34	$0.00	$13,847.54
116848	7-1/2 HP Simplex Packaged Irrigation Water Booster Pump Prefabricated System Including Pump, Piping, Valves, Specialties, Weather Resistant Enclosure and Control Panel.	EA	$850.20	$15,360.50	$0.00	$16,210.70

32-84-00 Planting Irrigation

Pricing applicable for both standard and reclaimed irrigation system components. Trenching for irrigation systems is not included in the LF unit cost

32-84-23 Underground Sprinklers

116849	1/2" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$4.43	$0.68	$0.00	$5.11
116850	3/4" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$4.43	$0.79	$0.00	$5.22
116851	1" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$4.43	$1.26	$0.00	$5.69
116852	1-1/4" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$5.31	$1.56	$0.00	$6.87
116853	1-1/2" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$5.31	$1.84	$0.00	$7.15
116854	2" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$5.31	$2.46	$0.00	$7.77
116855	2-1/2" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$5.31	$4.97	$0.00	$10.28
116856	3" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$6.20	$6.70	$0.00	$12.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116857	4" Irrigation Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement	LF	$8.86	$12.67	$0.00	$21.53
116858	1/2" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$17.71	$0.66	$0.00	$18.37
116859	3/4" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$17.71	$0.73	$0.00	$18.44
116860	1" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$16.82	$1.37	$0.00	$18.19
116861	1-1/4" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$20.37	$2.28	$0.00	$22.65
116862	1-1/2" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$23.91	$2.57	$0.00	$26.48
116863	2" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$24.79	$3.91	$0.00	$28.70
116864	2-1/2" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$30.11	$12.28	$0.00	$42.39
116865	3" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$36.31	$15.25	$0.00	$51.56
116866	4" Irrigation Water Fitting - PVC, Schedule 40, Solvent Cement	EA	$76.16	$27.42	$0.00	$103.58
116867	1/2" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$4.43	$0.89	$0.00	$5.32
116868	3/4" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$4.43	$1.24	$0.00	$5.67
116869	1" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$5.31	$1.84	$0.00	$7.15
116870	1-1/4" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$5.31	$2.66	$0.00	$7.97
116871	1-1/2" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$5.31	$2.86	$0.00	$8.17
116872	2" Irrigation Water Pipe - PVC, Schedule 80, Solid Wall, Solvent Cement	LF	$5.31	$4.08	$0.00	$9.39
116873	1/2" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$9.17	$0.00	$26.88
116874	3/4" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$10.52	$0.00	$28.23
116875	1" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$17.71	$14.90	$0.00	$32.61
116876	1-1/4" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$20.37	$29.79	$0.00	$50.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116877	1-1/2" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$23.91	$30.60	$0.00	$54.51
116878	2" Irrigation Water Fitting - PVC, Schedule 80, Solvent Cement	EA	$24.79	$37.79	$0.00	$62.58
	32-90-00 Planting					
	32-91-00 Planting Preparation					
	32-91-19 Landscape Grading					
116879	Import Topsoil Includes loading and hauling	CY	$4.48	$26.32	$0.00	$30.80
116880	Import Topsoil – From Stockpile Includes loading and hauling	CY	$4.48	$0.00	$0.00	$4.48
116881	Spread Topsoil (Hand) No machine access. Includes rolling	CY	$36.57	$0.00	$0.00	$36.57
116882	Spread Topsoil (Machine) Includes rolling	CY	$14.95	$0.00	$0.00	$14.95
116883	Structural Soil Includes rolling	CY	$18.16	$99.90	$0.00	$118.06
116884	Planting Bed Preparation Includes removing weeds, removing debris, and preparing soil for planting/landscape surfacing	SY	$0.61	$0.11	$0.00	$0.72
116885	[Modifier Soil Amendments] Includes all soil adjusting admixtures including, but not limited to lime, sand, perlite, loam, fertilizer, vermiculite, and aluminum sulfate	CY	$0.00	$8.00	$0.00	$8.00
116886	[Modifier] Quantity Premium - Landscape Grading (31-50 CY) Quantity premium can be used when total cubic yardage in section 32-91-19 Landscape Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$13.44	$0.00	$0.00	$13.44
116887	[Modifier] Quantity Premium - Landscape Grading (11-30 CY) Quantity premium can be used when total cubic yardage in section 32-91-19 Landscape Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$22.40	$0.00	$0.00	$22.40
116888	[Modifier] Quantity Premium - Landscape Grading (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 32-91-19 Landscape Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$67.21	$0.00	$0.00	$67.21
	32-92-00 Turf and Grasses					
	32-92-19 Seeding					

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116889	Seeding – St. Augustine Or Equal Includes Seed, fertilizer, and straw cover or equal	SY	$0.22	$0.40	$0.00	$0.62
116890	Seeding – Bluegrass Or Equal Includes Seed, fertilizer, and straw cover or equal	SY	$0.22	$0.28	$0.00	$0.50
116891	Seeding – Fescue / Rye Or Equal Includes Seed, fertilizer, and straw cover or equal	SY	$0.22	$0.23	$0.00	$0.45
116892	Seeding – Wild Flower Mix Or Equal Includes Seed, fertilizer, and straw cover or equal	SY	$0.22	$0.17	$0.00	$0.39
116893	Hydroseeding – St. Augustine Or Equal Includes Seed, fertilizer, wood fiber, and binder	SY	$0.28	$0.40	$0.10	$0.78
116894	Hydroseeding – Bluegrass Or Equal Includes Seed, fertilizer, wood fiber, and binder	SY	$0.28	$0.28	$0.10	$0.66
116895	Hydroseeding – Fescue / Rye Or Equal Includes Seed, fertilizer, wood fiber, and binder	SY	$0.28	$0.23	$0.10	$0.61
116896	Hydroseeding – Wild Flower Mix Or Equal Includes Seed, fertilizer, wood fiber, and binder	SY	$0.28	$0.17	$0.10	$0.55
116897	[Modifier] Seeding Less Than 500 SY Quantity premium can be used when total square yardage in section 32-92-19 Seeding are within stated quantities. Can be applied cumulatively to base line items.	SY	$0.98	$0.00	$0.00	$0.98

32-92-23 Sodding

116898	Sod – St. Augustine Or Equal Includes Sod and fertilizer	SY	$4.88	$5.66	$0.00	$10.54
116899	Sod – Bluegrass Or Equal Includes Sod and fertilizer	SY	$4.88	$4.62	$0.00	$9.50
116900	Sod – Fescue /Rye Or Equal Includes Sod and fertilizer	SY	$4.88	$4.11	$0.00	$8.99
116901	Sod – Wild Flower Mix Or Equal Includes Sod and fertilizer	SY	$4.88	$3.60	$0.00	$8.48
116902	[Modifier] Sod Less Than 500 SY Quantity premium can be used when total square yardage in section 32-92-23 Sodding are within stated quantities. Can be applied cumulatively to base line items.	SY	$0.98	$0.00	$0.00	$0.98

32-93-00 Plants

Due to the myriad of different planting options, common plantings have been included into the cost book. In the event a specific plant is required but not identified in the cost book, Solicitor is required to submit an option within the appropriate “price point” for Project Managers approval

32-93-13 Ground Covers

Includes delivery, excavation, backfill with suitable soils, and fertilizing

116903	Juniper – Up To 1 Gallon	EA	$12.19	$5.70	$0.00	$17.89

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116904	Juniper – Up To 5 Gallon	EA	$16.26	$15.98	$0.00	$32.24
116905	Juniper – Up To 15 Gallon	EA	$32.52	$51.37	$0.00	$83.89
116906	Rosmarinus – Up To 1 Gallon	EA	$12.19	$4.57	$0.00	$16.76
116907	Rosmarinus – Up To 5 Gallon	EA	$16.26	$11.42	$0.00	$27.68
116908	Rosmarinus – Up To 15 Gallon	EA	$32.52	$44.52	$0.00	$77.04
116909	Vinca – Up To 1 Gallon	EA	$12.19	$5.70	$0.00	$17.89
116910	Vinca – Up To 5 Gallon	EA	$16.26	$15.98	$0.00	$32.24
116911	Vinca (Per Flat)	FLAT	$78.05	$19.41	$0.00	$97.46
116912	Drosanthemum (Per Flat)	FLAT	$78.05	$11.42	$0.00	$89.47
116913	Grevillea – Up To 1 Gallon	EA	$12.19	$8.00	$0.00	$20.19
116914	Grevillea – Up To 5 Gallon	EA	$16.26	$20.55	$0.00	$36.81
116915	Grevillea – Up To 15 Gallon	EA	$32.52	$62.79	$0.00	$95.31
116916	Lampranthus (Per Flat)	FLAT	$78.05	$11.42	$0.00	$89.47
116917	Malephora (Per Flat)	FLAT	$78.05	$14.84	$0.00	$92.89
116918	Sedum (Per Flat)	FLAT	$78.05	$14.84	$0.00	$92.89

32-93-33 Shrubs

Includes delivery, excavation, backfill with suitable soils, and fertilizing

116919	Western Redbud – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116920	Western Redbud – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116921	Western Redbud – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
116922	Bladderpod – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116923	Bladderpod – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
116924	Bladderpod – Up To 15 Gallon	EA	$16.97	$74.20	$0.00	$91.17

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116925	Toyon – Up To 1 Gallon	EA	$10.19	$9.13	$0.00	$19.32
116926	Toyon – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116927	Toyon – Up To 15 Gallon	EA	$16.97	$79.92	$0.00	$96.89
116928	Torrey Pine – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116929	Torrey Pine – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116930	Torrey Pine – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116931	Western Sycamore – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116932	Western Sycamore – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116933	Western Sycamore – Up To 15 Gallon	EA	$16.97	$55.94	$0.00	$72.91
116934	Holly Leaf Cherry – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116935	Holly Leaf Cherry – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116936	Holly Leaf Cherry – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
116937	Coast Live Oak – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116938	Coast Live Oak – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116939	Coast Live Oak – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116940	Engelmann Oak – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116941	Engelmann Oak – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116942	Engelmann Oak – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116943	Valley Oak – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116944	Valley Oak – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116945	Valley Oak – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116946	Cordyline – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116947	Cordyline – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116948	Cordyline – Up To 15 Gallon	EA	$16.97	$55.94	$0.00	$72.91
116949	Bougainvillea – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116950	Bougainvillea – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116951	Bougainvillea – Up To 15 Gallon	EA	$16.97	$55.94	$0.00	$72.91
116952	Mandevilla – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116953	Mandevilla – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116954	Mandevilla – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116955	Agave – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116956	Agave – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116957	Agave – Up To 15 Gallon	EA	$16.97	$142.71	$0.00	$159.68
116958	Lavender – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116959	Lavender – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
116960	Lavender – Up To 15 Gallon	EA	$16.97	$51.37	$0.00	$68.34
116961	Dianella – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116962	Dianella – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116963	Dianella – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
116964	Aloe – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
116965	Aloe – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
116966	Aloe – Up To 15 Gallon	EA	$16.97	$85.62	$0.00	$102.59
116967	Star Jasmine – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116968	Star Jasmine – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
116969	Star Jasmine – Up To 15 Gallon	EA	$16.97	$55.94	$0.00	$72.91

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116970	Bird Of Paradise – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116971	Bird Of Paradise – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
116972	Bird Of Paradise – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
116973	Honeysuckle – Up To 1 Gallon	EA	$10.19	$4.57	$0.00	$14.76
116974	Honeysuckle – Up To 5 Gallon	EA	$12.73	$11.42	$0.00	$24.15
116975	Honeysuckle – Up To 15 Gallon	EA	$16.97	$44.52	$0.00	$61.49
116976	Buddleja – Up To 1 Gallon	EA	$10.19	$4.57	$0.00	$14.76
116977	Buddleja – Up To 5 Gallon	EA	$12.73	$11.42	$0.00	$24.15
116978	Buddleja – Up To 15 Gallon	EA	$16.97	$51.37	$0.00	$68.34
116979	Cistus – Up To 1 Gallon	EA	$10.19	$4.57	$0.00	$14.76
116980	Cistus – Up To 5 Gallon	EA	$12.73	$11.42	$0.00	$24.15
116981	Cistus – Up To 15 Gallon	EA	$16.97	$44.52	$0.00	$61.49
116982	Eucalyptus – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
116983	Eucalyptus – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116984	Eucalyptus – Up To 15 Gallon	EA	$16.97	$67.35	$0.00	$84.32
116985	Gaura – Up To 1 Gallon	EA	$10.19	$4.57	$0.00	$14.76
116986	Gaura – Up To 5 Gallon	EA	$12.73	$11.42	$0.00	$24.15
116987	Lantana – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116988	Lantana – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
116989	Lonicera – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116990	Lonicera – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116991	Lonicera – Up To 15 Gallon	EA	$16.97	$55.94	$0.00	$72.91
116992	Nandina – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
116993	Nandina – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
116994	Nandina – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
116995	Nerium – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116996	Nerium – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
116997	Nerium – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
116998	Pennisetum – Up To 1 Gallon	EA	$10.19	$5.70	$0.00	$15.89
116999	Pennisetum – Up To 5 Gallon	EA	$12.73	$15.98	$0.00	$28.71
117000	Pennisetum – Up To 15 Gallon	EA	$16.97	$44.52	$0.00	$61.49
117001	Phormium – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117002	Phormium – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
117003	Phormium – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
117004	Sedum – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
117005	Sedum – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
117006	Wisteria – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
117007	Wisteria – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
117008	Wisteria – Up To 15 Gallon	EA	$16.97	$90.19	$0.00	$107.16
117009	Yucca – Up To 1 Gallon	EA	$10.19	$8.00	$0.00	$18.19
117010	Yucca – Up To 5 Gallon	EA	$12.73	$20.55	$0.00	$33.28
117011	Yucca – Up To 15 Gallon	EA	$16.97	$62.79	$0.00	$79.76
117012	Alberta Spruce – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117013	Alberta Spruce – Up To 2 Gallon	EA	$10.61	$18.08	$0.00	$28.69
117014	Alberta Spruce – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117015	Alberta Spruce – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117016	Alberta Spruce – Up To 7 Gallon	EA	$14.55	$53.27	$0.00	$67.82
117017	American Hazelnut – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117018	American Hazelnut – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117019	American Hazelnut – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117020	American Hazelnut – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117021	American Hazelnut – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117022	Arborvitae – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117023	Arborvitae – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117024	Arborvitae – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117025	Arborvitae – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117026	Arborvitae – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117027	Azalea – Up To 1 Gallon	EA	$10.19	$7.61	$0.00	$17.80
117028	Azalea – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117029	Azalea – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117030	Azalea – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117031	Azalea – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117032	Blackhaw – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117033	Blackhaw – Up To 2 Gallon	EA	$10.61	$19.98	$0.00	$30.59
117034	Blackhaw – Up To 3 Gallon	EA	$11.32	$28.54	$0.00	$39.86
117035	Blackhaw – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117036	Blackhaw – Up To 7 Gallon	EA	$14.55	$51.37	$0.00	$65.92
117037	Blue Spruce – Up To 1 Gallon	EA	$10.19	$22.83	$0.00	$33.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117038	Blue Spruce – Up To 2 Gallon	EA	$10.61	$34.25	$0.00	$44.86
117039	Blue Spruce – Up To 3 Gallon	EA	$11.32	$45.66	$0.00	$56.98
117040	Blue Spruce – Up To 5 Gallon	EA	$12.73	$68.50	$0.00	$81.23
117041	Blue Spruce – Up To 7 Gallon	EA	$14.55	$91.33	$0.00	$105.88
117042	Blueberry – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117043	Blueberry – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117044	Blueberry – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117045	Blueberry – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117046	Blueberry – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117047	Boxwood – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117048	Boxwood – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117049	Boxwood – Up To 3 Gallon	EA	$11.32	$28.54	$0.00	$39.86
117050	Boxwood – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117051	Boxwood – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117052	Camellia – Up To 1 Gallon	EA	$10.19	$17.13	$0.00	$27.32
117053	Camellia – Up To 2 Gallon	EA	$10.61	$24.73	$0.00	$35.34
117054	Camellia – Up To 3 Gallon	EA	$11.32	$32.34	$0.00	$43.66
117055	Camellia – Up To 5 Gallon	EA	$12.73	$41.86	$0.00	$54.59
117056	Camellia – Up To 7 Gallon	EA	$14.55	$53.27	$0.00	$67.82
117057	Chokeberry – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117058	Chokeberry – Up To 2 Gallon	EA	$10.61	$16.18	$0.00	$26.79
117059	Chokeberry – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117060	Chokeberry – Up To 5 Gallon	EA	$12.73	$30.44	$0.00	$43.17
117061	Chokeberry – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117062	Coneflower – Up To 1 Gallon	EA	$10.19	$7.61	$0.00	$17.80
117063	Coneflower – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117064	Coneflower – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117065	Coneflower – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117066	Coneflower – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117067	Crape Myrtle – Up To 1 Gallon	EA	$10.19	$15.23	$0.00	$25.42
117068	Crape Myrtle – Up To 2 Gallon	EA	$10.61	$22.83	$0.00	$33.44
117069	Crape Myrtle – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117070	Crape Myrtle – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117071	Crape Myrtle – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117072	Cypress – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117073	Cypress – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117074	Cypress – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117075	Cypress – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117076	Cypress – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117077	Willow – Up To 1 Gallon	EA	$10.19	$17.13	$0.00	$27.32
117078	Willow – Up To 2 Gallon	EA	$10.61	$25.68	$0.00	$36.29
117079	Willow – Up To 3 Gallon	EA	$11.32	$34.25	$0.00	$45.57
117080	Willow – Up To 5 Gallon	EA	$12.73	$49.47	$0.00	$62.20
117081	Willow – Up To 7 Gallon	EA	$14.55	$83.72	$0.00	$98.27
117082	Dogwood – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117083	Dogwood – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117084	Dogwood – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117085	Dogwood – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117086	Dogwood – Up To 7 Gallon	EA	$14.55	$47.57	$0.00	$62.12
117087	Elderberry – Up To 1 Gallon	EA	$10.19	$15.23	$0.00	$25.42
117088	Elderberry – Up To 2 Gallon	EA	$10.61	$22.83	$0.00	$33.44
117089	Elderberry – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117090	Elderberry – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117091	Elderberry – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117092	Euonymus – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117093	Euonymus – Up To 2 Gallon	EA	$10.61	$14.27	$0.00	$24.88
117094	Euonymus – Up To 3 Gallon	EA	$11.32	$19.03	$0.00	$30.35
117095	Euonymus – Up To 5 Gallon	EA	$12.73	$28.54	$0.00	$41.27
117096	Euonymus – Up To 7 Gallon	EA	$14.55	$38.06	$0.00	$52.61
117097	Hibiscus – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117098	Hibiscus – Up To 2 Gallon	EA	$10.61	$18.08	$0.00	$28.69
117099	Hibiscus – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117100	Hibiscus – Up To 5 Gallon	EA	$12.73	$32.34	$0.00	$45.07
117101	Hibiscus – Up To 7 Gallon	EA	$14.55	$47.57	$0.00	$62.12
117102	Holly – Up To 1 Gallon	EA	$10.19	$13.32	$0.00	$23.51
117103	Holly – Up To 2 Gallon	EA	$10.61	$20.93	$0.00	$31.54
117104	Holly – Up To 3 Gallon	EA	$11.32	$28.54	$0.00	$39.86

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117105	Holly – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117106	Holly – Up To 7 Gallon	EA	$14.55	$51.37	$0.00	$65.92
117107	Hydrangea – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117108	Hydrangea – Up To 2 Gallon	EA	$10.61	$19.98	$0.00	$30.59
117109	Hydrangea – Up To 3 Gallon	EA	$11.32	$28.54	$0.00	$39.86
117110	Hydrangea – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117111	Hydrangea – Up To 7 Gallon	EA	$14.55	$51.37	$0.00	$65.92
117112	Japanese Maple – Up To 1 Gallon	EA	$10.19	$34.25	$0.00	$44.44
117113	Japanese Maple – Up To 2 Gallon	EA	$10.61	$50.42	$0.00	$61.03
117114	Japanese Maple – Up To 3 Gallon	EA	$11.32	$66.59	$0.00	$77.91
117115	Japanese Maple – Up To 5 Gallon	EA	$12.73	$87.52	$0.00	$100.25
117116	Japanese Maple – Up To 7 Gallon	EA	$14.55	$114.16	$0.00	$128.71
117117	Juniper – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117118	Juniper – Up To 2 Gallon	EA	$10.61	$14.27	$0.00	$24.88
117119	Juniper – Up To 3 Gallon	EA	$11.32	$19.03	$0.00	$30.35
117120	Juniper – Up To 5 Gallon	EA	$12.73	$26.64	$0.00	$39.37
117121	Juniper – Up To 7 Gallon	EA	$14.55	$38.06	$0.00	$52.61
117122	Laurel – Up To 1 Gallon	EA	$10.19	$15.23	$0.00	$25.42
117123	Laurel – Up To 2 Gallon	EA	$10.61	$22.83	$0.00	$33.44
117124	Laurel – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117125	Laurel – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117126	Laurel – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117127	Lilac – Up To 1 Gallon	EA	$10.19	$15.23	$0.00	$25.42

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117128	Lilac – Up To 2 Gallon	EA	$10.61	$22.83	$0.00	$33.44
117129	Lilac – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117130	Lilac – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117131	Lilac – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117132	Mugo Pine – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117133	Mugo Pine – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117134	Mugo Pine – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117135	Mugo Pine – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117136	Mugo Pine – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117137	New Jersey Tea – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117138	New Jersey Tea – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117139	New Jersey Tea – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117140	New Jersey Tea – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117141	New Jersey Tea – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117142	Ninebark – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117143	Ninebark – Up To 2 Gallon	EA	$10.61	$16.18	$0.00	$26.79
117144	Ninebark – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117145	Ninebark – Up To 5 Gallon	EA	$12.73	$30.44	$0.00	$43.17
117146	Ninebark – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117147	Peony – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117148	Peony – Up To 2 Gallon	EA	$10.61	$18.08	$0.00	$28.69
117149	Peony – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117150	Peony – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117151	Peony – Up To 7 Gallon	EA	$14.55	$53.27	$0.00	$67.82
117152	Pieris – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117153	Pieris – Up To 2 Gallon	EA	$10.61	$18.08	$0.00	$28.69
117154	Pieris – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117155	Pieris – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117156	Pieris – Up To 7 Gallon	EA	$14.55	$53.27	$0.00	$67.82
117157	Potentilla – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117158	Potentilla – Up To 2 Gallon	EA	$10.61	$16.18	$0.00	$26.79
117159	Potentilla – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117160	Potentilla – Up To 5 Gallon	EA	$12.73	$30.44	$0.00	$43.17
117161	Potentilla – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117162	Chokeberry – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117163	Chokeberry – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117164	Chokeberry – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117165	Chokeberry – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117166	Chokeberry – Up To 7 Gallon	EA	$14.55	$47.57	$0.00	$62.12
117167	Rose of Sharon – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117168	Rose of Sharon – Up To 2 Gallon	EA	$10.61	$16.18	$0.00	$26.79
117169	Rose of Sharon – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117170	Rose of Sharon – Up To 5 Gallon	EA	$12.73	$30.44	$0.00	$43.17
117171	Rose of Sharon – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117172	Rosebay – Up To 1 Gallon	EA	$10.19	$19.03	$0.00	$29.22

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117173	Rosebay – Up To 2 Gallon	EA	$10.61	$24.73	$0.00	$35.34
117174	Rosebay – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117175	Rosebay – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117176	Rosebay – Up To 7 Gallon	EA	$14.55	$70.40	$0.00	$84.95
117177	Ruby – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117178	Ruby – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117179	Ruby – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117180	Ruby – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117181	Ruby – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117182	Salvia – Up To 1 Gallon	EA	$10.19	$7.61	$0.00	$17.80
117183	Salvia – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117184	Salvia – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117185	Salvia – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117186	Salvia – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117187	Sand Cherry – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117188	Sand Cherry – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117189	Sand Cherry – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117190	Sand Cherry – Up To 5 Gallon	EA	$12.73	$32.34	$0.00	$45.07
117191	Sand Cherry – Up To 7 Gallon	EA	$14.55	$43.76	$0.00	$58.31
117192	Shrub Rose – Up To 1 Gallon	EA	$10.19	$17.13	$0.00	$27.32
117193	Shrub Rose – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117194	Shrub Rose – Up To 3 Gallon	EA	$11.32	$20.93	$0.00	$32.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117195	Shrub Rose – Up To 5 Gallon	EA	$12.73	$22.83	$0.00	$35.56
117196	Shrub Rose – Up To 7 Gallon	EA	$14.55	$26.64	$0.00	$41.19
117197	Rhododendron – Up To 1 Gallon	EA	$10.19	$15.23	$0.00	$25.42
117198	Rhododendron – Up To 2 Gallon	EA	$10.61	$22.83	$0.00	$33.44
117199	Rhododendron – Up To 3 Gallon	EA	$11.32	$30.44	$0.00	$41.76
117200	Rhododendron – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117201	Rhododendron – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117202	Smoke Bush – Up To 1 Gallon	EA	$10.19	$17.13	$0.00	$27.32
117203	Smoke Bush – Up To 2 Gallon	EA	$10.61	$24.73	$0.00	$35.34
117204	Smoke Bush – Up To 3 Gallon	EA	$11.32	$32.34	$0.00	$43.66
117205	Smoke Bush – Up To 5 Gallon	EA	$12.73	$39.96	$0.00	$52.69
117206	Smoke Bush – Up To 7 Gallon	EA	$14.55	$51.37	$0.00	$65.92
117207	Spicebush – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117208	Spicebush – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117209	Spicebush – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117210	Spicebush – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117211	Spicebush – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117212	Spirea – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117213	Spirea – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117214	Spirea – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117215	Spirea – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117216	Spirea – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117217	Viburnum – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117218	Viburnum – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117219	Viburnum – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117220	Viburnum – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117221	Viburnum – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21
117222	Weigela – Up To 1 Gallon	EA	$10.19	$9.51	$0.00	$19.70
117223	Weigela – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117224	Weigela – Up To 3 Gallon	EA	$11.32	$24.73	$0.00	$36.05
117225	Weigela – Up To 5 Gallon	EA	$12.73	$38.06	$0.00	$50.79
117226	Weigela – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117227	Winterberry – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117228	Winterberry – Up To 2 Gallon	EA	$10.61	$19.03	$0.00	$29.64
117229	Winterberry – Up To 3 Gallon	EA	$11.32	$26.64	$0.00	$37.96
117230	Winterberry – Up To 5 Gallon	EA	$12.73	$36.16	$0.00	$48.89
117231	Winterberry – Up To 7 Gallon	EA	$14.55	$49.47	$0.00	$64.02
117232	Yew – Up To 1 Gallon	EA	$10.19	$11.42	$0.00	$21.61
117233	Yew – Up To 2 Gallon	EA	$10.61	$17.13	$0.00	$27.74
117234	Yew – Up To 3 Gallon	EA	$11.32	$22.83	$0.00	$34.15
117235	Yew – Up To 5 Gallon	EA	$12.73	$34.25	$0.00	$46.98
117236	Yew – Up To 7 Gallon	EA	$14.55	$45.66	$0.00	$60.21

32-93-36 Ornamental Grasses and Perennials

Includes delivery, excavation, backfill with suitable soils, and fertilizing

117237	Alumroot Obsidian – Up To 1 Gallon	EA	$7.83	$9.31	$0.00	$17.14
117238	Alumroot Obsidian – Up To 2 Gallon	EA	$8.08	$13.03	$0.00	$21.11

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117239	Beardtongue – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117240	Beardtongue – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117241	Bee Balm – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117242	Bee Balm – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117243	Big Bluestem Grass – Up To 1 Gallon	EA	$7.83	$11.42	$0.00	$19.25
117244	Big Bluestem Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117245	Black-Eyed Susan – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117246	Black-Eyed Susan – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117247	Blazing Star – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117248	Blazing Star – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117249	Blue Grama Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117250	Blue Grama Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117251	Butterfly-Weed – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117252	Butterfly-Weed – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117253	Cardinal Flower – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117254	Cardinal Flower – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117255	Columbine – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117256	Columbine – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117257	Culver's Root – Up To 1 Gallon	EA	$7.83	$5.70	$0.00	$13.53
117258	Culver's Root – Up To 2 Gallon	EA	$8.08	$9.52	$0.00	$17.60
117259	Dwarf Pampas Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117260	Dwarf Pampas Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117261	Feather Reed Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117262	Feather Reed Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117263	Forest Grass – Up To 1 Gallon	EA	$7.83	$11.42	$0.00	$19.25
117264	Forest Grass – Up To 2 Gallon	EA	$8.08	$20.93	$0.00	$29.01
117265	Fountain Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117266	Fountain Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117267	Gaura – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117268	Gaura – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117269	Goldenrods – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117270	Goldenrods – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117271	Indian Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117272	Indian Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117273	Jacob's Ladder – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117274	Jacob's Ladder – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117275	Joe Pye Weed – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117276	Joe Pye Weed – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117277	Little Bluestem Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117278	Little Bluestem Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117279	Lobelia – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117280	Lobelia – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117281	Mountain Mint – Up To 1 Gallon	EA	$7.83	$5.70	$0.00	$13.53
117282	Mountain Mint – Up To 2 Gallon	EA	$8.08	$9.52	$0.00	$17.60
117283	New England Aster – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117284	New England Aster – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117285	Oxeye Sunflower – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117286	Oxeye Sunflower – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117287	Phlox – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117288	Phlox – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117289	Stonecrop – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117290	Stonecrop – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117291	Sundrops – Up To 1 Gallon	EA	$7.83	$5.70	$0.00	$13.53
117292	Sundrops – Up To 2 Gallon	EA	$8.08	$9.52	$0.00	$17.60
117293	Swamp Milkweed – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117294	Swamp Milkweed – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117295	Switch Grass – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117296	Switch Grass – Up To 2 Gallon	EA	$8.08	$19.03	$0.00	$27.11
117297	Virginia Bluebells – Up To 1 Gallon	EA	$7.83	$13.31	$0.00	$21.14
117298	Virginia Bluebells – Up To 2 Gallon	EA	$8.08	$17.13	$0.00	$25.21
117299	Virginia Creeper – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117300	Virginia Creeper – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117301	White Snakeroot – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117302	White Snakeroot – Up To 2 Gallon	EA	$8.08	$11.42	$0.00	$19.50
117303	White Wood Aster – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117304	White Wood Aster – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39
117305	Wild Bergamot – Up To 1 Gallon	EA	$7.83	$9.52	$0.00	$17.35
117306	Wild Bergamot – Up To 2 Gallon	EA	$8.08	$13.31	$0.00	$21.39

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117307	Hosta – Up To 1 Gallon	EA	$7.83	$5.70	$0.00	$13.53
117308	Daylilly – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117309	Sedum – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117310	Geranium – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117311	Fern – Up To 1 Gallon	EA	$7.83	$7.61	$0.00	$15.44
117312	Liriope – Up To 1 Gallon	EA	$7.83	$4.55	$0.00	$12.38
117313	Lavender – Up To 1 Gallon	EA	$7.83	$8.74	$0.00	$16.57
117314	Iris – Up To 1 Gallon	EA	$7.83	$8.74	$0.00	$16.57

32-93-43 Trees

Includes delivery, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing

117315	Fern Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117316	Fern Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117317	Fern Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117318	Red Shanks – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117319	Red Shanks – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117320	Red Shanks – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117321	Century Plant – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117322	Century Plant – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117323	Century Plant – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117324	Peppermint Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117325	Peppermint Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117326	Peppermint Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117327	Silk Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117328	Silk Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117329	Silk Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117330	Norfolk Island Pine, Star Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117331	Norfolk Island Pine, Star Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117332	Norfolk Island Pine, Star Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117333	Marina Strawberry Tree – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117334	Marina Strawberry Tree – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117335	Marina Strawberry Tree – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117336	Yew Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117337	Yew Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117338	Yew Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117339	Argentine Mesquite – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117340	Argentine Mesquite – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117341	Argentine Mesquite – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117342	Phoenix Mesquite – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117343	Phoenix Mesquite – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117344	Phoenix Mesquite – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117345	Coast Live Oak – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117346	Coast Live Oak – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117347	Coast Live Oak – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117348	Carolina Laurel Cherry – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117349	Carolina Laurel Cherry – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117350	Carolina Laurel Cherry – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117351	Catalina Cherry – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117352	Catalina Cherry – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117353	Catalina Cherry – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117354	Aristocrat Flowering Pear – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117355	Aristocrat Flowering Pear – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117356	Aristocrat Flowering Pear – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117357	Chanticleer Flowering Pear – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117358	Chanticleer Flowering Pear – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117359	Chanticleer Flowering Pear – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117360	Engelmann Oak, Mesa Oak – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117361	Engelmann Oak, Mesa Oak – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117362	Engelmann Oak, Mesa Oak – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117363	California Black Oak – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117364	California Black Oak – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117365	California Black Oak – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117366	Valley Oak – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117367	Valley Oak – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117368	Valley Oak – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117369	Soapbark Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117370	Soapbark Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117371	Soapbark Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117372	African Sumac – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117373	African Sumac – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117374	African Sumac – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117375	Tipu – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117376	Tipu – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117377	Tipu – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117378	Swan Hill Olive – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117379	Swan Hill Olive – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117380	Swan Hill Olive – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117381	Strawberry Tree – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117382	Strawberry Tree – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117383	Strawberry Tree – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117384	Purple Orchid Tree – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117385	Purple Orchid Tree – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117386	Purple Orchid Tree – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117387	White Orchid Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117388	White Orchid Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117389	White Orchid Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117390	Hong Kong Orchid – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117391	Hong Kong Orchid – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117392	Hong Kong Orchid – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117393	Lemon Bottlebrush – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117394	Lemon Bottlebrush – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117395	Lemon Bottlebrush – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117396	White Bottlebrush – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117397	White Bottlebrush – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117398	White Bottlebrush – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117399	Weeping Bottlebrush – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117400	Weeping Bottlebrush – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117401	Weeping Bottlebrush – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117402	Blue Atlas Cedar – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117403	Blue Atlas Cedar – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117404	Blue Atlas Cedar – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117405	Deodar Cedar – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117406	Deodar Cedar – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117407	Deodar Cedar – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117408	Cedar Of Lebanon – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117409	Cedar Of Lebanon – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117410	Cedar Of Lebanon – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117411	European Hackberry – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117412	European Hackberry – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117413	European Hackberry – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117414	Eastern Redbud – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117415	Eastern Redbud – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117416	Eastern Redbud – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117417	Western Redbud – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117418	Western Redbud – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117419	Western Redbud – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117420	Desert Willow – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117421	Desert Willow – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117422	Desert Willow – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117423	Chinese Fringe Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117424	Chinese Fringe Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117425	Chinese Fringe Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117426	Chitalpa – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117427	Chitalpa – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117428	Chitalpa – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117429	Camphor – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117430	Camphor – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117431	Camphor – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117432	Bladderpod – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117433	Bladderpod – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117434	Bladderpod – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117435	Bushrue – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117436	Bushrue – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117437	Bushrue – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117438	Bronze Loquat – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117439	Bronze Loquat – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117440	Bronze Loquat – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117441	Pink Fairy Duster – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117442	Pink Fairy Duster – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117443	Pink Fairy Duster – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117444	Australian Willow – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117445	Australian Willow – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117446	Australian Willow – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117447	Ginkgo, Maidenhair Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117448	Ginkgo, Maidenhair Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117449	Ginkgo, Maidenhair Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117450	Pink Trumpet Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117451	Pink Trumpet Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117452	Pink Trumpet Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117453	Toyon – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117454	Toyon – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117455	Toyon – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117456	Santa Barbara Ceanothus – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117457	Santa Barbara Ceanothus – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117458	Santa Barbara Ceanothus – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117459	Jacaranda – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117460	Jacaranda – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117461	Jacaranda – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117462	Chinese Flame Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117463	Chinese Flame Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117464	Chinese Flame Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117465	Crape Myrtle – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117466	Crape Myrtle – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117467	Crape Myrtle – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117468	Sweet Bay – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117469	Sweet Bay – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117470	Sweet Bay – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117471	Brisbane Box – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117472	Brisbane Box – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117473	Brisbane Box – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117474	Ironwood: Santa Cruz Island, Fernleaf Catalina – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117475	Ironwood: Santa Cruz Island, Fernleaf Catalina – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117476	Ironwood: Santa Cruz Island, Fernleaf Catalina – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117477	Smoothshell Macadamia – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117478	Smoothshell Macadamia – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117479	Smoothshell Macadamia – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117480	Sea Dahlia – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117481	Sea Dahlia – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117482	Sea Dahlia – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117483	Big Pod Ceanothus – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117484	Big Pod Ceanothus – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117485	Big Pod Ceanothus – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117486	Flaxleaf Paperbark – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117487	Flaxleaf Paperbark – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117488	Flaxleaf Paperbark – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117489	Cajeput Tree – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117490	Cajeput Tree – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117491	Cajeput Tree – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117492	White Bottle Brush – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117493	White Bottle Brush – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117494	White Bottle Brush – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117495	Weeping Bottle Brush – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117496	Weeping Bottle Brush – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117497	Weeping Bottle Brush – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117498	China Berry – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117499	China Berry – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117500	China Berry – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117501	New Zealand Christmas Tree – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73
117502	New Zealand Christmas Tree – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117503	New Zealand Christmas Tree – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117504	Channel Island Sagebook – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117505	Channel Island Sagebook – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117506	Channel Island Sagebook – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117507	Wilsonii Olive – Up To 24" Box	EA	$127.33	$285.40	$0.00	$412.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117508	Wilsonii Olive – Up To 36" Box	EA	$254.66	$856.21	$0.00	$1,110.87
117509	Wilsonii Olive – Up To 48" Box	EA	$509.31	$1,792.34	$0.00	$2,301.65
117510	Photinia, Fraser's Photinia – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117511	Photinia, Fraser's Photinia – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117512	Photinia, Fraser's Photinia – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117513	Canary Island Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117514	Canary Island Pine- Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117515	Canary Island Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117516	Eldarica Pine, Afghan Pine, Mondell Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117517	Eldarica Pine, Afghan Pine, Mondell Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117518	Eldarica Pine, Afghan Pine, Mondell Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117519	Aleppo Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117520	Aleppo Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117521	Aleppo Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117522	Bishop Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117523	Bishop Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117524	Bishop Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117525	Jelecote Pine, Mexican Weeping Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117526	Jelecote Pine, Mexican Weeping Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117527	Jelecote Pine, Mexican Weeping Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117528	Italian Stone Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117529	Italian Stone Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117530	Italian Stone Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117531	Torrey Pine – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117532	Torrey Pine – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117533	Torrey Pine – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117534	California Sycamore – Up To 24" Box	EA	$127.33	$228.32	$0.00	$355.65
117535	California Sycamore – Up To 36" Box	EA	$254.66	$684.97	$0.00	$939.63
117536	California Sycamore – Up To 48" Box	EA	$509.31	$1,449.85	$0.00	$1,959.16
117537	Autumn Blaze Maple – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117538	Autumn Blaze Maple – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117539	Autumn Blaze Maple – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117540	Beech – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117541	Beech – Up To 2-1/4" To 3" Caliper	EA	$127.33	$570.82	$0.00	$698.15
117542	Beech – Up To 3-1/4" To 4" Caliper	EA	$254.66	$970.37	$0.00	$1,225.03
117543	Cherry Tree – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117544	Cherry Tree – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117545	Cherry Tree – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117546	Crabapple – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117547	Crabapple – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117548	Crabapple – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117549	Dawn Redwood – Up To 2" Caliper	EA	$84.88	$513.72	$0.00	$598.60
117550	Dawn Redwood – Up To 2-1/4" To 3" Caliper	EA	$127.33	$684.97	$0.00	$812.30
117551	Dawn Redwood – Up To 3-1/4" To 4" Caliper	EA	$254.66	$913.30	$0.00	$1,167.96

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117552	Elm – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117553	Elm – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117554	Elm – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117555	Ginkgo Biloba – Up To 2" Caliper	EA	$84.88	$342.49	$0.00	$427.37
117556	Ginkgo Biloba – Up To 2-1/4" To 3" Caliper	EA	$127.33	$570.81	$0.00	$698.14
117557	Ginkgo Biloba – Up To 3-1/4" To 4" Caliper	EA	$254.66	$970.37	$0.00	$1,225.03
117558	Hornbeam – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117559	Hornbeam – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117560	Hornbeam – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117561	Japanese Maple – Up To 2" Caliper	EA	$84.88	$342.49	$0.00	$427.37
117562	Japanese Maple – Up To 2-1/4" To 3" Caliper	EA	$127.33	$570.81	$0.00	$698.14
117563	Japanese Maple – Up To 3-1/4" To 4" Caliper	EA	$254.66	$970.37	$0.00	$1,225.03
117564	Lilac – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117565	Lilac – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117566	Lilac – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117567	Linden – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117568	Linden – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117569	Linden – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117570	Locust – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117571	Locust – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117572	Locust – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117573	London Planetree – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117574	London Planetree – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117575	London Planetree – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117576	Magnolia – Up To 2" Caliper	EA	$84.88	$513.72	$0.00	$598.60
117577	Magnolia – Up To 2-1/4" To 3" Caliper	EA	$127.33	$742.05	$0.00	$869.38
117578	Magnolia – Up To 3-1/4" To 4" Caliper	EA	$254.66	$913.30	$0.00	$1,167.96
117579	Pear – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117580	Pear – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117581	Pear – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117582	Pin Oak – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117583	Pin Oak – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117584	Pin Oak – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117585	Poplar – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117586	Poplar – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117587	Poplar – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117588	Red Oak – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117589	Red Oak – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117590	Red Oak – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117591	Redbud – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117592	Redbud – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117593	Redbud – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117594	River Birch – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117595	River Birch – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117596	River Birch – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117597	Scarlet Oak – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117598	Scarlet Oak – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117599	Scarlet Oak – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117600	Serviceberry – Up To 2" Caliper	EA	$84.88	$171.23	$0.00	$256.11
117601	Serviceberry – Up To 2-1/4" To 3" Caliper	EA	$127.33	$228.32	$0.00	$355.65
117602	Serviceberry – Up To 3-1/4" To 4" Caliper	EA	$254.66	$570.81	$0.00	$825.47
117603	Sugar Maple – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117604	Sugar Maple – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117605	Sugar Maple – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117606	Sweet Gum – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117607	Sweet Gum – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117608	Sweet Gum – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117609	Sycamore – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117610	Sycamore – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117611	Sycamore – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117612	Weeping Willow – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117613	Weeping Willow – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117614	Weeping Willow – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117615	White Oak – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28
117616	White Oak – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117617	White Oak – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117618	Zelkova – Up To 2" Caliper	EA	$84.88	$285.40	$0.00	$370.28

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117619	Zelkova – Up To 2-1/4" To 3" Caliper	EA	$127.33	$399.56	$0.00	$526.89
117620	Zelkova – Up To 3-1/4" To 4" Caliper	EA	$254.66	$684.97	$0.00	$939.63
117621	Blue Spruce – 3'-6' Height	EA	$84.88	$171.23	$0.00	$256.11
117622	Blue Spruce – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117623	Blue Spruce – 10'-14' Height	EA	$254.66	$513.72	$0.00	$768.38
117624	Hemlock – 3'-6' Height	EA	$84.88	$114.17	$0.00	$199.05
117625	Hemlock – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117626	Hemlock – 10'-14' Height	EA	$254.66	$399.56	$0.00	$654.22
117627	Red Cedar – 3'-6' Height	EA	$84.88	$114.17	$0.00	$199.05
117628	Red Cedar – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117629	Red Cedar – 10'-14' Height	EA	$254.66	$399.56	$0.00	$654.22
117630	White Pine – 3'-6' Height	EA	$84.88	$171.23	$0.00	$256.11
117631	White Pine – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117632	White Pine – 10'-14' Height	EA	$254.66	$513.72	$0.00	$768.38
117633	Cypress – 3'-6' Height	EA	$84.88	$114.17	$0.00	$199.05
117634	Cypress – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117635	Cypress – 10'-14' Height	EA	$254.66	$399.56	$0.00	$654.22
117636	Norway Spruce – 3'-6' Height	EA	$84.88	$171.23	$0.00	$256.11
117637	Norway Spruce – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117638	Norway Spruce – 10'-14' Height	EA	$254.66	$513.72	$0.00	$768.38
117639	White Fir – 3'-6' Height	EA	$84.88	$171.23	$0.00	$256.11
117640	White Fir – 7'-9' Height	EA	$127.33	$228.32	$0.00	$355.65
117641	White Fir – 10'-14' Height	EA	$254.66	$513.72	$0.00	$768.38

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	32-94-00 Planting Accessories					
	32-94-00 Planting Accessories					
117642	Bioretention Garden Includes up to 2' of gravel bed, 3' of growing medium, plantings, and landscape covering	SF	$9.38	$6.24	$0.00	$15.62
117643	Landscape Edging – Plastic Includes stakes	LF	$1.62	$0.85	$0.00	$2.47
117644	Landscape Edging – Redwood Includes stakes	LF	$1.62	$1.71	$0.00	$3.33
117645	Landscape Edging – Pressure Treated Timber Up to 6"x6" Includes stakes	LF	$1.62	$2.28	$0.00	$3.90
117646	Landscape Edging – Metal Includes stakes	LF	$1.62	$6.28	$0.00	$7.90
117647	Landscape Edging – Natural	LF	$0.98	$0.00	$0.00	$0.98
117648	Mow Curb – Natural Color Includes stone base	CY	$174.21	$195.91	$5.00	$375.12
117649	Mow Curb – Natural Color Stamped Includes stone base	CY	$187.61	$195.91	$5.00	$388.52
117650	Mow Curb – Integral Color Includes stone base	CY	$174.21	$205.49	$5.00	$384.70
117651	Mow Curb – Integral Color Stamped Includes stone base	CY	$187.61	$205.49	$5.00	$398.10
	32-94-19 Landscape Surfacing					
117652	Marble / Granite Chips – Or Equal	CY	$32.52	$103.74	$0.00	$136.26
117653	River Rock Natural Up To 3" – Or Equal	CY	$32.52	$94.75	$0.00	$127.27
117654	River Rock Natural Up To 10" – Or Equal	CY	$32.52	$103.51	$0.00	$136.03
117655	River Rock Blue Up To 14" – Or Equal	CY	$32.52	$103.51	$0.00	$136.03
117656	Colorado Sunrise – Or Equal	CY	$32.52	$82.20	$0.00	$114.72
117657	Volcanic Lava Rock – Or Equal	CY	$32.52	$92.10	$0.00	$124.62
117658	Slate Stone Chips – Or Equal	CY	$32.52	$81.50	$0.00	$114.02
117659	Decomposed Granite – Or Equal	CY	$32.52	$89.67	$0.00	$122.19

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117660	Hardwood Mulch – Or Equal Landscape Cover	CY	$32.52	$34.25	$0.00	$66.77
117661	Hardwood Mulch – Or Equal (Blower Truck Application)	CY	$32.52	$34.25	$0.00	$66.77
117662	Compost – Or Equal Landscape Cover	CY	$32.52	$28.54	$0.00	$61.06
117663	Compost – Or Equal (Blower Truck Application)	CY	$12.19	$28.54	$0.00	$40.73
117664	Hardwood Playground Mulch – Or Equal	CY	$32.52	$34.25	$0.00	$66.77
117665	Hardwood Playground Mulch – Or Equal (Blower Truck Application)	CY	$12.19	$34.25	$0.00	$46.44
117666	Rubber Playground Mulch – Or Equal	CY	$32.52	$319.27	$0.00	$351.79
117667	Rubber Playground Mulch – Or Equal (Blower Truck Application)	CY	$12.19	$319.27	$0.00	$331.46
117668	Bark Nuggets – Or Equal Landscape Cover	CY	$32.52	$39.96	$0.00	$72.48
117669	Bark Nuggets – Or Equal (Blower Truck Application)	CY	$12.19	$39.96	$0.00	$52.15
117670	Fine Play Sands – Or Equal	CY	$32.52	$52.51	$0.00	$85.03
117671	Sand / Clay Infield Mix – Or Equal	CY	$32.52	$49.09	$0.00	$81.61
117672	Boulders	TON	$44.80	$85.62	$0.00	$130.42
117673	Landscape Fabric – Weed Barrier Includes staples	SF	$0.98	$0.09	$0.00	$1.07
117674	[Modifier] Quantity Premium - Landscape Surfacing (31-50 CY) Quantity premium can be used when total cubic yardage in section 32-94-19 Landscape Surfacing are within stated quantities. Can be applied cumulatively to base line items.	CY	$13.44	$0.00	$0.00	$13.44
117675	[Modifier] Quantity Premium - Landscape Surfacing (11-30 CY) Quantity premium can be used when total cubic yardage in section 32-91-19 Landscape Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$22.40	$0.00	$0.00	$22.40
117676	[Modifier] Quantity Premium - Landscape Surfacing (< or = to 10 CY) Quantity premium can be used when total cubic yardage in section 32-91-19 Landscape Grading are within stated quantities. Can be applied cumulatively to base line items.	CY	$67.21	$0.00	$0.00	$67.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	32-94-43 Tree Grates					
117677	Tree Grate – Up To 30" Painted Cast Iron With Frame Or Equal	EA	$243.89	$1,396.10	$0.00	$1,639.99
117678	Tree Grate – Up To 36" Painted Cast Iron With Frame Or Equal	EA	$243.89	$1,418.44	$0.00	$1,662.33
117679	Tree Grate – Up To 48" Painted Cast Iron With Frame Or Equal	EA	$243.89	$2,457.14	$0.00	$2,701.03
117680	Tree Grate – Up To 60" Painted Cast Iron With Frame Or Equal	EA	$243.89	$3,004.41	$0.00	$3,248.30
117681	Tree Grate – Up To 72" Painted Cast Iron With Frame Or Equal	EA	$243.89	$4,065.44	$0.00	$4,309.33
117682	Tree Grate – Up To 95" Painted Cast Iron With Frame Or Equal	EA	$243.89	$5,640.24	$0.00	$5,884.13
117683	Tree Grate – Up To 30" Cast Aluminum With Frame Or Equal	EA	$243.89	$1,814.93	$0.00	$2,058.82
117684	Tree Grate – Up To 36" Cast Aluminum With Frame Or Equal	EA	$243.89	$1,843.97	$0.00	$2,087.86
117685	Tree Grate – Up To 48" Cast Aluminum With Frame Or Equal	EA	$243.89	$3,194.28	$0.00	$3,438.17
117686	Tree Grate – Up To 60" Cast Aluminum With Frame Or Equal	EA	$243.89	$3,905.72	$0.00	$4,149.61
117687	Tree Grate – Up To 72" Cast Aluminum With Frame Or Equal	EA	$243.89	$5,285.07	$0.00	$5,528.96
117688	Tree Grate – Up To 95" Cast Aluminum With Frame Or Equal	EA	$243.89	$7,332.31	$0.00	$7,576.20
	32-96-00 Transplanting					
	32-96-43 Tree Transplanting					
117689	Tree Transplant – Up To 6" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	EA	$639.69	$85.62	$225.00	$950.31
117690	Tree Transplant – Up To 12" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	EA	$1,279.39	$114.16	$300.00	$1,693.55
117691	Tree Transplant – Up To 18" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	EA	$1,919.07	$256.87	$675.00	$2,850.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117692	Tree Transplant – Up To 24" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	EA	$2,558.77	$342.49	$900.00	$3,801.26
117693	Tree Transplant – Up To 36" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	EA	$3,838.16	$513.74	$1,350.00	$5,701.90
117694	Tree Transplant – Greater Than 36" Caliper Includes removal, hauling, excavation, backfill with suitable soils, staking, equipment, rigging, and fertilizing	IN	$106.62	$14.27	$37.50	$158.39

33-00-00 Utilities

• Item costs include all labor, material (including gaskets, bolts, etc.) small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Labor costs exclude rigging equipment. Refer to (CSI) MasterFormat Division 01 – General Requirements for Assembly Items: Construction Aids.
• Cutting and patching pipe work required for the installation or demolition/removal of site utilities shall be included under Divisions 33.
• Surface cutting and patching work required for the installation or demolition/removal of site utilities shall be included under Divisions 31 & 32.
• Piping and equipment installation and demolition/removal costs exclude excavation, backfill, and stone bedding.
• All piping costs under Division 33 exclude hangers.

33-00-00 Utilities

• Item costs include all labor, material (including gaskets, bolts, etc.) small equipment (welders, etc.), small tools and consumables (solder, flux, etc.) to install the item.
• Labor costs exclude rigging equipment. Refer to (CSI) MasterFormat Division 01 – General Requirements for Assembly Items: Construction Aids.
• Cutting and patching pipe work required for the installation or demolition/removal of site utilities shall be included under Divisions 33.
• Surface cutting and patching work required for the installation or demolition/removal of site utilities shall be included under Divisions 31 & 32.
• Piping and equipment installation and demolition/removal costs exclude excavation, backfill, and stone bedding.
• All piping costs under Division 33 exclude hangers.

33-01-00 Operation and Maintenance of Utilities

33-01-00 Operation and Maintenance of Utilities

117695	Underground Utility Locating Services using Drone/GPR/LiDar for undocumented Sewer, Storm drain, Domestic Water, Fire Water, Gas, Electrical Conduit, and Low Voltage Communications Conduit piping (>2,500 LF) To assist in exploration and documentation of existing unknown pipes locations, which includes the horizontal position and depth range of pipes. Includes Mobilization, Traffic Control, Public Safety, and escort of drivers and pedestrians safely through the work. Excludes additional mobilizations.	LF	$0.28	$0.00	$0.13	$0.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117696	All Survey Mapping related costs for Reports, CAD Drafting & Data Processing for undocumented Sewer, Storm drain, Domestic Water, Fire Water, Gas, Electrical Conduit, and Low Voltage Communications Conduit piping (>2,500 LF) Survey Mapping Documentation of existing unknown pipes, which includes condition, measurements of the depth, slope, material, and size of pipes. Includes submission of reports electronically in PDF format and inspection videos in MP4 or MOV format to the Agency.	LF	$0.41	$0.04	$0.03	$0.48
	33-01-10 Operation and Maintenance of Water Utilities					
117697	Remove Well Pump and Equipment Includes Delivery to Yard	EA	$3,500.66	$5,975.32	$3,773.08	$13,249.06
117698	Remove Well Pump and Equipment Includes Off-Site Disposal	EA	$4,339.96	$7,407.94	$4,677.69	$16,425.59
117699	Well Decommissioning Includes Pre/Post Video Inspection, Cleaning, Removal of Concrete Pads and Well Pedestals, Pipe & Conduit Capping, and Sealing	LF	$113.88	$194.41	$234.34	$542.63
117700	Well Casing Perforation	LF	$19.91	$34.19	$21.46	$75.56
117701	Well Conversion Conversion of Existing Well to Monitoring Well	LF	$29.44	$50.26	$31.74	$111.44
117702	Well Examination, Cleaning and Rehabilitation Includes Turbine Pump Removal/Reinstallation, Surge/Airlift Equipment, Overnight Chlorine Solution and Overnight Liquid Acid Descaler. 500' Deep.	EA	$11,867.24	$1,928.46	$2,398.90	$16,194.60
	33-01-30 Operation and Maintenance of Sewer Utilities					
117703	12"-18" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines may have up to 100% debris	LF	$9.63	$4.85	$9.50	$23.98
117704	21"-30" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$10.84	$5.42	$10.50	$26.76
117705	32"-48" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$11.73	$5.70	$11.99	$29.42
117706	52"-60" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$14.00	$6.85	$14.00	$34.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117707	62"-78" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$16.44	$7.79	$16.50	$40.73
117708	82"-96" ø CMP Jetting Flushing and Vacuum Operation < or = 100 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$19.60	$9.34	$19.60	$48.54
117709	12"-18" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines may have up to 100% debris	LF	$3.85	$2.00	$3.75	$9.60
117710	21"-30" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$4.37	$2.00	$4.26	$10.63
117711	32"-48" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$4.73	$2.28	$4.75	$11.76
117712	52"-60" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$5.60	$2.74	$5.60	$13.94
117713	62"-78" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$6.13	$2.94	$6.10	$15.17
117714	82"-96" ø CMP Jetting Flushing and Vacuum Operation 101-250 LF Includes 2-3 pass clean, Water Fees, Collecting all Water/ Debris in Operation Storm Drain Pipelines having 25% or less debris	LF	$6.65	$3.17	$6.65	$16.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117715	Hydro Jetting Flushing and Vacuum Operation for undocumented Sewer and Storm Drain Piping (>2,500 LF) To assist in exploration and documentation of existing unknown sewer and storm drain pipes. Includes Traffic Control, Public Safety, escort of drivers & pedestrians safely through the work, Diversion or bypass of existing stream flows, and Disposal of debris material removed. Includes Mobilization, and submission of reports electronically in PDF format, and legal disposal cost/fees of debris material removed. Excludes cost of water and additional mobilizations.	LF	$2.30	$0.34	$2.79	$5.43
117716	12"-18" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$4.90	$5.42	$4.00	$14.32
117717	21"-30" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$8.75	$9.70	$7.24	$25.69
117718	32"-48" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$9.63	$10.85	$8.00	$28.48
117719	52"-60" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$11.73	$12.84	$9.50	$34.07
117720	62"-78" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$12.60	$13.34	$10.25	$36.19
117721	82"-96" ø CMP CCTV 40-100 LF (price per LF) Includes Video Submission	LF	$13.65	$14.45	$11.01	$39.11
117722	12"-18" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$1.75	$2.28	$1.75	$5.78
117723	21"-30" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$2.35	$2.57	$1.90	$6.82
117724	32"-48" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$2.66	$3.13	$2.20	$7.99
117725	52"-60" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$3.53	$3.89	$2.79	$10.21
117726	62"-78" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$4.09	$4.34	$3.25	$11.68
117727	82"-96" ø CMP CCTV 101-250 LF (price per LF) Includes Video Submission	LF	$4.48	$4.78	$3.55	$12.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117728	Exploratory Camera Inspection Services (CCTV) for undocumented Sewer and Storm Drain Piping >2,500 LF To assist in exploration and documentation of existing unknown sewer and storm drain pipes, which includes condition, measurements of the depth, slope, material, and size of pipes. Includes Mobilization, Traffic Control, Public Safety, escort of drivers & pedestrians safely through the work, and Diversion or bypass of existing stream flows. Excludes additional mobilizations.	LF	$2.67	$0.01	$1.81	$4.49
117729	Disposal of debris material removed from CMP piping Includes offhaul and disposal at permitted landfill	CY	$52.49	$28.54	$125.00	$206.03
117730	Sanitary or Storm Sewer Pipe Re-Connection & Fitting - 3" to 4" Cut, Prepare and Connect to Existing Pipe	EA	$87.68	$59.23	$0.00	$146.91
117731	Sanitary or Storm Sewer Pipe Re-Connection & Fitting - 6" Cut, Prepare and Connect to Existing Pipe	EA	$132.85	$146.68	$0.00	$279.53
117732	Sanitary or Storm Sewer Pipe Re-Connection & Fitting - 8" Cut, Prepare and Connect to Existing Pipe	EA	$156.76	$335.72	$0.00	$492.48
117733	8" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$60.38	$57.44	$7.19	$125.01
117734	12" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$72.44	$68.92	$8.62	$149.98
117735	15" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$84.51	$80.42	$10.06	$174.99
117736	18" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$101.42	$96.50	$12.08	$210.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117737	21" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$111.08	$105.69	$13.22	$229.99
117738	24" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$120.74	$114.88	$14.38	$250.00
117739	30" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$130.40	$124.07	$15.52	$269.99
117740	36" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$140.06	$133.26	$16.68	$290.00
117741	42" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$144.89	$137.84	$17.25	$299.98
117742	48" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$198.49	$188.86	$23.63	$410.98
117743	54" Diameter 360 degree Cured in Place Pipe Liner (CIPP) Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	LF	$261.76	$249.05	$31.16	$541.97
117744	Single CIPP Point Repair (x 2' max) on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits as required per the technical provisions.	EA	$637.12	$2,671.39	$455.00	$3,763.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117745	2-10 each CIPP Point Repair (x 2' max) on 6"-8" Sewer Main between same Manholes Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits, all items can be performed at one time in the same physical location between same Manholes without additional crew setup.	EA	$637.12	$2,054.92	$250.00	$2,942.04
117746	11-25 each CIPP Point Repair (x 2' max) on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$612.62	$1,798.05	$175.00	$2,585.67
117747	26-50 each CIPP Point Repair (x 2' max) on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$595.11	$1,541.18	$100.00	$2,236.29
117748	Single CIPP Point Repair (x 2' max) on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$700.14	$2,671.39	$455.00	$3,826.53
117749	2-10 each CIPP Point Repair (x 2' max) on 10"-18" Sewer Main between same Manholes Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits, all items can be performed at one time in the same physical location between same Manholes without additional crew setup.	EA	$700.14	$2,054.92	$250.00	$3,005.06
117750	11-25 each CIPP Point Repair (x 2' max) on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$665.14	$1,798.05	$175.00	$2,638.19
117751	26-50 each CIPP Point Repair (x 2' max) on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$647.63	$1,541.18	$100.00	$2,288.81
117752	Single 4"-6" Top Hats on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$654.63	$2,671.39	$455.00	$3,781.02
117753	2-10 each 4"-6" Top Hats on 6"-8" Sewer Main between same Manholes Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits, all items can be performed at one time in the same physical location between same Manholes without additional crew setup.	EA	$654.63	$2,054.92	$250.00	$2,959.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117754	11-25 each 4"-6" Top Hats on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$630.12	$1,798.05	$175.00	$2,603.17
117755	26-50 each 4"-6" Top Hats on 6"-8" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$630.12	$1,798.05	$175.00	$2,603.17
117756	Single 4"-6" Top Hats on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$717.65	$2,671.39	$455.00	$3,844.04
117757	2-10 each 4"-6" Top Hats on 10"-18" Sewer Main between same Manholes Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits, all items can be performed at one time in the same physical location between same Manholes without additional crew setup.	EA	$717.65	$2,054.92	$250.00	$3,022.57
117758	11-25 each 4"-6" Top Hats on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$682.64	$1,798.05	$175.00	$2,655.69
117759	26-50 each 4"-6" Top Hats on 10"-18" Sewer Main Including mobilization, CCTV prior & after completion, cleaning, flushing, reaming, damming, notifications, permits.	EA	$665.14	$1,541.18	$100.00	$2,306.32
117760	48" ø CMP Invert Paving of Storm Sewer Installation of Invert Paving with Cementitious Liner Includes: Welding 1/2” DIA X 3” H4L Headed Studs at 3" OC. and 4"X4" - W4 X W4 WWF Mesh, 6000 PSI Concrete Cleaning and CCTV of existing CMP shall be found in 33-01-30.	LF	$290.87	$109.16	$64.60	$464.63
117761	96" ø CMP Invert Paving of Storm Sewer Installation of Invert Paving with Cementitious Liner Includes: Welding 1/2” DIA X 1.5” Headed Studs at 12" OC. and 6"X6" 1.4x1.4 WW Mesh, 6000 PSI Concrete Cleaning and CCTV of existing CMP shall be found in 33-01-30.	LF	$107.05	$84.51	$39.00	$230.56
117762	54" ø Snap-Tite HDPE Lining of Existing 60" CMP Storm Sewer Includes installation of Snap-Tite pipe, skids, annular void filling with cellular grout and conveyance piping, bulkheads, and seals. Ends shall be made smooth and flush. Cleaning and CCTV of existing CMP shall be found in 33-01-30.	LF	$115.90	$939.51	$25.79	$1,081.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117763	[Modifier] Temporary Sewer Bypass due to flow restrictions To include all temporary plugs, pumps, piping, vacuum truck as needed to complete the work by the day.	EA	$375.28	$611.91	$950.00	$1,937.19
117764	[Modifier] Mobilization of Vacuum Truck per project All work shall have adjacent access via Paved Roads. To be limited to one mobilization per project, or where locations are separated by more than 50 miles within one project. (This item is specific to Flushing and Vacuum operations only - not allowed for CIPP Point Repair)	EA	$276.48	$0.00	$1,180.00	$1,456.48
117765	[Modifier] Mobilization of CCTV Equipment To be limited to one mobilization per project, or where locations are separated by more than 50 miles within one project. All work shall have adjacent access via Paved Roads (Use of this mobilization item is limited to work quantity of less than 1000 LF).	EA	$276.48	$0.00	$1,180.00	$1,456.48

33-05-00 Common Work Results for Utilities

33-05-04 Selective Demolition for Utilities

- Demolition/Removal costs exclude any salvage value.
- Equipment demolition/removal costs exclude piping, hook-ups, and electrical connections.
- All Demolition/Removal costs exclude excavation, backfill, and stone bedding removal.

117766	Remove Pipe - Plastic (All Types) 36" to 48" Includes Fittings	LF	$27.37	$0.00	$0.00	$27.37
117767	Remove Catch Basin - 24" Square x 4' Deep	EA	$203.72	$0.00	$0.00	$203.72
117768	Remove Catch Basin - 48" Square x 4' Deep	EA	$305.59	$0.00	$0.00	$305.59
117769	Remove Manhole - 48" Dia x 4' Deep	EA	$372.44	$0.00	$0.00	$372.44
117770	Remove Manhole - 48" Dia x 8' Deep	EA	$525.86	$0.00	$0.00	$525.86
117771	Remove Manhole - 60" Dia x 12' Deep	EA	$679.29	$0.00	$0.00	$679.29
117772	Remove Manhole - 60" Dia x 16' Deep	EA	$833.36	$0.00	$0.00	$833.36
117773	Remove Ejector Pump - Duplex Includes Base Plate, Rails, Cover, Floats & Control Panel	EA	$1,909.92	$0.00	$0.00	$1,909.92
117774	Remove Fire Hydrant Includes Extension Spool, Hose Nozzles, Caps, Chains and Rings	EA	$318.32	$0.00	$0.00	$318.32
117775	Remove Cleanout Tee w/ Plug	EA	$101.87	$0.00	$0.00	$101.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117776	Remove Grease or Oil Interceptor	EA	$550.06	$0.00	$0.00	$550.06
117777	Remove Yard or Area Drain	EA	$127.33	$0.00	$0.00	$127.33
117778	Remove Trench Drain - Up to 12"	LF	$11.45	$0.00	$0.00	$11.45
117779	Remove Headwall, End Section or Pipe Outlet - HDPE	EA	$127.33	$0.00	$0.00	$127.33
117780	Remove Headwall, End Section or Pipe Outlet - Concrete	EA	$509.31	$0.00	$0.00	$509.31
117781	Remove Utility or Service Box - Underground Concrete	EA	$241.93	$0.00	$0.00	$241.93
117782	Remove Utility or Service Box - Underground Plastic	EA	$25.46	$0.00	$0.00	$25.46
117783	Remove Storage Tank - Underground Concrete	GAL	$0.40	$0.00	$0.00	$0.40
117784	Remove Storage Tank - Underground Plastic	GAL	$0.30	$0.00	$0.00	$0.30
117785	Remove Storage Tank - Underground Steel	GAL	$0.32	$0.00	$0.00	$0.32
117786	Remove Storage Tank Contents - Water	GAL	$0.02	$0.00	$0.00	$0.02
117787	Remove Backflow Preventer or Water Meter - 2" & Dn	EA	$59.20	$0.00	$0.00	$59.20
117788	Remove Backflow Preventer or Water Meter - 2-1/2" to 4"	EA	$173.80	$0.00	$0.00	$173.80
117789	Remove Backflow Preventer or Water Meter - 6" to 8"	EA	$253.38	$0.00	$0.00	$253.38
117790	Remove Iron Pipe - 4" to 8" Includes Fittings	LF	$8.91	$0.00	$0.00	$8.91
117791	Remove Iron Pipe - 10" to 16" Includes Fittings	LF	$13.37	$0.00	$0.00	$13.37
117792	Remove Iron Pipe - 18" to 24" Includes Fittings	LF	$16.55	$0.00	$0.00	$16.55
117793	Remove Pipe - Plastic (All Types) Under 2" Includes Fittings	LF	$2.42	$0.00	$0.00	$2.42
117794	Remove Pipe - Plastic (All Types) 2-1/2" to 4" Includes Fittings	LF	$2.81	$0.00	$0.00	$2.81
117795	Remove Pipe - Plastic (All Types) 6" to 10" Includes Fittings	LF	$4.46	$0.00	$0.00	$4.46
117796	Remove Pipe - Plastic (All Types) 12" to 18" Includes Fittings	LF	$12.73	$0.00	$0.00	$12.73

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117797	Remove Pipe - Plastic (All Types) 20" to 30" Includes Fittings	LF	$17.19	$0.00	$0.00	$17.19
117798	Remove Concrete Pipe - 12" to 21" Includes All Classes and Fittings	LF	$46.47	$0.00	$9.00	$55.47
117799	Remove Concrete Pipe - 24" to 36" Includes All Classes and Fittings	LF	$72.58	$0.00	$11.10	$83.68
117800	Remove Concrete Pipe - 42" to 60" Includes All Classes and Fittings	LF	$120.96	$0.00	$17.73	$138.69
117801	Remove Concrete Pipe - 66" to 84" Includes All Classes and Fittings	LF	$186.53	$0.00	$29.26	$215.79
117802	Remove Copper Pipe - 2" & Dn Includes Fittings	LF	$2.54	$0.00	$0.00	$2.54
117803	Remove Copper Pipe - 2-1/2" to 4" Includes Fittings	LF	$4.46	$0.00	$0.00	$4.46
117804	Remove Corrugated Metal Pipe - 12" to 18" Includes All Gauges and Fittings	LF	$6.68	$0.00	$0.98	$7.66
117805	Remove Corrugated Metal Pipe - 21" to 30" Includes All Gauges and Fittings	LF	$9.54	$0.00	$2.62	$12.16
117806	Remove Corrugated Metal Pipe - 36" to 48" Includes All Gauges and Fittings	LF	$12.73	$0.00	$3.54	$16.27
117807	Remove Corrugated Metal Pipe - 54" to 66" Includes All Gauges and Fittings	LF	$16.55	$0.00	$4.65	$21.20
117808	Remove Pipe Valve or Specialty - 2" & Dn Includes Extensions and Valve Box	EA	$39.79	$0.00	$0.00	$39.79
117809	Remove Pipe Valve or Specialty - 2-1/2" to 6" Includes Extensions and Valve Box	EA	$114.60	$0.00	$0.00	$114.60
117810	Remove Pipe Valve or Specialty - 8" to 12" Includes Extensions and Valve Box	EA	$222.82	$0.00	$0.00	$222.82
117811	Remove 56" Steel Water Transmission Pipeline Includes critical excavation around connection points, cutting and removal of pipe, and loading for transport to disposal. Excludes trench mass excavation or hauling to disposal and salvage and/or disposal costs	LF	$37.92	$0.00	$30.56	$68.48
117812	Demolish and Remove Existing 66" Welded Steel Pipe Manifold Includes removal of 4" ARV, enclosure, associated valves, piping, and their disposal fees.	LS	$14,569.37	$6,228.66	$11,755.39	$32,553.42

33-05-09 Piping Specials for Utilities

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117813	24" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$259.74	$594.25	$1,178.06	$2,032.05
117814	30" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$259.74	$758.29	$1,178.06	$2,196.09
117815	36" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$259.74	$840.33	$1,178.06	$2,278.13
117816	42" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$295.68	$930.78	$1,198.54	$2,425.00
117817	48" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$321.34	$995.40	$1,213.17	$2,529.91
117818	54" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$339.82	$1,041.93	$1,223.70	$2,605.45
117819	60" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$378.51	$1,098.15	$1,245.76	$2,722.42
117820	66" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$423.10	$1,178.05	$1,271.18	$2,872.33
117821	72" ø Storm Drain Main Pipe Concrete Lug Includes Concrete (short load fee inclusive), grinding to flow conform, grouting or sealing of entry point. Excludes Pipe and coring of existing RCP Pipe.	EA	$452.02	$1,226.30	$1,287.67	$2,965.99
117822	Core Single Hole for 12" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$316.63	$0.00	$780.00	$1,096.63
117823	Core Single Hole for 15" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$395.80	$0.00	$975.00	$1,370.80
117824	Core Single Hole for 18" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$448.57	$0.00	$1,105.00	$1,553.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117825	Core Single Hole for 21" - 27" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$659.65	$0.00	$1,625.00	$2,284.65
117826	Core Single Hole for 30" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$738.82	$0.00	$1,820.00	$2,558.82
117827	Core Single Hole for 36" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$923.52	$0.00	$2,275.00	$3,198.52
117828	Core Single Hole for 42" ø Storm Drain Pipe (RCP or CMP) into Concrete Headwall Includes mobilization. Can also be used as sawcut coring for Lug Detail for Larger Pipe interception.	EA	$1,160.99	$0.00	$2,860.00	$4,020.99
	33-05-85 Miscellaneous Site					
117829	POLYWRAP Pipe Protection Tubular Polyethylene Encasement Protection	LF	$0.95	$0.90	$0.00	$1.85
117830	Tracer Wire 12 Gauge Solid Wire	LF	$0.38	$0.59	$0.00	$0.97
117831	Metallic Utility Warning Tape 3"	LF	$0.32	$0.44	$0.00	$0.76
117832	Thrust Block- 1 to 3 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$31.83	$39.39	$0.00	$71.22
117833	Thrust Block- 4 to 6 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$50.93	$91.90	$0.00	$142.83
117834	Thrust Block- 7 to 9 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$76.39	$137.26	$0.00	$213.65
117835	Gilsulate 500XR Includes Carboline	CF	$6.27	$30.65	$3.93	$40.85
117836	Up to 2" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$26.74	$7.63	$24.00	$58.37
117837	4" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$37.56	$10.92	$34.34	$82.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117838	6" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$49.66	$14.31	$45.00	$108.97
117839	8" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$57.94	$16.75	$52.67	$127.36
117840	10" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$78.95	$22.80	$71.67	$173.42
117841	12" Pipe - Horizontal Boring or Directional Drilling (HDD) Common Earth Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$137.52	$39.75	$125.00	$302.27
117842	Up to 2" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$47.12	$13.58	$42.72	$103.42
117843	4" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$67.48	$19.43	$61.11	$148.02
117844	6" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$88.49	$25.48	$80.10	$194.07
117845	8" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$103.13	$29.82	$93.75	$226.70

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117846	10" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$140.70	$40.57	$127.57	$308.84
117847	12" Pipe - Horizontal Boring or Directional Drilling (HDD) Rock Includes Setup, Entry and Exit Pits, Managing Drilling Fluids, and Restoring the Site. Excludes Routing In-Between Multiple Utilities or Structures. Excludes Pipe.	LF	$245.11	$70.75	$222.50	$538.36

33-10-00 Water Utilities

33-14-00 Water Utility Transmission and Distribution

• Equipment costs exclude electrical and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment hook-ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Equipment costs exclude concrete pads and dunnage.

• Piping items include couplings as required.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

33-14-11 Water Utility Transmission Piping

117848	Moccasin Penstock Removable Spools (RSP) Demolition and removal of existing piping. Replacement with 22' x 104" diameter 3 piece removable Spools w/2 Butt Straps, 4 Vic Rings, 1 each 30" MH & cover, 1-8" FL outlet, 2 each Vic Gaskets, 1- Victaulic End Cap Includes: Polyurethane lined and Epoxy with Urethane top coat Excludes: 2 each Victaulic couplings	EA	$5,219.80	$307,187.45	$4,510.98	$316,918.23
117849	Furnish and install 60" Diameter AWWA C200 (1/2" Wall Thickness) Welded Steel Water Transmission Pipe Welded Steel Pipe will have 5/8” thick cement mortar lining in accordance with AWWA C205, tape coated, per AWWA C214, with Cement Mortar armor coated per AWWA C205. Includes bell & spigot lap welded joints, all mainline elbows, access manways, blowoff outlets to first flange, and buttstraps as shown. Also, includes installation of prime and tape for external joints with Polyguard RD-6, and grout joints (internal and external). Excludes welder or crane operator.	EA	$88.64	$1,487.08	$154.22	$1,729.94

33-14-16 Site Water Utility Distribution Piping

Excludes excavation and backfill. Fittings represent average cost of all fitting types.

117850	Tapping Sleeve & Valve- 4" Main	EA	$797.05	$980.34	$0.00	$1,777.39
117851	Tapping Sleeve & Valve- 6" Main	EA	$1,062.74	$980.34	$0.00	$2,043.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117852	Tapping Sleeve & Valve- 8" Main	EA	$1,416.98	$1,120.96	$0.00	$2,537.94
117853	Tapping Sleeve & Valve- 10" Main	EA	$1,594.11	$1,714.63	$0.00	$3,308.74
117854	Tapping Sleeve & Valve- 12" Main	EA	$1,771.23	$3,105.09	$0.00	$4,876.32
117855	1-1/2" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$5.31	$0.93	$0.00	$6.24
117856	2" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$5.31	$1.24	$0.00	$6.55
117857	2-1/2" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$6.20	$1.91	$0.00	$8.11
117858	3" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$6.20	$2.06	$0.00	$8.26
117859	4" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$7.08	$2.35	$0.00	$9.43
117860	6" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$10.63	$3.54	$0.00	$14.17
117861	8" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$12.40	$4.12	$0.00	$16.52
117862	10" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$15.05	$5.00	$0.00	$20.05
117863	12" Site Domestic Water Pipe - PVC, Schedule 40, Solid Wall, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$16.82	$5.58	$0.00	$22.40
117864	1-1/2" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$23.91	$4.29	$0.00	$28.20

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117865	2" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$24.79	$4.29	$0.00	$29.08
117866	2-1/2" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$30.99	$8.59	$0.00	$39.58
117867	3" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$35.42	$14.08	$0.00	$49.50
117868	4" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$76.16	$25.10	$0.00	$101.26
117869	6" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$167.38	$83.01	$0.00	$250.39
117870	8" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$201.92	$126.06	$0.00	$327.98
117871	10" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$222.30	$238.89	$0.00	$461.19
117872	12" Site Domestic Water Fitting - PVC, Schedule 40, Solvent Cement Includes priming, and gluing to pipe.	EA	$235.58	$330.32	$0.00	$565.90
117873	1/2" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$5.31	$2.86	$0.00	$8.17
117874	1/2" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$5.31	$3.84	$0.00	$9.15
117875	3/4" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$5.31	$4.67	$0.00	$9.98
117876	3/4" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$6.20	$7.03	$0.00	$13.23
117877	1" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$6.20	$6.84	$0.00	$13.04

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117878	1" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$6.20	$9.15	$0.00	$15.35
117879	1-1/4" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$7.08	$9.47	$0.00	$16.55
117880	1-1/4" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$7.08	$11.50	$0.00	$18.58
117881	1-1/2" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$7.08	$12.04	$0.00	$19.12
117882	1-1/2" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$7.08	$15.15	$0.00	$22.23
117883	2" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$7.97	$18.86	$0.00	$26.83
117884	2" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$8.86	$22.55	$0.00	$31.41
117885	2-1/2" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$10.63	$27.00	$0.00	$37.63
117886	2-1/2" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$10.63	$33.17	$0.00	$43.80
117887	3" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$1.24	$37.72	$0.00	$38.96
117888	3" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$13.28	$45.77	$0.00	$59.05
117889	4" Water Utility Pipe - Copper, Type L, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$1.60	$63.14	$0.00	$64.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117890	4" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$17.71	$79.72	$0.00	$97.43
117891	6" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$32.76	$182.12	$0.00	$214.88
117892	8" Water Utility Pipe - Copper, Type K, Hard Drawn, Soldered Includes cutting, deburring, cleaning, flux, and required soldering or brazing	LF	$32.76	$340.97	$0.00	$373.73
117893	1/2" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$33.65	$1.47	$0.00	$35.12
117894	3/4" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$50.48	$4.14	$0.00	$54.62
117895	1" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$59.34	$11.24	$0.00	$70.58
117896	1-1/4" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$66.42	$16.04	$0.00	$82.46
117897	1-1/2" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$69.97	$24.60	$0.00	$94.57
117898	2" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$80.59	$41.96	$0.00	$122.55
117899	2-1/2" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$130.18	$76.82	$0.00	$207.00
117900	3" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$155.87	$109.83	$0.00	$265.70
117901	4" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$209.00	$248.38	$0.00	$457.38
117902	6" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$475.57	$1,406.18	$0.00	$1,881.75
117903	8" Water Utility Fitting - Copper, Wrot, Soldered Includes cleaning, flux, and required soldering or brazing	EA	$652.69	$5,297.25	$0.00	$5,949.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117904	1" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$8.83	$1.83	$0.00	$10.66
117905	1.5" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$10.60	$3.05	$0.00	$13.65
117906	2" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$13.25	$5.21	$0.00	$18.46
117907	4" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$29.61	$16.91	$0.05	$46.57
117908	6" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$39.48	$30.07	$0.07	$69.62
117909	8" Water Utility Pipe - Galvanized Steel, Schedule 40 - MIP x MIP Includes 1 standard galvanized threaded coupling (FIP) per 21 LF of pipe. Material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	LF	$49.35	$49.65	$0.08	$99.08
117910	1" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$77.38	$5.79	$0.00	$83.17
117911	1.5" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$93.52	$17.10	$0.00	$110.62
117912	2" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$113.61	$20.37	$0.00	$133.98

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117913	4" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$299.14	$105.49	$26.25	$430.88
117914	6" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$590.81	$446.46	$51.84	$1,089.11
117915	8" Water Utility Fitting - Galvanized Steel, Schedule 40 - FIP x FIP Threaded Fitting (FIP) material meeting the requirements of NSF 61, ASTM A53, and ASTM A123.	EA	$807.91	$1,691.36	$70.90	$2,570.17
117916	4" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 51, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$48.24	$62.75	$1.46	$112.45
117917	4" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 350, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$33.26	$45.19	$1.01	$79.46
117918	6" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$62.82	$57.73	$1.78	$122.33
117919	6" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 350, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$42.01	$30.89	$1.28	$74.18
117920	8" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$66.33	$78.67	$1.89	$146.89
117921	8" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 350, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$45.52	$40.68	$1.38	$87.58
117922	10" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$79.94	$101.42	$2.15	$183.51

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117923	10" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 350, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$50.76	$48.55	$1.54	$100.85
117924	12" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$88.99	$128.68	$2.37	$220.04
117925	12" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$56.02	$62.34	$1.70	$120.06
117926	14" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$102.89	$160.20	$9.49	$272.58
117927	14" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$61.27	$73.30	$6.57	$141.14
117928	16" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$109.31	$191.48	$10.05	$310.84
117929	16" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$68.28	$89.46	$7.31	$165.05
117930	18" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$117.68	$220.68	$10.61	$348.97
117931	18" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$73.52	$103.74	$7.88	$185.14
117932	20" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$126.13	$252.80	$11.18	$390.11
117933	20" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$77.03	$122.78	$8.26	$208.07

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117934	24" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Class 50, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint Includes 1 Standard Accessory Pack of Gland, Gasket, T-Bolts w/Nuts per 18 LF of Pipe	LF	$138.30	$321.60	$12.11	$472.01
117935	24" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$84.03	$164.19	$9.00	$257.22
117936	30" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$94.53	$361.96	$10.13	$466.62
117937	36" Water Utility Pipe - Ductile Iron (DIP), AWWA C151, Pressure Class 250, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Includes 1 Standard Gasket per 18 LF of Pipe	LF	$106.79	$494.58	$11.44	$612.81
117938	4" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$208.12	$214.17	$12.36	$434.65
117939	4" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$355.95	$235.66	$10.81	$602.42
117940	6" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$292.79	$333.31	$17.57	$643.67
117941	6" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$496.00	$342.33	$15.05	$853.38
117942	8" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$307.84	$464.01	$18.48	$790.33
117943	8" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$538.00	$549.43	$16.33	$1,103.76

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117944	10" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$419.69	$654.79	$25.18	$1,099.66
117945	10" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$719.47	$789.36	$21.84	$1,530.67
117946	12" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$477.26	$945.76	$28.64	$1,451.66
117947	12" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$806.43	$1,017.79	$24.48	$1,848.70
117948	14" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$556.16	$1,573.72	$117.81	$2,247.69
117949	14" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$979.73	$1,905.94	$29.74	$2,915.41
117950	16" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$588.22	$2,099.02	$124.60	$2,811.84
117951	16" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$1,098.77	$2,641.80	$33.36	$3,773.93
117952	18" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$659.70	$3,383.75	$139.74	$4,183.19
117953	18" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$1,222.47	$3,014.66	$37.11	$4,274.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117954	20" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$735.15	$3,618.58	$155.73	$4,509.46
117955	20" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$1,346.75	$4,796.87	$40.88	$6,184.50
117956	24" Water Utility Fitting - Ductile Iron (DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Glands, Gaskets, T-Bolts w/Nuts)	EA	$851.25	$4,689.87	$180.32	$5,721.44
117957	24" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$1,532.90	$5,613.80	$46.54	$7,193.24
117958	30" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$1,988.63	$6,691.33	$60.38	$8,740.34
117959	36" Water Utility Fitting - Ductile Iron DIP), AWWA C153, Cement Mortar Lined & Asphalt Coated (CML&C), Push On Joint Push On Fitting includes necessary standard Gaskets	EA	$2,298.47	$7,761.17	$69.78	$10,129.42
117960	4" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$15.05	$140.43	$0.00	$155.48
117961	6" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$20.37	$177.02	$0.00	$197.39
117962	8" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$24.79	$236.43	$0.00	$261.22
117963	10" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$30.99	$337.70	$0.00	$368.69
117964	12" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$34.53	$446.32	$0.00	$480.85
117965	14" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$48.71	$559.23	$0.00	$607.94

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117966	16" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$55.80	$757.34	$0.00	$813.14
117967	18" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$62.88	$1,005.86	$0.00	$1,068.74
117968	20" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$77.94	$1,228.75	$0.00	$1,306.69
117969	24" Mechanical Joint Restraint MJ Restraint Gland for Ductile Iron Pipe w/accessories	EA	$100.07	$1,669.60	$0.00	$1,769.67
117970	4" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$11.87	$7.94	$0.00	$19.81
117971	4" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$11.87	$9.20	$0.00	$21.07
117972	4" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Purple - Reclaimed) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$11.87	$9.28	$0.00	$21.15
117973	4" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Green - Force Main) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$11.87	$9.36	$0.00	$21.23
117974	6" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$16.62	$16.21	$0.15	$32.98
117975	6" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$16.62	$18.60	$0.15	$35.37
117976	6" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Purple - Reclaimed) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$16.62	$18.76	$0.15	$35.53
117977	6" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Green - Force Main) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$16.62	$18.93	$0.15	$35.70
117978	8" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$21.74	$27.79	$0.21	$49.74
117979	8" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$21.74	$32.05	$0.21	$54.00
117980	8" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Purple - Reclaimed) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$21.74	$32.34	$0.21	$54.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117981	8" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Green - Force Main) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$21.74	$32.63	$0.21	$54.58
117982	10" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$26.84	$41.71	$0.25	$68.80
117983	10" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$26.84	$48.86	$0.25	$75.95
117984	10" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Purple - Reclaimed) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$26.84	$49.31	$0.25	$76.40
117985	10" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Green - Force Main) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$26.84	$49.75	$0.25	$76.84
117986	12" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$29.41	$58.72	$0.28	$88.41
117987	12" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$29.41	$69.07	$0.28	$98.76
117988	12" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Purple - Reclaimed) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$29.41	$69.69	$0.28	$99.38
117989	12" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint (Green - Force Main) Includes 1 Standard Gasket per 20 LF of Pipe	LF	$29.41	$70.32	$0.28	$100.01
117990	14" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$33.24	$71.56	$0.31	$105.11
117991	16" Water Utility Pipe - PVC C-900, DR-18, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$37.08	$98.47	$0.34	$135.89
117992	4" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$308.54	$427.89	$0.00	$736.43
117993	4" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$308.54	$869.31	$0.00	$1,177.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
117994	4" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$308.54	$874.33	$0.00	$1,182.87
117995	6" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$439.00	$590.15	$41.39	$1,070.54
117996	6" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$439.00	$1,224.00	$41.39	$1,704.39
117997	6" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$439.00	$1,231.80	$41.39	$1,712.19
117998	8" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$461.85	$812.57	$45.20	$1,319.62
117999	8" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$461.85	$1,798.88	$45.20	$2,305.93
118000	8" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$461.85	$1,809.90	$45.20	$2,316.95
118001	10" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$629.94	$1,347.43	$62.02	$2,039.39
118002	10" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$629.94	$2,499.96	$62.02	$3,191.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118003	10" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$629.94	$2,515.91	$62.02	$3,207.87
118004	12" Water Utility Fitting - DIP AWWA C153 for PVC C -900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$713.98	$1,625.62	$71.33	$2,410.93
118005	12" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$713.98	$3,098.72	$71.33	$3,884.03
118006	12" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$713.98	$3,126.27	$71.33	$3,911.58
118007	14" Water Utility Fitting - DIP AWWA C153 for PVC C -900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$831.24	$2,687.69	$83.04	$3,601.97
118008	16" Water Utility Fitting - DIP AWWA C153 for PVC C -900 Pipe, Mechanical Joint MJ Fitting includes necessary standard Accessory Packs (Wedge Type Restraint Glands for PVC C-900, Gaskets, Bolts w/Nuts)	EA	$879.59	$3,500.55	$88.41	$4,468.55
118009	4" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$7.28	$15.48	$0.00	$22.76
118010	6" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$11.87	$29.87	$0.00	$41.74
118011	8" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$15.34	$44.87	$0.14	$60.35
118012	10" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$19.17	$66.52	$0.17	$85.86
118013	12" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$23.01	$90.99	$0.22	$114.22
118014	14" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$28.13	$130.43	$0.26	$158.82
118015	16" Water Utility Pipe - PVC Schedule 80, Solvent Cement Weld	LF	$33.24	$207.40	$0.31	$240.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118016	4" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$73.77	$47.16	$0.00	$120.93
118017	6" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$112.62	$101.38	$0.00	$214.00
118018	8" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$141.01	$224.66	$6.51	$372.18
118019	10" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$180.77	$1,517.80	$8.35	$1,706.92
118020	12" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$189.75	$2,014.64	$8.76	$2,213.15
118021	14" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$245.48	$3,643.44	$11.34	$3,900.26
118022	16" Water Utility Fitting - PVC Schedule 80, Solvent Cement Weld	EA	$319.18	$5,075.99	$14.74	$5,409.91
118023	4" NRS Gate Valve w/Valve Box and Cover	EA	$304.65	$966.26	$0.00	$1,270.91
118024	6" NRS Gate Valve w/Valve Box and Cover	EA	$392.32	$1,102.80	$0.00	$1,495.12
118025	8" NRS Gate Valve w/Valve Box and Cover	EA	$464.06	$1,601.69	$0.00	$2,065.75
118026	10" NRS Gate Valve w/Valve Box and Cover	EA	$590.71	$2,577.15	$0.00	$3,167.86
118027	12" NRS Gate Valve w/Valve Box and Cover	EA	$655.35	$3,502.72	$0.00	$4,158.07
118028	4" NRS Gate Valve w/Post Indicator, Valve Box and Cover PIV	EA	$924.58	$3,031.40	$0.00	$3,955.98
118029	6" NRS Gate Valve w/Post Indicator, Valve Box and Cover PIV	EA	$1,012.25	$3,167.94	$0.00	$4,180.19
118030	8" NRS Gate Valve w/Post Indicator, Valve Box and Cover PIV	EA	$1,083.99	$3,666.83	$0.00	$4,750.82
118031	10" NRS Gate Valve w/Post Indicator, Valve Box and Cover PIV	EA	$1,210.64	$4,642.28	$0.00	$5,852.92
118032	12" NRS Gate Valve w/Post Indicator, Valve Box and Cover PIV	EA	$1,275.28	$5,567.86	$0.00	$6,843.14
118033	6" Water Transmission Pipe - Welded Steel, AWWA C200, 1/4" Thick Wall, Cement Mortar Lined and Coated (CML&C), Bell and Spigot Lap Welded Joints Prime and tape external joints (Polyguard RD-6), and grout joints (Internal and external)	LF	$118.67	$815.17	$180.96	$1,114.80

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
	33-14-19 Valves and Hydrants for Water Utility Service					
118034	Fire Hydrant Head Includes 12" Hydrant Extension Spool, Hose Nozzles, Caps, Chains and Rings. 4-1/2" or 5-1/4" Valve.	EA	$531.37	$6,314.87	$0.00	$6,846.24
118035	Fire Hydrant Head w/3' Barrel Extension and Elbow Includes 12" Hydrant Extension Spool, Hose Nozzles, Caps, Chains and Rings. Ductile Iron Flanged Barrel. 4-1/2" or 5-1/4" Valve.	EA	$761.63	$7,216.81	$0.00	$7,978.44
118036	Fire Hydrant Head w/5' Barrel Extension and Elbow Includes 12" Hydrant Extension Spool, Hose Nozzles, Caps, Chains and Rings. Ductile Iron Flanged Barrel. 4-1/2" or 5-1/4" Valve.	EA	$885.62	$7,606.73	$0.00	$8,492.35
118037	Fire Hydrant Head w/7' Barrel Extension and Elbow Includes 12" Hydrant Extension Spool, Hose Nozzles, Caps, Chains and Rings. Ductile Iron Flanged Barrel. 4-1/2" or 5-1/4" Valve.	EA	$1,062.74	$7,995.34	$0.00	$9,058.08
118038	Fire Hydrant Breakaway Valve/Guard Post Jones J6000 or Equal	EA	$336.54	$1,110.68	$0.00	$1,447.22
118039	2" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$177.12	$668.89	$0.00	$846.01
118040	2-1/2" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$335.82	$2,716.31	$0.00	$3,052.13
118041	3" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$314.40	$2,886.98	$0.00	$3,201.38
118042	4" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$472.03	$3,372.74	$0.00	$3,844.77
118043	6" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$708.49	$5,552.09	$0.00	$6,260.58
118044	8" Reduced Pressure Backflow Preventer Watts 957 Or Equal.	EA	$1,062.74	$13,405.65	$0.00	$14,468.39
118045	2" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,270.85	$1,200.41	$0.00	$2,471.26
118046	3" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$1,803.99	$2,147.94	$0.00	$3,951.93
118047	4" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$2,578.02	$3,721.27	$0.00	$6,299.29

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118048	6" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$4,897.45	$7,849.08	$0.00	$12,746.53
118049	8" Domestic Water Service Hook-Up Includes all required pipe, fittings, valves, and specialties within 10 LF of point of connection for proper operation.	EA	$6,562.41	$10,955.75	$0.00	$17,518.16
	33-14-23 Enclosures for Water Utility Piping and Valves					
118050	Utility, Service, or Meter Box or Vault - Precast Concrete 12" x 24" Traffic Rated. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$229.20	$285.55	$0.00	$514.75
118051	Utility, Service, or Meter Box or Vault - Precast Concrete 18" x 36" Traffic Rated. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$477.48	$591.78	$0.00	$1,069.26
118052	Utility, Service, or Meter Box or Vault - Precast Concrete 24" x 48" Traffic Rated. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$668.47	$866.49	$0.00	$1,534.96
118053	Utility, Service, or Meter Box or Vault - Precast Concrete 11' x 16' x 6' Traffic Rated. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$1,909.92	$25,507.58	$0.00	$27,417.50
118054	Furnish & Install 6'x13'x7' Precast Concrete Vault w/Floor, Ladder & 5'x5' DBL Leaf Aluminum H20 Hatch cast in 10" Riser Slab Vault to be delivered and set by the manufacturer, with labor performed by the contractor to completion as detailed. Vault is traffic-rated, placed in incidental traffic or off-road. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$2,037.25	$30,010.56	$0.00	$32,047.81
118055	Furnish & Install 6'x13'x7' Precast Concrete Vault w/Floor, Ladder & 4'x4' DBL Leaf Aluminum 300PSF Hatch cast in 8" Riser Slab Vault to be delivered and set by the manufacturer, with labor performed by the contractor to completion as detailed. Vault is Pedestrian Loading, placed in incidental traffic or off-road. Precast Concrete Box With Steel Lid Installed to Grade. Excludes Excavation or Backfill.	EA	$2,037.25	$25,271.09	$0.00	$27,308.34
118056	Utility, Service, or Meter Box or Vault - Plastic 12" x 12" Non-Traffic Rated. Plastic Box And Lid.	EA	$38.20	$47.26	$0.00	$85.46

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118057	Utility, Service, or Meter Box or Vault - Plastic 12" x 24" Non-Traffic Rated. Plastic Box And Lid.	EA	$50.93	$94.52	$0.00	$145.45
118058	Valve Box- 36" Deep Cast Iron. Includes Cover.	EA	$127.33	$196.93	$0.00	$324.26
118059	Valve Box - 54" Deep Cast Iron. Includes Cover.	EA	$292.86	$364.98	$0.00	$657.84
118060	4' x 4' x 2' Above Ground Pump Head Enclosure w/ 6" Slab. Including new foundation and foot concrete slab with base anchoring, hardware shall bolted to slab. (Enclose to be Strong Box PL-40AL or equal).	EA	$2,561.64	$6,295.18	$121.90	$8,978.72
	33-16-00 Water Utility Storage Tanks					
	33-16-53 Ground-Level Metal Water Storage Cisterns					
118061	10,000 Gallon Water Storage Tank - Steel AWWA D103-09 Specifications. Thompson Tank Bolted Steel or Tiger Tank Galvanized	EA	$4,250.95	$82,276.40	$0.00	$86,527.35
118062	24" Aluminum Pressure Vacuum Vent	EA	$2,503.04	$5,460.00	$0.00	$7,963.04
118063	24" Roof Hatch	EA	$4,669.15	$4,910.00	$0.00	$9,579.15
118064	Siphon Line - 2" x 40'	EA	$2,448.04	$1,240.00	$0.00	$3,688.04
	33-16-56 Ground-Level Plastic Water Storage Cisterns					
118065	500 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$433.95	$3,222.33	$0.00	$3,656.28
118066	750 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$433.95	$3,855.22	$0.00	$4,289.17
118067	1,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$584.51	$4,376.23	$0.00	$4,960.74
118068	1,250 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$584.51	$4,801.70	$0.00	$5,386.21
118069	1,500 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$726.20	$5,501.59	$0.00	$6,227.79
118070	2,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$726.20	$6,940.10	$0.00	$7,666.30
118071	3,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$726.20	$7,216.82	$0.00	$7,943.02

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118072	4,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,098.16	$10,597.40	$0.00	$11,695.56
118073	5,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,098.16	$12,350.55	$0.00	$13,448.71
118074	7,500 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,461.27	$19,429.34	$0.00	$20,890.61
118075	10,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,461.27	$24,027.33	$0.00	$25,488.60
118076	12,500 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,461.27	$33,426.00	$0.00	$34,887.27
118077	15,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,966.06	$38,939.70	$0.00	$40,905.76
118078	20,000 Gallon Water Storage Tank - Plastic Ground-Level. Includes Ball Valve and Level Sensor w/ LED Display and Controller.	EA	$1,966.06	$58,384.59	$0.00	$60,350.65

33-30-00 Sanitary Sewerage

• Equipment costs exclude electrical and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment hook-ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Equipment costs exclude concrete pads and dunnage.

• Piping items include couplings as required.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

33-31-00 Sanitary Sewerage Piping

33-31-13 Site Sanitary Sewerage Gravity Piping

Excludes excavation and backfill. Fittings represent average cost of all fitting types.

118079	Exploratory Camera Inspection Services (CCTV) for undocumented Sewer and Storm Drain Piping 1,000-2,500 LF To assist in exploration and documentation of existing unknown sewer and storm drain pipes, which includes condition, measurements of the depth, slope, material, and size of pipes. Includes Mobilization, Traffic Control, Public Safety, escort of drivers & pedestrians safely through the work, and Diversion or bypass of existing stream flows. Excludes additional mobilizations.	LF	$7.97	$0.00	$0.00	$7.97
118080	4" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$5.46	$3.13	$0.00	$8.59

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118081	6" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$8.90	$7.25	$0.00	$16.15
118082	8" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$10.68	$13.18	$0.00	$23.86
118083	10" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$14.39	$20.48	$0.17	$35.04
118084	12" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$17.26	$29.48	$0.22	$46.96
118085	15" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$21.09	$43.49	$0.26	$64.84
118086	18" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$24.93	$63.02	$0.31	$88.26
118087	21" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$26.84	$90.58	$0.33	$117.75
118088	24" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$30.68	$120.78	$1.90	$153.36
118089	27" Sanitary Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$31.64	$181.18	$1.96	$214.78
118090	4" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$5.46	$4.00	$0.00	$9.46
118091	6" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$8.90	$8.95	$0.00	$17.85
118092	8" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$10.68	$16.20	$0.00	$26.88
118093	10" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$14.39	$25.22	$0.17	$39.78
118094	12" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$17.26	$36.27	$0.22	$53.75
118095	15" Sanitary Utility Pipe - PVC, SDR-26, Gasketed Pre-belled pipe.	LF	$21.09	$54.44	$0.26	$75.79
118096	4" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$73.77	$29.06	$0.00	$102.83
118097	6" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$112.62	$57.52	$0.00	$170.14
118098	8" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$130.98	$171.50	$0.00	$302.48
118099	10" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$180.77	$468.88	$8.35	$658.00
118100	12" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$189.75	$670.32	$8.76	$868.83

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118101	15" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$245.48	$1,362.88	$11.34	$1,619.70
118102	18" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$319.18	$2,486.59	$14.74	$2,820.51
118103	21" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$336.77	$4,459.48	$15.56	$4,811.81
118104	24" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$405.27	$5,843.53	$41.86	$6,290.66
118105	27" Sanitary Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$453.81	$6,635.53	$46.87	$7,136.21
118106	1-1/2" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$5.31	$0.93	$0.00	$6.24
118107	2" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$5.31	$1.24	$0.00	$6.55
118108	3" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$6.20	$2.06	$0.00	$8.26
118109	4" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$7.08	$2.35	$0.00	$9.43
118110	6" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$10.63	$3.54	$0.00	$14.17
118111	8" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$12.40	$4.12	$0.00	$16.52
118112	10" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$15.05	$5.00	$0.00	$20.05
118113	12" Sanitary Utility Pipe - PVC, Schedule 40, Solvent Cement Includes cutting to required lengths, couplings if required, priming, and gluing.	LF	$16.82	$5.58	$0.00	$22.40
118114	1-1/2" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$23.02	$2.60	$0.00	$25.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118115	2" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$24.79	$3.06	$0.00	$27.85
118116	3" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$35.42	$8.50	$0.00	$43.92
118117	4" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$76.16	$15.16	$0.00	$91.32
118118	6" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$167.38	$50.14	$0.00	$217.52
118119	8" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$201.92	$76.14	$0.00	$278.06
118120	10" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$222.30	$144.27	$0.00	$366.57
118121	12" Sanitary Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$235.58	$199.50	$0.00	$435.08
118122	2" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$10.63	$14.12	$0.00	$24.75
118123	3" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$14.17	$18.57	$0.00	$32.74
118124	4" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$18.60	$24.14	$0.00	$42.74
118125	5" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$22.14	$34.06	$0.00	$56.20
118126	6" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$26.56	$41.48	$0.00	$68.04
118127	8" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$34.53	$64.59	$0.00	$99.12
118128	10" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$46.06	$107.49	$0.00	$153.55
118129	12" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$49.60	$156.18	$0.00	$205.78
118130	15" Sanitary Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$59.34	$228.26	$0.00	$287.60
118131	2" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$43.39	$27.96	$0.00	$71.35
118132	3" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$63.77	$47.63	$0.00	$111.40
118133	4" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$86.79	$66.72	$0.00	$153.51
118134	5" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$108.04	$105.88	$0.00	$213.92

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118135	6" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$122.21	$132.87	$0.00	$255.08
118136	8" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$158.53	$356.05	$0.00	$514.58
118137	10" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$224.07	$544.71	$0.00	$768.78
118138	12" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$282.51	$1,220.65	$0.00	$1,503.16
118139	15" Sanitary Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$372.84	$2,035.69	$0.00	$2,408.53
118140	4" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$14.78	$10.63	$0.00	$25.41
118141	6" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$18.76	$12.41	$0.00	$31.17
118142	8" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$30.60	$16.54	$2.01	$49.15
118143	10" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$42.34	$23.04	$2.79	$68.17
118144	12" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$46.90	$33.08	$3.09	$83.07
118145	15" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$50.09	$68.53	$3.30	$121.92
118146	18" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$58.33	$79.16	$3.84	$141.33
118147	21" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$70.55	$98.67	$4.65	$173.87
118148	24" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$80.13	$121.11	$26.40	$227.64
118149	27" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$99.87	$155.37	$32.90	$288.14
118150	30" Sanitary Utility Pipe - Vitrified Clay (VCP), Bell and Spigot, Gasketed Joint	LF	$123.84	$180.78	$40.80	$345.42
118151	4" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$45.48	$49.04	$0.00	$94.52
118152	6" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$59.70	$113.15	$0.00	$172.85
118153	8" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$96.67	$170.28	$4.46	$271.41

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118154	10" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$179.24	$270.05	$8.28	$457.57
118155	12" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$212.52	$380.07	$9.82	$602.41
118156	15" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$317.99	$646.72	$14.69	$979.40
118157	18" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$373.46	$874.36	$17.25	$1,265.07
118158	24" Sanitary Utility Fitting - Vitrified Clay, Bell and Spigot, Gasketed Joint	EA	$536.90	$1,323.37	$55.45	$1,915.72
118159	Sanitary Manhole Tie-In - 10" & Dn	EA	$354.25	$158.34	$0.00	$512.59
118160	Sanitary Manhole Tie-In - 12" to 21"	EA	$708.49	$756.47	$0.00	$1,464.96
118161	Sanitary Manhole Tie-In - 24" to 36"	EA	$1,062.74	$2,462.93	$0.00	$3,525.67
	33-32-13 Site Sanitary Manholes and Equipment					
	All items exclude reinforcement, excavation, or backfill, unless otherwise noted					
118162	48" Dia Precast Manhole W/Cast Iron Frame & Cover- 4' Deep Traffic Rated. Includes Steps.	EA	$859.05	$3,019.58	$0.00	$3,878.63
118163	48" Dia Precast Manhole W/Cast Iron Frame & Cover- 8' Deep Traffic Rated. Includes Steps.	EA	$1,213.30	$5,382.74	$0.00	$6,596.04
118164	60" Dia Precast Manhole W/Cast Iron Frame & Cover- 12' Deep Traffic Rated. Includes Steps.	EA	$1,567.54	$7,450.50	$0.00	$9,018.04
118165	60" Dia Precast Manhole W/Cast Iron Frame & Cover- 16' Deep Traffic Rated. Includes Steps.	EA	$1,921.79	$9,715.19	$0.00	$11,636.98
118166	Cleanout Tee W/Plug- Up to 8" Pipe Cast Iron Or Plastic	EA	$283.39	$1,150.47	$0.00	$1,433.86
118167	1,000 Gallon Precast Grease Trap Traffic Rated.	EA	$1,275.28	$7,019.88	$0.00	$8,295.16
118168	2,000 Gallon Precast Grease Trap Monarch 4,500 Gallon, 2-Compartment, Traffic Rated.	EA	$2,125.48	$22,766.36	$0.00	$24,891.84
118169	4,500 Gallon Precast Grease Trap Monarch 4,500 Gallon, 2-Compartment, Traffic Rated.	EA	$2,125.48	$26,125.97	$0.00	$28,251.45
118170	7,500 Gallon Precast Grease Trap Monarch 4,500 Gallon, 2-Compartment, Traffic Rated.	EA	$4,250.95	$64,330.29	$0.00	$68,581.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118171	350 Gallon Steel Oil/Water Separator	EA	$1,275.28	$42,908.80	$0.00	$44,184.08
118172	1,000 Gallon Steel Oil/Water Separator - Triple Basin	EA	$2,302.60	$73,968.92	$0.00	$76,271.52
118173	Sanitary Septic System (Gallons per Day) Includes tank, supplemental treatment system, field, drip and reserve dispersal lines.	GPD	$83.81	$365.70	$120.75	$570.26
118174	Bar Screen Structure Bar Screen Structure and Bar Screen Includes excavation and backfill, plus 6" Diameter Diesel Pump for bypass during installation.	LS	$4,336.35	$16,499.99	$3,528.68	$24,365.02

33-40-00 Stormwater Utilities

• Equipment costs exclude electrical and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment hook-ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Equipment costs exclude concrete pads and dunnage.

• Piping items include couplings as required.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

33-42-00 Stormwater Conveyance

33-42-11 Stormwater Gravity Piping

Excludes excavate and backfill. Fittings represent average cost of all fitting types.

118175	12" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$45.49	$25.28	$0.98	$71.75
118176	12" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$39.19	$17.43	$0.89	$57.51
118177	12" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$35.08	$14.25	$0.80	$50.13
118178	15" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$49.82	$31.32	$1.07	$82.21
118179	15" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$43.32	$20.75	$0.98	$65.05
118180	15" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$41.26	$17.55	$0.93	$59.74
118181	18" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$54.15	$33.72	$1.16	$89.03

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118182	18" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$47.45	$25.21	$1.07	$73.73
118183	18" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$45.39	$20.95	$1.04	$67.38
118184	21" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$60.65	$39.22	$1.30	$101.17
118185	21" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$57.76	$29.65	$1.30	$88.71
118186	21" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$57.76	$24.33	$1.30	$83.39
118187	24" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$64.99	$44.71	$3.12	$112.82
118188	24" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$55.71	$34.08	$2.82	$92.61
118189	24" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$51.58	$27.70	$2.62	$81.90
118190	30" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$84.33	$54.55	$3.01	$141.89
118191	30" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$73.63	$41.79	$2.76	$118.18
118192	30" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$68.88	$34.34	$2.59	$105.81
118193	36" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$94.30	$65.51	$3.53	$163.34
118194	36" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$80.76	$49.56	$3.17	$133.49
118195	36" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$76.02	$41.06	$3.00	$120.08
118196	42" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$101.90	$75.46	$3.82	$181.18

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118197	42" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$90.26	$58.44	$3.54	$152.24
118198	42" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$83.13	$48.87	$3.28	$135.28
118199	48" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$107.01	$86.45	$4.00	$197.46
118200	48" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$99.76	$66.25	$3.92	$169.93
118201	48" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$92.64	$55.61	$3.65	$151.90
118202	54" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$114.38	$101.73	$4.28	$220.39
118203	54" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$104.51	$78.32	$4.11	$186.94
118204	54" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$104.51	$65.57	$4.11	$174.19
118205	60" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$119.48	$111.66	$4.47	$235.61
118206	60" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$114.02	$86.13	$4.47	$204.62
118207	60" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$118.77	$71.25	$4.65	$194.67
118208	66" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 12 Gauge Includes 1 metal band coupling per 20 LF.	LF	$126.84	$123.30	$4.75	$254.89
118209	66" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 14 Gauge Includes 1 metal band coupling per 20 LF.	LF	$121.14	$95.65	$4.75	$221.54
118210	66" Storm Utility Pipe - Corrugated Metal (CMP), Galvanized, 16 Gauge Includes 1 metal band coupling per 20 LF.	LF	$121.14	$78.64	$4.75	$204.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118211	12" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$460.05	$308.39	$9.88	$778.32
118212	12" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$445.60	$284.76	$9.57	$739.93
118213	12" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$437.36	$270.58	$9.38	$717.32
118214	15" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$559.06	$336.75	$12.01	$907.82
118215	15" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$540.50	$303.67	$11.60	$855.77
118216	15" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$528.13	$289.49	$11.34	$828.96
118217	18" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$658.09	$369.83	$14.13	$1,042.05
118218	18" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$635.40	$332.02	$13.64	$981.06
118219	18" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$623.02	$313.11	$13.37	$949.50
118220	21" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$874.70	$401.73	$18.78	$1,295.21
118221	21" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$670.46	$359.20	$14.40	$1,044.06
118222	21" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$670.46	$335.57	$14.40	$1,020.43
118223	24" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$990.23	$433.63	$47.54	$1,471.40
118224	24" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$920.09	$386.37	$44.17	$1,350.63
118225	24" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$882.96	$358.02	$42.39	$1,283.37

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118226	30" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,382.48	$487.99	$49.40	$1,919.87
118227	30" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,287.47	$431.27	$46.01	$1,764.75
118228	30" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,235.20	$398.19	$44.14	$1,677.53
118229	36" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,646.16	$573.06	$61.62	$2,280.84
118230	36" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,532.13	$502.17	$57.34	$2,091.64
118231	36" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,472.75	$464.35	$55.12	$1,992.22
118232	42" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,909.82	$632.15	$71.48	$2,613.45
118233	42" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,779.18	$556.52	$66.60	$2,402.30
118234	42" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,710.29	$513.99	$64.01	$2,288.29
118235	48" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,154.49	$695.95	$80.64	$2,931.08
118236	48" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,019.09	$606.15	$75.57	$2,700.81
118237	48" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,933.58	$558.89	$72.37	$2,564.84
118238	54" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,468.04	$984.26	$92.38	$3,544.68
118239	54" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,384.90	$880.28	$89.26	$3,354.44
118240	54" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,159.24	$823.56	$80.81	$3,063.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118241	60" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,691.32	$1,043.33	$100.73	$3,835.38
118242	60" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,667.57	$929.90	$99.84	$3,697.31
118243	60" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,387.27	$863.73	$89.36	$3,340.36
118244	66" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,976.37	$1,135.50	$111.29	$4,223.16
118245	66" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,969.25	$1,012.61	$111.14	$4,093.00
118246	66" Storm Utility (CMP) Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,610.57	$936.98	$97.70	$3,645.25
118247	12" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$4.21	$33.08	$0.93	$38.22
118248	15" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$4.61	$35.45	$1.02	$41.08
118249	18" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$5.01	$40.18	$1.10	$46.29
118250	21" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$5.61	$44.31	$1.24	$51.16
118251	24" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$13.44	$48.44	$2.97	$64.85
118252	30" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$13.44	$54.36	$2.97	$70.77
118253	36" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$15.95	$61.44	$3.02	$80.41
118254	42" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$17.82	$69.71	$3.38	$90.91
118255	48" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$19.24	$77.98	$3.65	$100.87

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118256	54" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$20.17	$180.78	$3.82	$204.77
118257	60" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$21.59	$189.05	$4.09	$214.73
118258	66" Storm Utility Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$22.52	$211.50	$4.27	$238.29
118259	15" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$49.82	$32.88	$1.07	$83.77
118260	15" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$45.69	$24.20	$0.98	$70.87
118261	15" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$43.63	$20.47	$0.93	$65.03
118262	18" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$54.15	$39.34	$1.16	$94.65
118263	18" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$50.02	$29.40	$1.07	$80.49
118264	18" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$47.97	$24.44	$1.04	$73.45
118265	21" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$54.46	$45.64	$1.17	$101.27
118266	21" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$50.34	$34.47	$1.08	$85.89
118267	21" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$48.28	$28.27	$1.04	$77.59
118268	24" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$64.99	$52.17	$3.12	$120.28
118269	24" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$58.80	$39.76	$2.82	$101.38
118270	24" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$54.67	$32.33	$2.62	$89.62

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118271	30" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$77.20	$48.76	$2.76	$128.72
118272	30" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$72.45	$40.07	$2.59	$115.11
118273	30" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$84.33	$63.64	$3.01	$150.98
118274	36" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$94.30	$76.42	$3.53	$174.25
118275	36" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$84.80	$57.82	$3.17	$145.79
118276	36" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$80.05	$47.89	$3.00	$130.94
118277	42" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$101.90	$88.02	$3.82	$193.74
118278	42" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$94.78	$68.18	$3.54	$166.50
118279	42" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$87.65	$57.00	$3.28	$147.93
118280	48" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$107.01	$100.87	$4.00	$211.88
118281	48" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$104.64	$77.28	$3.92	$185.84
118282	48" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$97.51	$64.89	$3.65	$166.05
118283	54" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$114.38	$118.67	$4.28	$237.33
118284	54" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$109.63	$91.38	$4.11	$205.12

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118285	54" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$109.63	$76.49	$4.11	$190.23
118286	60" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$119.48	$130.27	$4.47	$254.22
118287	60" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$119.48	$100.49	$4.47	$224.44
118288	60" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 16 Gauge Includes 1 Metal Band per 20 LF	LF	$124.23	$83.14	$4.65	$212.02
118289	66" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 12 Gauge Includes 1 Metal Band per 20 LF	LF	$126.84	$143.85	$4.75	$275.44
118290	66" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$126.84	$111.60	$4.75	$243.19
118291	66" Equivalent Storm Utility Arch Pipe - Corrugated Metal (CMPA), Galvanized, 14 Gauge Includes 1 Metal Band per 20 LF	LF	$126.84	$91.74	$4.75	$223.33
118292	15" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$559.06	$346.20	$12.01	$917.27
118293	15" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$540.50	$311.47	$11.60	$863.57
118294	15" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$528.13	$296.57	$11.34	$836.04
118295	18" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$658.09	$380.94	$14.13	$1,053.16
118296	18" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$635.40	$341.23	$13.64	$990.27
118297	18" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$623.02	$321.39	$13.37	$957.78
118298	21" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$874.70	$410.01	$18.78	$1,303.49
118299	21" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$670.46	$365.35	$14.40	$1,050.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118300	21" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$670.46	$340.53	$14.40	$1,025.39
118301	24" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$990.23	$447.93	$47.54	$1,485.70
118302	24" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$920.09	$398.31	$44.17	$1,362.57
118303	24" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$882.96	$368.53	$42.39	$1,293.88
118304	30" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,382.48	$505.01	$49.40	$1,936.89
118305	30" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,287.47	$445.46	$46.01	$1,778.94
118306	30" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,235.20	$410.72	$44.14	$1,690.06
118307	36" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,646.16	$593.15	$61.62	$2,300.93
118308	36" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,532.13	$518.71	$57.34	$2,108.18
118309	36" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,472.75	$479.01	$55.12	$2,006.88
118310	42" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,909.82	$655.19	$71.48	$2,636.49
118311	42" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,779.18	$575.78	$66.60	$2,421.56
118312	42" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,710.29	$531.12	$64.01	$2,305.42
118313	48" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,154.49	$722.18	$80.64	$2,957.31
118314	48" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,019.09	$627.89	$75.57	$2,722.55

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118315	48" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$1,933.58	$578.27	$72.37	$2,584.22
118316	54" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,468.04	$1,023.13	$92.38	$3,583.55
118317	54" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,384.90	$913.95	$89.26	$3,388.11
118318	54" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,159.24	$854.40	$80.81	$3,094.45
118319	60" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,691.32	$1,085.17	$100.73	$3,877.22
118320	60" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,667.57	$966.06	$99.84	$3,733.47
118321	60" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,387.27	$896.57	$89.36	$3,373.20
118322	66" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 12 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,976.37	$1,181.93	$111.40	$4,269.70
118323	66" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 14 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,969.25	$1,052.90	$111.14	$4,133.29
118324	66" Equivalent Storm Utility Arch Fitting - Galvanized, Corrugated, 16 Gauge, Banded Metal Includes 2 metal band couplings per fitting.	EA	$2,610.57	$973.51	$97.70	$3,681.78
118325	15" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$4.61	$37.22	$1.02	$42.85
118326	18" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$5.01	$42.18	$1.10	$48.29
118327	21" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$5.61	$44.31	$1.24	$51.16
118328	24" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$13.44	$50.87	$2.97	$67.28
118329	30" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$13.44	$57.07	$2.97	$73.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118330	36" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$15.95	$64.51	$3.02	$83.48
118331	42" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$17.82	$73.20	$3.38	$94.40
118332	48" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$19.24	$81.88	$3.65	$104.77
118333	54" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$20.17	$189.82	$3.82	$213.81
118334	60" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$21.59	$198.50	$4.09	$224.18
118335	66" Equivalent Storm Utility Arch Band Coupling - Galvanized, Corrugated, ALL Gauges, Banded Metal Additional metal band couplings when required.	EA	$22.52	$222.09	$4.27	$248.88
118336	[Modifier] 12" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$22.51	$0.00	$22.51
118337	[Modifier] 15" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$25.57	$0.00	$25.57
118338	[Modifier] 18" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$31.28	$0.00	$31.28
118339	[Modifier] 21" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$39.53	$0.00	$39.53
118340	[Modifier] 24" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$47.72	$0.00	$47.72
118341	[Modifier] 30" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$54.64	$0.00	$54.64
118342	[Modifier] 36" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$65.13	$0.00	$65.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118343	[Modifier] 42" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$79.14	$0.00	$79.14
118344	[Modifier] 48" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$91.69	$0.00	$91.69
118345	[Modifier] 54" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$104.25	$0.00	$104.25
118346	[Modifier] 60" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$116.04	$0.00	$116.04
118347	[Modifier] 66" or Equivalent Storm Utility Pipe Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	LF	$0.00	$129.79	$0.00	$129.79
118348	[Modifier] 12" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$252.59	$0.00	$252.59
118349	[Modifier] 15" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$317.83	$0.00	$317.83
118350	[Modifier] 18" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$362.24	$0.00	$362.24
118351	[Modifier] 21" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$426.08	$0.00	$426.08
118352	[Modifier] 24" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$491.32	$0.00	$491.32
118353	[Modifier] 30" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$612.06	$0.00	$612.06
118354	[Modifier] 36" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$848.00	$0.00	$848.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118355	[Modifier] 42" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$878.53	$0.00	$878.53
118356	[Modifier] 48" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$909.07	$0.00	$909.07
118357	[Modifier] 54" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$1,010.38	$0.00	$1,010.38
118358	[Modifier] 60" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$1,113.08	$0.00	$1,113.08
118359	[Modifier] 66" or Equivalent Storm Utility Fitting Polymer Coating Can be applied cumulatively to base line items chosen within 33-42-11.	EA	$0.00	$1,219.95	$0.00	$1,219.95
118360	4" PVC Schedule 40 Drain Tile w/ Filter Fabric - Solvent Cement (Includes Fittings) Solid Core Pipe, Socket Fittings	LF	$6.20	$3.96	$0.00	$10.16
118361	6" PVC Schedule 40 Drain Tile w/ Filter Fabric - Solvent Cement (Includes Fittings) Solid Core Pipe, Socket Fittings	LF	$10.63	$7.19	$0.00	$17.82
118362	4" Storm Water Utility Pipe - HDPE, Perforated, Solid Core, Includes Fittings	LF	$12.40	$2.36	$0.00	$14.76
118363	6" Storm Water Utility Pipe - HDPE, Perforated, Solid Core, Includes Fittings	LF	$16.82	$3.10	$0.00	$19.92
118364	8" Storm Water Utility Pipe - HDPE, Perforated, Solid Core, Includes Fittings	LF	$17.71	$4.66	$0.00	$22.37
118365	4" Storm Water Utility Pipe - HDPE, Perforated, Flexible, Includes Fittings	LF	$4.43	$2.74	$0.00	$7.17
118366	6" Storm Water Utility Pipe - HDPE, Perforated, Flexible, Includes Fittings	LF	$8.86	$3.27	$0.00	$12.13
118367	4" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 252	LF	$11.13	$3.15	$0.00	$14.28
118368	6" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 252	LF	$15.58	$6.50	$0.00	$22.08
118369	8" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 252	LF	$19.30	$10.70	$0.00	$30.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118370	10" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 252	LF	$23.00	$14.37	$0.00	$37.37
118371	12" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$24.50	$12.93	$0.00	$37.43
118372	15" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$28.76	$21.66	$0.43	$50.85
118373	18" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$31.96	$25.54	$2.37	$59.87
118374	21" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$35.16	$33.39	$2.61	$71.16
118375	24" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$46.68	$41.23	$2.28	$90.19
118376	30" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$54.46	$58.55	$2.66	$115.67
118377	36" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$63.22	$78.05	$3.08	$144.35
118378	42" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$74.89	$105.36	$3.65	$183.90
118379	48" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$83.64	$136.67	$4.07	$224.38
118380	60" Storm Utility Pipe - HDPE, Corrugated, Double Wall, Banded Plastic Complies with ASTM F2648 and AASHTO M 294	LF	$90.45	$198.44	$4.40	$293.29
118381	4" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$129.87	$45.96	$0.00	$175.83
118382	6" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$152.13	$72.20	$0.00	$224.33
118383	8" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$175.13	$101.75	$0.00	$276.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118384	10" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$219.66	$216.63	$0.00	$436.29
118385	12" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$224.11	$292.11	$0.00	$516.22
118386	15" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$303.60	$830.38	$14.03	$1,148.01
118387	18" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$374.72	$1,181.58	$17.31	$1,573.61
118388	21" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$406.67	$1,731.33	$18.79	$2,156.79
118389	24" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$533.92	$2,281.10	$36.25	$2,851.27
118390	30" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$714.81	$3,518.47	$48.53	$4,281.81
118391	36" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$907.37	$4,660.66	$61.59	$5,629.62
118392	42" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$1,113.54	$6,981.15	$75.59	$8,170.28
118393	48" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$1,650.38	$7,798.41	$88.60	$9,537.39
118394	60" Storm Utility Fitting - HDPE Belled End Watertight For HDPE Corrugated, Double Wall, Banded Plastic Pipe	EA	$1,650.38	$12,478.77	$112.03	$14,241.18
118395	12" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$90.54	$62.14	$7.80	$160.48

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118396	12" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$90.54	$63.80	$7.80	$162.14
118397	12" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$90.54	$63.80	$7.80	$162.14
118398	15" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$99.70	$66.17	$8.59	$174.46
118399	15" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$99.70	$66.17	$8.59	$174.46
118400	15" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$99.70	$66.17	$8.59	$174.46
118401	18" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$108.88	$53.17	$9.37	$171.42
118402	18" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$108.88	$54.36	$9.37	$172.61
118403	18" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$108.88	$80.82	$9.37	$199.07
118404	21" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$119.20	$65.58	$10.27	$195.05
118405	21" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$119.20	$67.35	$10.27	$196.82
118406	21" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$119.20	$100.67	$10.27	$230.14
118407	24" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$127.21	$77.98	$10.96	$216.15
118408	24" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$127.21	$80.34	$10.96	$218.51
118409	24" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$127.21	$120.52	$10.96	$258.69
118410	27" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$157.04	$92.75	$10.06	$259.85

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118411	27" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$157.04	$96.30	$10.06	$263.40
118412	27" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$157.04	$142.50	$10.06	$309.60
118413	30" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$167.60	$107.53	$10.74	$285.87
118414	30" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$167.60	$112.25	$10.74	$290.59
118415	30" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$167.60	$164.48	$10.74	$342.82
118416	36" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$196.63	$139.43	$12.60	$348.66
118417	36" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$196.63	$145.33	$12.60	$354.56
118418	36" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$196.63	$219.77	$12.60	$429.00
118419	42" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$223.02	$178.41	$14.29	$415.72
118420	42" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$223.02	$184.32	$14.29	$421.63
118421	42" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$223.02	$273.65	$14.29	$510.96
118422	48" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$252.06	$220.96	$16.16	$489.18
118423	48" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$252.06	$230.40	$16.16	$498.62
118424	48" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$252.06	$340.30	$16.16	$608.52
118425	54" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$283.73	$281.21	$18.19	$583.13

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118426	54" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$283.73	$415.45	$18.19	$717.37
118427	54" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$283.73	$269.40	$18.19	$571.32
118428	60" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$316.72	$320.21	$22.28	$659.21
118429	60" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$316.72	$335.57	$22.28	$674.57
118430	60" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$316.72	$496.27	$22.28	$835.27
118431	66" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$356.30	$534.07	$25.06	$915.43
118432	66" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$356.30	$555.34	$25.06	$936.70
118433	66" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$356.30	$679.41	$25.06	$1,060.77
118434	72" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$393.27	$621.51	$27.66	$1,042.44
118435	72" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Bell & Spigot Includes Rubber Gasket(s)	LF	$393.27	$649.87	$27.66	$1,070.80
118436	72" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$393.27	$803.47	$27.66	$1,224.40
118437	78" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$435.49	$714.86	$30.62	$1,180.97
118438	78" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$435.49	$929.90	$30.62	$1,396.01
118439	84" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$479.04	$815.29	$33.70	$1,328.03
118440	84" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$479.04	$1,059.87	$33.70	$1,572.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118441	96" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Bell & Spigot Includes Rubber Gasket(s)	LF	$525.23	$1,036.25	$36.94	$1,598.42
118442	96" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3750D Class 5, Bell & Spigot Includes Rubber Gasket(s)	LF	$572.73	$1,347.00	$40.28	$1,960.01
118443	12" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$132.95	$63.80	$11.45	$208.20
118444	12" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$132.95	$63.80	$11.45	$208.20
118445	15" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$138.53	$66.17	$11.93	$216.63
118446	15" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$138.53	$66.17	$11.93	$216.63
118447	18" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$156.16	$41.36	$13.44	$210.96
118448	18" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$156.16	$44.90	$13.44	$214.50
118449	21" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$172.63	$47.26	$14.87	$234.76
118450	21" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$172.63	$51.39	$14.87	$238.89
118451	24" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$189.11	$53.17	$16.28	$258.56
118452	24" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$189.11	$57.90	$16.28	$263.29
118453	27" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$238.04	$64.98	$15.26	$318.28
118454	27" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$238.04	$70.90	$15.26	$324.20
118455	30" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$255.69	$76.80	$16.39	$348.88

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118456	30" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$255.69	$83.89	$16.39	$355.97
118457	36" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$302.86	$124.07	$19.41	$446.34
118458	36" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$302.86	$134.70	$19.41	$456.97
118459	42" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$348.73	$165.42	$22.36	$536.51
118460	42" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$348.73	$179.60	$22.36	$550.69
118461	48" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$394.58	$206.78	$25.30	$626.66
118462	48" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$394.58	$224.50	$25.30	$644.38
118463	54" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$444.39	$251.67	$28.49	$724.55
118464	54" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$444.39	$272.95	$28.49	$745.83
118465	60" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$495.54	$300.12	$34.86	$830.52
118466	60" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$495.54	$324.94	$34.86	$855.34
118467	66" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$546.68	$534.07	$38.44	$1,119.19
118468	66" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$546.68	$534.07	$38.44	$1,119.19
118469	72" Storm Water Utility Pipe - Reinforced Concrete (RCP), 2000D Class 3, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$584.61	$621.51	$41.11	$1,247.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118470	72" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$584.61	$621.51	$41.11	$1,247.23
118471	78" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$651.59	$714.86	$45.83	$1,412.28
118472	84" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$715.92	$815.29	$50.35	$1,581.56
118473	96" Storm Water Utility Pipe - Reinforced Concrete (RCP), 3000D Class 4, Tongue & Groove (T&G) Requires Grout or Mastic Tape	LF	$820.84	$1,036.25	$57.73	$1,914.82
118474	1-1/2" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$5.31	$1.87	$0.00	$7.18
118475	2" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$5.31	$2.54	$0.00	$7.85
118476	3" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$6.20	$5.06	$0.00	$11.26
118477	4" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$6.20	$6.81	$0.00	$13.01
118478	6" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$10.63	$12.88	$0.00	$23.51
118479	8" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$11.51	$20.04	$0.00	$31.55
118480	10" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$14.17	$28.24	$0.00	$42.41
118481	12" Storm Utility Pipe - PVC, Schedule 40, DWV, Solvent Cement	LF	$15.05	$37.41	$0.00	$52.46
118482	1-1/2" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$23.02	$2.60	$0.00	$25.62
118483	2" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$24.79	$3.06	$0.00	$27.85
118484	3" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$35.42	$8.50	$0.00	$43.92
118485	4" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$76.16	$15.16	$0.00	$91.32
118486	6" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$167.38	$50.14	$0.00	$217.52
118487	8" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$201.92	$76.14	$0.00	$278.06

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118488	10" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$222.30	$144.27	$0.00	$366.57
118489	12" Storm Utility Fitting - PVC, Schedule 40, DWV, Solvent Cement	EA	$235.58	$199.50	$0.00	$435.08
118490	2" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$10.63	$14.12	$0.00	$24.75
118491	3" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$14.17	$18.57	$0.00	$32.74
118492	4" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$18.60	$24.14	$0.00	$42.74
118493	5" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$22.14	$34.06	$0.00	$56.20
118494	6" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$26.56	$41.48	$0.00	$68.04
118495	8" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$34.53	$64.59	$0.00	$99.12
118496	10" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$46.06	$107.49	$0.00	$153.55
118497	12" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$49.60	$156.18	$0.00	$205.78
118498	15" Storm Utility Pipe - Cast Iron, Service Weight, Single Hub, Gasketed Joint	LF	$59.34	$228.26	$0.00	$287.60
118499	2" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$43.39	$27.96	$0.00	$71.35
118500	3" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$63.77	$47.63	$0.00	$111.40
118501	4" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$86.79	$66.72	$0.00	$153.51
118502	5" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$108.04	$105.88	$0.00	$213.92
118503	6" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$122.21	$132.87	$0.00	$255.08
118504	8" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$158.53	$356.05	$0.00	$514.58
118505	10" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$224.07	$544.71	$0.00	$768.78
118506	12" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$282.51	$1,220.65	$0.00	$1,503.16
118507	15" Storm Utility Fitting - Cast Iron, Service Weight, Single Hub, Gasketed Joint	EA	$372.84	$2,035.69	$0.00	$2,408.53

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118508	4" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$5.46	$3.13	$0.00	$8.59
118509	6" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$8.90	$7.25	$0.00	$16.15
118510	8" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$10.68	$13.18	$0.00	$23.86
118511	10" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$14.39	$20.48	$0.17	$35.04
118512	12" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$17.26	$29.48	$0.22	$46.96
118513	15" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$21.09	$43.49	$0.26	$64.84
118514	18" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$24.93	$63.02	$0.31	$88.26
118515	21" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$26.84	$90.58	$0.33	$117.75
118516	24" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$30.68	$120.78	$1.90	$153.36
118517	27" Storm Utility Pipe - PVC, SDR-35, Gasketed Pre-belled pipe.	LF	$31.64	$181.18	$1.96	$214.78
118518	4" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$73.77	$29.06	$0.00	$102.83
118519	6" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$112.62	$57.52	$0.00	$170.14
118520	8" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$130.98	$171.50	$0.00	$302.48
118521	10" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$180.77	$468.88	$8.35	$658.00
118522	12" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$189.75	$670.32	$8.76	$868.83
118523	15" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$245.48	$1,362.88	$11.34	$1,619.70
118524	18" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$319.18	$2,486.59	$14.74	$2,820.51
118525	21" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$336.77	$4,459.48	$15.56	$4,811.81
118526	24" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$405.27	$5,843.53	$41.86	$6,290.66

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118527	27" Storm Utility Fitting - PVC, SDR-26, Gasketed For SDR-35 or SDR-26 pipe.	EA	$453.81	$6,635.53	$46.87	$7,136.21
	33-42-16 Stormwater Force Main Piping					
118528	Furnish and Install 66" Diameter Welded Steel Pipe Manifold with 4" Air Release Valve Assembly Includes 54LF of 5/8" pipe with 66"x54" concentric reducer, 66" and 54" restrained flange coupling adaptors, and 30"x4" Flanged outlet. All components to be polyurethane-lined and epoxy prime coated. Also includes all SS NBG sets, 4" epoxy-lined and coated ECC Plug Valve, ARV, and custom valve enclosure.	LS	$88,733.63	$280,868.68	$32,222.41	$401,824.72
	33-42-23 Headwalls and Endwalls for Stormwater Piping					
118529	Grout Patch Pipe at Structure Entry After Demolition Clean and prepare concrete surface, and apply non-shrink grout to annular void between pipe and remaining hole in structure. Finish exterior smooth with brush.	CF	$25.46	$10.29	$0.00	$35.75
	33-42-31 Stormwater Area Drains and Inlets					
	All items exclude reinforcement, excavation, or backfill, unless otherwise noted					
118530	36" ø Corrugated Metal Pipe (CMP) Inlet Structure with Concrete Base & Grate (or solid lid) Premanufactured CMP Inlet includes side outlet stub and Inlet hole (6"-12") to match diameters needed. May be used for ditch drainage with slots in lieu of pipe openings. 48" ø Concrete Base x 6" thick. Grate/Lid to include hardware and chain	EA	$643.49	$4,157.02	$177.16	$4,977.67
118531	12" Square Precast Catch Basin W/Cast Iron Frame & Grate - 4'-6' Deep Install Traffic Rated Storm Inlet similar to Oldcastle Infrastructure 1212CV Cast-in-place base (if required) - is separate UPB item	EA	$373.19	$1,164.27	$178.93	$1,716.39
118532	12" Square Precast Catch Basin W/Cast Iron Frame & Grate - 7'-9' Deep Install Traffic Rated Storm Inlet similar to Oldcastle Infrastructure 1212CV Cast-in-place base (if required) - is separate UPB item	EA	$634.42	$1,894.52	$304.18	$2,833.12
118533	24" Square Precast Catch Basin W/Cast Iron Frame & Grate - 4' Deep Traffic Rated. Includes Steps.	EA	$531.37	$1,247.22	$0.00	$1,778.59
118534	24" Square Precast Catch Basin W/Cast Iron Frame & Grate - 8' Deep Traffic Rated. Includes Steps.	EA	$557.93	$1,838.01	$0.00	$2,395.94
118535	48" Square Precast Catch Basin W/Cast Iron Frame & Grate - 4' Deep Traffic Rated. Includes Steps.	EA	$735.06	$2,461.62	$0.00	$3,196.68

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118536	48" Square Precast Catch Basin W/Cast Iron Frame & Grate - 8' Deep Traffic Rated. Includes Steps.	EA	$965.32	$4,266.80	$0.00	$5,232.12
118537	48" Dia Precast Manhole W/Cast Iron Frame & Cover - 4' Deep Traffic Rated. Includes Steps.	EA	$859.05	$3,019.58	$0.00	$3,878.63
118538	48" Dia Precast Manhole W/Cast Iron Frame & Cover - 8' Deep Traffic Rated. Includes Steps.	EA	$1,213.30	$5,382.74	$0.00	$6,596.04
118539	60" Dia Precast Manhole W/Cast Iron Frame & Cover - 12' Deep Traffic Rated. Includes Steps.	EA	$1,567.54	$7,450.50	$0.00	$9,018.04
118540	60" Dia Precast Manhole W/Cast Iron Frame & Cover - 16' Deep Traffic Rated. Includes Steps.	EA	$1,921.79	$9,715.19	$0.00	$11,636.98
118541	Yard or Area Drain Simple non-precast (complete) structure, including pipe riser, grate and final raising to grade	EA	$354.25	$613.90	$0.00	$968.15
118542	6" Trench Drain - Polymer Body & Ductile Iron Grate	LF	$29.22	$210.06	$0.00	$239.28
118543	12" Trench Drain - HDPE Body & Ductile Iron Grate Includes Outlet and End Cap. Zurn Z882 or equal. Excludes excavation or concrete.	LF	$5.15	$283.77	$0.00	$288.92
118544	12" Trench Drain - HDPE Body & Ductile Iron Heel Proof Grate Includes Outlet and End Cap. Zurn Z882 w/ P12-GHPD or equal. Excludes excavation or concrete.	LF	$6.45	$362.02	$0.00	$368.47
118545	Headwall - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - Less than 1 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,985.10	$592.49	$21.00	$2,598.59
118546	Headwall - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 1-2 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,062.54	$468.06	$11.01	$1,541.61
118547	Headwall - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 2-3 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$989.75	$439.52	$34.99	$1,464.26
118548	Headwall - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 3-4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$823.16	$428.11	$87.00	$1,338.27
118549	Headwall - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - More than 4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$772.77	$405.28	$65.00	$1,243.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118550	Headwall with Foundation Footing - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 2-3 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$949.84	$447.52	$8.00	$1,405.36
118551	Headwall with Foundation Footing - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 3-4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$913.46	$437.23	$97.00	$1,447.69
118552	Headwall with Foundation Footing - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - More than 4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,040.14	$424.69	$88.00	$1,552.83
118553	Headwall with Wingwalls and Outfall Slab - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - Less than 1 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$2,631.86	$625.60	$23.00	$3,280.46
118554	Headwall with Wingwalls and Outfall Slab - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 1-2 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,595.21	$570.81	$16.00	$2,182.02
118555	Headwall with Wingwalls and Outfall Slab - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 2-3 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,446.12	$557.11	$13.00	$2,016.23
118556	Headwall with Wingwalls and Outfall Slab - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - From 3-4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,207.43	$551.40	$128.00	$1,886.83
118557	Headwall with Wingwalls and Outfall Slab - Concrete at Piping Outlet for Single or Dual 12"- 48" Pipe - More than 4 CY Includes formwork and any required chamfers, keyways, or thickened sections.	CY	$1,173.84	$521.72	$99.00	$1,794.56
118558	Culvert - Concrete Cast-In-Place Reinforced Concrete	CY	$177.12	$164.11	$0.00	$341.23
118559	Cleanout Tee W/Plug- Up to 8" Pipe Cast Iron Or Plastic	EA	$566.79	$1,317.19	$0.00	$1,883.98

33-46-23 Modular Buried Stormwater Storage Units

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118560	Stormtech SC-310 Chamber- Includes Excavation, Backfill & Stone Base 34" Wide X 16" High X 85.4" Long, 14.7 Cf Chamber Storage, 35.7 Cf Of Storage W/12" Stone Foundation.	EA	$147.02	$182.48	$0.00	$329.50
118561	Stormtech SC-740 Chamber- Includes Excavation, Backfill & Stone Base 51" Wide X 30" High X 85.4" Long, 45.9 Cf Chamber Storage, 81.7 Cf Of Storage W/12" Stone Foundation.	EA	$237.35	$406.99	$0.00	$644.34
118562	Stormtech MC-3500 Chamber- Includes Excavation, Backfill & Stone Base 77" Wide X 45" High X 86" Long, 109.9 Cf Chamber Storage, 184.0 Cf Of Storage W/12" Stone Foundation.	EA	$555.28	$783.78	$0.00	$1,339.06
118563	Stormtech MC-4500 Chamber- Includes Excavation, Backfill & Stone Base 100" Wide X 60" High X 48.3" Long, 106.5 Cf Chamber Storage, 166.3 Cf Of Storage W/12" Stone Foundation.	EA	$439.27	$710.26	$0.00	$1,149.53

33-44-00 Stormwater Utility Equipment

33-44-26 Stormwater Catch Basin Insert Filters

118564	Catch Basin or Curb Inlet Filter Basket Includes temporary BMP, traffic control, removal/replacement of inlet cover and installation of new filter. Excludes catch basin cleaning.	EA	$417.13	$926.44	$0.00	$1,343.57
118565	Storm Drain Inlet Filter & Media Installation in public right-of-way includes inlet filters, media, temporary BMPs, and traffic control.	EA	$225.84	$1,271.42	$0.00	$1,497.26

33-50-00 Hydrocarbon Utilities

• Equipment costs exclude electrical and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment hook-ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Equipment costs exclude concrete pads and dunnage.

• Piping items include couplings as required.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.

33-52-00 Hydrocarbon Transmission and Distribution

33-52-16 Gas Hydrocarbon Piping

Excludes excavate and backfill. Fittings represent average cost of all fitting types.

118566	1-1/4" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$5.22	$4.18	$0.00	$9.40
118567	1-1/2" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$5.22	$4.18	$0.00	$9.40

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118568	2" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$5.84	$5.19	$0.00	$11.03
118569	3" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$6.91	$10.84	$0.00	$17.75
118570	4" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$14.96	$24.78	$0.00	$39.74
118571	6" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$16.20	$77.30	$0.00	$93.50
118572	8" Natural Gas Pipe - Polyethylene, SDR-11, Includes Fittings	LF	$19.48	$105.03	$0.00	$124.51

33-60-00 Hydronic and Steam Energy Utilities

• Equipment costs exclude electrical and piping hook-ups (connections) unless stated otherwise. The contractor is responsible for adding these additional items as required.
• Equipment hook-ups (connections) include all required pipe, fittings, valves, and specialties within in 10 LF of the point of connection for proper operation. Reference contract documents and/or applicable codes and standards for details.
• Equipment costs exclude concrete pads and dunnage.

• Piping items include couplings as required.
• Pipe fitting items reflect the average cost of all fitting types and should be quantified as such. Fittings exclude couplings, valves, and specialties.
• Pre-Insulated / Prefabricated piping systems to be factor fabricated, assembled, and pressure tested. System includes insulated carrier piping, conduit, fittings, and inner pipe supports.

33-61-00 Hydronic Energy Distribution

33-61-13 Buried Hydronic Energy Distribution

118573	2-1/2" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$18.60	$12.29	$6.24	$37.13
118574	3" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$21.25	$16.09	$7.06	$44.40
118575	4" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$25.68	$22.91	$8.69	$57.28
118576	5" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$31.88	$31.04	$10.59	$73.51
118577	6" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$35.42	$40.28	$7.97	$83.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118578	8" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$44.29	$66.63	$9.78	$120.70
118579	10" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$54.03	$107.15	$11.95	$173.13
118580	12" Carbon Steel Pipe - Standard Weight, ERW, Butt Weld ASTM A53, Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$62.88	$131.19	$13.95	$208.02
118581	2-1/2" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$18.60	$24.59	$6.24	$49.43
118582	3" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$21.25	$32.18	$7.06	$60.49
118583	4" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$25.68	$45.82	$8.69	$80.19
118584	5" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$31.88	$62.08	$10.59	$104.55
118585	6" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$35.42	$80.54	$7.97	$123.93
118586	8" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$44.29	$133.27	$9.78	$187.34
118587	10" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$54.03	$214.30	$11.95	$280.28
118588	12" Carbon Steel Pipe - Standard Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	LF	$62.88	$262.38	$13.95	$339.21
118589	2-1/2" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$350.70	$33.53	$0.00	$384.23

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118590	3" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$369.30	$38.86	$0.00	$408.16
118591	4" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$458.75	$58.76	$0.00	$517.51
118592	5" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$534.91	$111.34	$0.00	$646.25
118593	6" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$570.33	$114.79	$0.00	$685.12
118594	8" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$766.95	$209.28	$0.00	$976.23
118595	10" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$983.92	$414.22	$0.00	$1,398.14
118596	12" Carbon Steel Fitting - Standard Weight, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 40, Black Steel, Plain Ends.	EA	$1,215.07	$598.94	$0.00	$1,814.01
118597	1/2" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$5.31	$4.67	$0.00	$9.98
118598	3/4" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$6.20	$6.02	$0.00	$12.22
118599	1" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$7.97	$8.47	$0.00	$16.44
118600	1-1/4" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$8.86	$11.12	$0.00	$19.98
118601	1-1/2" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$9.74	$12.73	$0.00	$22.47
118602	2" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 40.	LF	$11.51	$16.82	$0.00	$28.33
118603	1/2" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$55.80	$8.25	$0.00	$64.05

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118604	3/4" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$78.82	$9.41	$0.00	$88.23
118605	1" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$95.65	$12.57	$0.00	$108.22
118606	1-1/4" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$110.70	$20.06	$0.00	$130.76
118607	1-1/2" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$120.44	$24.23	$0.00	$144.67
118608	2" Stainless Steel Fitting, Type 304, Standard Weight, 150 PSI Threaded ASTM Type 304, NPT, Schedule 40.	EA	$147.90	$32.89	$0.00	$180.79
118609	2-1/2" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$25.68	$26.74	$8.42	$60.84
118610	3" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$28.34	$34.31	$9.51	$72.16
118611	4" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$35.42	$48.69	$11.95	$96.06
118612	5" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$42.50	$67.73	$14.12	$124.35
118613	6" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$46.06	$85.59	$10.33	$141.98
118614	8" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$57.57	$127.48	$12.86	$197.91
118615	10" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$71.74	$180.92	$15.94	$268.60
118616	12" Stainless Steel Pipe, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	LF	$85.02	$239.17	$18.84	$343.03
118617	2-1/2" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$691.67	$56.94	$0.00	$748.61
118618	3" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$726.20	$49.27	$0.00	$775.47

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118619	4" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$900.67	$77.30	$0.00	$977.97
118620	5" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$1,043.26	$269.12	$0.00	$1,312.38
118621	6" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$1,151.30	$209.34	$0.00	$1,360.64
118622	8" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$1,458.60	$442.55	$0.00	$1,901.15
118623	10" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$1,852.71	$695.26	$0.00	$2,547.97
118624	12" Stainless Steel Fitting, Type 304, Standard Weight, ERW, Butt Weld ASTM Type 304, Schedule 40, Plain Ends.	EA	$2,263.64	$979.92	$0.00	$3,243.56
118625	2-1/2" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$22.14	$35.89	$7.31	$65.34
118626	3" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$24.79	$46.98	$8.27	$80.04
118627	4" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$30.11	$66.90	$10.17	$107.18
118628	5" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$37.19	$90.62	$12.40	$140.21
118629	6" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$41.62	$117.58	$9.33	$168.53
118630	8" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$51.37	$194.58	$11.44	$257.39
118631	10" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$62.88	$312.88	$13.98	$389.74

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118632	12" Carbon Steel Pipe - Extra Heavy Weight, Seamless, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	LF	$73.51	$383.07	$16.32	$472.90
118633	2-1/2" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$389.67	$33.53	$0.00	$423.20
118634	3" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$410.04	$38.86	$0.00	$448.90
118635	4" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$509.23	$58.76	$0.00	$567.99
118636	5" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$593.37	$111.34	$0.00	$704.71
118637	6" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$633.21	$114.79	$0.00	$748.00
118638	8" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$851.97	$209.28	$0.00	$1,061.25
118639	10" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$1,091.96	$414.22	$0.00	$1,506.18
118640	12" Carbon Steel Fitting - Extra Heavy, Butt Weld ASTM A53, Type S (Seamless), Grade B, Schedule 80, Black Steel, Plain Ends.	EA	$1,348.79	$598.94	$0.00	$1,947.73
118641	1/2" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$20.37	$10.35	$0.00	$30.72
118642	3/4" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$22.14	$12.63	$0.00	$34.77
118643	1" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$23.91	$16.30	$0.00	$40.21
118644	1-1/4" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$28.34	$22.75	$0.00	$51.09
118645	1-1/2" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$26.56	$27.01	$0.00	$53.57

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118646	2" Stainless Steel Pipe, Type 304, Extra Heavy Weight, ERW, Threaded ASTM Type 304, NPT, Schedule 80.	LF	$26.56	$33.35	$0.00	$59.91
118647	1/2" Stainless Steel Fitting, Type 304, Extra Heavy Weight, 2000 PSI Threaded ASTM Type 304, NPT, Schedule 80.	EA	$62.88	$12.45	$0.00	$75.33
118648	3/4" Stainless Steel Fitting, Type 304, Extra Heavy Weight, 2000 PSI Threaded ASTM Type 304, NPT, Schedule 80.	EA	$88.56	$14.19	$0.00	$102.75
118649	1" Stainless Steel Fitting, Type 304, Extra Heavy Weight, 2000 PSI Threaded ASTM Type 304, NPT, Schedule 80.	EA	$108.04	$18.96	$0.00	$127.00
118650	1-1/4" Stainless Steel Fitting, Type 304, Extra Heavy Weight, 2000 PSI Threaded ASTM Type 304, NPT, Schedule 80.	EA	$125.75	$30.26	$0.00	$156.01
118651	1-1/2" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$135.50	$36.55	$0.00	$172.05
118652	2" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$166.50	$49.60	$0.00	$216.10
118653	2-1/2" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$29.22	$52.95	$9.76	$91.93
118654	3" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$32.76	$67.93	$11.03	$111.72
118655	4" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$41.62	$96.41	$13.86	$151.89
118656	5" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$48.71	$134.10	$16.39	$199.20
118657	6" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$54.03	$169.47	$11.97	$235.47
118658	8" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$67.31	$252.43	$14.90	$334.64
118659	10" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$97.42	$422.38	$0.00	$519.80
118660	12" Stainless Steel Pipe, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	LF	$112.47	$514.77	$0.00	$627.24

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118661	2-1/2" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$781.11	$85.85	$0.00	$866.96
118662	3" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$820.96	$74.30	$0.00	$895.26
118663	4" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$1,017.57	$116.56	$0.00	$1,134.13
118664	5" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$1,178.75	$405.83	$0.00	$1,584.58
118665	6" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$1,300.09	$315.68	$0.00	$1,615.77
118666	8" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$1,648.13	$667.37	$0.00	$2,315.50
118667	10" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$2,093.60	$1,048.44	$0.00	$3,142.04
118668	12" Stainless Steel Fitting, Type 304, Extra Heavy, ERW, Butt Weld ASTM Type 304, Schedule 80, Plain Ends.	EA	$2,558.54	$1,477.72	$0.00	$4,036.26
118669	POLYWRAP Pipe Protection Tubular Polyethylene Encasement Protection	LF	$0.95	$0.84	$0.00	$1.79
118670	Thrust Block- 1 to 3 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$31.83	$36.57	$0.00	$68.40
118671	Thrust Block- 4 to 6 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$50.93	$85.33	$0.00	$136.26
118672	Thrust Block- 7 to 9 CF Including excavation, forms, concrete as required, and compacting backfill	EA	$76.39	$127.45	$0.00	$203.84
118673	4" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$11.87	$9.20	$0.00	$21.07
118674	6" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$16.62	$18.60	$0.15	$35.37
118675	8" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$21.74	$32.05	$0.21	$54.00

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118676	10" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$26.84	$48.86	$0.25	$75.95
118677	12" Water Utility Pipe - PVC C-900, DR-14, Gasket Joint Includes 1 Standard Gasket per 20 LF of Pipe	LF	$29.41	$69.07	$0.28	$98.76
118678	4" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$308.54	$786.17	$0.00	$1,094.71
118679	4" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$308.54	$869.31	$0.00	$1,177.85
118680	4" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$308.54	$874.33	$0.00	$1,182.87
118681	6" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$439.00	$1,116.60	$41.39	$1,596.99
118682	6" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$439.00	$1,224.00	$41.39	$1,704.39
118683	6" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$439.00	$1,231.80	$41.39	$1,712.19
118684	8" Water Utility Fitting - DIP AWWA C153 for PVC C-900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$461.85	$1,645.75	$45.20	$2,152.80
118685	8" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$461.85	$1,798.88	$45.20	$2,305.93

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118686	8" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$461.85	$1,809.90	$45.20	$2,316.95
118687	10" Water Utility Fitting - DIP AWWA C153 for PVC C -900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$629.94	$2,330.30	$62.02	$3,022.26
118688	10" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$629.94	$2,499.96	$62.02	$3,191.92
118689	10" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$629.94	$2,515.91	$62.02	$3,207.87
118690	12" Water Utility Fitting - DIP AWWA C153 for PVC C -900 Pipe, Mechanical Joint MJ Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$713.98	$2,831.14	$71.33	$3,616.45
118691	12" Water Utility Fitting - DIP AWWA C116 (Epoxied) for PVC C-900 Pipe, Mechanical Joint MJ Epoxy Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$713.98	$3,098.72	$71.33	$3,884.03
118692	12" Water Utility Fitting - DIP AWWA B508 (Zinced) for PVC C-900 Pipe, Mechanical Joint MJ Zinc Lined and Coated Fittings Include Required Wedge Type Restraint DIP Glands for PVC C-900, Gaskets, SS 316 Bolts and Nuts. Similar or Equal to EBAA Megalug.	EA	$713.98	$3,126.27	$71.33	$3,911.58
118693	1/2" Globe Valve - Outside Stem and Yoke (OS&Y), Full or Reduced Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 598. Socket Weld, NPT. or Flanged.	EA	$36.31	$48.76	$0.00	$85.07
118694	3/4" Globe Valve - Outside Stem and Yoke (OS&Y), Full or Reduced Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$47.83	$56.07	$0.00	$103.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118695	1" Globe Valve - Outside Stem and Yoke (OS&Y), Full or Reduced Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$59.34	$70.70	$0.00	$130.04
118696	1-1/2" Globe Valve - Outside Stem and Yoke (OS&Y), Full or Reduced Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$70.85	$134.09	$0.00	$204.94
118697	2" Globe Valve - Outside Stem and Yoke (OS&Y), Full or Reduced Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$87.68	$182.85	$0.00	$270.53
118698	1/2" Gate Valve - Outside Stem and Yoke (OS&Y), Full Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$36.31	$54.86	$0.00	$91.17
118699	3/4" Gate Valve - Outside Stem and Yoke (OS&Y), Full Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$47.83	$67.04	$0.00	$114.87
118700	1" Gate Valve - Outside Stem and Yoke (OS&Y), Full Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$59.34	$79.24	$0.00	$138.58
118701	1-1/2" Gate Valve - Outside Stem and Yoke (OS&Y), Full Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$70.85	$142.62	$0.00	$213.47
118702	2" Gate Valve - Outside Stem and Yoke (OS&Y), Full Port, Class 800 (for HTW) Bolted or Welded Bonnet - Marking MSS SP25, API 602 & 598. Socket Weld, NPT. or Flanged.	EA	$87.68	$201.14	$0.00	$288.82
118703	1/2" Ball Valve - Bronze Body, Stainless Ball, 2 Piece, Full Port 600 PSI WOG. Threaded FIP, PTFE Seats and Seals, Similar to NIBCO figure T-585-70-66 or equal.	EA	$36.31	$42.66	$0.00	$78.97
118704	3/4" Ball Valve - Bronze Body, Stainless Ball, 2 Piece, Full Port 600 PSI WOG. Threaded FIP, PTFE Seats and Seals, Similar to NIBCO figure T-585-70-66 or equal.	EA	$62.88	$78.02	$0.00	$140.90

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118705	1-1/2" Ball Valve - Bronze Body, Stainless Ball, 2 Piece, Full Port 600 PSI WOG. Threaded FIP, PTFE Seats and Seals, Similar to NIBCO figure T-585-70-66 or equal.	EA	$100.07	$232.83	$0.00	$332.90
118706	2" Ball Valve - Bronze Body, Stainless Ball, 2 Piece, Full Port 600 PSI WOG. Threaded FIP, PTFE Seats and Seals, Similar to NIBCO figure T-585-70-66 or equal.	EA	$120.44	$346.04	$0.00	$466.48
118707	4" NRS Gate Valve w/Valve Box and Cover AWWA C509, 250 PSI Min, MJ, FLG, or MJxFL Epoxied Interior and Exterior, 2" OP Nut, Open CC. Includes Necessary Restraint Gland Packs for PVC C-900. Similar to EBAA MegaLug. VB to be Concrete with Triangular Iron Cover. Similar to Christy G04	EA	$260.81	$1,822.90	$34.79	$2,118.50
118708	6" NRS Gate Valve w/Valve Box and Cover AWWA C509, 250 PSI Min, MJ, FLG, or MJxFL Epoxied Interior and Exterior, 2" OP Nut, Open CC. Includes Necessary Restraint Gland Packs for PVC C-900. Similar to EBAA MegaLug. VB to be Concrete with Triangular Iron Cover. Similar to Christy G04	EA	$381.26	$2,412.02	$50.84	$2,844.12
118709	8" NRS Gate Valve w/Valve Box and Cover AWWA C509, 250 PSI Min, MJ, FLG, or MJxFL Epoxied Interior and Exterior, 2" OP Nut, Open CC. Includes Necessary Restraint Gland Packs for PVC C-900. Similar to EBAA MegaLug. VB to be Concrete with Triangular Iron Cover. Similar to Christy G04	EA	$421.99	$3,589.31	$56.28	$4,067.58
118710	10" NRS Gate Valve w/Valve Box and Cover AWWA C509, 250 PSI Min, MJ, FLG, or MJxFL Epoxied Interior and Exterior, 2" OP Nut, Open CC. Includes Necessary Restraint Gland Packs for PVC C-900. Similar to EBAA MegaLug. VB to be Concrete with Triangular Iron Cover. Similar to Christy G04	EA	$563.70	$5,295.74	$75.18	$5,934.62
118711	12" NRS Gate Valve w/Valve Box and Cover AWWA C509, 250 PSI Min, MJ, FLG, or MJxFL Epoxied Interior and Exterior, 2" OP Nut, Open CC. Includes Necessary Restraint Gland Packs for PVC C-900. Similar to EBAA MegaLug. VB to be Concrete with Triangular Iron Cover. Similar to Christy G04	EA	$638.09	$6,244.62	$85.10	$6,967.81

33-70-00 Electrical Utilities

33-71-00 Electrical Utility Transmission and Distribution

33-71-15 Electrical Overhead Utilities

118712	Remove Utility Pole - Wood	EA	$715.21	$315.25	$0.00	$1,030.46
118713	Remove Utility Pole Connection Includes removal of the existing cable from the existing pole.	EA	$715.21	$3,150.87	$0.00	$3,866.08

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118714	Service Entry Wedge Clamp	EA	$14.84	$12.79	$0.00	$27.63
118715	Overhead Utility - Hendrix Aerial Spacer Cable System	EA	$357.60	$1,237.66	$0.00	$1,595.26
118716	5KV Individual Aerial Cable	LF	$40.23	$16.85	$0.00	$57.08
118717	15KV Overhead Triplex cable	LF	$40.23	$45.16	$0.00	$85.39
118718	35KV Overhead Triplex Cable	LF	$67.04	$117.83	$0.00	$184.87
118719	Overhead Telecommunications Cable	LF	$26.82	$6.68	$0.00	$33.50
118720	Utility Pole Connection Includes reconnection of the existing cable to the new pole.	EA	$715.21	$3,142.09	$0.00	$3,857.30
118721	Utility Pole Mounted - Current Limiting Fused Cutouts	EA	$715.21	$683.10	$0.00	$1,398.31
118722	Utility Pole Mounted - Current Transformer (CT) / Potential Transformer (PT) Metering	EA	$1,430.42	$18,608.97	$0.00	$20,039.39
118723	Utility Pole Mounted - Transformer 15KV to 480V	EA	$715.21	$5,675.60	$0.00	$6,390.81
118724	Utility Pole Mounted - Gang Operated Air Break (GOAB)	EA	$1,430.42	$7,155.21	$0.00	$8,585.63
118725	40' Wood Utility Pole - Creosoted	EA	$715.21	$2,993.33	$0.00	$3,708.54
118726	58' Wood Utility Pole - Creosoted	EA	$2,860.83	$4,568.76	$0.00	$7,429.59
118727	58' Wood Utility Pole - Creosoted w/ 4' Crossarm	EA	$2,860.83	$4,883.85	$0.00	$7,744.68
118728	Utility Pole Guy Wire Assembly	EA	$715.21	$1,155.97	$0.00	$1,871.18
	33-71-19 Electrical Underground Utilities					
	Excludes excavation, bedding and backfill unless otherwise noted.					
118729	2" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$22.34	$45.69	$0.00	$68.03
118730	2" x 6 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$16.09	$111.86	$0.00	$127.95

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118731	3" x 1 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$22.34	$36.24	$0.00	$58.58
118732	3" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$28.61	$50.42	$0.00	$79.03
118733	3" x 4 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$26.82	$66.17	$0.00	$92.99
118734	4" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$22.34	$59.87	$0.00	$82.21
118735	4" x 4 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$40.23	$72.47	$0.00	$112.70
118736	4" x 8 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$49.17	$135.49	$0.00	$184.66
118737	4" x 9 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$176.45	$0.00	$230.09
118738	4" x 10 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$143.37	$0.00	$197.01
118739	4" x 12 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$71.52	$302.48	$0.00	$374.00
118740	4" x 16 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$89.40	$201.66	$0.00	$291.06
118741	5" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$31.29	$80.34	$0.00	$111.63
118742	5" x 3 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$35.76	$67.74	$0.00	$103.50

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118743	5" x 4 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$40.23	$99.25	$0.00	$139.48
118744	5" x 6 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$143.37	$0.00	$197.01
118745	5" x 8 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$151.24	$0.00	$204.88
118746	5" x 9 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$151.24	$0.00	$204.88
118747	5" x 10 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$58.11	$185.90	$0.00	$244.01
118748	5" x 12 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$166.99	$0.00	$220.63
118749	5" x 16 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$80.47	$262.30	$0.00	$342.77
118750	5" x 18 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$80.47	$262.30	$0.00	$342.77
118751	6" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$44.70	$116.59	$0.00	$161.29
118752	6" x 4 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$62.58	$140.21	$0.00	$202.79
118753	6" x 6 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$67.04	$165.42	$0.00	$232.46
118754	6" x 8 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$58.11	$157.54	$0.00	$215.65

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118755	6" x 10 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$58.11	$173.29	$0.00	$231.40
118756	6" x 16 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$116.22	$315.09	$0.00	$431.31
118757	6" x 24 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$134.10	$362.35	$0.00	$496.45
118758	2" x 2 + 1.5" x 1 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$15.20	$77.20	$0.00	$92.40
118759	2" x 4 + 1.5" x 1 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$16.09	$89.80	$0.00	$105.89
118760	3" x 2 + 2" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$32.19	$75.63	$0.00	$107.82
118761	3" x 6 + 1" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$44.70	$132.33	$0.00	$177.03
118762	4"+ 2" PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$17.88	$47.26	$0.00	$65.14
118763	4" x 2 + 2" PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$26.82	$64.59	$0.00	$91.41
118764	4" x 4 + 2" x 1 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$44.70	$100.82	$0.00	$145.52
118765	4" x 6 + 2" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$62.58	$182.75	$0.00	$245.33

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118766	5" x 4 + 2.5" x 1 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$35.76	$80.34	$0.00	$116.10
118767	5" x 6 + 2.5" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$162.27	$0.00	$215.91
118768	5" x 8 + 2" x 2 PVC Schedule 40 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$53.64	$162.27	$0.00	$215.91
118769	4" x 4 PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$40.23	$109.65	$0.00	$149.88
118770	4" x 5 PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$41.12	$130.76	$0.00	$171.88
118771	4" x 8 PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$80.47	$219.30	$0.00	$299.77
118772	5 x 4" PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$41.12	$119.73	$0.00	$160.85
118773	6" x 4" PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$41.12	$135.49	$0.00	$176.61
118774	6" x 5 PVC Schedule 40 Concrete Duct Bank - w/3 Inter-Ducts per Conduit PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes 3 Interducts within each duct, and all conduit Accessories, sweeps, couplers and glue.	LF	$41.12	$143.37	$0.00	$184.49

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118775	2" x 2 PVC Schedule 80 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$14.31	$81.92	$0.00	$96.23
118776	4" x 4 PVC Schedule 80 Concrete Duct Bank PVC Duct shall be Schedule 40 Electrical grade conduit with integrally cast end bells. Includes all conduit Accessories, sweeps, couplers and glue.	LF	$44.70	$116.59	$0.00	$161.29
118777	5" x 4 FRE Concrete Duct Bank Fiberglass Reinforced Epoxy Duct shall be encapsulated in an internally steam cured corrosion resistant epoxy resin system	LF	$40.23	$118.16	$0.00	$158.39
118778	4" PVC Schedule 40 Duct Shoes Made of vinyl ester fiberglass reinforced plastic	EA	$13.41	$8.83	$0.00	$22.24
118779	5" PVC Schedule 40 Duct Shoes Made of vinyl ester fiberglass reinforced plastic	EA	$13.41	$9.30	$0.00	$22.71
118780	24" Sonotube Concrete forming tool for supports and columns	LF	$8.94	$10.98	$0.00	$19.92
118781	30" Sonotube Concrete forming tool for supports and columns	LF	$8.94	$13.92	$0.00	$22.86
118782	Quazite Electrical Handhole - 12" x 14" x 14" Includes Box, and Cover	EA	$178.80	$611.94	$0.00	$790.74
118783	Quazite Electrical Handhole - 25" x 15" x 18" Includes Box, and Cover	EA	$268.20	$741.15	$0.00	$1,009.35
118784	Quazite Electrical Handhole - 17" x 30" x 18" Includes Box, and Cover	EA	$373.69	$1,145.86	$0.00	$1,519.55
118785	Quazite Electrical Handhole 36" x 36" x 30" Includes Box, and Cover	EA	$447.99	$1,244.60	$0.00	$1,692.59
118786	Quazite Electrical Handhole 48" x 48" x 36" Includes Box, and Cover	EA	$715.21	$1,976.00	$0.00	$2,691.21
118787	Hand Excavation, Backfill	CY	$178.80	$13.43	$0.00	$192.23
118788	Excavation and Backfill	CY	$20.56	$13.31	$0.00	$33.87
118789	Pole Auger, Backfill, and Tamp	EA	$178.80	$165.42	$0.00	$344.22
118790	Electrical Vault: 10' L X 6' W X 7' H w/ 36" Entry	EA	$4,291.25	$10,810.12	$0.00	$15,101.37
118791	Telecom Vault: 6' L X 6' W X 6' H w/ 36" Entry	EA	$3,576.04	$8,592.23	$0.00	$12,168.27
118792	Generator / Transformer Pad	SF	$8.94	$19.70	$0.00	$28.64

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118793	Switch / Transformer Pad w/4' Vault	EA	$1,430.42	$5,356.48	$0.00	$6,786.90
	33-71-26 Transmission and Distribution Equipment					
118794	Gas Insulated SF6 Two Bay Medium Voltage Switch	EA	$3,218.44	$74,062.54	$0.00	$77,280.98
118795	Gas Insulated SF6 Three Bay Medium Voltage Switch	EA	$4,291.25	$107,749.85	$0.00	$112,041.10
118796	Gas Insulated SF6 Four Bay Medium Voltage Switch	EA	$5,364.06	$138,712.45	$0.00	$144,076.51
118797	Gas Insulated SF6 Five Bay Medium Voltage Switch	EA	$6,436.87	$169,675.05	$0.00	$176,111.92
118798	Gas Insulated SF6 Six Bay Medium Voltage Switch	EA	$7,152.08	$200,637.65	$0.00	$207,789.73
	33-79-00 Site Lighting					
	33-79-13 Site Improvement Grounding					
118799	6" wide Indirect Linear LED Wet Location	LF	$223.50	$392.93	$0.00	$616.43
118800	LED Exterior Wall Mounted Accent Light	EA	$357.60	$547.27	$0.00	$904.87
118801	Alight ACL Indirect Linear LED Wet Location	EA	$223.50	$611.30	$0.00	$834.80
118802	Lumenpulse LOI-HO LED Inground Light	EA	$223.50	$884.03	$0.00	$1,107.53
118803	Unique APST-12-L730 In Ground Light	EA	$266.92	$472.31	$0.00	$739.23
118804	Teron Charparral Ground Mounted Flagpole light	EA	$223.50	$217.51	$0.00	$441.01
118805	Lumiere Cambria LED Ground Mounted Landscape Light	EA	$134.10	$173.21	$0.00	$307.31
118806	BK HP 2 LED Ground Mounted Flagpole light	EA	$223.50	$882.84	$0.00	$1,106.34
118807	Ligman UKI LED Ground Mounted Flagpole light	EA	$223.50	$882.84	$0.00	$1,106.34
118808	Winonia Step 13 LED Exterior	EA	$268.20	$621.25	$0.00	$889.45
118809	8" Wet Location Down Light LED	EA	$178.80	$365.36	$0.00	$544.16
118810	4" Wet Location Down Light LED	EA	$178.80	$294.28	$0.00	$473.08
118811	Helipad Inset Fixture AV-HL12	EA	$268.20	$507.52	$0.00	$775.72
118812	SistemaluxLED Bollard	EA	$357.60	$1,848.11	$0.00	$2,205.71

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118813	42" X 6" Round Stainless Steel LED Bollard	EA	$357.60	$2,726.68	$0.00	$3,084.28
118814	Bega 99 553-K30 LED Bollard	EA	$536.41	$1,022.16	$0.00	$1,558.57
118815	6" X 48" LED Bollard	EA	$223.50	$877.14	$0.00	$1,100.64
118816	36" Bollard 1L 50W MH	EA	$715.21	$1,305.06	$0.00	$2,020.27
118817	20W MR16 12V Mini Post Bollard	EA	$268.20	$244.92	$0.00	$513.12
118818	Calpipe ssls06750 36" X 6" Round Stainless Steel LED Bollard	EA	$357.60	$2,726.68	$0.00	$3,084.28
118819	49" Selux OLMLB LED Bollard	EA	$715.21	$1,690.22	$0.00	$2,405.43
118820	Bega 77792 LED Bollard	EA	$715.21	$877.14	$0.00	$1,592.35
118821	36" Selux MTR LED Bollard	EA	$715.21	$877.85	$0.00	$1,593.06
118822	48" Damp Location Motion Sensing Surface Mounted Linear LED	EA	$178.80	$422.23	$0.00	$601.03
118823	Selux M60 Wet Location Linear	EA	$178.80	$378.16	$0.00	$556.96
118824	Axis Wet Beam 4 LED	EA	$178.80	$378.16	$0.00	$556.96
118825	Delta Light 4" Exterior Downlight LED Polycarbonate lens	EA	$178.80	$393.79	$0.00	$572.59
118826	8" Wet Location LED Lensed Down Light	EA	$178.80	$356.83	$0.00	$535.63
118827	6" Wet Location Down Light LED	EA	$178.80	$368.20	$0.00	$547.00
118828	7" Vandal Resistant Downlight LED Polycarbonate lens	EA	$178.80	$393.79	$0.00	$572.59
118829	LED Surface Mounted 44W Canopy Fixture	EA	$223.50	$381.00	$0.00	$604.50
118830	75W MR16 12V Underwater	EA	$178.80	$689.43	$0.00	$868.23
118831	300W Incandescent Underwater Par 56	EA	$178.80	$780.93	$0.00	$959.73
118832	Remove, refurbish, and Reinstall pole	EA	$1,430.42	$1,620.66	$0.00	$3,051.08
118833	Exterior Stainless Steel Guard Rail	LF	$53.64	$78.14	$0.00	$131.78
118834	Gardco gl18 Gull Wing Pole	EA	$715.21	$4,154.00	$0.00	$4,869.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118835	Gardco gl18 Gull Wing Pole Two Head	EA	$715.21	$5,575.63	$0.00	$6,290.84
118836	In Ground LED 15% Flagpole Uplight	EA	$223.50	$613.74	$0.00	$837.24
118837	Recessed In Ground 15% LED Flagpole Light	EA	$268.20	$598.50	$0.00	$866.70
118838	Recessed In Ground LED Flagpole Light	EA	$268.20	$601.34	$0.00	$869.54
118839	2" X 48" In Ground LED Walkway Fixture	EA	$357.60	$1,259.57	$0.00	$1,617.17
118840	12" X 24" In Ground LED Walkway Fixture	EA	$357.60	$975.24	$0.00	$1,332.84
118841	12" X 4" In Ground LED Walkway Fixture	EA	$357.60	$976.66	$0.00	$1,334.26
118842	LV LED MR16 Landscape Lights	EA	$134.10	$191.77	$0.00	$325.87
118843	Ligman UOD LED Pedistal Flood Grade Mount	EA	$223.50	$495.95	$0.00	$719.45
118844	Uplight Flood 12W LED In Grade mount	EA	$223.50	$414.72	$0.00	$638.22
118845	Surface Mounted LED Dock Fixture 4000K, 9000Lum	EA	$223.50	$881.41	$0.00	$1,104.91
118846	LUX Rail	LF	$89.40	$1,614.57	$0.00	$1,703.97
118847	Wagner LULS	LF	$89.40	$1,614.57	$0.00	$1,703.97
118848	Alphabet ZEDA 750 Rail Puck	EA	$178.80	$362.52	$0.00	$541.32
118849	17' Decorative Pole Teardrop Pole Top Fixture	EA	$1,251.61	$4,677.16	$0.00	$5,928.77
118850	MR16 Landscape Uplight 1L 20W	EA	$134.10	$119.41	$0.00	$253.51
118851	Alphabet NU3RD 4" Downlight	EA	$178.80	$362.52	$0.00	$541.32
118852	FC Lighting FCCSQ606 Linear Wall Mount	EA	$223.50	$676.90	$0.00	$900.40
118853	Lithonia OLSS Wall/Step	EA	$223.50	$162.04	$0.00	$385.54
118854	Lumenfacade HO Series LED	LF	$67.06	$197.61	$0.00	$264.67
118855	Bega 84 083	EA	$715.21	$4,651.42	$0.00	$5,366.63
118856	Sternberg "Main Street Series"	EA	$715.21	$3,481.57	$0.00	$4,196.78

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118857	AION WR Series 3000	LF	$22.34	$53.53	$0.00	$75.87
118858	FC Lighting FCLS 101 Wall/Step	EA	$223.50	$353.99	$0.00	$577.49
118859	LED Parking Deck Fixture	EA	$178.80	$962.44	$0.00	$1,141.24
118860	Potted Light Tape in .8" X .8" Lensed channel	LF	$28.61	$35.49	$0.00	$64.10
118861	Bega 88991 12' LED Pathway Pole	EA	$536.41	$2,480.74	$0.00	$3,017.15
118862	12' Selux Astro LED Walkway pole	EA	$715.21	$4,488.08	$0.00	$5,203.29
118863	12' Solana SL660 LED Walkway pole	EA	$715.21	$3,066.46	$0.00	$3,781.67
118864	10' Gardco CR20 LED Pedestrian Pole	EA	$715.21	$3,710.45	$0.00	$4,425.66
118865	12' Decorative Pathway Pole Custom Color (Campus Std)	EA	$715.21	$4,179.59	$0.00	$4,894.80
118866	Bega 889 83 6' Walkway pole	EA	$715.21	$3,082.10	$0.00	$3,797.31
118867	20' Invue ARB w/Two Heads	EA	$357.60	$5,346.74	$0.00	$5,704.34
118868	15' Invue ARB	EA	$357.60	$3,925.12	$0.00	$4,282.72
118869	10' Invue ARB	EA	$357.60	$3,214.31	$0.00	$3,571.91
118870	Louis Poulsen Kipp LED Walkway pole	EA	$715.21	$2,000.23	$0.00	$2,715.44
118871	12' LED Pathway Pole With Acorn Type Fixture	EA	$715.21	$3,835.56	$0.00	$4,550.77
118872	6" Surface mounted Cylinder LED Wet Location	EA	$223.50	$680.96	$0.00	$904.46
118873	ANP Lighting LF 1853 Decorative	EA	$223.50	$688.06	$0.00	$911.56
118874	LED Exterior Entry Wall Sconce	EA	$178.80	$521.71	$0.00	$700.51
118875	BK Lighting Mini Micro LED Cylinder Sconce Up/ Down	EA	$178.80	$594.15	$0.00	$772.95
118876	8" X 18" LED Cylinder Sconce Up/ Down	EA	$223.50	$594.15	$0.00	$817.65
118877	100W MH Invue Decorative Wall Sconce	EA	$178.80	$1,751.45	$0.00	$1,930.25
118878	Exterior LED Wall Sconce w/Clear Glass Shade	EA	$268.20	$382.41	$0.00	$650.61

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118879	Bega 6516 LED D/I cylinder sconce	EA	$178.80	$493.28	$0.00	$672.08
118880	Modern FormWS W5416 Exterior Pendent	EA	$178.80	$540.22	$0.00	$719.02
118881	Primarysma Insert Zero Step Light	EA	$178.80	$281.48	$0.00	$460.28
118882	Visa Lighting Wrap Sconce	EA	$268.20	$489.04	$0.00	$757.24
118883	Wet Location 48" Surface Mounted Linear	EA	$178.80	$392.37	$0.00	$571.17
118884	Ilumipod in grade RGB LED	EA	$268.20	$1,201.28	$0.00	$1,469.48
118885	RAB SLIMM17 Wall Pack	EA	$178.80	$112.38	$0.00	$291.18
118886	Invue ENV Wall Mounted LED Fixture	EA	$268.20	$1,429.75	$0.00	$1,697.95
118887	Kim Wall Director Sconce	EA	$223.50	$406.59	$0.00	$630.09
118888	ALD-5000 300W LED Flood	EA	$223.50	$463.79	$0.00	$687.29
118889	McDraw VPL	EA	$223.50	$961.36	$0.00	$1,184.86
118890	Invue ENC Recessed Wall Mounted LED Fixture	EA	$268.20	$955.33	$0.00	$1,223.53
118891	Lumecon LWP MN Wall Pack	EA	$223.50	$410.85	$0.00	$634.35
118892	McGraw Impact Elite Trapezoid LED Wall Pack	EA	$223.50	$1,167.16	$0.00	$1,390.66
118893	Lithonia Wedge Wall Pack	EA	$178.80	$542.93	$0.00	$721.73
118894	Lumark Crosstour Maxx LED (58W)	EA	$178.80	$301.92	$0.00	$480.72
118895	Lumark Crosstour Maxx LED (102W)	EA	$178.80	$674.25	$0.00	$853.05
118896	Lumark Crosstour MaxxLED (81W)	EA	$178.80	$406.18	$0.00	$584.98
118897	FC Lighting FCW 1011 LED	EA	$178.80	$417.96	$0.00	$596.76
118898	Bega 33055 Recessed Wall Mounted LED	EA	$178.80	$499.00	$0.00	$677.80
118899	Lumark LDWP-FC-6B Wall Mounted LED	EA	$178.80	$476.58	$0.00	$655.38
118900	Ligman ULEW 30011 LED Wedge Wall Pack	EA	$223.50	$1,167.16	$0.00	$1,390.66
118901	FCS 1502 LED Step Light	EA	$223.50	$608.32	$0.00	$831.82

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118902	Cooper LDWP FC LED Wall Pack	EA	$223.50	$781.89	$0.00	$1,005.39
118903	Spectrum Recessed LED Wall / Step Light	EA	$268.20	$246.62	$0.00	$514.82
118904	BEGA 24 151 LED Step Light	EA	$223.50	$499.59	$0.00	$723.09
118905	Cantilevered LED Linear Sign Light	EA	$268.20	$604.14	$0.00	$872.34
118906	iLight Plexineon White 1X Series	LF	$22.34	$85.29	$0.00	$107.63
118907	Recessed LED Wall / Step Light	EA	$268.20	$490.32	$0.00	$758.52
	33-79-23 Roadway and Traffic Lighting					
118908	30" X 7' Concrete Pole Base	EA	$357.60	$602.41	$0.00	$960.01
118909	24" X 7' Concrete Pole Base	EA	$357.60	$654.79	$0.00	$1,012.39
118910	18" x 5' Concrete Pole Base	EA	$357.60	$385.98	$0.00	$743.58
118911	10" x 3' Concrete Pole Base	EA	$268.20	$248.13	$0.00	$516.33
118912	30" x 5' Concrete Pole Base	EA	$357.60	$468.69	$0.00	$826.29
118913	30" X 8' Concrete Pole Base	EA	$536.41	$685.11	$0.00	$1,221.52
118914	24" x 24" x 36" Concrete Foundation	EA	$357.60	$220.57	$0.00	$578.17
118915	Hinged Pole Base	EA	$134.10	$640.60	$0.00	$774.70
118916	Lithonia CXS1 LED Pole Head	EA	$178.80	$752.04	$0.00	$930.84
118917	Sistemalux Movit	EA	$178.80	$1,162.89	$0.00	$1,341.69
118918	Lithonia DSX0 LED P5 Pole Head	EA	$357.60	$981.60	$0.00	$1,339.20
118919	Lithonia DSX0 LED P1 Pole Head	EA	$357.60	$1,749.28	$0.00	$2,106.88
118920	HI-Lite 15124-91 Pole Head	EA	$178.80	$652.16	$0.00	$830.96
118921	Signify Gardco Pureform P26 LED Pole Head	EA	$357.60	$1,939.10	$0.00	$2,296.70
118922	General Electric EALS LED Heads	EA	$178.80	$968.13	$0.00	$1,146.93
118923	150W LED Yoke Mounted Floods	EA	$178.80	$382.41	$0.00	$561.21

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118924	McGraw Edison Gleon	EA	$178.80	$956.32	$0.00	$1,135.12
118925	Pico Primarysm 25"	EA	$357.60	$1,769.93	$0.00	$2,127.53
118926	Lithonia DSX1 P7 LED Pole Head	EA	$178.80	$1,907.95	$0.00	$2,086.75
118927	Cree Leedway STR-LWY LED Pole Head Tenon Mount	EA	$268.20	$813.17	$0.00	$1,081.37
118928	Solar Powered LED Pole heads 7000LU	EA	$268.20	$3,242.74	$0.00	$3,510.94
118929	RAB ALED2T150	EA	$178.80	$964.68	$0.00	$1,143.48
118930	Selux Olivia LED Pole Head	EA	$178.80	$1,396.04	$0.00	$1,574.84
118931	Ligman UHAM 20001 LED Pole Head	EA	$223.50	$1,895.51	$0.00	$2,119.01
118932	Kim OURO LED Post Top	EA	$178.80	$968.13	$0.00	$1,146.93
118933	20' Invue ARB w/Two Heads	EA	$536.41	$5,181.83	$0.00	$5,718.24
118934	ILP AL 56W Pole Head	EA	$178.80	$463.45	$0.00	$642.25
118935	10' 4" Round Aluminum Pole	EA	$357.60	$2,027.83	$0.00	$2,385.43
118936	KW RSP 22'-4" Non-Tapered Pole	EA	$357.60	$1,846.27	$0.00	$2,203.87
118937	16' 4" X 4" Alum Pole	EA	$536.41	$1,604.87	$0.00	$2,141.28
118938	17' 4" X 4" Alum Pole	EA	$536.41	$1,604.87	$0.00	$2,141.28
118939	25' 5" Square Aluminum Pole	EA	$357.60	$2,637.93	$0.00	$2,995.53
118940	30' Square Aluminum Pole	EA	$357.60	$3,223.23	$0.00	$3,580.83
118941	30' Tapered Aluminum Pole	EA	$715.21	$4,437.00	$0.00	$5,152.21
118942	20' 5" Square Aluminum Pole	EA	$357.60	$3,851.70	$0.00	$4,209.30
118943	20' 4" Round Aluminum Pole	EA	$357.60	$3,312.24	$0.00	$3,669.84
118944	Eaton RSA T 4 12' Aluminum Pole	EA	$357.60	$1,846.27	$0.00	$2,203.87
118945	22' Straight Round Steel Pole	EA	$715.21	$2,260.31	$0.00	$2,975.52

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118946	14' Light Pole w/Crossarm	EA	$357.60	$1,532.05	$0.00	$1,889.65
118947	15' Straight Steel Pole	EA	$715.21	$1,545.53	$0.00	$2,260.74
118948	25' Tapered Steel Pole	EA	$715.21	$1,950.12	$0.00	$2,665.33
118949	30' Tapered Steel Pole	EA	$715.21	$2,517.89	$0.00	$3,233.10
118950	35' Tapered Steel Pole	EA	$715.21	$3,101.86	$0.00	$3,817.07
118951	SPI SECI Styk 101"	EA	$536.41	$1,575.20	$0.00	$2,111.61
118952	12' LED Pathway Pole With Lithonia MRP LED	EA	$715.21	$3,539.85	$0.00	$4,255.06
118953	8' Plaster Pathway Pole	EA	$356.67	$1,248.45	$0.00	$1,605.12
118954	14' Selux Quartro Pole	EA	$1,072.81	$4,827.85	$0.00	$5,900.66
118955	12' Cordia Pedestrian Pole	EA	$1,072.81	$4,827.85	$0.00	$5,900.66
118956	16' Saturn Cutoff Post Light 100W CMH	EA	$715.21	$4,542.10	$0.00	$5,257.31
118957	16' LED Walkway pole w/ Custom Finish	EA	$715.21	$4,392.50	$0.00	$5,107.71
118958	Gardco Gullwing G18 LED With Pole	EA	$715.21	$4,061.60	$0.00	$4,776.81
118959	17' Decorative Pole w/ Twin Teardrop Pole Top Fixture	EA	$1,430.42	$5,245.81	$0.00	$6,676.23
118960	12' US Architectural RZR Walkway Pole	EA	$536.41	$2,409.66	$0.00	$2,946.07
118961	10' Coral Column LED	EA	$1,430.42	$4,544.94	$0.00	$5,975.36
118962	20' Rectangular pole (4" X 6") w/ 4.5' cantilever Single head 150W MH	EA	$715.21	$4,345.92	$0.00	$5,061.13

34-00-00 Transportation

34-40-00 Transportation Signaling and Control Equipment

34-41-00 Roadway Signaling and Control Equipment

34-41-13 Traffic Signals

118963	Remove existing traffic arm and signals	EA	$923.16	$0.00	$625.00	$1,548.16
118964	Install new Traffic Arm 25'	EA	$1,846.31	$28,255.09	$1,250.00	$31,351.40
118965	Install new Traffic Arm 8'	EA	$1,846.31	$9,418.36	$1,250.00	$12,514.67

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118966	Re-install traffic signal	EA	$615.43	$0.00	$416.67	$1,032.10

34-70-00 Transportation Construction and Equipment

34-71-00 Roadway Construction

34-71-13 Vehicle Barriers

Post Hole Excavation, Backfill, and Import Materials are Included in Items unless noted otherwise

118967	Delineators - Class 1 Flexible Installed per Caltrans A73c. Including surface mount or embedded per site conditions encountered.	EA	$31.83	$49.35	$5.04	$86.22
118968	Remove and Reinstall Metal Guardrail - (Less than 50 LF)	LF	$79.36	$0.00	$57.98	$137.34
118969	Remove and Reinstall Guardrail - (Less than 50 LF) Includes wooden post replacement.	LF	$79.36	$5.58	$57.98	$142.92
118970	Midwest Guardrail System - Steel Post, 15-100 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$43.77	$24.25	$11.50	$79.52
118971	Midwest Guardrail System - Steel Post, 101-500 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$29.19	$24.25	$6.90	$60.34
118972	Midwest Guardrail System - Steel Post, 501-1000 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$25.59	$24.25	$5.75	$55.59
118973	Midwest Guardrail System - Steel Post, 1,001-2,000 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$21.99	$24.25	$4.60	$50.84
118974	Midwest Guardrail System - Steel Post, 2,001-5,000 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$16.88	$24.25	$4.60	$45.73
118975	Midwest Guardrail System - Steel Post, 5,001-10,000 LF Includes excavation and import, and removal of spoil. Redefined W-beam guardrail at 31" tall with MGS terminals and rail splices occur mid span between posts.	LF	$14.54	$24.25	$4.02	$42.81

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
118976	Thruway Guardrail – Galvanized Steel	LF	$9.75	$28.54	$0.00	$38.29

35-00-00 Waterway and Marine Construction

35-00-00 Waterway and Marine Construction

35-05-00 Common Work Results for Waterway and Marine Construction

35-05-50 Common Work Results for Marine Construction

118977	Small Deck Barges Cargo Deck less than 100'	DY	$0.00	$0.00	$1,125.00	$1,125.00
118978	Large Deck Barges Cargo Deck greater than 100'	DY	$0.00	$0.00	$2,500.00	$2,500.00

35-05-00 Common Work Results for Waterway and Marine Construction

35-05-50 Common Work Results for Marine Construction

35-05-50 Common Work Results for Marine Construction

118979	Small Tug Boat / 500 HP to 800 HP Plus fuel / 8 hour minimum / portal to portal	HR	$0.00	$0.00	$750.00	$750.00
118980	Large Tug Boat / 1000 HP to 2000 HP Plus fuel / 8 hour minimum / portal to portal	HR	$0.00	$0.00	$850.00	$850.00

35-20-00 Waterway and Marine Construction and Equipment

35-24-00 Dredging

35-24-23 Clamshell Dredging

118981	Marina Basin Dredging Includes mobilization, floating turbidity curtain, temporary dewatering/spoil area, dredging, and pre/post surveys.	CY	$29.06	$4.42	$52.93	$86.41

40-00-00 Process Interconnections

40-00-00 Process Interconnections

40-05-00 Common Work Results for Process Interconnections

40-05-59 Hydraulic Gates

118982	30" × 18" Slide Gate Slide Gate to be municipal-grade, corrosion-resistant, and fully self-contained stainless gate. Opening: 30" × 18" Material: 316 stainless steel Bolts: 0.50" dia., Qty 35 (typical for face-mount self-contained frame) Frame: Self-contained (SC) Stem: Single Rising Stem (SRS) Operator: Yoke-mounted handwheel Seal: Top seal (upward opening) Mounting: Face of side walls Design Pressure: 5.6 ft seating / 5.6 ft unseating Certification: AWWA C561-14 - Anchors included (Gate similar to Fontaine-Aquanox Series 20 Model: 203-Y1X-30x18-A-EC-6)	EA	$0.00	$16,343.25	$0.00	$16,343.25

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

The Simplebid® UPB

		Units	Labor	Material	Equipment	Total
46-00-00	**Water and Wastewater Equipment**					
46-20-00	**Water and Wastewater Preliminary Treatment Equipment**					
46-23-00	**Grit Removal and Handling Equipment**					
46-23-43	**Inline Baffled Grit Removal Equipment**					
118983	Install new replacement FRP Baffles with SS angle L at vertical edges font and back, including X-ray, air monitoring, sealant, delivery and manufacturer inspection. To be measured by SF of face of Baffles. For installation and epoxy of SS anchor bolts use 03-15-19 Excludes demolition and removal of existing baffles, hardware, cleaning and patching of concrete surfaces.	SF	$15.87	$133.52	$6.45	$155.84

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.

Simplebid®

FOS

©2026 FOS of CannonDesign. All Rights Reserved.

©2026 Facility Optimization Solutions, LLC. All Rights Reserved.